

Getting Around Segue

A plain-language, screenshot-by-screenshot walkthrough of the Segue Healthcare Integration Platform — what every screen does, what each field means, and where to find the values it's asking for.

WHAT'S INSIDE

1. What is Segue?
2. First-time setup
3. Signing in & out
4. The Dashboard
5. Building your first pipeline
6. Sending data to SQL Server
7. Mapping fields (the details)
8. Sending data to a CSV file
9. Managing saved connections
10. The EHR endpoint directory
11. Branding & system settings
12. Users & roles
13. Execution history & audit logs

1

What is Segue?

Segue moves healthcare data from one place to another. On one side is a **source** — typically an EHR system like Epic, speaking the FHIR standard. On the other side is a **destination** — a database table or a CSV file. In between, you draw a **pipeline** (Segue calls it a *Workflow*) that says "pull these kinds of records from here, and write them there, mapped to these columns."

Sources: Epic, Generic FHIR

Destinations: SQL Server, CSV

Everything is role-protected

Every change is logged forever

Note on scope. This deployment is currently configured to only offer two destination types — **SQL Server** and **CSV** — even though the product supports many more under the hood. If you don't see Snowflake, S3, MongoDB, etc. in your Node Library, that's expected — it's a deliberate configuration choice, not a bug.

2

First-time setup

The very first time anyone opens Segue on a brand-new installation (nobody has an account yet), it shows a one-time setup screen instead of a login page. This is where you create the very first administrator account and tell Segue how to send email.

Segue
Healthcare Integration Platform

ONE-TIME SETUP

Create the platform administrator

This is a **one-time setup**. Create the first **SuperAdmin** account to finish provisioning this deployment. You will be signed in automatically once it's created.

First name * Jane Last name * Doe

Email address * admin@fhirbridge.local

Password *
..... Strong

PASSWORD REQUIREMENTS:

- ✓ At least 12 characters
- ✓ No more than 64 characters
- ✓ At least one uppercase letter
- ✓ At least one lowercase letter
- ✓ At least one number
- ✓ At least one special character

Confirm password *
.....

✓ Passwords match

Email server

Segue sends account and notification email through this server. It is saved and enabled as part of finishing setup.

SMTP host * smtp.office365.com Port * 587

☐ Use SSL/TLS

Username notifications@yourorg.cor Password

From address * no-reply@yourorg.com From name * Segue Platform

☐ I accept the [Terms and Conditions](#)

Create SuperAdmin & Continue


The one-time setup screen — only ever shown once, on a fresh installation.

FIELD	WHAT TO ENTER
First name / Last name	Your own name — shown in the top-right corner once you're signed in.
Email address	Becomes your username. Use a real address you can receive mail at — password resets go here.
Password / Confirm password	Minimum 12 characters, must include an uppercase letter, a lowercase letter, a number, and a special character. The strength meter and checklist update live as you type.
SMTP host / Port	The outgoing mail server Segue uses to send invitations and password resets — ask whoever manages your organization's email (e.g. <code>smtp.office365.com</code> , port <code>587</code>).
Use SSL/TLS	Leave checked unless your mail provider specifically tells you not to encrypt the connection.
Username / Password (SMTP)	The mailbox credentials for that outgoing mail server — not your Segue password.
From address / From name	What recipients see as the sender — e.g. <code>no-reply@yourorg.com</code> / "Your Company Platform".
I accept the Terms and Conditions	Required — you can't finish setup without it.

Once you click **Create SuperAdmin & Continue**, you're signed in automatically — no separate login step.

3 Signing in & out


After the first admin exists, everyone else sees the ordinary sign-in screen below.

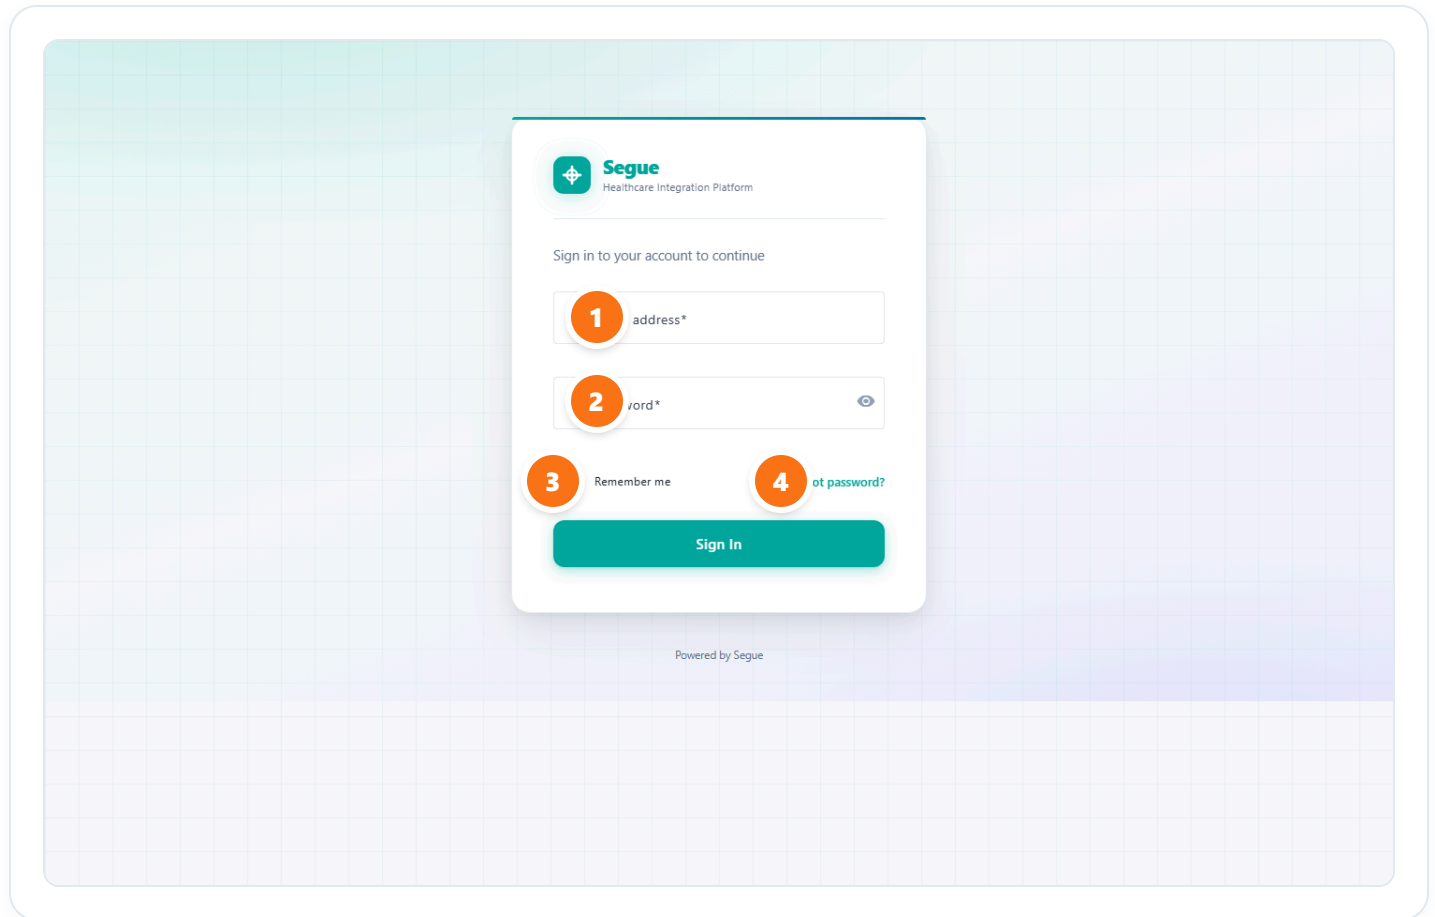The image shows a sign-in form for the Segue Healthcare Integration Platform. The form is centered on a light blue grid background. It features a Segue logo at the top, followed by the text "Sign in to your account to continue". Below this are four numbered callouts: 1. "address*" (email address field), 2. "password*" (password field with an eye icon to toggle visibility), 3. "Remember me" (checkbox), and 4. "Forgot password?" (link). A teal "Sign In" button is at the bottom of the form. Below the button, it says "Powered by Segue".

#	FIELD	WHAT IT DOES
1	Email address	The address your account was created or invited with.
2	Password	Click the eye icon to reveal what you've typed before submitting.
3	Remember me	Keeps you signed in longer on this specific browser/device.
4	Forgot password?	Sends a reset link to your email — only works if the SMTP settings above have been configured correctly.

Signing out

Click your name in the top-right corner at any time to open the account menu.

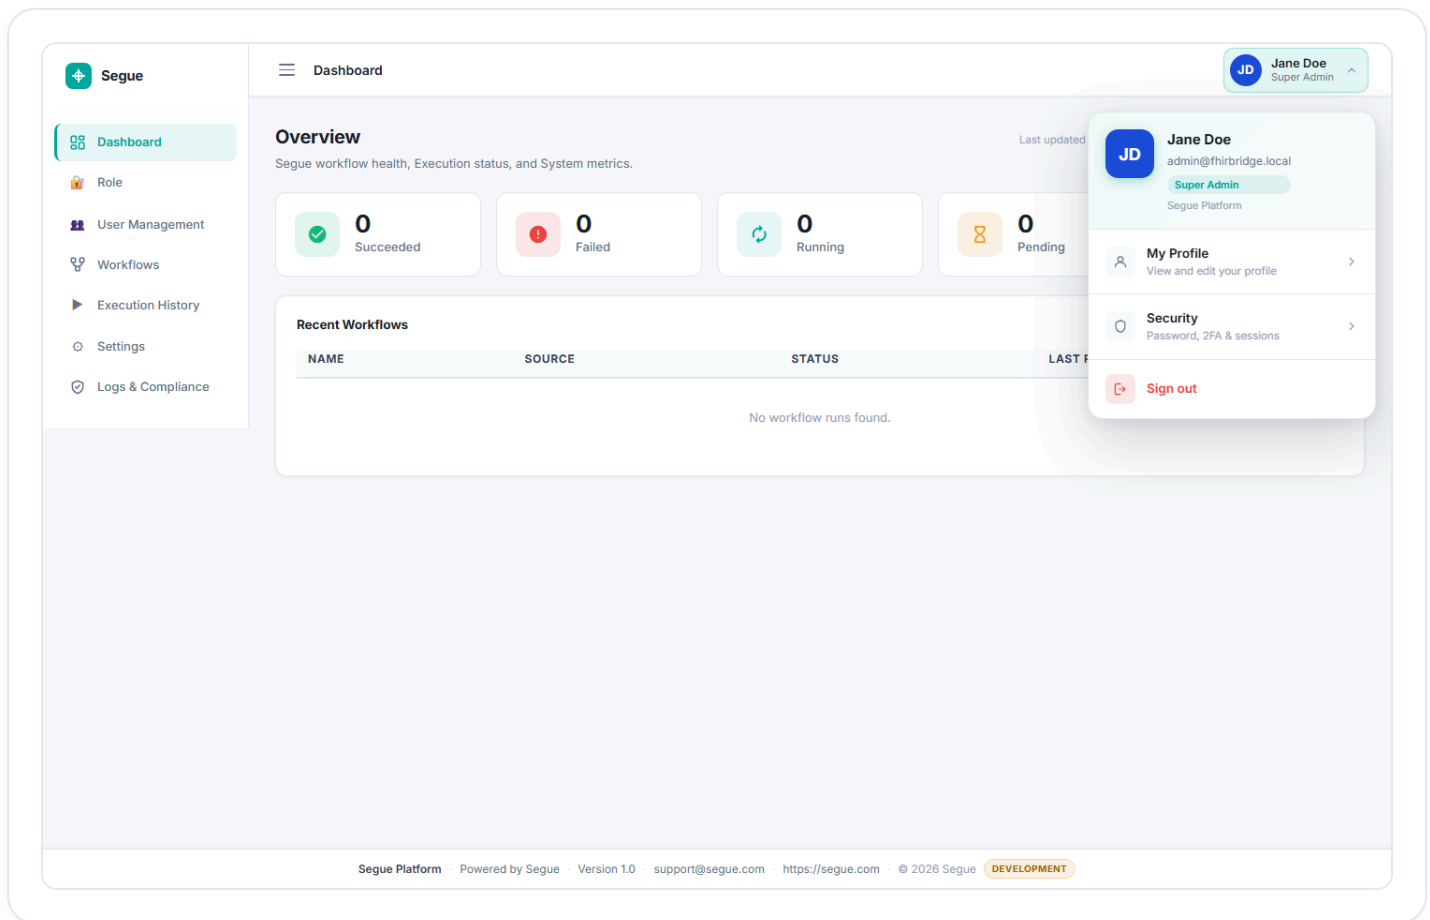


- **My Profile** — view and edit your own name/email.
- **Security** — change your password, set up two-factor authentication, and see active sessions.
- **Sign out** — asks you to confirm, then ends your session immediately.

4

The Dashboard

The first thing you see after signing in. It's a health check for the whole platform — how many pipeline runs succeeded, failed, or are still running, plus a quick list of recent activity.

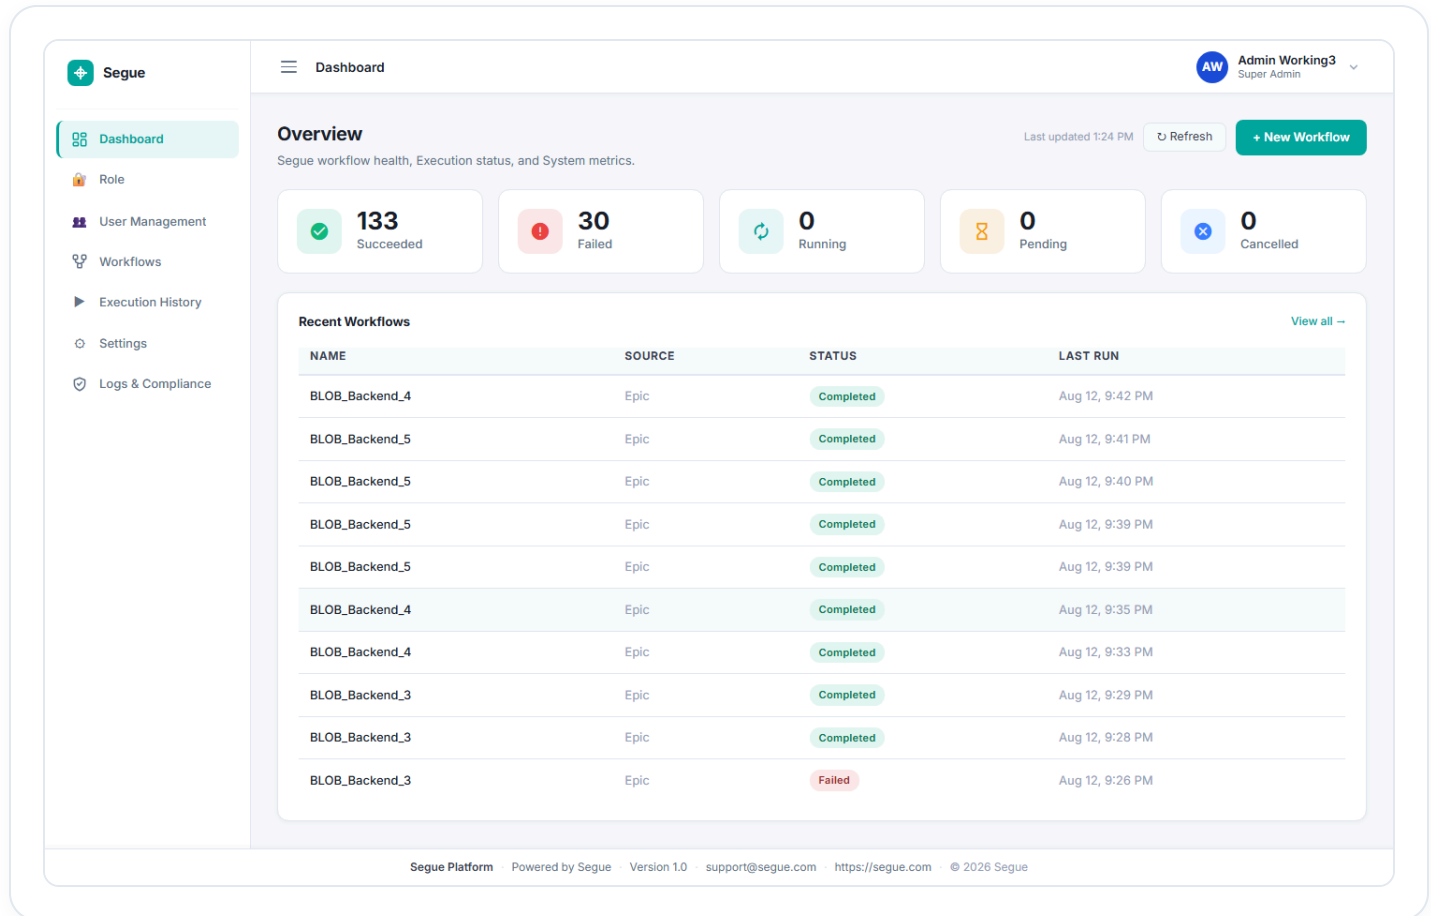

- **Succeeded / Failed / Running / Pending / Cancelled** — live counts across every pipeline run, updated whenever you click **Refresh**.
- **+ New Workflow** — the starting point for building a new pipeline (covered next).
- **Recent Workflows** — the last few pipelines that ran, their source, status, and when they last ran. Click **View all** to see the full execution history.
- The left-hand menu is your main navigation for the rest of the app: **Role**, **User Management**, **Workflows**, **Execution History**, **Settings**, and **Logs & Compliance**.

5 Building your first pipeline

A pipeline (Workflow) always starts the same way: give it a name, then add a **source** node (where the data comes from), then attach a **destination** node downstream of it (where the data goes). Click **Workflows** in the left menu, then **+ New Workflow**.

The screenshot shows the Segue Platform interface for managing workflows. On the left is a sidebar with navigation links: Dashboard, Role, User Management, Workflows (highlighted), Execution History, Settings, and Logs & Compliance. The main content area is titled 'Workflows' and includes a description: 'Launch interactive (EHR / patient) workflows, run backend workflows, and inspect what they wrote.' There are 'Refresh' and '+ New Workflow' buttons. Below this is a search bar and filter buttons for Status, Audience, and Source, along with a Reset button. A table lists seven workflows, each with a number, name, source, audience, status, last run time, action by, action on time, and a 'Run' button. All workflows are 'Enabled' and 'Succeeded'. The footer contains platform information: Segue Platform, Powered by Segue, Version 1.0, support@segue.com, https://segue.com, © 2026 Segue.

	WORKFLOW ↑	SOURCE ↑	AUDIENCE ↑	STATUS ↑	LAST RUN ↓	ACTION BY	ACTION ON ↑	ACTIONS
1	BLOB_Backend_4 Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 9:42 PM	Admin Working3	Aug 12, 9:33 PM	▶ Run
2	BLOB_Backend_5 Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 9:41 PM	Admin Working3	Aug 12, 9:38 PM	▶ Run
3	BLOB_Backend_3 Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 9:29 PM	Admin Working3	Aug 12, 9:27 PM	▶ Run
4	BLOB_Backend_Test_2 Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 8:15 PM	Admin Working3	Aug 12, 8:14 PM	▶ Run
5	BLOB_SAS_URL Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 5:42 PM	Admin Working3	Aug 12, 5:41 PM	▶ Run
6	BLOB_Backend_Account_Key Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 4:47 PM	Admin Working3	Aug 12, 4:46 PM	▶ Run
7	Blob_Backend Backend / on-demand	Epic	Backend Service	Enabled	Succeeded Aug 12, 3:46 PM	Admin Working3	Aug 12, 3:44 PM	▶ Run


The Workflows list — every pipeline you've built, with its status and last run. This is also where you'd click into an existing one to edit it.

The screenshot displays the Segue Workflow Builder interface. On the left is a sidebar with the Segue logo and a menu containing: Dashboard, Role, User Management, Workflows, Execution History, Settings, and Logs & Compliance. The main area is titled 'Workflow Builder' and features a top header with a user profile 'Jane Doe Super Admin'. Below the header is a 'Workflow Name' input field, a 'Clear canvas' button, and a 'Save' button. The central workspace is a large grid for building the workflow. At the bottom of the grid are zoom controls (set to 100%) and a '+ Add module' button. The footer contains platform information: Segue Platform, Powered by Segue, Version 1.0, support@segue.com, https://segue.com, © 2026 Segue, and a DEVELOPMENT status tag.

A brand-new, empty pipeline canvas. Type a name in the top-left field, then click + **Add module** to place your first node.

Choosing a node

Clicking + **Add module** opens the Node Library — every source and destination type this deployment currently allows.

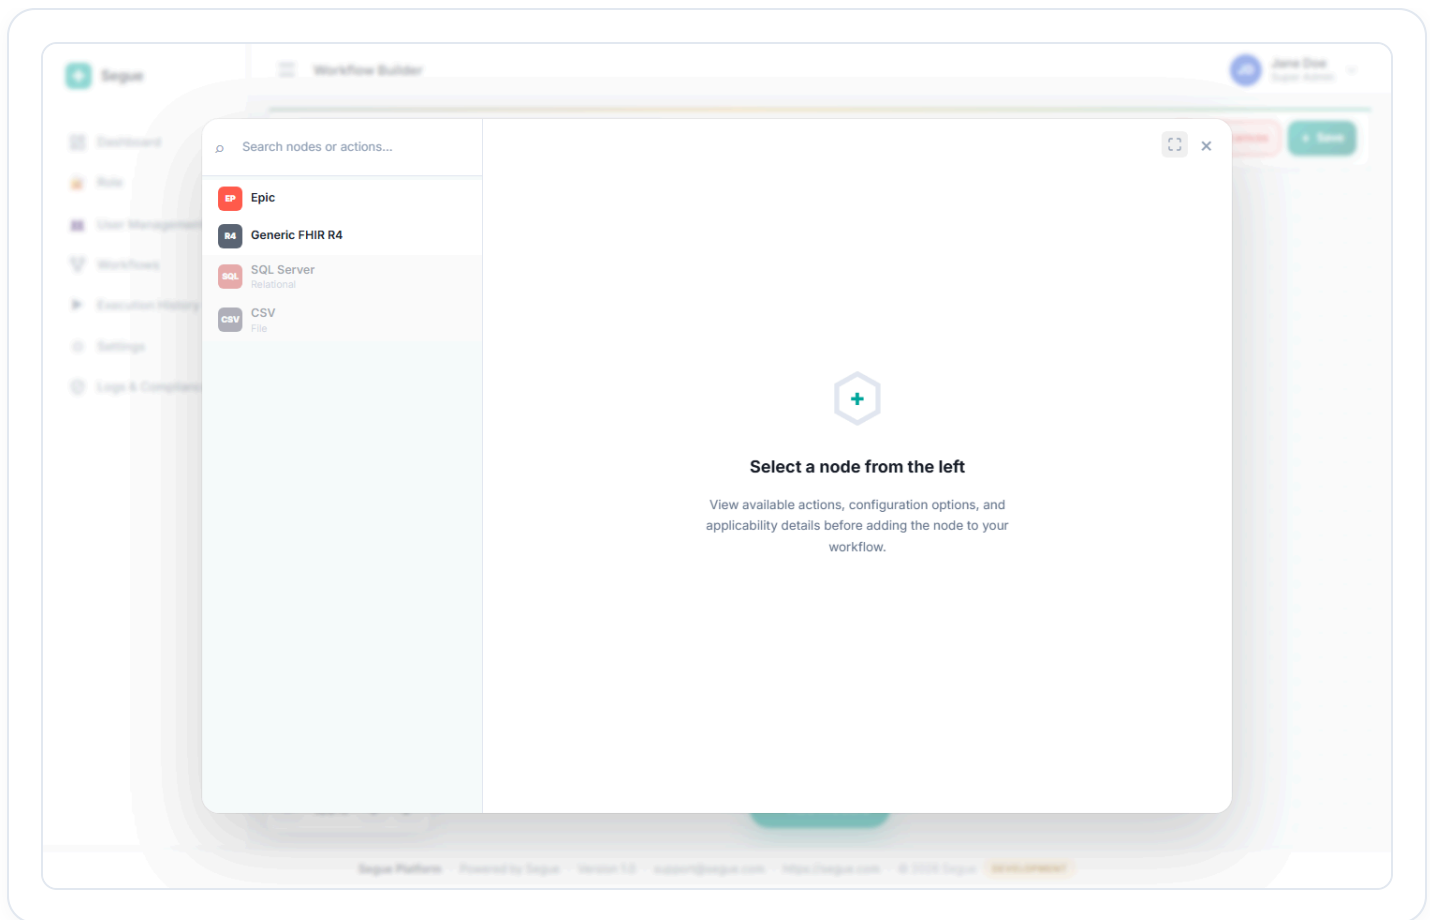


- **Epic** — connects to an Epic EHR's FHIR API. The one you'll use for a real hospital/clinic system.
- **Generic FHIR R4** — connects to any other standards-compliant FHIR server (test servers, non-Epic EHRs).
- **SQL Server** — writes incoming records into tables in a SQL Server database.
- **CSV** — writes incoming records out as delimited text files (downloaded, emailed, or delivered over SFTP).

A destination is greyed out until you've placed a source node first — Segue always connects a destination to whatever's upstream of it, so it needs something to connect *to*.

Configuring an Epic source

Click **Epic** to open its configuration form.

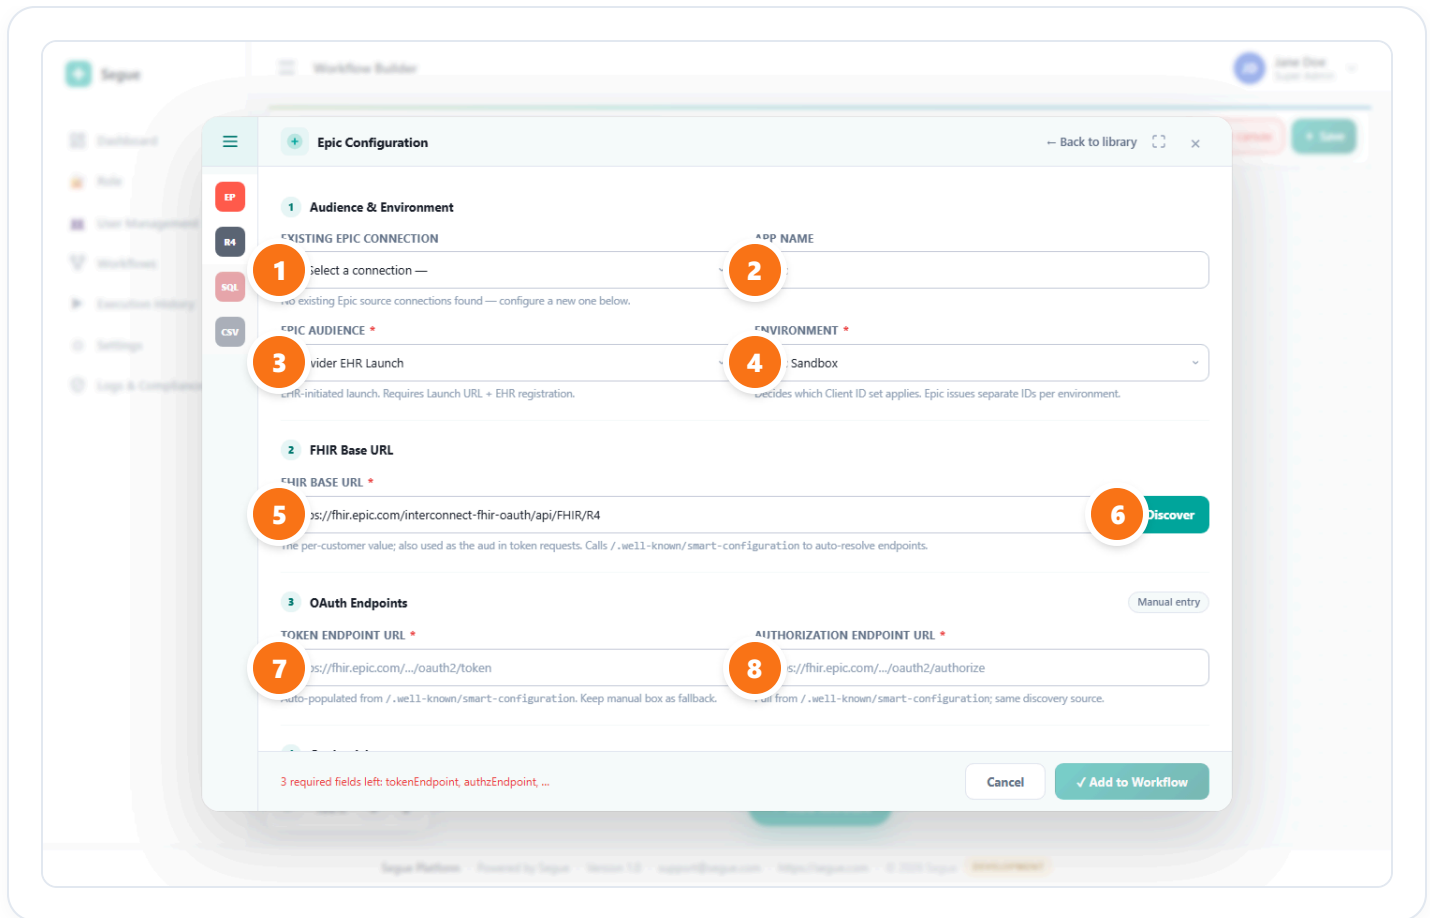

#	FIELD	WHAT IT IS / WHERE TO GET IT
1	Existing Epic connection	Reuse a connection someone already set up, instead of typing everything again.
2	App name	A label for your own reference — matches the name Epic has on file for your registered app.
3	Epic Audience	The kind of launch: <i>Provider EHR Launch</i> (from inside Epic), <i>Backend Services</i> (unattended, system-to-system), <i>Standalone</i> , or <i>Patient</i> . Your Epic administrator will tell you which one your app is registered as.
4	Environment	<i>Epic Sandbox</i> for testing, <i>Production</i> for real patient data — Epic issues a separate Client ID for each.
5	FHIR base URL	The per-customer API address Epic gave you, e.g. <code>https://fhir.epic.com/interconnect-fhir-oauth/api/FHIR/R4</code> .
6	Discover	Click this after filling in the base URL — it automatically fetches the token/authorize endpoints below for you, so you don't have to hunt them down.
7	Token endpoint URL	Where Segue exchanges credentials for an access token. Auto-filled by Discover; only type it manually if Discover fails.
8	Authorization endpoint URL	Used for the interactive (user-facing) login flows. Same auto-fill rule as above.

Scrolling down reveals the credentials section:

Epic Configuration — Back to library

Provider EHR Launch — Epic Sandbox

EHR-initiated launch. Requires Launch URL + EHR registration. Decides which Client ID set applies. Epic issues separate IDs per environment.

2 FHIR Base URL

FHIR BASE URL *

[Discover](#)

The per-customer value; also used as the aud in token requests. Calls /.well-known/smart-configuration to auto-resolve endpoints.

3 OAuth Endpoints [Manual entry](#)

TOKEN ENDPOINT URL *

Auto-populated from /.well-known/smart-configuration. Keep manual box as fallback.

AUTHORIZATION ENDPOINT URL *

Pull from /.well-known/smart-configuration; same discovery source.

4 Credentials

CLIENT ID — SANDBOX *

From the customer's own Epic app registration (Production/Non-Production based on Environment).

CLIENT AUTH METHOD


Provider EHR launch is normally a public client (PKCE) — no client secret required. Choose Client Secret or JWT only based on how your Epic app is actually registered — the server's discovery document lists everything it can accept, not what your specific app uses.

3 required fields left: tokenEndpoint, authEndpoint, ...

[Cancel](#) [Add to Workflow](#)

Segue Platform — Powered by Segue — Version 1.0 — support@segue.com — https://segue.com — © 2020 Segue — [Privacy Policy](#)

- **Client ID — Sandbox** — from your organization's own Epic app registration (a different one exists for Production). This is not something you invent; Epic assigns it when your app is registered on their App Orchard.
- **Client Auth Method** — how Segue proves it's really your app: *Public Client + PKCE* (no secret — typical for a Provider EHR launch), *Client Secret*, or *Private Key JWT*. Match whatever your Epic app registration actually uses — Epic's discovery document lists every method it can technically accept, not the one your app is actually configured for.

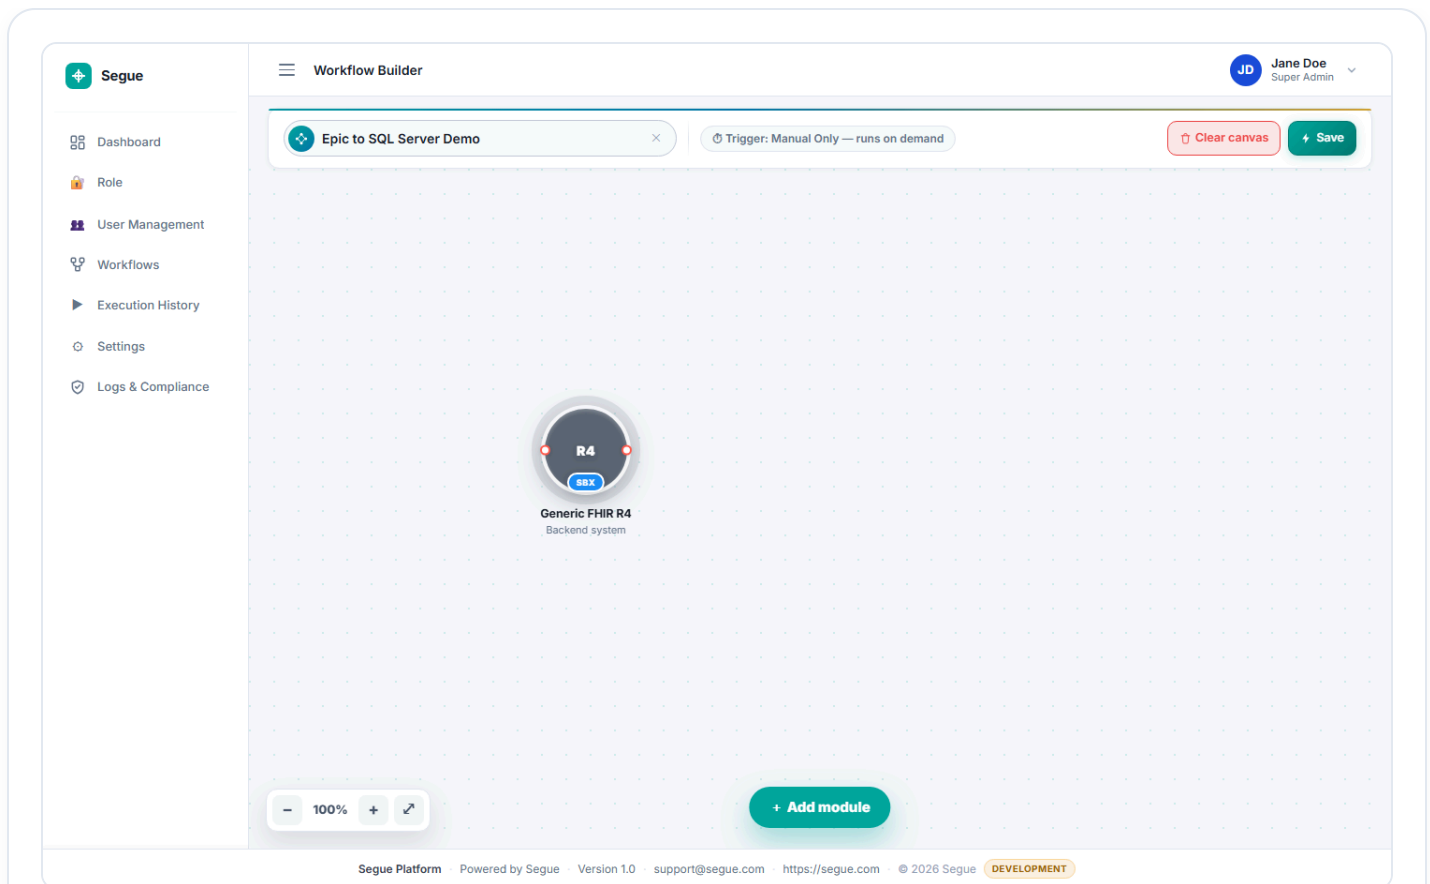

Once saved, the source appears as a node on the canvas, along with a banner explaining when this pipeline runs (here: manually, on demand).

About the other source, "Generic FHIR R4": it works the same way but with far fewer fields — just a base URL, a polling method (Search via REST), and a run schedule — since it doesn't need OAuth or vendor-specific setup. It's useful for connecting to a plain test FHIR server. This manual focuses on Epic since that's the source most deployments actually use.

6 Sending data to SQL Server

With a source on the canvas, hover over it and click the small + that appears on its right edge to attach a destination downstream. Every destination wizard follows the same four steps: **Configure** → **Data groups** → **Map fields** → **Review**.

Step 1 — Configure


The screenshot shows the 'SQL Server Configuration' dialog box in the Segue Workflow Builder. The dialog has a progress bar at the top with four steps: 1. Configure (active), 2. Data groups, 3. Map fields, and 4. Review. The main content area is titled '1 Configure SQL Server' and contains the following fields and options:

- Existing SQL Server connection:** A dropdown menu with the option 'Choose a connection...'.
- Destination name *** (1): A text field containing '. Production'.
- SQL Server *** (2): A text field containing 'sql-prod.company.com,1433'.
- Database *** (3): A text field containing 'icalDataWarehouse'.
- Authentication *** (4): A dropdown menu with the option 'Username / Password'.
- Username** (5): A text field containing 'segue'.
- Password** (6): A password field with masked characters '.....'.
- Schema** (7): A text field containing '...'.
- Write mode** (8): A dropdown menu with the option 'Insert by source id'.

Below the fields is a 'Test Connection' button. At the bottom of the dialog, there are three buttons: 'Cancel', 'Step 1 of 4 Back', and 'Test connection & Next'.

#	FIELD	WHAT IT IS / WHERE TO GET IT
1	Destination name	A label for this connection, shown later in the Destination Connections list.
2	SQL Server	Hostname (and port) of the database server — ask your DBA. Format: <code>tcp:servername,1433</code> .
3	Database	The specific database on that server to write into — it must already exist.
4	Authentication	<i>SQL Username/Password, Managed Identity, or Azure AD</i> — whichever your database is set up to accept.
5	Username	A SQL login with write access to the target database (only needed for SQL auth).
6	Password	The password for that login. Stored encrypted — never shown again once saved.
7	Schema	The SQL schema tables live under — <code>dbo</code> is the SQL Server default unless your DBA uses something else.
8	Write mode	<i>Upsert by source id</i> (update if it already exists, insert if not — the safe default), <i>Insert only</i> , or <i>Update only</i> .


Click **Test connection & Next** — Segue actually opens the connection before letting you proceed. If it fails, you'll see exactly why:

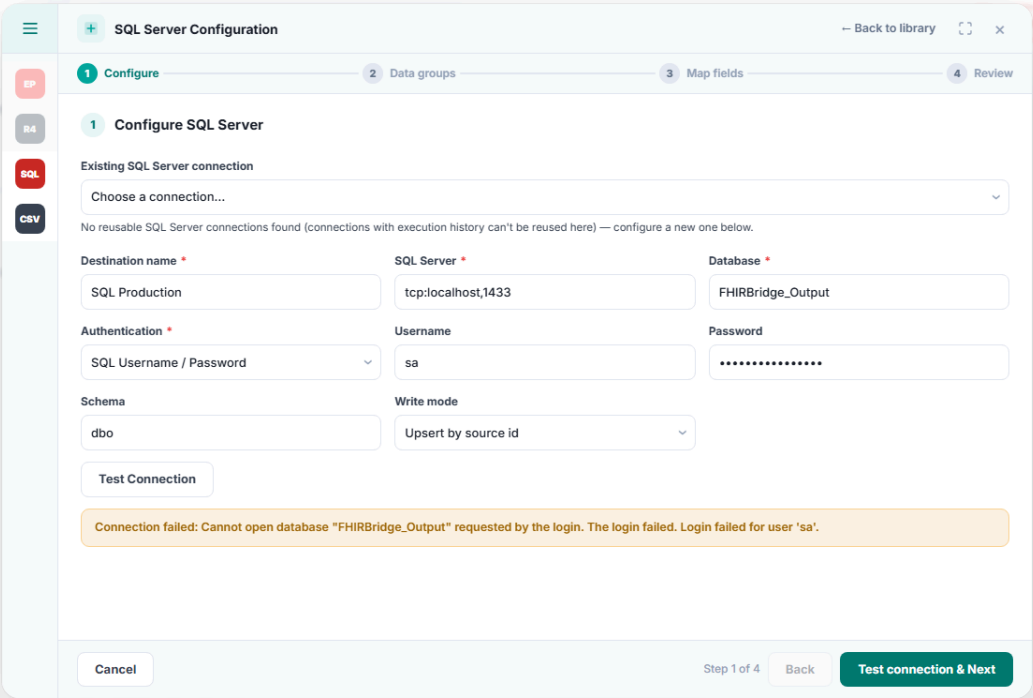

A real connection failure — here, the target database name doesn't exist yet. Fix the field it complains about and try again.


Step 2 — Data groups

Pick which kinds of FHIR records this destination should receive — you don't have to map everything at once.

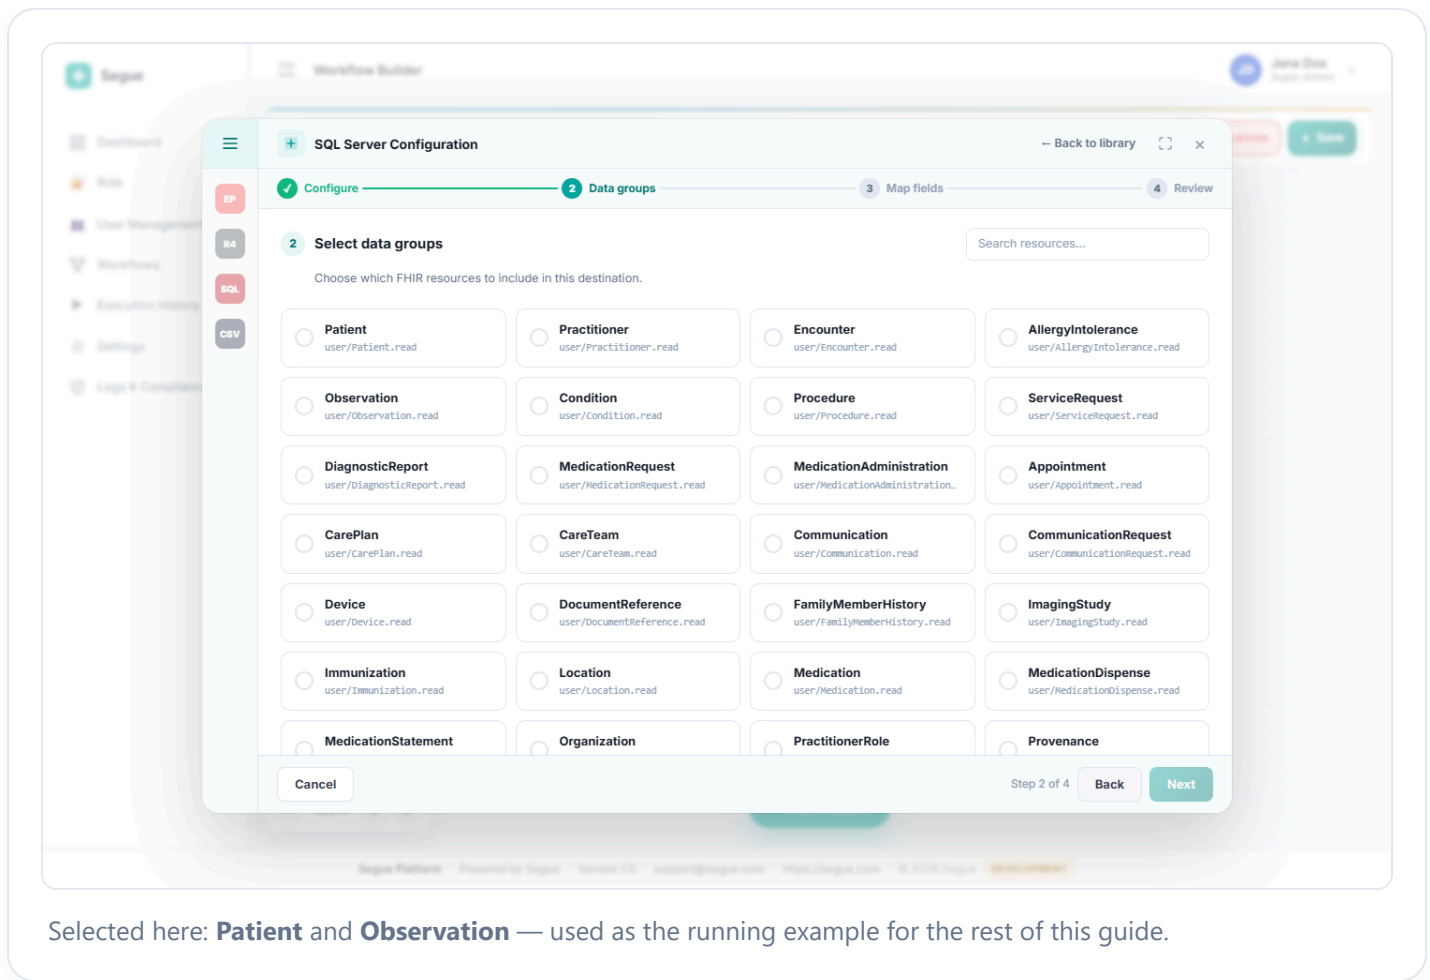


Step 3 — Map fields

Each selected group gets its own **Map** button — click it to open that group's field-mapping canvas (the next chapter covers this screen in depth).

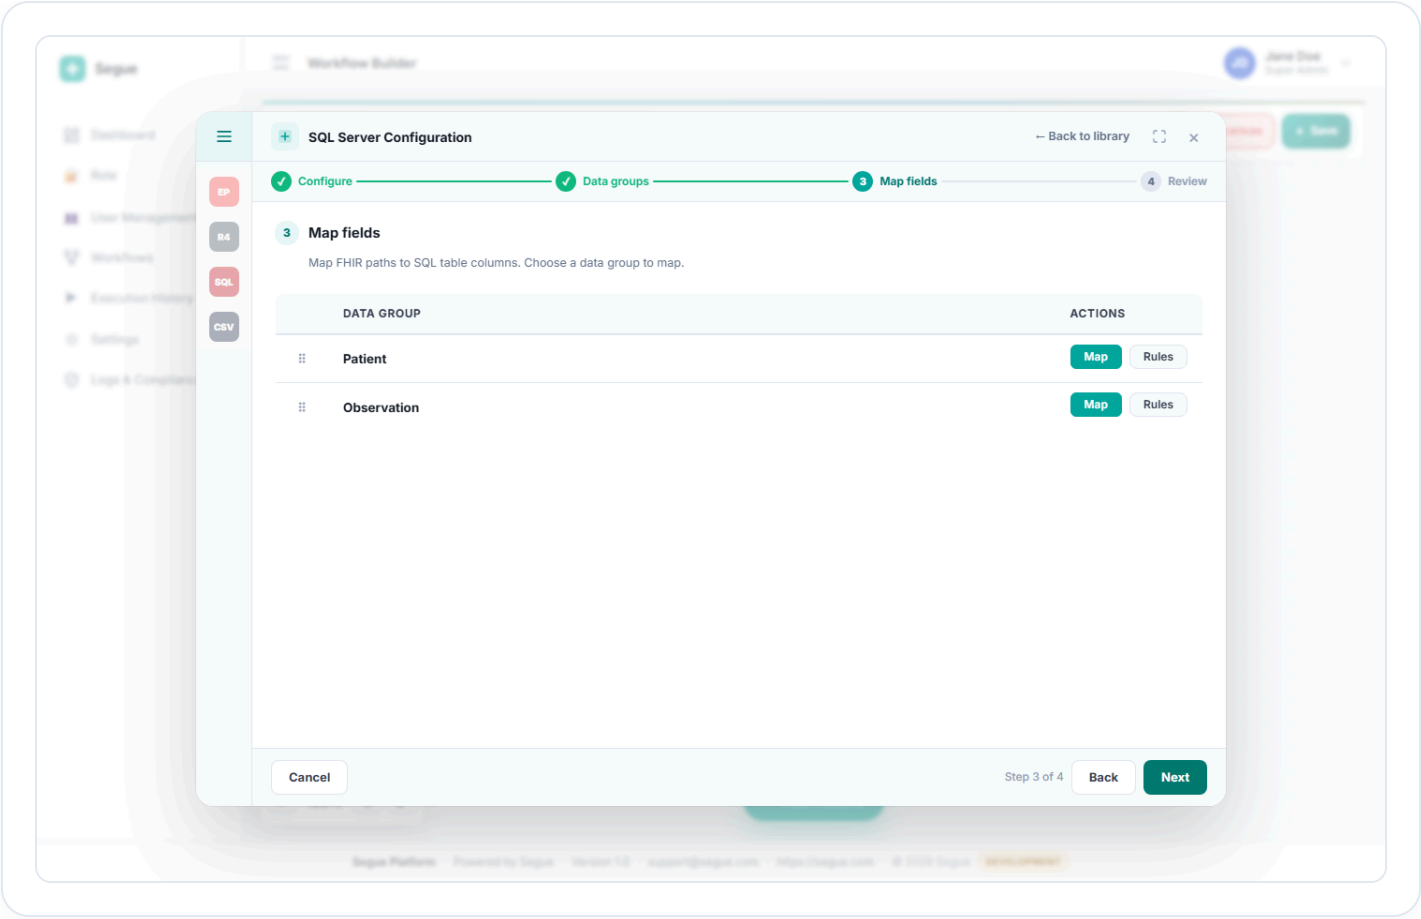

Step 4 — Review

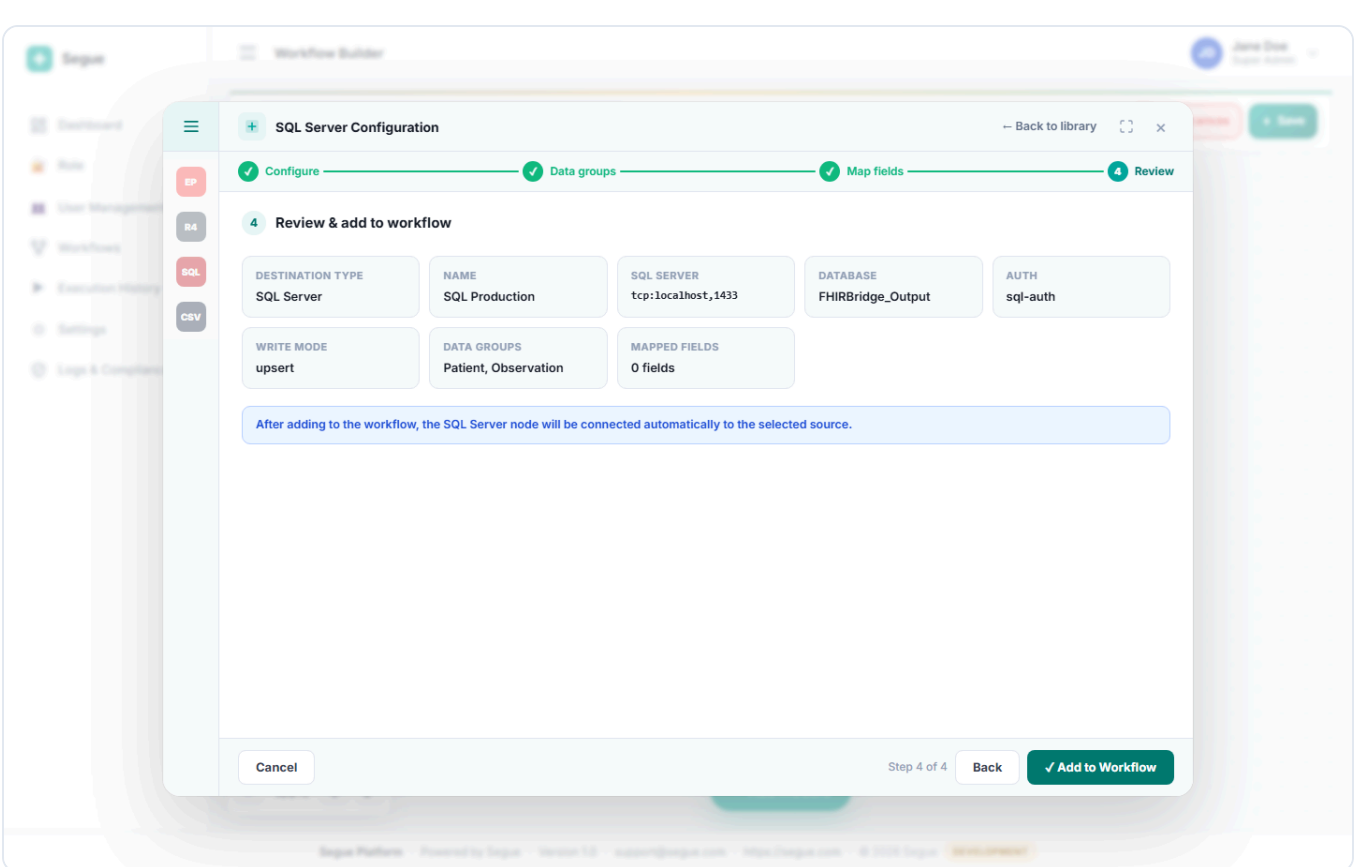

The screenshot shows the 'Segue Workflow Builder' interface. A modal window titled 'SQL Server Configuration' is open, displaying a progress bar with four steps: 'Configure', 'Data groups', 'Map fields', and 'Review' (the current step, marked with a '4'). The 'Review & add to workflow' section contains the following configuration details:

DESTINATION TYPE	NAME	SQL SERVER	DATABASE	AUTH
SQL Server	SQL Production	tcp:localhost,1433	FHIRBridge_Output	sql-auth

WRITE MODE	DATA GROUPS	MAPPED FIELDS
upsert	Patient, Observation	0 fields

Below the configuration fields, a blue informational box states: "After adding to the workflow, the SQL Server node will be connected automatically to the selected source." At the bottom of the modal, there are three buttons: 'Cancel', 'Back', and 'Add to Workflow' (highlighted in green). The footer of the Segue Platform indicates it is 'Powered by Segue', version 1.0, with contact information and a copyright notice for 2018.

A last summary before it's added to the canvas — check the destination type, connection details, write mode, and which data groups are included, then click **Add to Workflow**.

Real-world gotcha: if you mapped a brand-new column onto a table that doesn't exist yet in the target database, Segue won't silently fail — it tells you exactly what's missing:

Segue

Workflow Builder

Dashboard

Role

User Management

Workflow

Execution History

Settings

Logs & Compliance

SQL Server Configuration

Configure Data groups Map fields Review

4 Review & add to workflow

DESTINATION TYPE
SQL Server

NAME
SQL Production

SQL SERVER
tcp:localhost,1433

DATABASE
FHIRBridge_Output

AUTH
sql-auth

WRITE MODE
upsert

DATA GROUPS
Patient, Observation

MAPPED FIELDS
0 fields

After adding to the workflow, the SQL Server node will be connected automatically to the selected source.

Cancel

Schema change failed

Add column "BasedOnDetails" on dbo.PatientObservation failed: Table 'dbo.PatientObservation' does not exist. Create it first via "Create a new table...".

4 of 4


Back

Add to Workflow

Use the canvas's "Create a new table..." option first if the table itself doesn't exist yet, then map columns onto it.

7 Mapping fields (the details)


This is the heart of Segue: connecting a field from the incoming FHIR data (left) to a column in your destination table (right). It looks visual and free-form, but every connection you draw becomes one exact, reviewable rule.

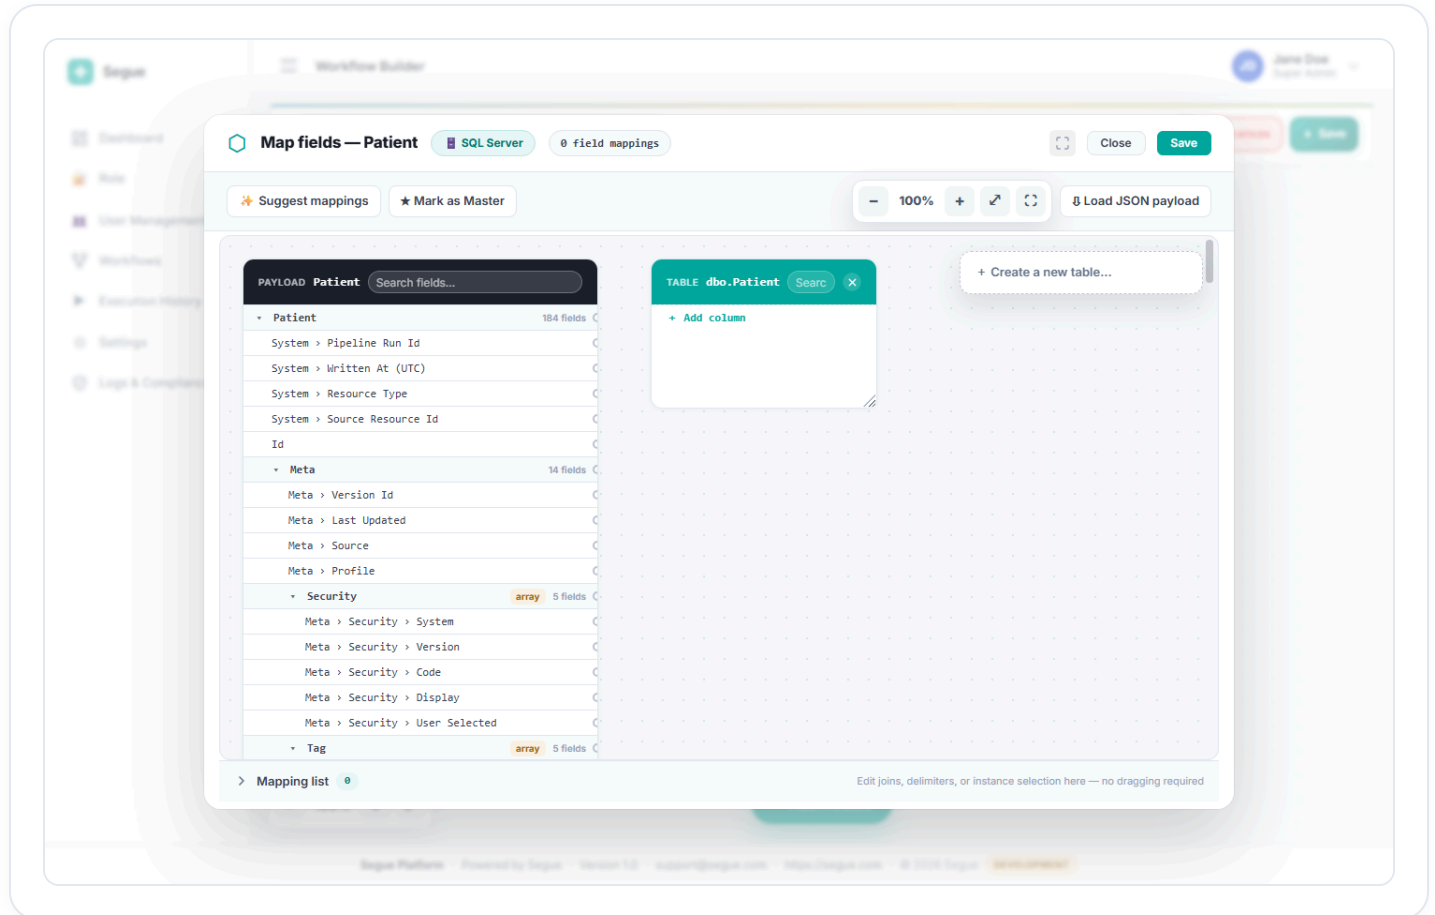

- **Left panel (Payload)** — every field that can appear in this FHIR resource, organized as a tree you can expand. A field tagged **array** means the source can send more than one of it (e.g. a patient can have several addresses).
- **Right panel (Table)** — the destination table's columns. Use **+ Add column** to create a new one, or **+ Add a table from your database...** / **+ Create a new table...** to bring in a different target.
- **Suggest mappings** — auto-matches source fields to columns with obviously similar names, so you're not connecting everything by hand.
- **Mark as Master** — flags this group's mapping as the authoritative one used elsewhere in the product (e.g. lineage displays).
- **Load JSON payload** — paste a real example FHIR record so the source tree reflects fields your actual data really uses, not just the generic shape.


Adding another table to map into

The primary table for a data group is attached automatically (e.g. `dbo.Patient` for the Patient group). If you need a *second* table — say, a child table for a repeating field — you have two options, both under **+ Add a table from your database...** in the top-right of the canvas.

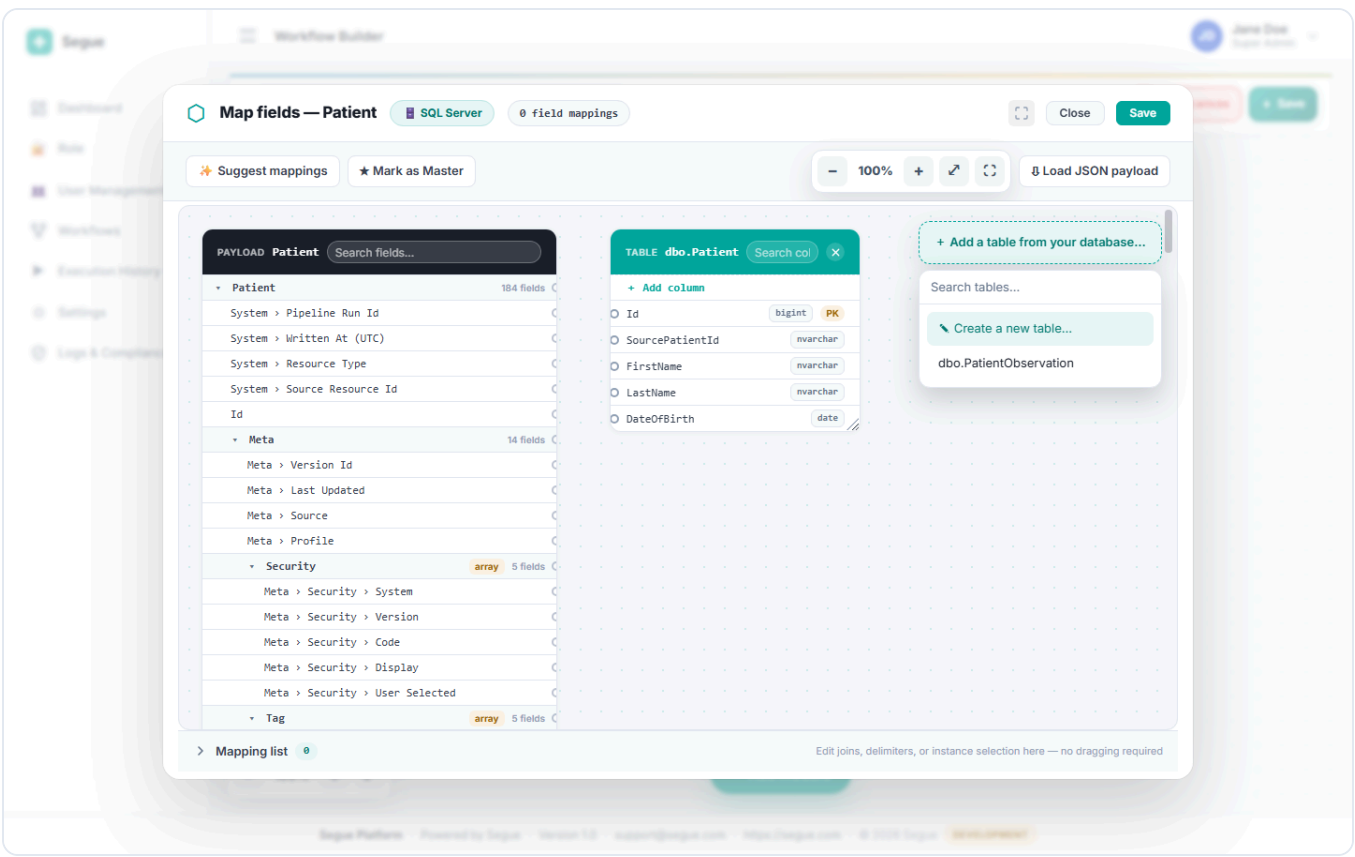


The screenshot shows the 'Map fields — Patient' dialog in the Segue Workflow Builder. The dialog is titled 'Map fields — Patient' and shows '0 field mappings'. It has a search bar at the top right with 'Close' and 'Save' buttons. Below the search bar are buttons for 'Suggest mappings' and 'Mark as Master'. The main area is divided into two panels: 'PAYLOAD Patient' and 'TABLE dbo.Patient'. The 'PAYLOAD Patient' panel shows a list of fields for the 'Patient' table, including 'System > Pipeline Run Id', 'System > Written At (UTC)', 'System > Resource Type', 'System > Source Resource Id', 'Id', 'Meta', 'Security', and 'Tag'. The 'TABLE dbo.Patient' panel shows a list of fields for the 'dbo.Patient' table, including 'Id', 'SourcePatientId', 'FirstName', 'LastName', and 'DateOfBirth'. A search bar is visible at the top right of the dialog, and a button labeled '+ Add a table from your database...' is present. The background shows the Segue Platform interface with a sidebar and a top navigation bar.

Pick an existing table. Click **+ Add a table from your database...** to open a searchable list of every other table Segue already found in your connected database (here, `dbo.PatientObservation`) — pick one to bring it onto the canvas alongside the primary table.

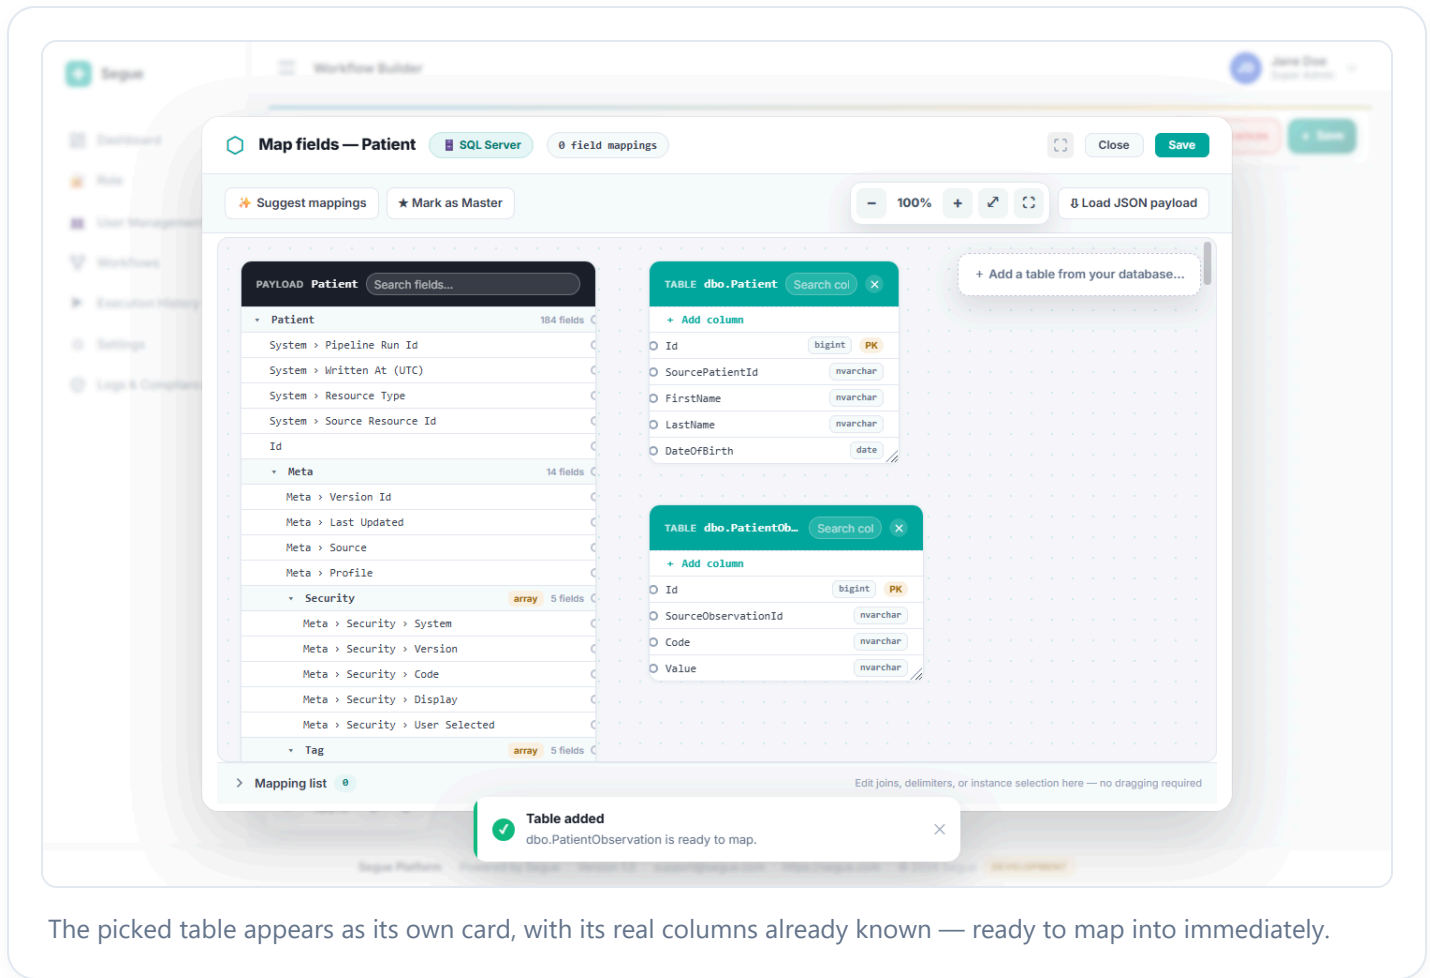


The picked table appears as its own card, with its real columns already known — ready to map into immediately.

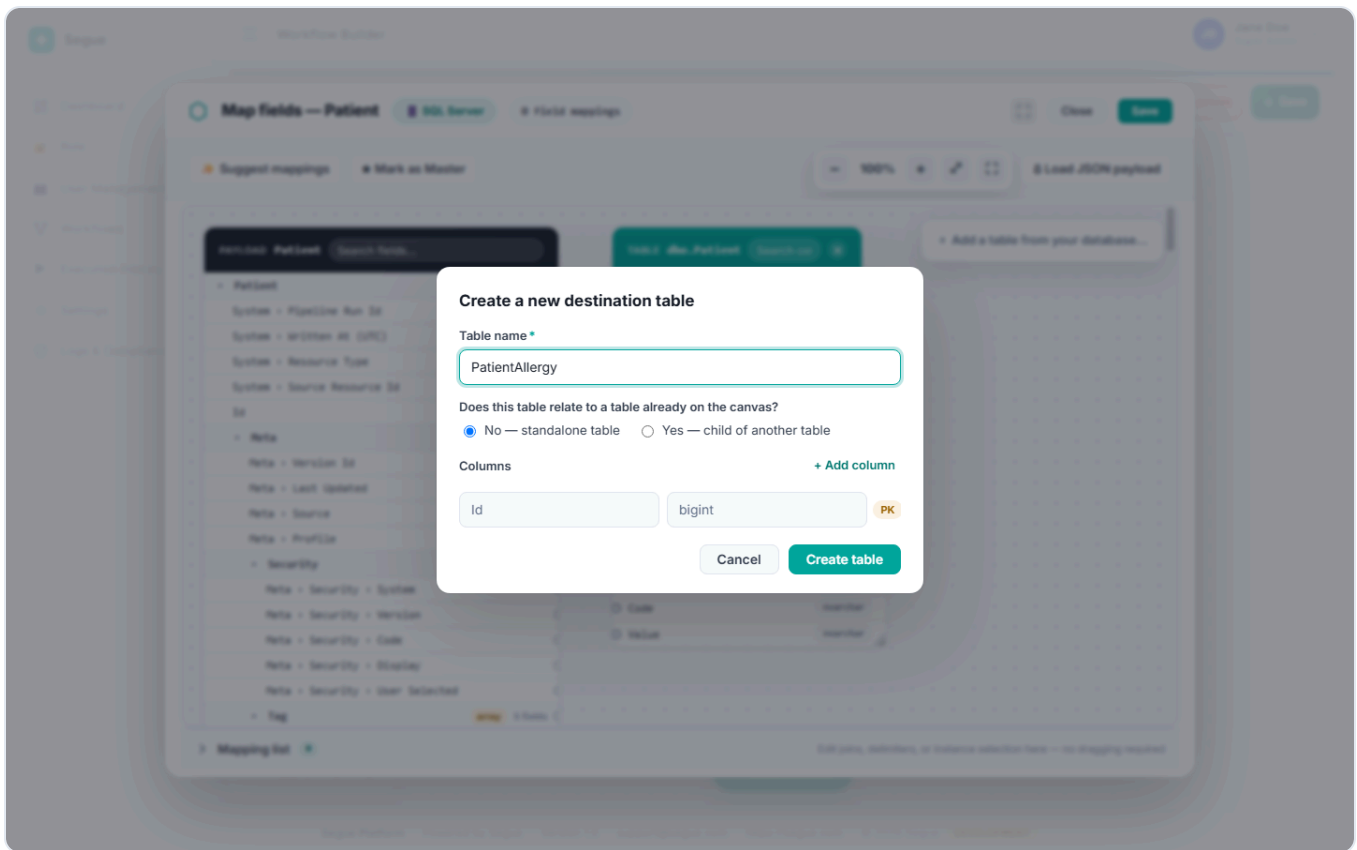

Or create a brand-new table. From the same menu, choose **Create a new table....** Give it a name, say whether it's a standalone table or a *child of another table already on the canvas* (Segue then adds the foreign-key column for you), and define its starting columns. Like adding a column, nothing is created in the real database until you finish the wizard.

Adding a new column

Click + **Add column** on the table panel.

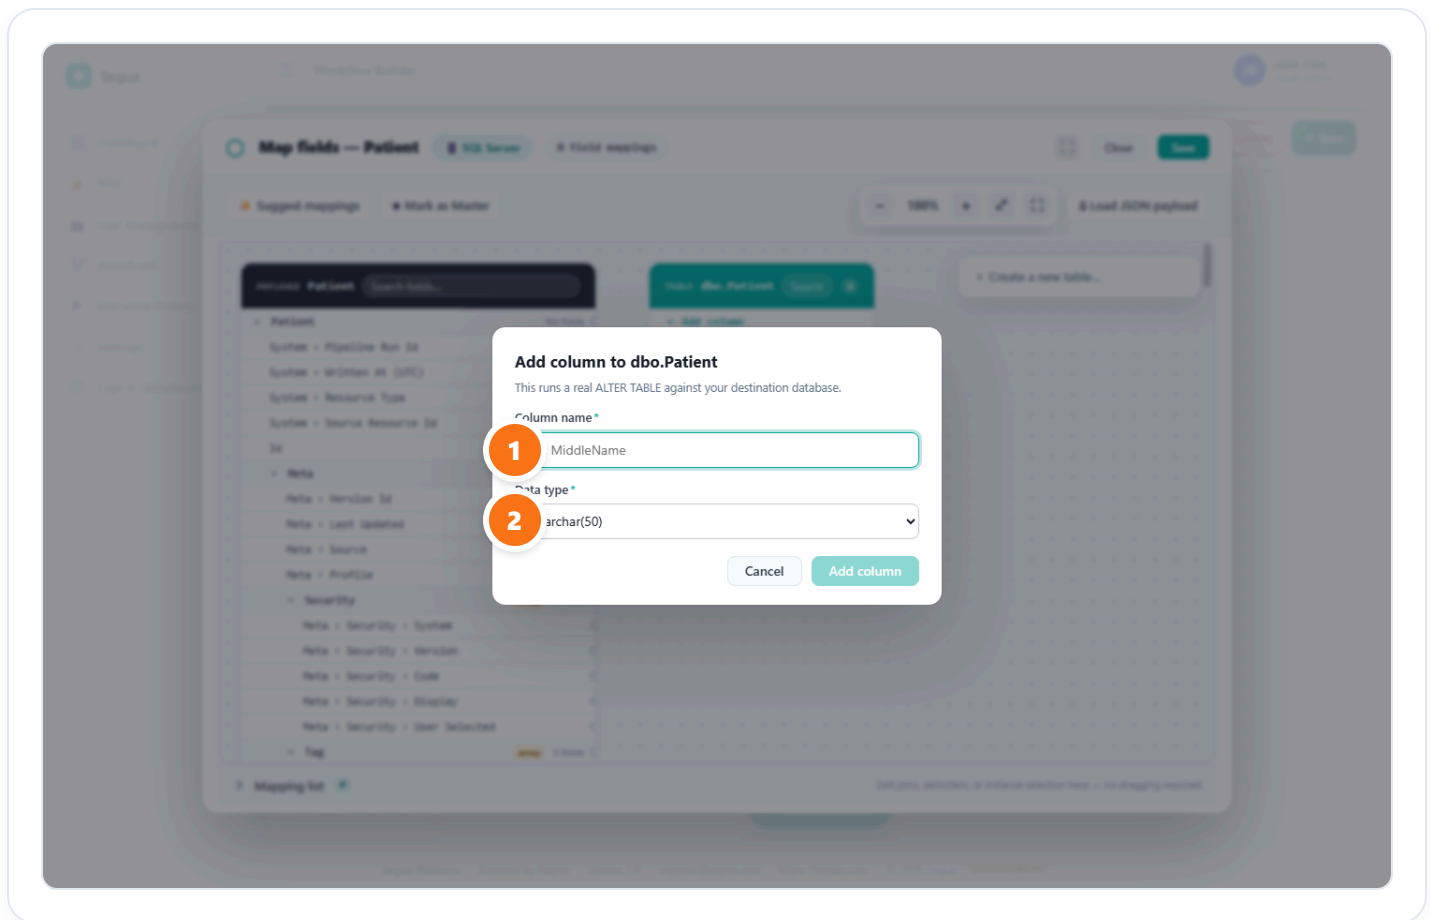


#	FIELD	WHAT TO ENTER
1	Column name	The exact SQL column name to create, e.g. <code>MiddleName</code> .
2	Data type	Pick a SQL type that fits the data: short text (<code>nvarchar(50/120/255)</code>), long text/JSON blobs (<code>nvarchar(max)</code>), whole numbers (<code>int</code> / <code>bigint</code>), true/false (<code>bit</code>), dates (<code>date</code> / <code>datetime2</code>), money/decimals (<code>decimal(18,2)</code>), or a GUID (<code>uniqueidentifier</code>).


This runs a real `ALTER TABLE` against your destination database the moment you finish the wizard (via **Add to Workflow / Save**) — not immediately. Nothing touches the real schema until then, so it's safe to experiment while mapping.

Two ways to build a mapping

Every connection you draw between a source field and a destination column is called a **mapping**. Segue gives you two ways to create one — use whichever feels more natural, they end up creating the exact same kind of rule.

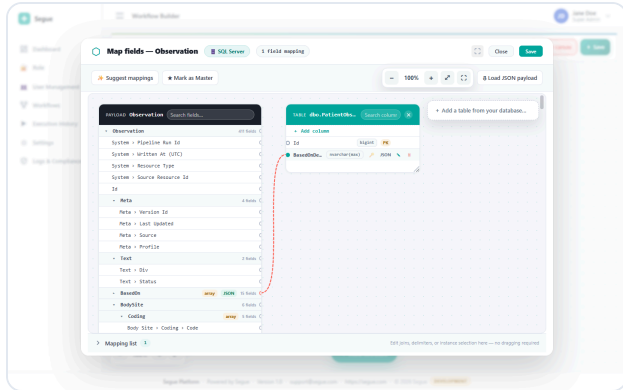

Option 1 — drag and drop. Drag a field (or a whole array group) straight from the Payload tree on the left onto a column in the Table panel on the right. A dashed line confirms the connection. Fastest for simple, one-to-one mappings and for the whole-array-to-JSON mode described below.

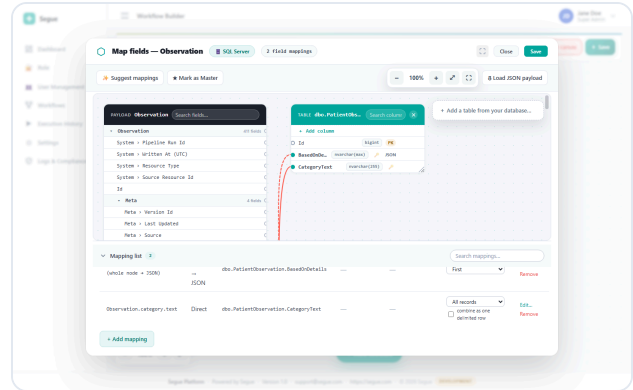


Option 2 — the Mapping list. Click the **Mapping list** bar at the bottom of the canvas to expand a plain table of every rule created so far — source field(s), mode, destination column, and instance selection, all in one place. No dragging required, and it's the easiest way to review everything you've mapped at a glance.

Click **+ Add mapping** inside that same accordion to build a rule from dropdowns instead of dragging — the better choice when you want precise control over which array item to use, or want to combine several array values into one field (see below):

Turning a repeating field into one column — three ways

FHIR records are full of arrays (a list of "based on" references, several categories, multiple components). A single SQL column can't hold a list directly, so Segue gives you three ways to flatten one down, available from either method above. Which one you want depends on the answer to: *"do I need every item, or just one?"*

- **Array → JSON** — drag the whole array group onto a column (see Option 1 above); Segue tags it **JSON** and stores the entire list as one JSON-text string. Best when you need every item and every sub-field, and don't mind reading it back with a JSON query later.
- **Array → single record** — map one specific leaf field with Instance set to *First*, *Nth*, or *Criteria* (see the Instance Selection table below). Only that one item is used.
- **Array → comma-separated** — map a leaf field with Instance set to *All records* and check **combine as one delimited row**. Every value is joined into one string in a single column.

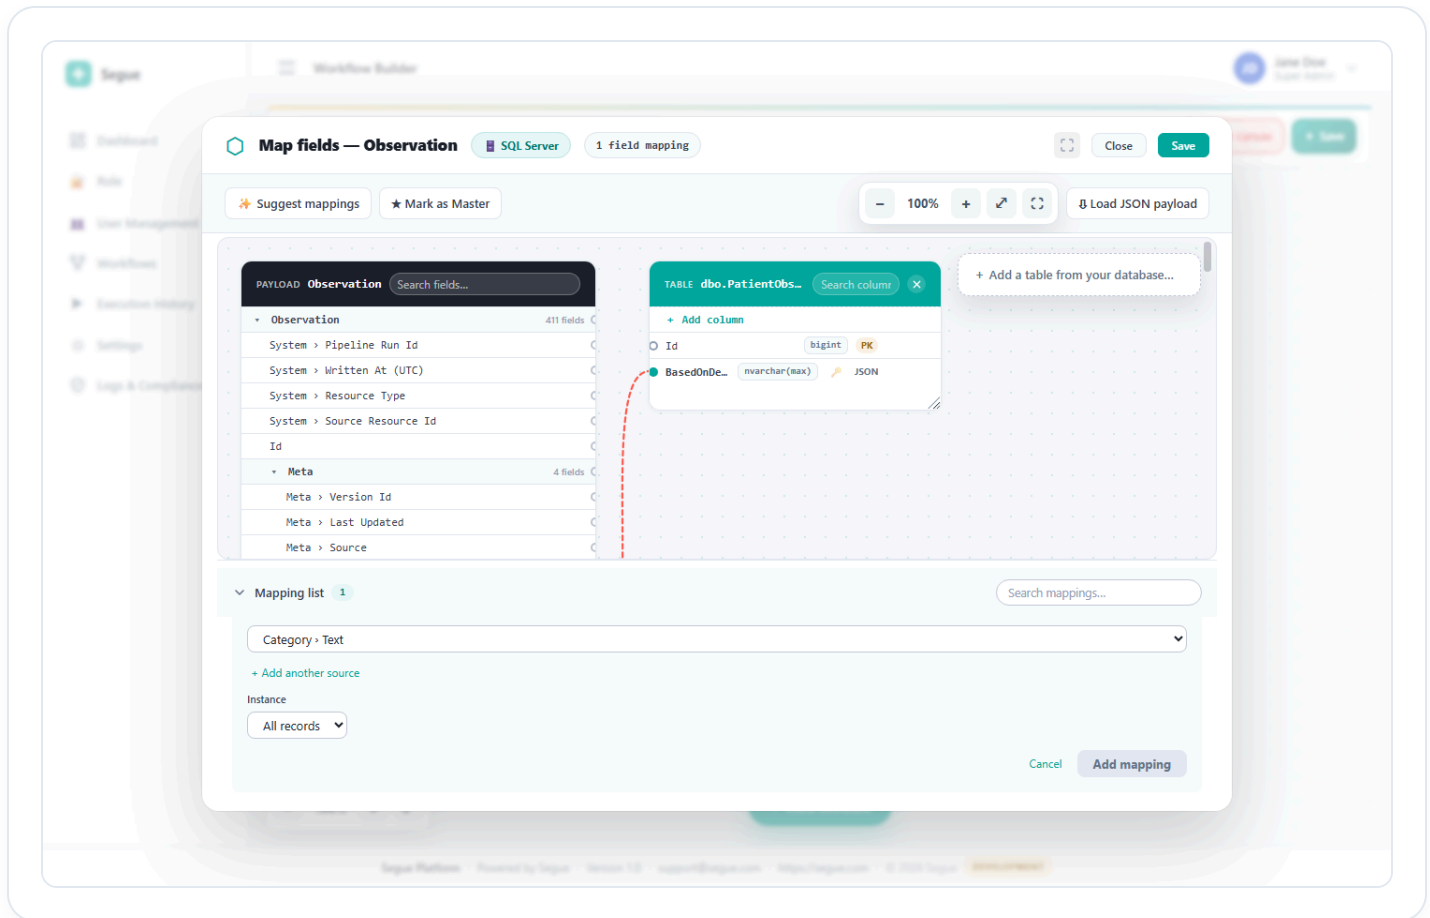

SETTING

WHAT IT MEANS

Source field(s)

Pick one specific leaf field from the tree (e.g. `Category > Text`), not a whole array group.

Instance — All records

Array → **comma-separated**. Pulls every value from the array and joins them into one string in a single column. Pair this with the **combine as one delimited row** checkbox below (see next screenshot).

Instance — First


Array → **single record**. Only the first item in the array is used — everything after it is ignored. Use this when you only ever care about one value (e.g. the primary category).

Instance — Nth

Same idea as First, but lets you pick a specific position (2nd, 3rd, ...) instead of always the first.

Instance — Criteria

Picks whichever array item matches a condition you define (e.g. "the one where `use = official` "), rather than by position.

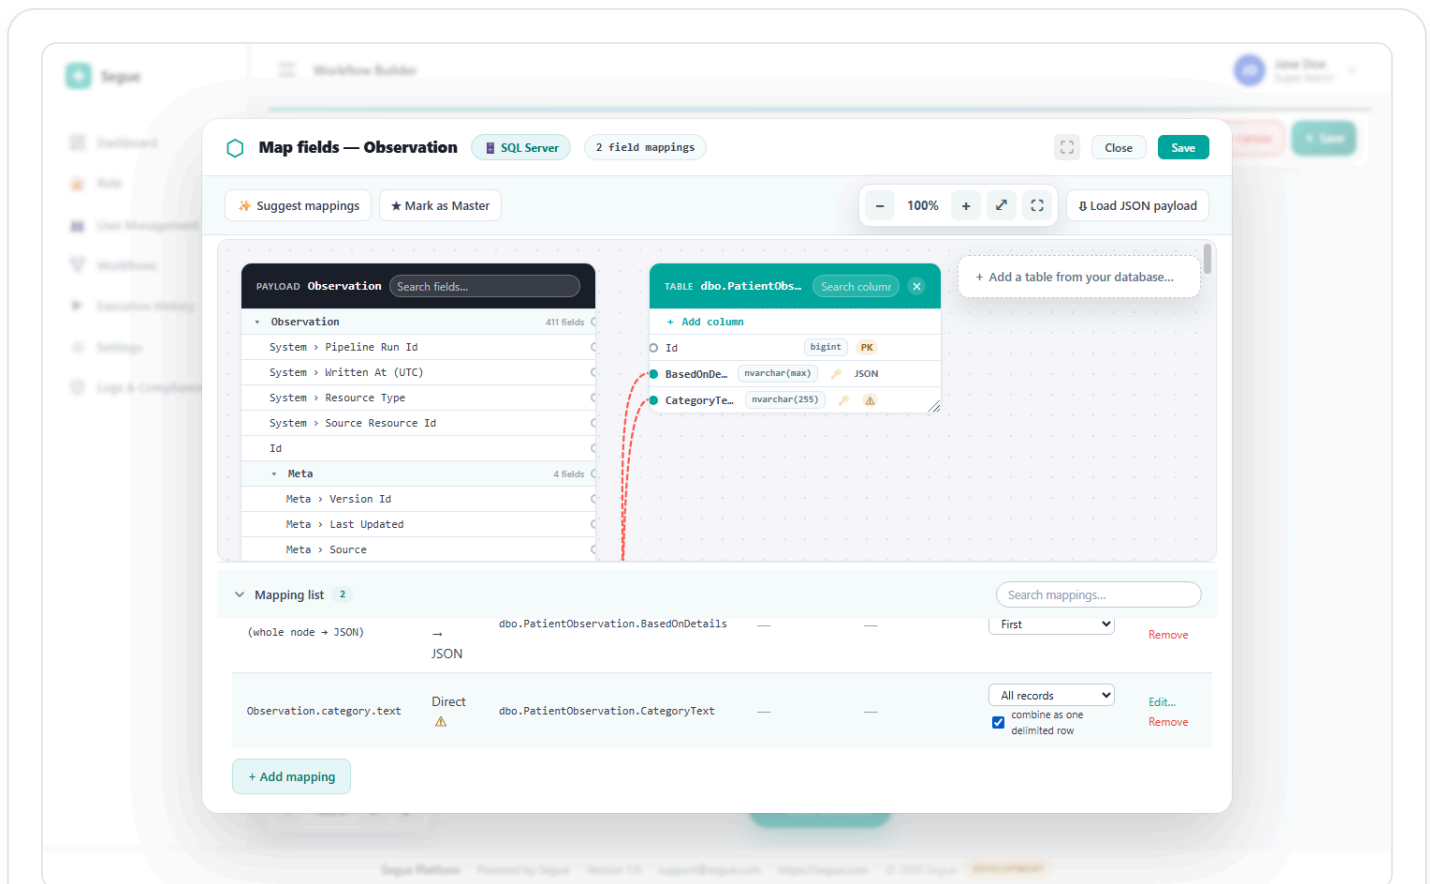


With **Instance = All records** and **combine as one delimited row** checked, every value in the array is joined into a single comma-separated string in that one column — Array → comma-separated, the third mode.

This manual-mapping panel is marked "preview" in the product itself (you'll see a small ⚠ next to *Direct* mode) — meaning it's shown for review but not yet fully enforced by the pipeline engine. The drag-and-drop **Array** → **JSON** mapping described above is the fully working path today.

Marking a primary / upsert key

Every mapped column has a small 🔑 button. Click it to mark that column as the key Segue uses to tell "this is the same record as before" from "this is a brand-new one" — which is what makes **Upsert by source id** (from the Configure step) actually work. Typically you'd mark the column holding the FHIR resource's own id as the key.

Leaving a mapping screen without saving always asks first — nothing is silently discarded:

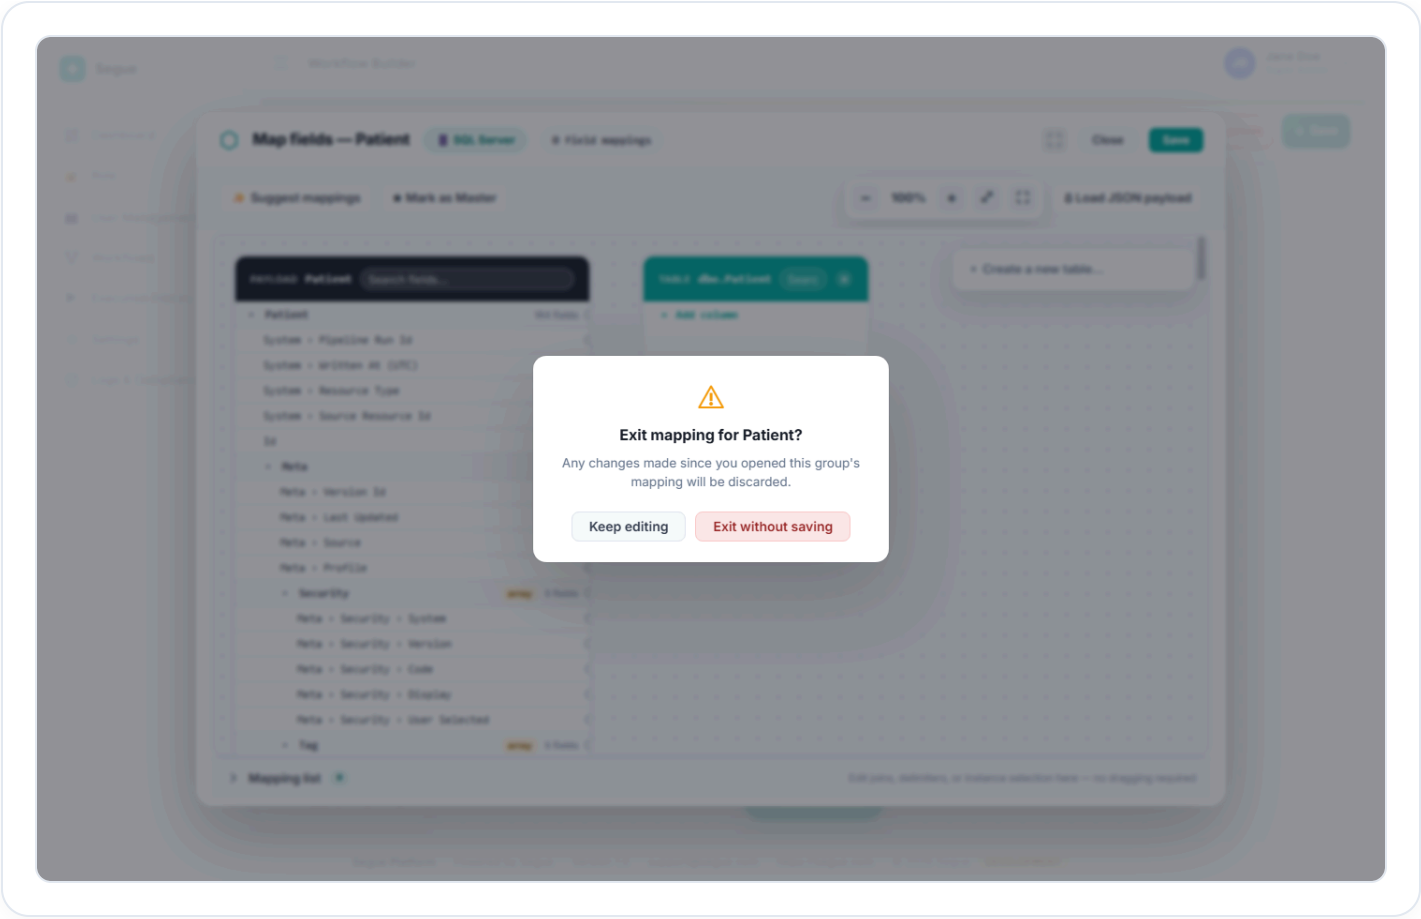

Exit mapping for Patient?


Any changes made since you opened this group's mapping will be discarded.

Keep editing

Exit without saving

8 Sending data to a CSV file

The CSV destination follows the exact same four-step wizard as SQL Server — only the Configure step's fields differ, since there's no database to connect to.

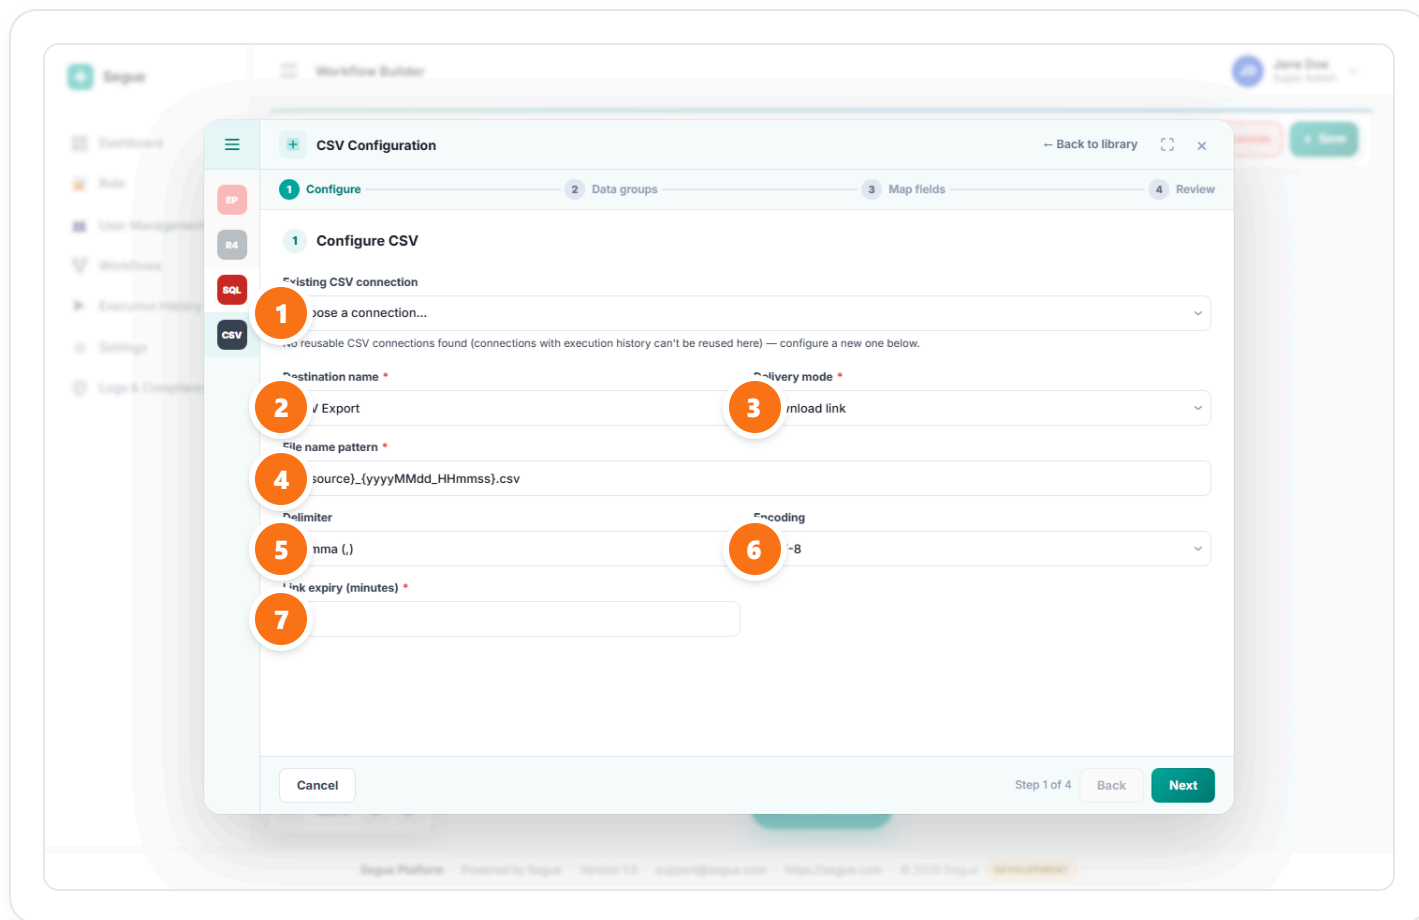


#	FIELD	WHAT IT IS
1	Existing CSV connection	Reuse a previously configured CSV destination instead of starting over.
2	Destination name	A label for this connection.
3	Delivery mode	How the file reaches you — only two choices are enabled in this deployment: Email or Download link (see below for what each means).
4	File name pattern	A template for the generated file's name — <code>{resource}</code> and date/time placeholders get filled in automatically, e.g. <code>Patient_20260813_113000.csv</code> .
5	Delimiter	Comma is the CSV default — change it if whatever will read this file expects something else (tab, semicolon, pipe).
6	Encoding	UTF-8 covers virtually every case, including non-English characters in names/addresses.
7	Link expiry (minutes)	Only shown for Download link mode (see below) — how long the generated link stays valid before it stops working.

Download link. After the run finishes, Segue generates a secure, time-limited link to download the file — good when someone just needs to grab the file manually, without managing a mailbox or an SFTP account. Set how long the link should stay valid in **Link expiry (minutes)**.

Email. The file is attached to (or linked from) an email sent automatically when the run finishes — good for recurring, scheduled exports where someone just needs it to land in their inbox. See the recipient/subject/body fields below.

Choosing **Email** as the delivery mode reveals who receives it and what it says:

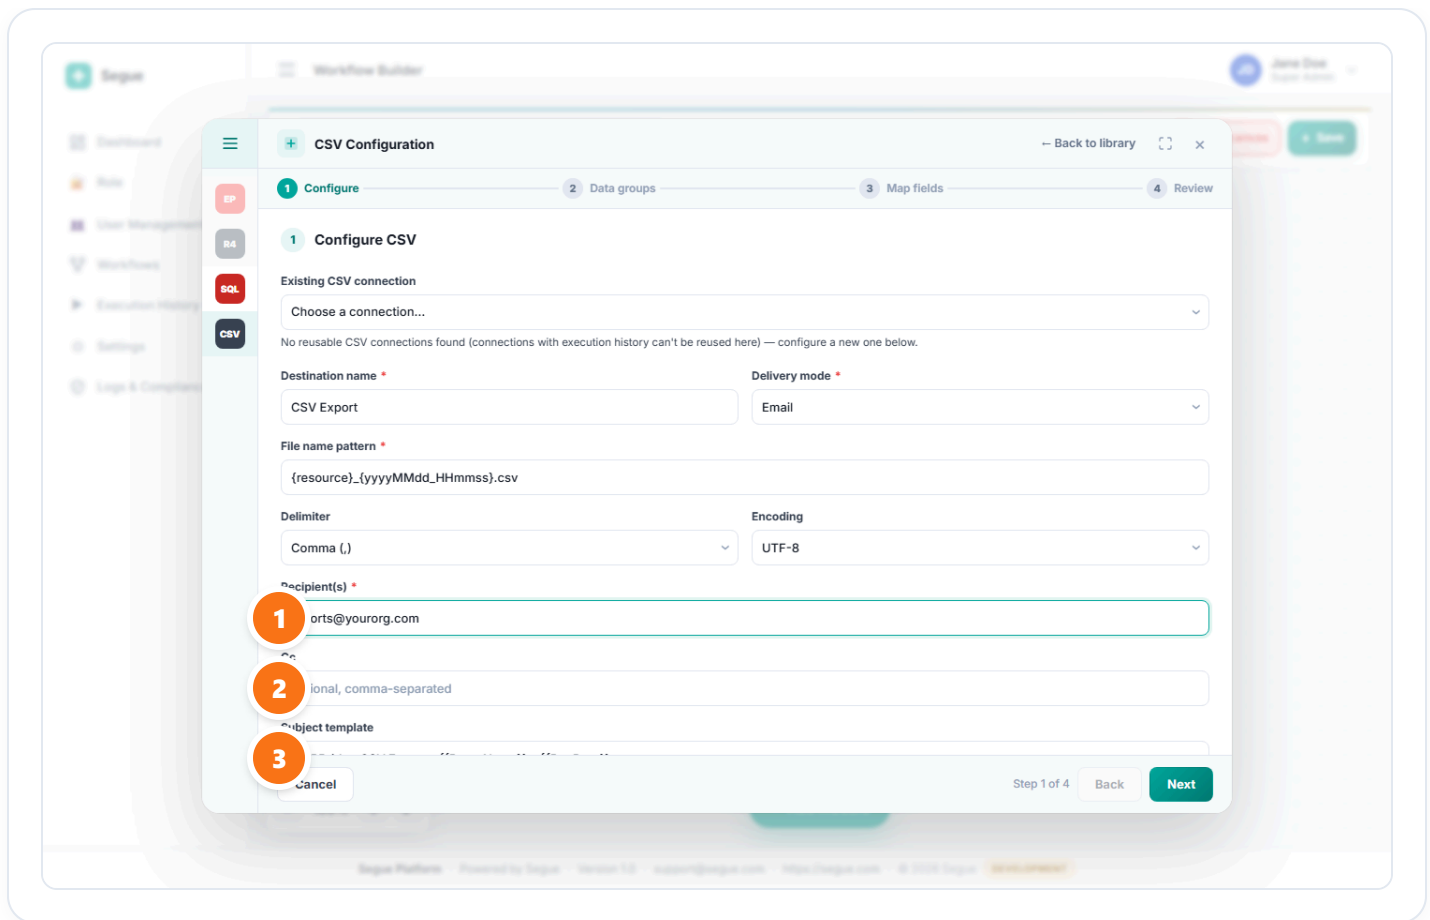

#	FIELD	WHAT IT IS
1	Recipient(s)	Required — one or more email addresses, comma-separated, e.g. <code>alice@company.com, bob@company.com</code> .
2	Cc	Optional — additional addresses copied on the same email.
3	Subject template / Body template	The email's subject and message. Placeholders like <code>{{RouteName}}</code> , <code>{{RunDate}}</code> , and <code>{{RowCount}}</code> get filled in automatically for each run.

Steps 2–4 (Data groups, Map fields, Review) work identically to the SQL Server walkthrough above.

9

Managing saved connections


Every source and destination you've ever configured — plus mapping profiles and transformation rules — has its own dedicated admin screen, separate from the pipeline canvas. Find them under **Settings** → **Workflow Configurations**.

The screenshot displays the 'Settings' page for 'Workflow Configurations' in the Segue Platform. The left sidebar shows the navigation menu with 'Settings' highlighted. The main content area is titled 'Settings' and contains tabs for 'Branding', 'Workflow Configurations', 'EHR Endpoints', 'Allowed Origins', and 'System Settings'. Under 'Workflow Configurations', there are sub-tabs for 'Source Connections', 'Destination Connections', 'Mapping Profiles', and 'Transformation Rules'. The 'Source Connections' tab is active, showing a search bar with the text 'Search by name, EHR, or base URL...', a 'Reset' button, and a dropdown menu with 'Epic' selected. There are also three filter dropdowns: 'All EHRs', 'All audiences', and 'All statuses'. A 'New Source Connection' button is located next to the search bar. Below the filters is a table with the following data:

	NAME ↑	EHR ↑	AUDIENCE ↑	BASE URL	CLIENT ID	STATUS ↑	ACTION BY
1	BackendSystem Gaurav	Epic	Backend System	https://fhir.epic.com/interconnect-fhir-oauth/api...	0184f963-e044-4af2-a2fc-7546ec71ceac	Active	admin@mailinator.cc
2	BackendSystem Gaurav-1	Epic	Backend System	https://fhir.epic.com/interconnect-fhir-oauth/api...	266c4a3e-49a3-4fb0-b2a9-062aaae5baf1	Active	admin@mailinator.cc
3	BS 9 Connection	Epic	Backend System	https://fhir.epic.com/interconnect-fhir-oauth/api...	0184f963-e044-4af2-a2fc-7546ec71ceac	Active	admin@mailinator.cc
4	BS Gaurav	Epic	Backend System	https://fhir.epic.com/interconnect-fhir-oauth/api...	0184f963-e044-4af2-a2fc-7546ec71ceac	Active	admin@mailinator.cc

At the bottom of the page, there is a footer with the text: 'Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue'.

Source Connections — every EHR/FHIR connection, searchable by name, EHR vendor, audience, or status. + **New Source Connection** creates one without needing to open the pipeline canvas at all.

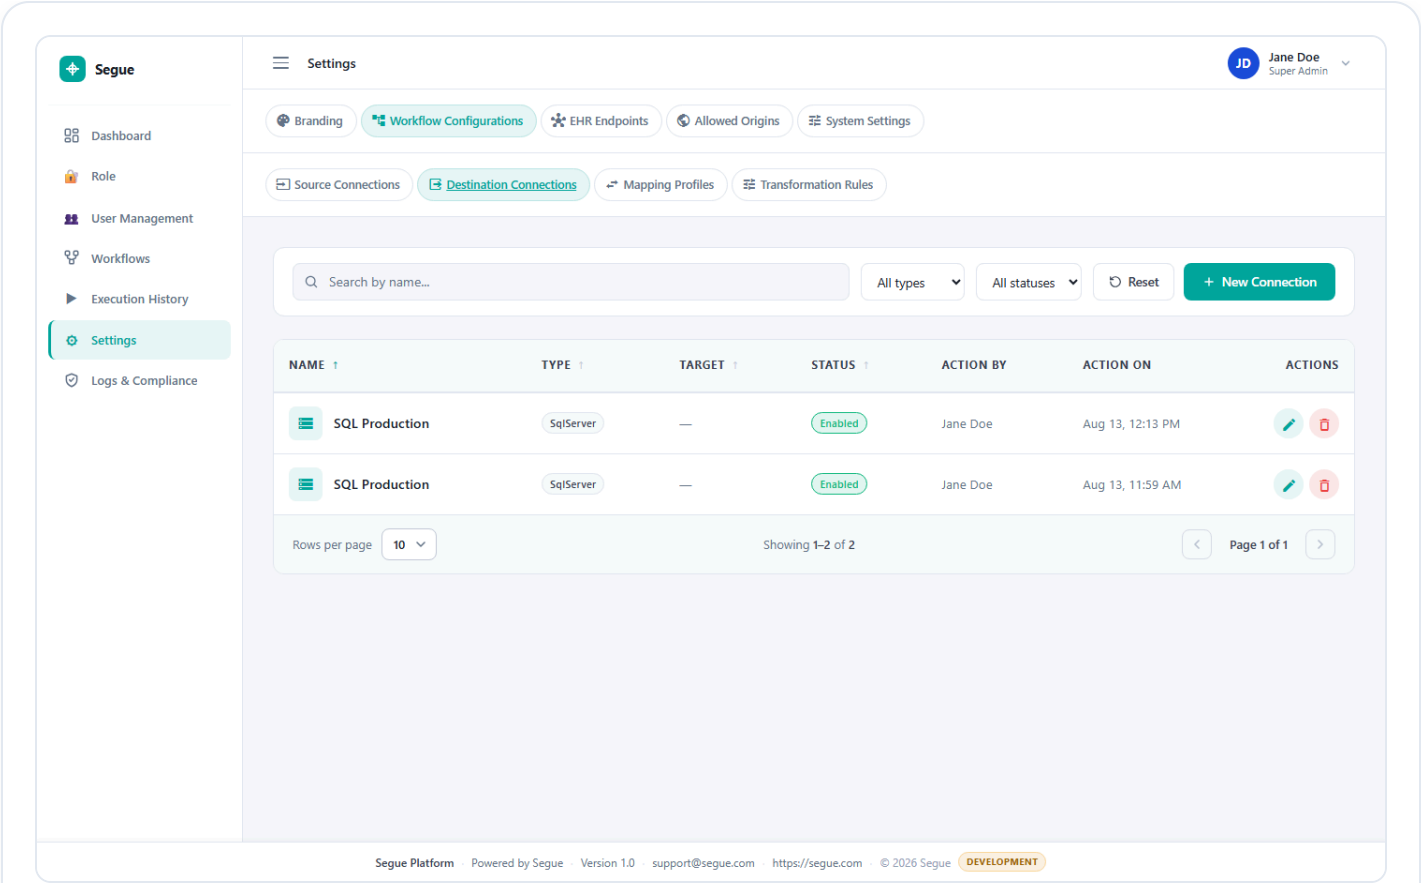

Destination Connections — every SQL Server/CSV target, its status, and who last touched it. The pencil icon edits; the trash icon deletes (blocked once a connection has real run history, to protect that history).

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Settings

Branding

Workflow Configurations

EHR Endpoints

Allowed Origins

System Settings

Source Connections

Destination Connections

Mapping Profiles

Transformation Rules

Q Search by name or target object...

All resource types

All statuses


Reset

New Mapping Profile

NAME	RESOURCE TYPE	SOURCE	DESTINATION	TARGET OBJECT	FIELDS	STATUS	MO
AllergyIntolerance mapping	AllergyIntolerance	BS Gaurav 3	SQL Production	dbo.AllergyIntolerance;mode=up...	14	Enabled	Jul AM
AllergyIntolerance mapping	AllergyIntolerance	BS Gaurav	SQL Production	dbo.AllergyIntolerance;mode=up...	14	Enabled	Jul PM
AllergyIntolerance mapping	AllergyIntolerance	Patient_limited	CSV Export	allergyintolerance.csv	120	Enabled	Jul PM
Condition mapping	Condition	BS Gaurav	SQL Production	dbo.Condition_NewMapped;mod...	13	Enabled	Jul PM
Condition mapping	Condition	BackendSystem Gaurav	SQL Production	dbo.Condition_NewMapped;mod...	13	Enabled	Jul PM
Condition mapping	Condition	Patient	CSV Export	conditions.csv	154	Enabled	Jul PM
Condition mapping	Condition	BackendSystem Gaurav	SQL Production	dbo.Condition_Full;mode=upsert	148	Enabled	Jul PM

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

Mapping Profiles — a saved, reusable field-mapping (source → target object → field list) that can be applied to more than one pipeline, so you don't have to redraw the same mapping twice. Each row here shows its resource type, source, destination, target table, and field count.

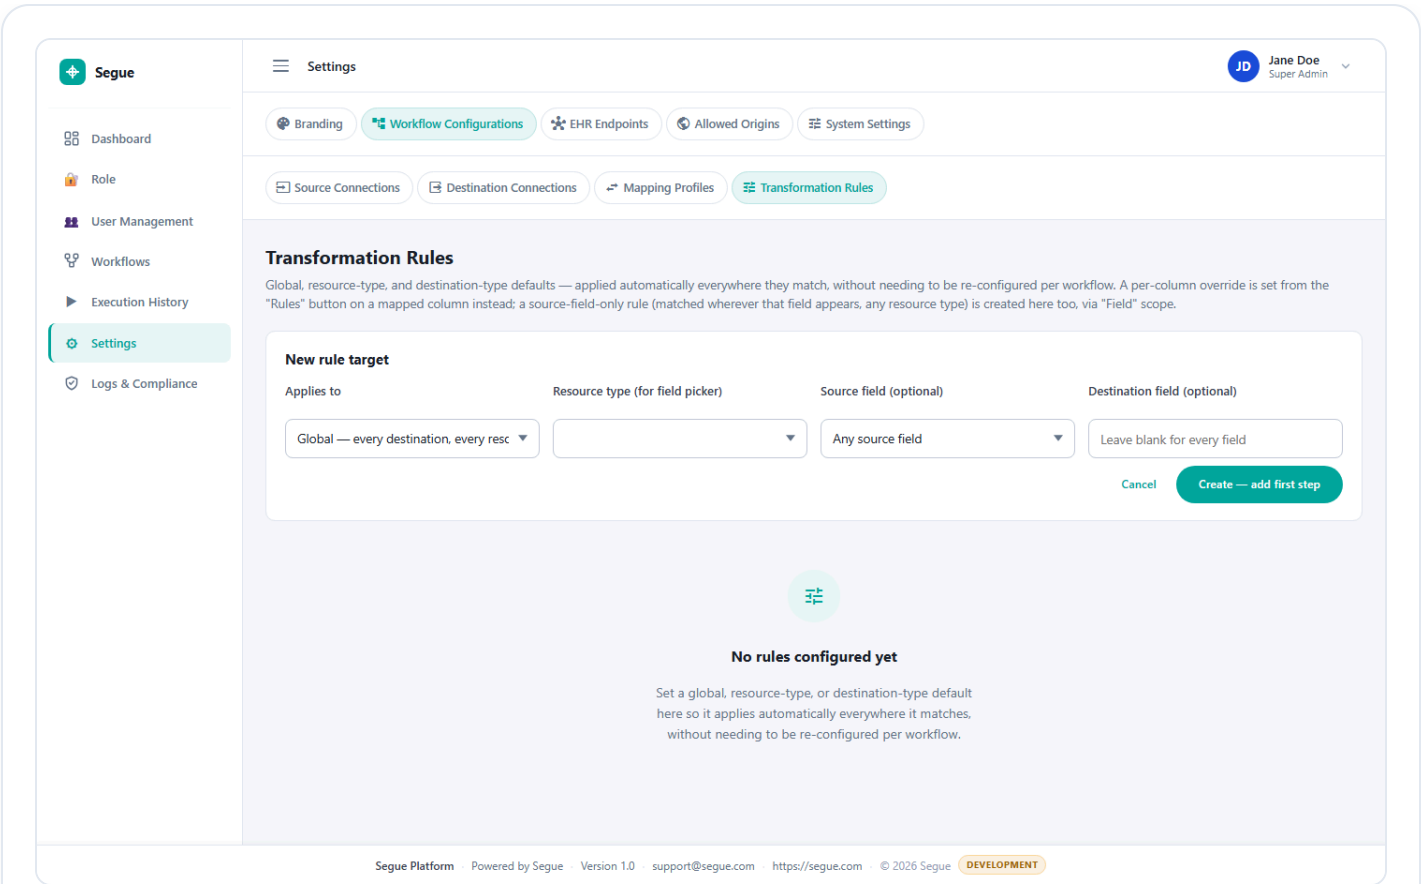

Transformation Rules — set a default once (globally, for a resource type, for a destination type, or for one specific source field) instead of repeating the same per-column rule in every pipeline. A per-column override is still available from the "Rules" button next to any mapped field on the canvas.

10 The EHR endpoint directory

Under **Settings** → **EHR Endpoints** is a pre-loaded directory of hundreds of real Epic MyChart FHIR endpoints across the US — a lookup table, not something you need to fill in yourself.

The screenshot shows the Segue Platform interface. On the left is a sidebar with navigation links: Dashboard, Role, User Management, Workflows, Execution History, Settings (highlighted), and Logs & Compliance. The main area is titled 'Settings' and contains tabs for Branding, Workflow Configurations, EHR Endpoints (selected), Allowed Origins, and System Settings. Below the tabs is a search bar with the placeholder 'Search by name, vendor, or FHIR base URL...' and buttons for 'Reset' and '+ Add Endpoint'. A table displays a list of endpoints, showing 1 to 10 of 480 entries. The table has columns for #, NAME, VENDOR, ENDPOINT TYPE, FHIR BASE URL, STATUS, ACTION BY, ACTION ON, and ACTION. The first six entries are listed below:


#	NAME	VENDOR	ENDPOINT TYPE	FHIR BASE URL	STATUS	ACTION BY	ACTION ON	ACTION
1	Access Community Health Network	Epic	MyChart	https://eprescribing.accesscommunityhealth.net/FHIR/...	Active	anonymous	Aug 13, 11:18 AM	[Edit]
2	Acumen Physician Solutions, LLC.	Epic	MyChart	https://epicproxy.et1041.epichosted.com/FHIRProxy/...	Active	anonymous	Aug 13, 11:18 AM	[Edit]
3	Adult & Pediatric Ear, Nose & Throat - Kalamazoo	Epic	MyChart	https://hygieia.bronsonhg.org/FHIRProxy/api/FHIR/...	Active	anonymous	Aug 13, 11:18 AM	[Edit]
4	AdvantageCare Physicians	Epic	MyChart	https://epwebapps.acpny.com/FHIRproxy/api/FHIR/...	Active	anonymous	Aug 13, 11:18 AM	[Edit]
5	AdventHealth	Epic	MyChart	https://mobile.adventhealth.com/oauth2-PRD/api/F...	Active	anonymous	Aug 13, 11:18 AM	[Edit]
6	Akron Children's Hospital	Epic	MyChart	https://haiku-canto-prod.chmca.org/ARR-FHIR-PRD...	Active	anonymous	Aug 13, 11:18 AM	[Edit]

At the bottom of the interface, there is a footer with the text: 'Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue · DEVELOPMENT'.

- Search by hospital/health-system name, vendor, or base URL to quickly find the exact endpoint you need when configuring an Epic source — instead of hunting it down manually.
- **+ Add Endpoint** lets you register one that isn't already listed.
- The pencil icon opens an entry for editing if a URL or name ever changes.

11 Branding & system settings

Also under **Settings**: how the platform looks, security secrets, and the deeper runtime configuration knobs. Most people will only ever touch **Branding**, **Email**, and **Terminology Codes** — the rest is here for completeness.

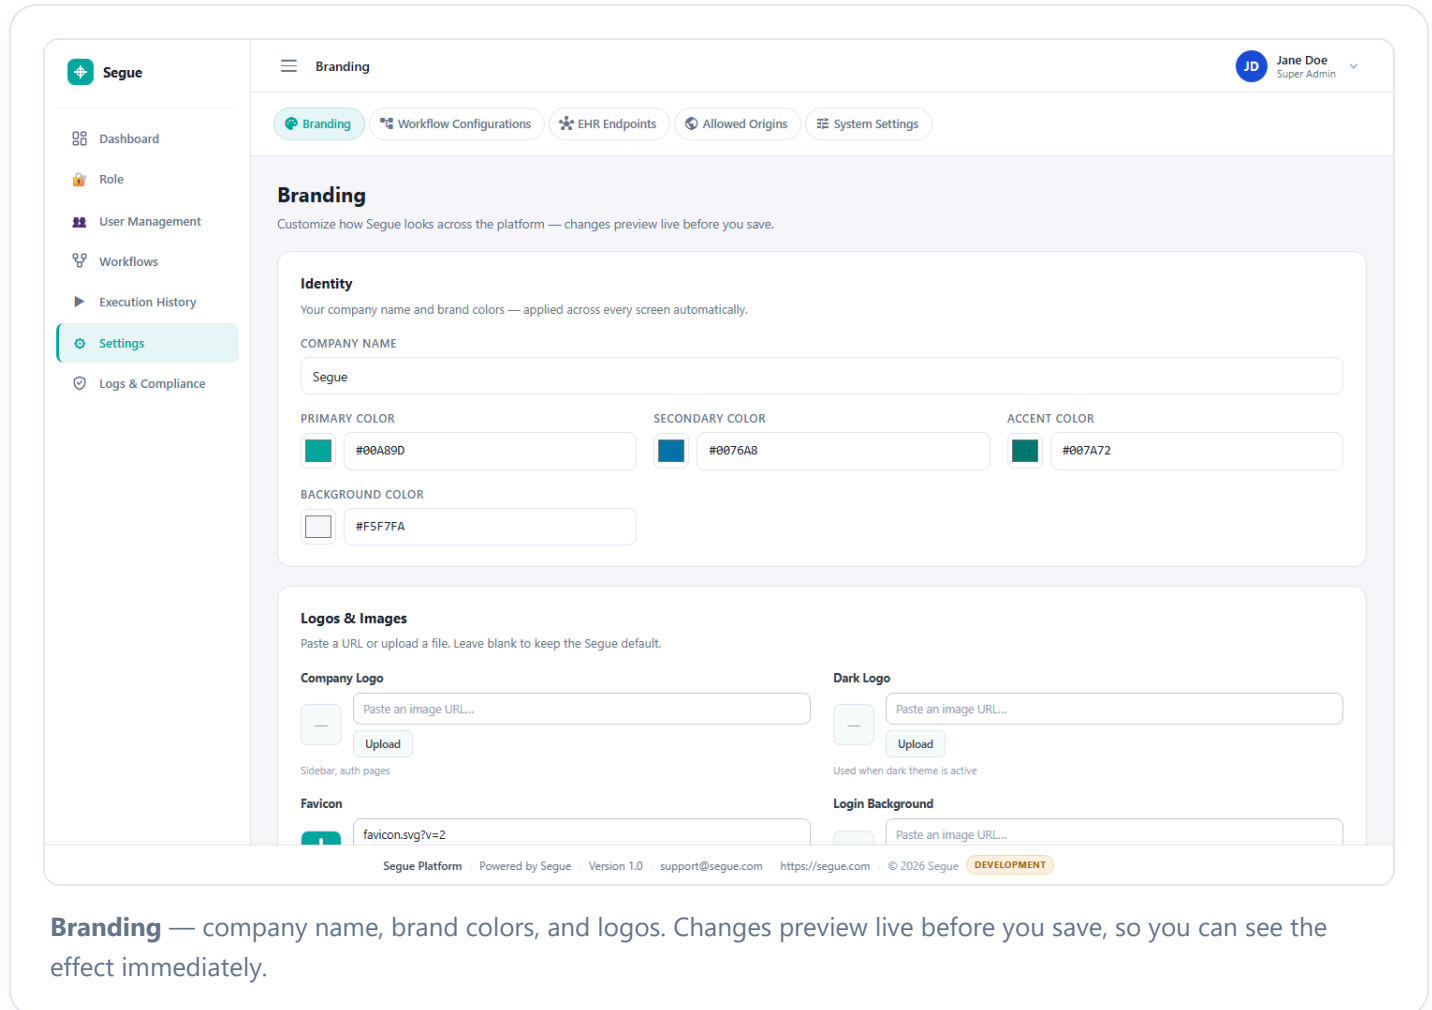

The screenshot displays the 'Branding' settings page within the Segue application. The left sidebar contains navigation links: Dashboard, Role, User Management, Workflows, Execution History, Settings (highlighted), and Logs & Compliance. The top navigation bar shows 'Branding' as the active tab, with other tabs for Workflow Configurations, EHR Endpoints, Allowed Origins, and System Settings. The user profile 'Jane Doe Super Admin' is visible in the top right.

The main content area is titled 'Branding' and includes a subtitle: 'Customize how Segue looks across the platform — changes preview live before you save.' It is divided into two sections:

- Identity**: This section allows for customizing the company name and brand colors. The 'COMPANY NAME' field is set to 'Segue'. Below it, there are color pickers for 'PRIMARY COLOR' (hex #00A89D), 'SECONDARY COLOR' (hex #0076A8), 'ACCENT COLOR' (hex #007A72), and 'BACKGROUND COLOR' (hex #F5F7FA).
- Logos & Images**: This section provides options for uploading or pasting URLs for various images. It includes fields for 'Company Logo' (with a note 'Sidebar, auth pages'), 'Dark Logo' (with a note 'Used when dark theme is active'), 'Favicon' (set to 'favicon.svg?v=2'), and 'Login Background'.

The footer of the page contains the following text: 'Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue · DEVELOPMENT'.

Branding — company name, brand colors, and logos. Changes preview live before you save, so you can see the effect immediately.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Settings

Branding

Workflow Configurations

EHR Endpoints

Allowed Origins

System Settings

Email

General

Security

Terminology Codes

Email Settings

Configure the outbound SMTP server Segue uses to send notification emails.

SMTP Server

Enable email and configure the server Segue connects to for sending it.

HOST *

smtp.office365.com

PORT *

587

Use SSL/TLS

USERNAME

notifications@yourorg.com

PASSWORD

Leave blank to keep the current password

FROM ADDRESS *

no-reply@yourorg.com

FROM NAME *

Segue Platform

Save Email Settings

Send a Test Email

Sends using the currently saved settings above — save your changes first if you just edited them.

SEND TO

you@example.com

Send Test Email

Segue Platform

Powered by Segue

Version 1.0

support@segue.com

https://segue.com

© 2026 Segue

DEVELOPMENT

System Settings → Email — the same SMTP fields from first-time setup, editable later. Use **Send Test Email** to confirm it actually works before relying on it.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Settings

Branding

Workflow Configurations

EHR Endpoints

Allowed Origins

System Settings

Email

General

Security

Terminology Codes

App-wide signing secrets, auto-generated on first boot. Regenerating one signs out every user immediately.

SECRET	STATUS	LAST ROTATED	ACTIONS
JWT Signing Key	Provisioned	8/13/26, 11:18 AM	
Download-Link Signing Secret	Provisioned	8/13/26, 11:18 AM	

Segue Platform

Powered by Segue

Version 1.0

support@segue.com

https://segue.com

© 2026 Segue

DEVELOPMENT

Security — the app-wide signing secrets, generated automatically the first time the app started. Regenerating one immediately signs every user out — only do this if a secret may have leaked.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Settings

Branding

Workflow Configurations

EHR Endpoints

Allowed Origins

System Settings

Email

General

Security

Terminology Codes

LOINC

SNOMED CT

RxNorm

ICD-10

LOINC Terminology

Configure the official LOINC release service and synchronize the local terminology database.

Connection

Credentials and endpoints used to authenticate with and download from the official LOINC release service.

DOWNLOAD API URL *

https://loinc.regenstrief.org/api/v1

FHIR API URL

https://fhir.loinc.org

USERNAME

LOINC username

PASSWORD

LOINC password

Synchronization

☐ Enabled

Schedule automatic LOINC release imports, or run one on demand below.

FREQUENCY

Monthly

EXECUTION TIME

02:00 AM

RETRY COUNT

3

RETRY INTERVAL (SECONDS)

60

DOWNLOAD TIMEOUT (SECONDS)

900

Save Settings

Synchronize Now

Import History

The most recent LOINC synchronization runs.
LOINC has not been synchronized yet.

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

DEVELOPMENT

Terminology Codes — keeps the local copy of medical code systems (LOINC, SNOMED CT, RxNorm, ICD-10) up to date by downloading official releases on a schedule, or on demand via **Synchronize Now**. Needed if pipelines validate or translate codes.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Settings

Branding

Workflow Configurations

EHR Endpoints

Allowed Origins

System Settings

Browser origins allowed to call the API with credentials. Changes take effect immediately — no restart needed.

+ Add Origin

ORIGIN URL	LABEL	ADDED	ADDED BY	ACTIONS
No allowed origins yet Add the URLs allowed to call the API — e.g. your portal's production domain.				

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

DEVELOPMENT

Allowed Origins — the web addresses permitted to call Segue's API from a browser. If you run your own portal on a different domain, add it here — changes apply immediately, no restart needed.

System Settings → **General** exposes dozens of low-level runtime switches (rate limits, retry counts, background-worker timers, feature toggles). These are meant for technical administrators troubleshooting a specific issue, not day-to-day configuration — leave them at their defaults unless you've been told to change a specific one.


12 Users & roles

Manage who can sign in and what they're allowed to do from the left-hand **User Management** and **Role** menu items.

The screenshot displays the 'User Management' section of the Segue Platform. The left sidebar contains navigation links: Dashboard, Role, User Management (highlighted), Workflows, Execution History, Settings, and Logs & Compliance. The main content area is titled 'User Management' and includes a sub-header 'Manage platform users, roles, and access permissions'. A top right button 'Invite User' is present. Below the header, there are four summary cards: '3 Total Users', '1 Active', '2 Deactivated', and '0 Must Change Password'. A search bar and filters for 'All Roles' and 'All Statuses' are provided. The main table lists three users: f1g1 (Audit, Deactivated, SSO), Jane Foster (QWERTY, Deactivated, Local), and Admin Working3 (SuperAdmin, Active, Local). Each row includes a 'View' link. The footer shows 'Segue Platform - Powered by Segue - Version 1.0 - support@segue.com - https://segue.com - © 2026 Segue'.

	NAME	ROLE	STATUS	LOGIN TYPE	LAST LOGIN	ACTION BY	ACTION ON	
FG	f1g1 helloworld2@mailinator.com	Audit	Deactivated	SSO	—	admin@mailinator.com	Jul 29, 2026	View
JF	Jane Foster newsuperadmin@mailinator.com	QWERTY	Deactivated	Local	Jul 28, 2026	admin@mailinator.com	Jul 29, 2026	View
AW	Admin Working3 admin@mailinator.com	SuperAdmin	Active	Local	Aug 13, 2026	anonymous	Aug 13, 2026	View

Click **Invite User** to bring a new person onto the platform:

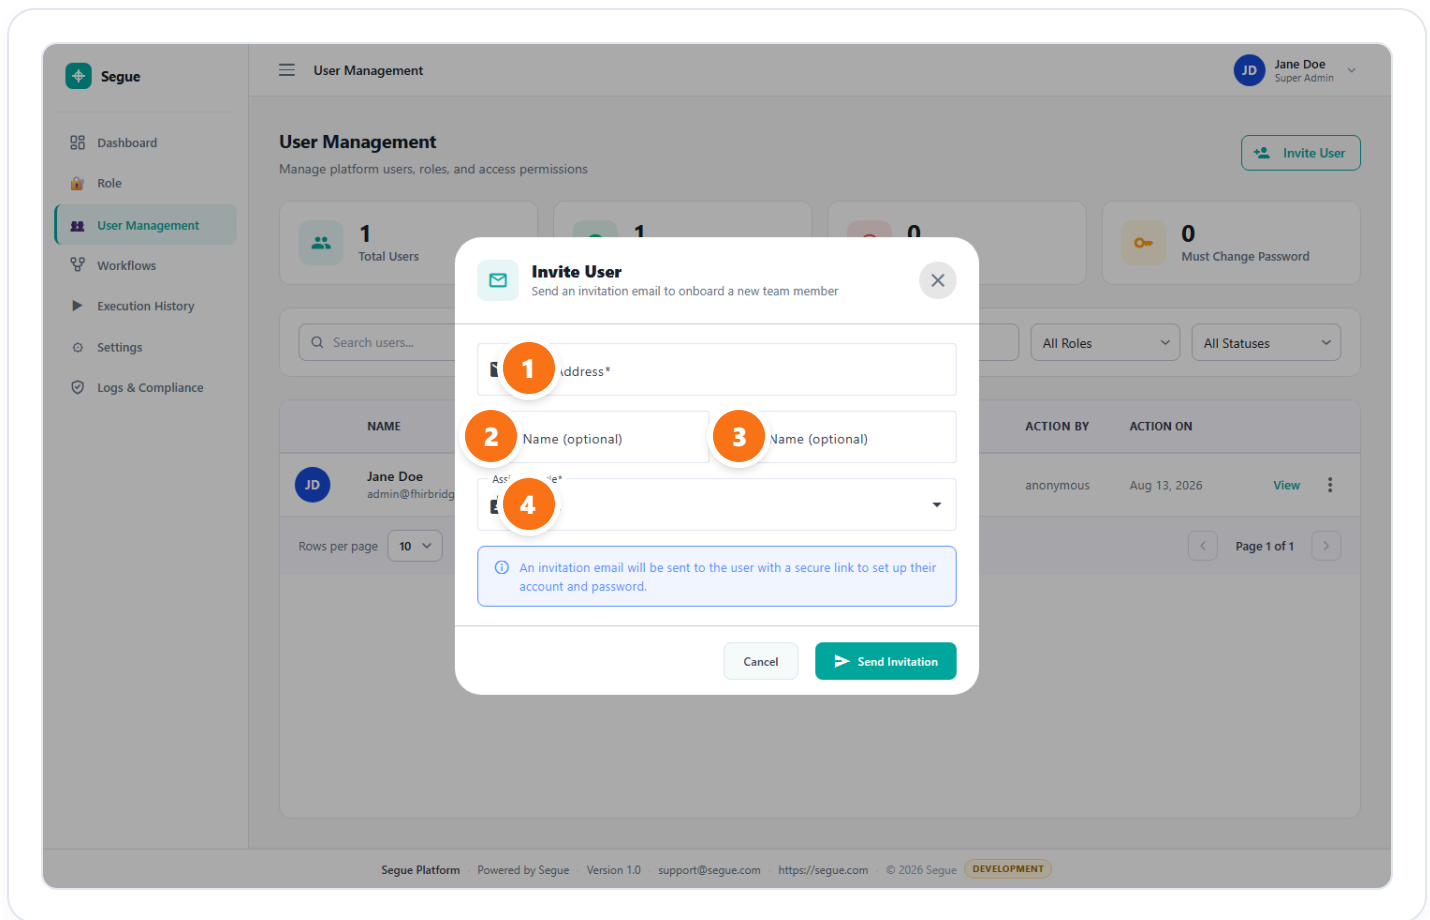

#	FIELD	WHAT IT IS
1	Email address	Required — the invitation link is sent here.
2	First name	Optional — the person can fill this in themselves when accepting.
3	Last name	Optional, same as above.
4	Assigned Role	What they'll be able to do — see the Role list below for what each one means.

Segue

Dashboard
Role
User Management
Workflows
Execution History
Settings
Logs & Compliance

Role

Search by name or description...

Reset

Add Role

	ROLE NAME	DESCRIPTION	PERMISSIONS	ACTION BY	ACTION ON	ACTIONS
1	Admin System	Administers configuration and users.	32	anonymous	Jul 22, 1:48 PM	
2	Audit System	Read-only access to configuration and audit logs.	3	anonymous	Jul 22, 1:48 PM	
3	Operations System	Builds and runs pipeline configurations, and reviews data and audit output.	10	anonymous	Jul 22, 1:48 PM	
4	QWERTY	QWERTYYYY	29	admin@mailinator.com	Jul 28, 10:18 PM	
5	SuperAdmin System	Full platform administrator.	40	anonymous	Jul 22, 1:48 PM	

Rows per page 10
Showing 1-5 of 5

Page 1 of 1

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

- **SuperAdmin** — full access to everything, including user management and security settings.
- **Admin** — administers configuration and users, but with a narrower permission set than SuperAdmin.
- **Operations** — builds and runs pipelines, and reviews their data/audit output — the day-to-day pipeline-builder role.
- **Audit** — read-only access to configuration and audit logs, for compliance review.

Click + **Add Role** to define a custom role with its own hand-picked set of permissions if none of the built-in ones fit.

Setting exactly what a role can do

Click the  key icon in a role's row to open its permission grid — every individual permission this deployment knows about, grouped by area, with a checkbox per action.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

User Management

Admin Permissions

Admin

System

Administers configuration and users.

Switch Role

Admin

System roles cannot be modified.

Search permissions or groups...

32 of 40 selected

Reset

ACCESS CONTROL

GROUP	ASSIGN	CREATE	DEACTIVATE	DELETE	EDIT	INVITE	VIEW	ALL
Role	☒	☒	☐	☒	☒	☒	☒	☒
User	☒	☒	☒	☒	☒	☒	☒	☒

WORKFLOWS

GROUP	ASSIGN	EDIT	EXECUTE	READ	ALL
Allscripts	☒	☐	☒	☒	☐
Athenahealth	☒	☐	☒	☒	☐
Cerner	☒	☐	☒	☒	☐
Epic	☒	☐	☒	☒	☐
NewEHR	☒	☐	☒	☒	☐

PLATFORM

GROUP	CREATE	DELETE	EDIT	EXECUTE	READ	RUN	TEST	VIEW	WRITE	ALL
Configuration	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Governance	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Payload	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Pipeline	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Report	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Source Connections	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Workflow	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

Cancel

Save Permissions

Segue Platform

Powered by Segue

Version 1.0

support@segue.com

https://segue.com

© 2026 Segue

DEVELOPMENT


The permissions screen for the built-in **Admin** role — 32 of 40 total permissions selected.

- **Groups (left column)** — permissions are organized by area: **Access Control** (managing Roles/Users themselves), **Workflows** (broken down further by EHR vendor — Epic, Cerner, Athenahealth, etc. — so a role can be scoped to just one vendor's connections), and **Platform** (Configuration, Governance, Payload, Pipeline, Report, Source Connections, Workflow).
- **Columns** — the specific action within that group: Create, Edit, Delete, Assign, Invite, Deactivate, View, Read, Write, Run, Test, Execute, or **All** as a shortcut for every action in that row.
- **System roles cannot be modified** — the four built-in roles (SuperAdmin, Admin, Operations, Audit) are locked; to get a different mix of permissions, create a new custom role via + **Add Role** and it opens here fully editable.
- **Switch Role** (top right) — jump straight to another role's permission grid without going back to the list first.

This grid grows over time. The 40 permissions shown here are what's defined today — as more of the platform gets wired up to fine-grained access control, new rows will appear in the relevant group automatically. Nothing about how you use this screen changes.

13 Execution history & audit logs

Two different views of "what happened": one for pipeline runs, one for everything anyone changed in the system.

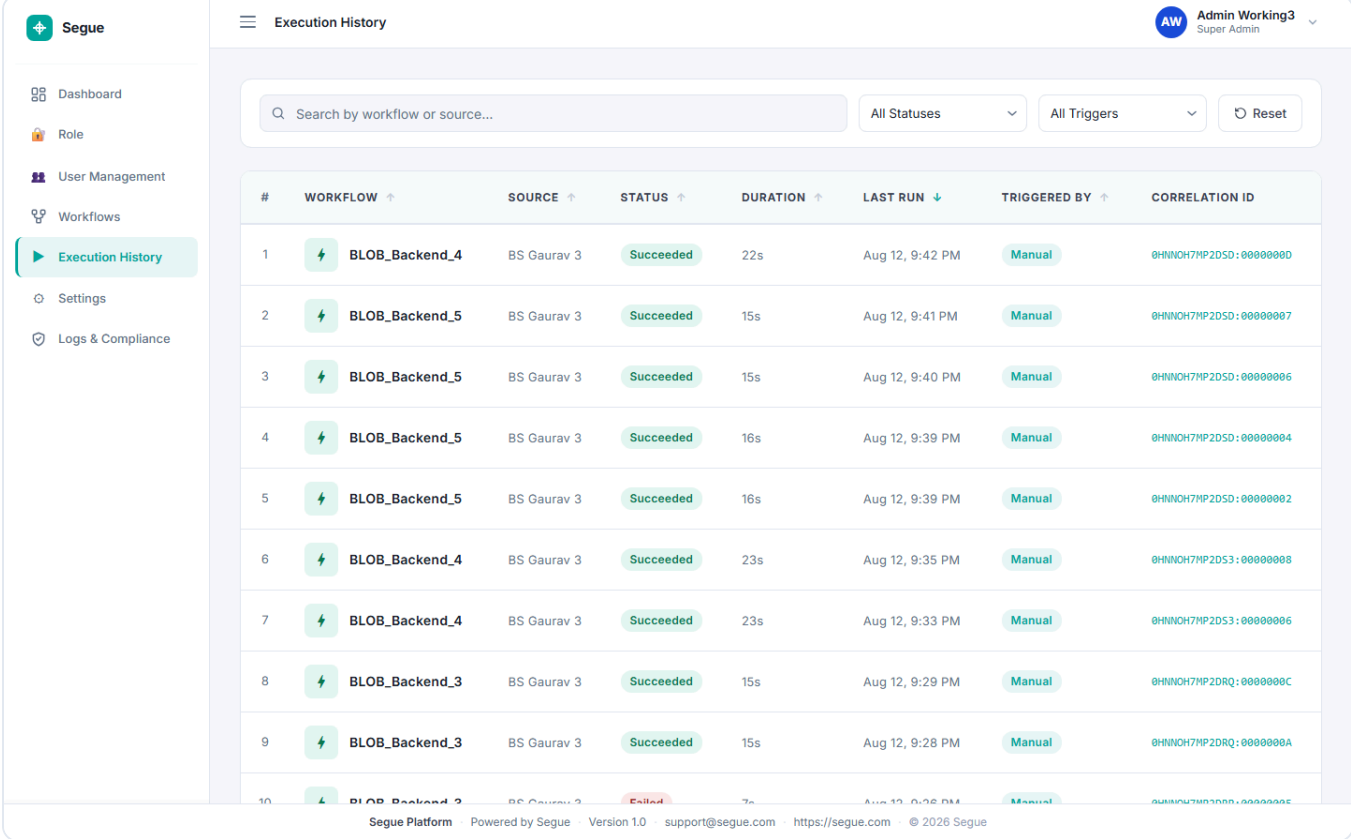

The screenshot displays the 'Execution History' page in the Segue Platform. The left sidebar contains navigation links: Dashboard, Role, User Management, Workflows, Execution History (active), Settings, and Logs & Compliance. The main content area shows a table of execution history with columns: #, WORKFLOW, SOURCE, STATUS, DURATION, LAST RUN, TRIGGERED BY, and CORRELATION ID. The table lists 10 entries, all with a status of 'Succeeded' except for the last one which is 'Failed'. The footer of the interface includes the text: Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue.

#	WORKFLOW	SOURCE	STATUS	DURATION	LAST RUN	TRIGGERED BY	CORRELATION ID
1	BLOB_Backend_4	BS Gaurav 3	Succeeded	22s	Aug 12, 9:42 PM	Manual	0HNNOH7HP2D5D:00000000
2	BLOB_Backend_5	BS Gaurav 3	Succeeded	15s	Aug 12, 9:41 PM	Manual	0HNNOH7HP2D5D:00000007
3	BLOB_Backend_5	BS Gaurav 3	Succeeded	15s	Aug 12, 9:40 PM	Manual	0HNNOH7HP2D5D:00000006
4	BLOB_Backend_5	BS Gaurav 3	Succeeded	16s	Aug 12, 9:39 PM	Manual	0HNNOH7HP2D5D:00000004
5	BLOB_Backend_5	BS Gaurav 3	Succeeded	16s	Aug 12, 9:39 PM	Manual	0HNNOH7HP2D5D:00000002
6	BLOB_Backend_4	BS Gaurav 3	Succeeded	23s	Aug 12, 9:35 PM	Manual	0HNNOH7HP2D5D:00000008
7	BLOB_Backend_4	BS Gaurav 3	Succeeded	23s	Aug 12, 9:33 PM	Manual	0HNNOH7HP2D5D:00000006
8	BLOB_Backend_3	BS Gaurav 3	Succeeded	15s	Aug 12, 9:29 PM	Manual	0HNNOH7HP2DRQ:0000000C
9	BLOB_Backend_3	BS Gaurav 3	Succeeded	15s	Aug 12, 9:28 PM	Manual	0HNNOH7HP2DRQ:0000000A
10	BLOB_Backend_3	BS Gaurav 3	Failed	7s	Aug 12, 9:28 PM	Manual	0HNNOH7HP2DRQ:0000000E

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

Execution History — every time a pipeline ran, its status, how long it took, and what/who triggered it. Filter by status or trigger type to find a specific run quickly, or search by workflow/source name.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Segue

Admin Working3
Super Admin

Audit Logs

Correlation Search

Errors

Compliance Reports

Audit Logs

Immutable, hash-chained record of every configuration and entity change — who, what, when.

What am I looking at?

Filter by Correlation ID...

Search

Reset

Timestamp ↓	Actor ↑	Module ↑	Action ↑	Entity ↑	Status ↑	Correlation ID ↑	
Aug 13, 1:24:38 PM	anonymous	User	Updated	Admin Working3	Success	0HINP1050E0P4:00000014	 
Aug 13, 1:24:38 PM	anonymous	User	Updated	Admin Working3	Success	0HINP1050E0P4:00000014	 
Aug 13, 1:11:17 PM	anonymous	User	Updated	Admin Working3	Success	0HINP1050E0P3:00000003	 
Aug 13, 1:11:17 PM	anonymous	User	Updated	Admin Working3	Success	0HINP1050E0P3:00000003	 
Aug 13, 1:01:49 PM	anonymous	Permission	Updated	Edit Source Connections	Success	-	 
Aug 13, 1:01:49 PM	anonymous	Permission	Updated	View Payload	Success	-	 
Aug 13, 1:01:49 PM	anonymous	Permission	Updated	Write Configuration	Success	-	 
Aug 13, 1:01:49 PM	anonymous	Permission	Updated	Read Governance	Success	-	 
Aug 13, 1:01:48 PM	anonymous	Permission	Updated	Read Governance	Success	-	 

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

Logs & Compliance → Audit Logs — an immutable, hash-chained record of every configuration and entity change: who did it, what module, what action, and when. Search by Correlation ID to trace one specific event across the system.

Segue

Dashboard

Role

User Management

Workflows

Execution History

Settings

Logs & Compliance

Segue

Audit Logs

Correlation Search

Errors

Compliance Reports

Compliance Reports

Generate the HIPAA §164.312(b) / SOC 2 audit report — audit-trail hash-chain integrity plus authentication, data-access, security, and error activity for a date range.

What am I looking at?

From

To

14-07-2026

13-08-2026

Generate & Download PDF

Report contents

- Audit-trail hash-chain integrity verification (full history, not just the selected period)
- Authentication summary — total, successful, failed, distinct users
- Patient/resource data access summary — allowed vs. denied
- Security events by severity, unresolved count
- Errors by severity

SOC 2 Evidence Export

A distinct report from the HIPAA one above — Security/Availability/Processing Integrity framing. Manual-trigger only; no scheduled monthly generation exists yet.

From

To

14-07-2026

13-08-2026

Generate & Download PDF

Report contents

- Processing integrity — audit-trail hash-chain verification
- Change management — configuration changes by action type
- Access control — authorization denials by permission code
- Availability — endpoint health check uptime percentage per endpoint
- Security incidents by severity

Segue Platform · Powered by Segue · Version 1.0 · support@segue.com · https://segue.com · © 2026 Segue

DEVELOPMENT

Compliance Reports — generates a ready-to-share HIPAA §164.312(b) or SOC 2 evidence PDF for a date range: audit-trail integrity, authentication activity, data-access summaries, security events, and errors — pick your dates and click **Generate & Download PDF**.

Segue Healthcare Integration Platform — User Manual