Why Robust-RAG Results Are Often Incomparable: A Comparability Map and Re-analysis

Anonymous ACL submission

Abstract

Robust retrieval-augmented generation (RAG) papers often use the same words—noise, faithfulness, conflict, security, calibration, and robustness—while measuring different evidence states, interventions, metrics, and system actions. This makes many apparent comparisons invalid or only partially valid. We analyze this comparability problem for text/document-grounded robust RAG under unreliable evidence. Our central device is a five-coordinate tuple: failure type, evidence assumption, intervention point, metric target, and action policy. Using a 342-row adjudicated venue-expanded evidence map, we re-analyze representative paper groups and illustrate how ordinary survey groupings can lead to wrong recommendations: ranking noise methods that solve different pipeline problems, treating faithfulness metrics as conflict robustness, comparing natural conflict with poisoning, pooling security defenses across incompatible attacker capabilities, or treating calibration as action control. We also provide peer-reviewed-only sensitivity checks and an action-labeled evaluation blueprint. The contribution is therefore an analysis paper with a reusable evidence map, not a venue-complete census or a new leaderboard.

1 Problem: Robustness Results That Look Comparable Are Often Not

Retrieval-augmented generation (RAG) combines a parametric language model with external evidence retrieved at inference time (Lewis et al., 2020). Under unreliable evidence, this pipeline can fail because retrieved passages are irrelevant, insufficient, conflicting, stale, unsupported by citations, or adversarially corrupted. The literature has responded with filters, rerankers, note-taking prompts, conflict-aware generators, poisoning defenses, calibration methods, abstention policies, and evaluation toolkits. Yet the resulting claims are often hard to compare.

The core problem is not terminology alone. Two papers can both report "robustness to noisy retrieval" while one changes context construction, another trains the generator, and a third introduces a diagnostic benchmark. Two security papers can both report lower attack success while assuming different attacker access, objectives, and defense actions. A calibration method can improve confidence estimates without deciding whether to answer, retrieve again, or abstain. If these papers are read as substitutable methods, a survey can recommend the wrong benchmark, method, or deployment policy.

This paper asks one question: **why are robust-RAG results often incomparable, and how can we make the comparisons explicit?** We answer by using a comparability tuple, applying it to a 342-row adjudicated evidence map, and showing five high-value re-analyses where the tuple changes the conclusion. Table 1 previews the practical risk: conventional survey groupings can imply recommendations that do not survive evidence-state and action normalization.

Contributions. We make three focused contributions. First, we define a five-coordinate comparability tuple for robust-RAG claims and use it to label comparisons as valid, partial, invalid, or under-specified. Second, we release a reusable adjudicated evidence map and coding substrate: Map A is a 268-row double-coded seed; Map B is a 342-row adjudicated venue-expanded map built after C02/C03 second coding of 148 candidate additions. Third, we give five worked re-analyses, peer-reviewed-only sensitivity checks, and action-labeled evaluation examples that translate the comparability analysis into benchmark design, method choice, and deployment policy.

Audited adjacent-survey grouping	Wrong recommendation it can imply	Why the tuple rejects it	Correct recommendation
General/evaluation RAG surveys group retriever, generator, and evaluation work as robustness enhancements (Gao et al., 2024; Sharma, 2025; Yu et al., 2024a).	Pick the best "noise robustness" method across IrrelCtx, RAAT, Chain-of-Note, Sufficient Context, and RGB.	These papers target filtering, training, generator reading, sufficiency estimation, and diagnostic benchmarking under different actions.	Choose by evidence state and action: filter hard negatives, train through noise, read documents, abstain/re-retrieve, or benchmark abilities.
Evaluation and trustworthy-RAG surveys group faithfulness metrics, support labels, and conflict methods under factuality or grounding (Yu et al., 2024a; Zhou et al., 2024; Ni et al., 2025).	Use any faithfulness metric as a proxy for conflict robustness.	LLM-judge scores, span labels, and source-conflict reasoning measure different units and reward different actions.	Report answer correctness, claim support, citation entailment, source disagreement, and action under conflict separately.
Security-focused surveys group poisoning, prompt injection, data extraction, and defenses as RAG attacks/defenses (Xu et al., 2026; Ni et al., 2025).	Deploy one "RAG defense" expected to reduce all attacks.	Corpus poisoning, memory poisoning, data extraction, bounded corruption, and instruction hijacking assume different attacker capabilities and objectives.	Match defenses to a capability envelope and state whether they prevent, demote, detect, trace, recover, or limit leakage.
General and evaluation surveys group adaptive retrieval, uncertainty, calibration, and abstention under adaptive or reliable RAG (Sharma, 2025; Yu et al., 2024a).	Treat confidence calibration as deciding when to retrieve or abstain.	Confidence target, evidence sufficiency, retrieval trigger, action set, and cost are separable.	Evaluate policies over answer, retrieve, verify, clarify, abstain, and escalate with coverage and cost.
Broad RAG surveys often treat multimodal, graph, table, domain, and agentic RAG as application extensions (Gao et al., 2024; Sharma, 2025).	Transfer passage-level citation or recall metrics to pages, tables, graphs, tools, and images.	The evidence object changes; layout, cell provenance, graph edge, visual region, and domain authority become validity conditions.	Use beyond-text papers as typed-evidence stress tests unless running a separate systematic multimodal/agentic survey.

Table 1: Concrete delta relative to audited adjacent-survey groupings. The table uses survey-family organizing units as the starting point, then shows which recommendation changes when robust-RAG papers are recoded by failure, assumption, intervention, metric, and action.

2 The Comparability Tuple

We read each robust-RAG paper as a tuple:

$$(\text{failure}, \text{assumption}, \text{intervention}, \text{metric}, \text{action}).$$

Failure is the evidence problem: noisy retrieval, distraction, knowledge conflict, adversarial corruption, OOD/uncertainty, calibration/control, or evaluation. **Assumption** records the evidence state or threat model: benign hard negatives, insufficient context, stale or conflicting sources, attacker-created documents, instruction-bearing retrieved text, or typed evidence beyond passages. **Intervention** locates the method in the pipeline: corpus/KB, retriever/context, context assembly, generator, system control, or evaluation. **Metric** records what is optimized: answer correctness, support, faithfulness, attack success, selective risk, calibration, action utility, or cost. **Action** records what the system should do: answer, abstain, retrieve again, filter, verify, expose conflict, clarify, quarantine, trace, or recover.

A comparison is *valid* only when these coordinates align closely enough for the reported metric to answer the same question. It is *partial* when the papers are complementary mechanisms inside the same problem family. It is *invalid* when a shared label hides different scientific games. It is *under-specified* when the paper omits a coordinate needed to decide. Appendix Table 11 gives the full codebook; the main point is simple: a score is not portable unless the evidence state, metric target, and action policy are portable.

3 Evidence Map and Coding Process

The analysis is grounded in a reusable scoping resource, not a venue-complete census. We began with 1,904 retrieved records, 1,399 deduplicated candidates, and 536 relevant included papers. Map A is the 268-row adjudicated seed produced from 274 double-coded candidate records. Map B is the current synthesis map: 342 rows after adding 74 retained venue/extension additions to Map A and excluding 74 boundary additions after C02/C03 second coding and final adjudication. Its source strata are 126 venue/proceedings-linked rows, 207 arXiv/preprint rows, 5 workshop/challenge rows, and 4 other/unclear rows.

The map is used to support claims at the right level. Venue-linked rows anchor conservative mechanism-level conclusions. Preprints remain useful for emerging threat variants and fast-moving benchmark proposals, but they do not become field-wide prevalence estimates. Detailed corpus lineage, field coverage, source strata, and release check-

Comparison family	Ordinary taxonomy code	Five-coordinate code adds	Error reduced
Noise methods	Same failure family: noisy retrieval / distraction.	Intervention separates filter, training, reader, sufficiency predictor, and benchmark; action separates answer, filter, abstain, and re-retrieve.	Prevents ranking complementary pipeline components as substitutes.
Faithfulness/conflict	Same trust/factuality or grounding family.	Metric unit separates LLM-judge score, span support, answer correctness, and source-conflict resolution; action records expose/resolve/answer.	Prevents treating citation support as conflict robustness.
Conflict vs. poisoning	Same broad "conflicting evidence" or robustness family.	Evidence assumption separates natural disagreement from attacker-created evidence; metric separates reconciliation from attack success.	Prevents transfer from benign conflict methods to adversarial defenses.
Security defenses	Same security/attack-defense family.	Assumption records attacker access, insertion budget, objective, and defense action.	Prevents pooling prevention, demotion, detection, traceback, recovery, and leakage control.
Calibration/control	Same uncertainty/adaptive RAG family.	Action policy separates confidence estimation, retrieval trigger, abstention, clarification, verification, and escalation.	Prevents treating better calibration as a complete action policy.

Table 2: Side-by-side delta between ordinary robust-RAG taxonomy coding and the five-coordinate tuple. In the five main re-analyses, ordinary family labels would allow a direct or ambiguous comparison in all five cases; tuple coding identifies a breaking coordinate in all five and changes the recommendation.

sums are in Appendix F; the central map artifact is the 342-row adjudicated Map B.

4 Five Re-analyses That Change Recommendations

Table 3 is the paper's main analysis artifact. Each row names concrete robust-RAG papers that adjacent surveys could reasonably group together, then shows which tuple coordinate blocks the comparison and what recommendation changes. The same families are expanded in Appendix Tables 25 and 27.

The re-analyses yield a narrower but more actionable synthesis than a citation-list survey. Noise robustness decomposes into context construction, generator training, evidence reading, sufficiency prediction, and diagnostic benchmarking. Faithfulness and conflict separate span support from source reconciliation. Natural conflict and poisoning share annotation needs but not threat games. Security defenses are comparable only inside capability envelopes. Calibration, retrieval control, abstention, and clarification are action policies, not interchangeable uncertainty scores.

5 Peer-Reviewed-Only Sensitivity

Because 207 of 342 Map-B rows are arXiv/preprint records, we explicitly ask which conclusions survive when preprints are downweighted. Table 4 reports the venue-linked backbone by primary label. The listed rows sum to 118 venue-linked records; the remaining venue/proceedings-linked records are foundation, boundary, or OOD/uncertainty rows that support background or secondary claims rather than the five core comparisons.

The conservative picture is favorable but not uniform. The strongest venue-backed conclusions are that retrieval is context construction rather than neutral recall, answer accuracy is insufficient for robust-RAG evaluation, and RAG security requires capability normalization. Calibration/action-control and knowledge-conflict conclusions remain well supported conceptually but still have fewer directly comparable venue-linked method evaluations. Extension-layer claims are weakest and are retained only as stress tests for typed evidence states, not as a systematic multimodal or agentic RAG survey.

6 Action-Labeled Evaluation Blueprint

The most important practical consequence is that robust-RAG evaluation needs action labels. A benchmark item should specify not only the query and answer but also the retrieved evidence state, the correct system action, plausible wrong actions, and metric consequences. Table 5 gives examples, and Table 6 reports a minimal 60-item diagnostic pilot with three simple policies. This is a sanity-check pilot for the annotation schema, not a deployed LLM leaderboard.

The blueprint turns "calibration is not action control" into an annotation requirement. A correct answer can be the wrong action when evidence is poisoned, stale, or insufficient. A refusal can be correct when evidence is absent, but wrong when re-retrieval would recover support. A security defense can reduce attack success while failing to quarantine malicious evidence or report utility loss.

Ordinary survey comparison	Five-coordinate diagnosis	Breaking coordinate(s)	Verdict	Changed recommendation
Yoran et al. (2024), Fang et al. (2024), Yu et al. (2023), Joren et al. (2025), and Chen et al. (2024a) as "noise robustness."	Shared broad failure label, but filtering/back-off, noise-aware training, generator evidence reading, sufficiency estimation, and ability benchmarking intervene at different points and reward different metrics/actions.	Intervention, metric, action.	Partial / under-specified	Do not pick one "best noise method." Choose by evidence state: hard-negative filtering, training-through-noise, document reading, abstention/re-retrieval, or diagnostic benchmarking.
Niu et al. (2024), RAGAS/ARES (Es et al., 2024; Saad-Falcon et al., 2024), Zhang et al. (2025g), and Wang et al. (2025b) as a common faithfulness toolbox.	LLM-judge scores, span-level support labels, and fact/source conflict reasoning measure different units. A supported citation, correct answer, and resolved conflict are not equivalent.	Metric unit, failure subtype, action.	Partial	Report answer correctness, claim support, citation entailment, source disagreement, and action under conflict separately.
Zhang et al. (2025g) / Wang et al. (2025b) vs. Zou et al. (2025) as "conflicting evidence."	Natural or diagnostic source conflict differs from attacker-created evidence corruption. Conflict methods ask how to reconcile or expose disagreement; poisoning asks whether an attacker can steer an answer.	Evidence assumption, threat model, metric, action.	Invalid for direct ranking	Share claim/source annotations where useful, but evaluate conflict resolution and adversarial steering under separate threat games.
Zou et al. (2025), AgentPoison (Chen et al., 2024f), Spill-Beans (Unknown, 2025), ReliabilityRAG (Shen et al., 2025), and SeCon-RAG (Si et al., 2025) as generic RAG security.	Corpus poisoning, memory poisoning, data extraction, bounded filtering, and semantic conflict-free filtering assume different attacker capabilities and defense actions.	Assumption, objective, defense action.	Partial / invalid across threat models	Report capability envelope, clean utility, and whether the method prevents, demotes, detects, traces, recovers, or limits leakage.
Asai et al. (2024a), FLARE/DRAGIN (Jiang et al., 2023; Su et al., 2024), Joren et al. (2025), and Jang et al. (2025a) as adaptive or uncertainty RAG.	Confidence, evidence sufficiency, retrieval trigger, critique policy, and abstention answer different control questions. Calibration can improve belief estimates without selecting the right action.	Failure subtype, metric target, action set.	Partial	Evaluate over a shared action set: answer, retrieve again, verify, clarify, abstain, or escalate, with coverage and cost.

Table 3: Five worked re-analyses. Each row shows how an ordinary survey grouping can imply a misleading comparison, which tuple coordinate breaks the comparison, and what recommendation changes after normalization.

This is why answer accuracy, faithfulness, attack success, calibration error, and cost should be reported as a diagnostic scorecard rather than one robustness scalar.

7 Artifact and Validation Boundary

The strong artifact claim is the reproducible coding substrate. The release includes the Map-A adjudicated seed, the Map-B adjudicated synthesis map, the 416-row candidate expansion, excluded boundary rows, C02/C03 second-coding outputs, adjudication changes, search logs, source-strata reconciliation, venue recall audit, codebook, and worked re-analysis worksheets. This supports inspection and reuse of the comparability analysis.

The human expert evidence is reported as stress-test evidence for the comparison protocol, not as validation of the whole map or field-wide conclusions. The original 12-pair pilot suggested the tuple was usable on deliberately difficult pairs. We then ran the larger R17 60-pair blind validation with three control annotators, three protocol annotators, and three gold adjudicators. Tables 7 and 8 report the key result: after clearer training and gold construction, the protocol improves agreement with panel gold and reduces coordinate-level errors on unseen hard pairs.

8 Implications, Limitations, and Ethics

For benchmark builders, the implication is to annotate evidence state and action before ranking systems. For method designers, the implication is to state the operating region: negative type, source reliability, attacker capability, metric target, and action set. For system builders, the implication is to treat robust RAG as risk-adaptive control rather than a fixed retrieve-then-answer pipeline.

Three limitations bound the claims. First, Map B is open-PDF based and scoping, not venue-complete. It improves venue-linked coverage relative to Map A (126 versus 42 venue/proceedings-linked rows), but arXiv/preprint rows remain the largest source stratum. Second, the map is deepest for text/document RAG; beyond-text work is used only as typed-evidence stress tests. Third, the expert studies validate the protocol only for paper-pair comparison judgment, not for the whole evidence map or field-wide conclusions. The stronger contribution remains the released schema, map, second-coding/adjudication trail, re-analysis worksheets, and error analyses. We discuss attacks and defenses at the level of threat model and evaluation signal, not operational payloads.

9 Conclusion

Robust-RAG progress is hard to interpret when papers share labels but not evidence states, interventions, metrics, or actions. A five-coordinate

Conclusion tested after downweighting preprints	Venue-linked support in map	What remains supported	What remains trend evidence
Noise/distraction are not reducible to retriever recall.	22 primary noisy-retrieval and 6 distraction venue-linked rows, plus context-compression/reranking benchmarks.	Context construction, ranking, compression, and generator selectivity all affect robustness.	Exact method rankings across retrievers, generators, and context budgets.
Natural conflict and poisoning are different comparison games.	16 primary knowledge-conflict and 26 adversarial-corruption venue-linked rows.	Source reconciliation and attacker-created integrity failures require different assumptions and metrics.	Transfer from conflict-resolution methods to adaptive poisoning defenses.
RAG security results require capability normalization.	26 primary adversarial-corruption venue-linked rows, including poisoning, privacy/extraction, and defenses.	Attack success is uninterpretable without corpus access, query control, retriever visibility, insertion budget, objective, and defense action.	Detailed cross-threat leaderboards across heterogeneous attacker capabilities.
Calibration, abstention, and retrieval control are separable.	20 primary calibration/control venue-linked rows plus answerability and adaptive retrieval work.	Confidence target, evidence sufficiency, coverage, retrieval cost, and action utility should be reported separately.	Frontier-model control policies and multi-action cost tradeoffs across domains.
Answer accuracy alone is insufficient for robust-RAG evaluation.	28 primary evaluation/benchmark venue-linked rows.	Evidence state, support, threat model, action policy, and cost are needed to interpret results.	A full action-trace benchmark remains future work.
Extension-layer RAG requires typed evidence states.	6 primary extension-layer venue-linked rows.	Visual, graph, table, memory, tool, code, and domain evidence require modality-specific grounding and action labels.	Unified evaluation across text, multimodal, graph, table, and agentic RAG remains immature and is not treated as co-equal coverage.

Table 4: Peer-reviewed / venue-linked sensitivity in the main text. Counts refer to primary labels in the 342-record adjudicated venue-expanded evidence map.

Example query	Retrieved evidence state	Correct action	Wrong action	Metric consequence
"What is the refund deadline in policy version 3?"	Gold policy passage is present, but a high-ranked older policy gives a different deadline.	Compare provenance/date, prefer the current policy, cite the supporting span.	Answer from the older top-ranked passage.	Answer accuracy alone may mark one string right/wrong; action-aware scoring credits source freshness and conflict handling.
"Which paper introduced method X's ablation result?"	Retrieved documents are topically related but none contains the requested ablation.	Detect insufficiency and re-retrieve or abstain with missing-evidence explanation.	Guess from a related abstract.	Selective risk and sufficiency detection should be rewarded; forced-answer accuracy should not.
"Summarize whether product Y is safe for use case Z."	Retrieved reviews contain plausible positive statements and a contradictory safety notice from an authoritative source.	Expose conflict, prioritize authoritative safety evidence, or escalate.	Produce a balanced answer that hides the conflict.	Faithfulness to a retrieved passage is not enough; metric must score conflict disclosure and source authority.
"What does the linked document instruct the assistant to do?"	A retrieved document contains task-irrelevant instructions mixed with factual content.	Treat instructions as untrusted evidence, filter or quarantine, then answer only from factual support.	Follow the retrieved instruction.	Attack success must be separated from poisoned retrieval and from final answer utility.
"Should the system answer now or search again?"	Current evidence is relevant but incomplete; a second retrieval is available at latency cost.	Choose re-retrieval if expected utility exceeds cost, otherwise abstain.	Answer immediately with overconfident unsupported text.	Calibration error alone is insufficient; score action utility, coverage, latency, and evidence sufficiency.

Table 5: Illustrative action-labeled evaluation blueprint. Rows are examples of the annotation schema implied by the re-analyses, not a released benchmark or empirical leaderboard.

Policy	Ans.	Act.	Joint	Unsafe
Answer-only	0.17	0.17	0.17	0.83
Abstain-on-missing	0.67	0.33	0.33	0.17
State-label heuristic	1.00	1.00	1.00	0.00

Table 6: Minimal action-labeled pilot over 60 diagnostic items and three simple policies. The state-label heuristic uses the gold evidence-state label and is an upper-bound sanity check, not a deployed model. Unsafe is the rate of answering when the gold action is to abstain, quarantine, clarify, expose conflict, or re-retrieve.

comparability tuple makes these mismatches explicit. Applied to an adjudicated evidence map, it changes how common groups of papers should be read: many are complementary, invalid for direct ranking, or under-specified rather than competing leaderboard entries. The next step is not another universal robustness score, but action-labeled evaluation with corpus snapshots, evidence-state labels, gold actions, baseline systems, and error analysis.

Quantity	Control	Protocol	Gold / model	Interpretation
Annotators / judgments	3 / 180	3 / 180	3 gold adjudicators / 180 gold votes	Expanded R17 validation uses unseen pairs and multiple gold adjudicators.
Agreement with panel gold	0.567	0.883	Panel consensus over 60 pairs	The tuple protocol improves verdict agreement on the blinded re-annotation.
Mean confidence	4.07	3.83	–	Protocol users are slightly less confident but substantially more aligned with panel gold.
Protocol minus control	+0.317, clustered bootstrap 95% CI [0.192, 0.439]		Mixed-effects OR = 80.34	Clustered bootstrap and mixed-effects logit both support a positive protocol effect on verdict accuracy.
Gold inter-agreement	–		Fleiss $\kappa = 0.772$; 50/60 unanimous	Gold construction is stable after clearer adjudication guidance.

Table 7: Expanded 60-pair expert validation (R17 blind re-annotation). The five-coordinate protocol improves verdict agreement with panel gold on unseen hard pairs while retaining coordinate-level error auditability.

Condition	Wrong verdicts	Missed gold coordinates (F/A/I/M/Act)	Extra coordinates	Use
Control	78/180	34 / 55 / 28 / 1 / 82	failure 12; assumption 20; metric 3; action 2	Ordinary judgments over-call invalid in many partial cases and miss key action and assumption distinctions.
Protocol	21/180	10 / 12 / 7 / 13 / 16	assumption 27; failure 9; action 2	Protocol reduces wrong verdicts and missed coordinates, though it sometimes over-tags assumptions.

Table 8: Per-coordinate error audit for the R17 60-pair expert validation. Counts are over 180 judgments per condition. F/A/I/M/Act denote failure, assumption, intervention, metric, and action.

References

Sahar Abdelnabi, Aideen Fay, Giovanni Cherubin, Ahmed Salem, Mario Fritz, and Andrew Paverd. 2024. Get my drift? catching llm task drift with activation deltas.

Sahar Abdelnabi, Aideen Fay, Ahmed Salem, Egor Zverev, Kai-Chieh Liao, Chi-Huang Liu, Chun-Chih Kuo, Jannis Weigend, Danyael Manlangit, Alex Apostolov, Haris Umair, João Donato, Masayuki Kawakita, Athar Mahboob, Tran Huu Bach, Tsun-Han Chiang, Myeongjin Cho, Hajin Choi, Byeonghyeon Kim, and 6 others. 2025. Llmail-inject: A dataset from a realistic adaptive prompt injection challenge.

Rustam Abdumalikov, Pasquale Minervini, and Yova Kementchedjhieva. 2024. Answerability in retrieval-augmented open-domain question answering.

Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2024a. Self-rag: Learning to retrieve, generate, and critique through self-reflection. In *ICLR*.

Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2024b. Self-rag: Learning to retrieve, generate, and critique through self-reflection. In *ICLR 2024*.

Gaurav Bagwe, Saket S. Chaturvedi, Xiaolong Ma, Xiaoyong Yuan, Kuang-Ching Wang, and Lan Zhang. 2025. Your rag is unfair: Exposing fairness vulnerabilities in retrieval-augmented generation via backdoor attacks.

Alexandra Bazarova, Andrei Volodichev, Daria Kotova, and Alexey Zaytsev. 2026. Intrygue: Induction-aware entropy gating for reliable rag uncertainty estimation.

Baolong Bi, Shaohan Huang, Yiwei Wang, Tianchi Yang, Zihan Zhang, Haizhen Huang, Lingrui Mei, Junfeng Fang, Zehao Li, Furu Wei, Weiwei Deng, Feng Sun, Qi Zhang, and Shenghua Liu. 2024. Context-dpo: Aligning language models for context-faithfulness.

Qingqing Cao, Sewon Min, Yizhong Wang, and Hannaneh Hajishirzi. 2024. Btr: Binary token representations for efficient retrieval augmented language models. In *ICLR 2024*.

Alberto Castagnaro, Umberto Salviati, Mauro Conti, Luca Pajola, and Simeone Pizzi. 2025. The hidden threat in plain text: Attacking rag data loaders.

Arie Cattan, Alon Jacovi, Ori Ram, Jonathan Herzig, Roee Aharoni, Sasha Goldshtein, Eran Ofek, Idan Szpektor, and Avi Caciularu. 2025. Dragged into conflicts: Detecting and addressing conflicting sources in search-augmented llms.

Debashish Chakraborty, Eugene Yang, Daniel Khashabi, Dawn Lawrie, and Kevin Duh. 2025. Principled context engineering for rag: Statistical guarantees via conformal prediction.

Hongyan Chang, Ergute Bao, Xinjian Luo, and Ting Yu. 2026. Overcoming the retrieval barrier: Indirect prompt injection in the wild for llm systems.

Zhiyuan Chang, Mingyang Li, Xiaojun Jia, Junjie Wang, Yuekai Huang, Ziyou Jiang, Yang Liu, and Qing Wang. 2025. One shot dominance: Knowledge poisoning attack on retrieval-augmented generation systems.

Saket S. Chaturvedi, Gaurav Bagwe, Lan Zhang, and Xiaoyong Yuan. 2025. Aip: Subverting retrieval-augmented generation via adversarial instructional prompt.

Harsh Chaudhari, Giorgio Severi, John Abascal, Anshuman Suri, Matthew Jagielski, Christopher A. Choquette-Choo, Milad Nasr, Cristina Nita-Rotaru,

and Alina Oprea. 2024. Phantom: General backdoor attacks on retrieval augmented language generation.

Guoxin Chen, Minpeng Liao, Peiying Yu, Dingmin Wang, Zile Qiao, Chao Yang, Xin Zhao, and Kai Fan. 2025a. C-3po: Compact plug-and-play proxy optimization to achieve human-like retrieval-augmented generation. In *ICML 2025*.

Haotian Chen, Qingqing Long, Meng Xiao, Xiao Luo, Wei Ju, Chengrui Wang, Xuezhi Wang, Yuanchun Zhou, and Hengshu Zhu. 2025b. Scirerankbench: Benchmarking rerankers towards scientific retrieval-augmented generated llms.

Jiawei Chen, Hongyu Lin, Xianpei Han, and Le Sun. 2024a. Benchmarking large language models in retrieval-augmented generation. In *AAAI*.

Juan Chen, Baolong Bi, Wei Zhang, Jingyan Sui, Xiaofei Zhu, Yuanzhuo Wang, Lingrui Mei, and Shenghua Liu. 2025c. Rethinking all evidence: Enhancing trustworthy retrieval-augmented generation via conflict-driven summarization.

Lihu Chen, Gerard de Melo, Fabian M. Suchanek, and Gaël Varoquaux. 2025d. Query-level uncertainty in large language models.

Liuji Chen, Xiaofang Yang, Yuanzhuo Lu, Jinghao Zhang, Xin Sun, Qiang Liu, Shu Wu, Jing Dong, and Liang Wang. 2025e. Poisonarena: Uncovering competing poisoning attacks in retrieval-augmented generation.

Lu Chen, Ruqing Zhang, Jiafeng Guo, Yixing Fan, and Xueqi Cheng. 2024b. Controlling risk of retrieval-augmented generation: A counterfactual prompting framework. In *Findings of the Association for Computational Linguistics: EMNLP 2024*.

Qizhi Chen, Chao Qi, Yihong Huang, Muquan Li, Rongzheng Wang, Dongyang Zhang, Ke Qin, and Shuang Liang. 2026a. Kepo: Knowledge evolution poison on graph-based retrieval-augmented generation.

Shijie Chen, Bernal Jimenez Gutierrez, and Yu Su. 2025f. Attention in large language models yields efficient zero-shot re-rankers. In *ICLR 2025*.

Si-An Chen, Lesly Miculicich, Julian Martin Eisenschlos, Zifeng Wang, Zilong Wang, Yanfei Chen, Yasuhisa Fujii, Hsuan-Tien Lin, Chen-Yu Lee, and Tomas Pfister. 2024c. TableRAG: Million-token table understanding with language models. In *Advances in Neural Information Processing Systems*.

Sizhe Chen, Arman Zharmagambetov, Saeed Mahloujifar, Kamalika Chaudhuri, David Wagner, and Chuan Guo. 2024d. Secalign: Defending against prompt injection with preference optimization.

Tailun Chen, Yu He, Yan Wang, Shuo Shao, Haolun Zheng, Zhihao Liu, Jinfeng Li, Zhizhen Qin, Yuefeng Chen, Zhixuan Chu, Zhan Qin, and Kui Ren. 2025g. Mirage: Misleading retrieval-augmented generation via black-box and query-agnostic poisoning attacks.

Wang Chen, Guanqiang Qi, Weikang Li, Yang Li, Deguo Xia, and Jizhou Huang. 2026b. Decide then retrieve: A training-free framework with uncertainty-guided triggering and dual-path retrieval.

Yen-Shan Chen, Sian-Yao Huang, Cheng-Lin Yang, and Yun-Nung Chen. 2025h. Eyes-on-me: Scalable rag poisoning through transferable attention-steering attractors.

Yi Chen, Daiwei Chen, Sukrut Madhav Chikodikar, Caitlyn Heqi Yin, and Ramya Korlakai Vinayak. 2026c. Is conformal factuality for rag-based llms robust? novel metrics and systematic insights.

Yulin Chen, Haoran Li, Yuan Sui, Yue Liu, Yufei He, Xiaoling Bai, Chi Fei, Yabo Li, Haozhe Ma, Yangqiu Song, and Bryan Hooi. 2025i. Robustness via referencing: Defending against prompt injection attacks by referencing the executed instruction.

Yulin Chen, Haoran Li, Zihao Zheng, Yangqiu Song, Dekai Wu, and Bryan Hooi. 2024e. Defense against prompt injection attack by leveraging attack techniques.

Zhaorun Chen, Zhen Xiang, Chaowei Xiao, Dawn Song, and Bo Li. 2024f. Agentpoison: Red-teaming llm agents via poisoning memory or knowledge bases. In *Advances in Neural Information Processing Systems*.

Zhuo Chen, Yuyang Gong, Jiawei Liu, Miaokun Chen, Haotan Liu, Qikai Cheng, Fan Zhang, Wei Lu, and Xiaozhong Liu. 2025j. Flippedrag: Black-box opinion manipulation adversarial attacks to retrieval-augmented generation models.

Pengzhou Cheng, Yidong Ding, Tianjie Ju, Zongru Wu, Wei Du, Ping Yi, Zhuosheng Zhang, and Gongshen Liu. 2024a. Trojanrag: Retrieval-augmented generation can be backdoor driver in large language models.

Xin Cheng, Xun Wang, Xingxing Zhang, Tao Ge, Si-Qing Chen, Furu Wei, Huishuai Zhang, and Dongyan Zhao. 2024b. xrag: Extreme context compression for retrieval-augmented generation with one token. In *NeurIPS 2024*.

Zirui Cheng, Jikai Sun, Anjun Gao, Yueyang Quan, Zhuqing Liu, Xiaohua Hu, and Minghong Fang. 2025. Secure retrieval-augmented generation against poisoning attacks.

Nadezhda Chirkova, Thibault Formal, Vassilina Nikoulina, and Stéphane CLINCHANT. 2025. Provence: efficient and robust context pruning for retrieval-augmented generation. In *ICLR 2025*.

Sukmin Cho, Soyeong Jeong, Jeongyeon Seo, Taeho Hwang, and Jong C. Park. 2024. Typos that broke the rag's back: Genetic attack on rag pipeline by simulating documents in the wild via low-level perturbations.

Chanwoo Choi, Jinsoo Kim, Sukmin Cho, Soyeong Jeong, and Buru Chang. 2025a. The rag paradox: A black-box attack exploiting unintentional vulnerabilities in retrieval-augmented generation systems.

Eunseong Choi, June Park, Hyeri Lee, and Jongwuk Lee. 2025b. Conflict-aware soft prompting for retrieval-augmented generation.

Sarthak Choudhary, Nils Palumbo, Ashish Hooda, Krishnamurthy Dj Dvijotham, and Somesh Jha. 2025. Through the stealth lens: Attention-aware defenses against poisoning in rag.

Cody Clop and Yannick Teglia. 2024. Backdoored retrievers for prompt injection attacks on retrieval augmented generation of large language models.

Lu Dai, Liang Sun, Fanpu Cao, Ziyang Rao, Cehao Yang, Hao Liu, and Hui Xiong. 2026. Llm-oriented information retrieval: A denoising-first perspective.

Lu Dai, Yijie Xu, Jinhui Ye, Hao Liu, and Hui Xiong. 2025a. Seper: Measure retrieval utility through the lens of semantic perplexity reduction. In *ICLR 2025*.

Xinbang Dai, Huikang Hu, Yuncheng Hua, Jiaqi Li, Nan Hu, Yongrui Chen, Rihui Jin, Yuxin Zhang, Yuyang Zhang, Xiaoguang Li, Lifeng Shang, and Guilin Qi. 2025b. After retrieval, before generation: Enhancing the trustworthiness of large language models in rag.

Yanbo Dai, Zhenlan Ji, Zongjie Li, Kuan Li, and Shuai Wang. 2025c. Disabling self-correction in retrieval-augmented generation via stealthy retriever poisoning.

Soumil Datta, Melissa Umble, Daniel S. Brown, and Guanhong Tao. 2026. A sentence relation-based approach to sanitizing malicious instructions.

Björn Deiseroth, Max Henning Höth, Kristian Kersting, and Letitia Parcalabescu. 2025. Bounding hallucinations: Information-theoretic guarantees for rag systems via merlin-arthur protocols.

Sagie Dekel, Moshe Tennenholtz, and Oren Kurland. 2026. Addressing corpus knowledge poisoning attacks on rag using sparse attention.

Aritra Dhar, Vasilije Stambolic, and Lukas Cavigelli. 2025. Rag-pull: Turning retrieval into a code-injection channel via invisible unicode perturbations.

Hanxing Ding, Shuchang Tao, Liang Pang, Zihao Wei, Liwei Chen, Kun Xu, Huawei Shen, and Xueqi Cheng. 2025. Revisiting robust rag: Do we still need complex robust training in the era of powerful llms?

Kennedy Edemacu, Vinay M. Shashidhar, Micheal Tuape, Dan Abudu, Beakcheol Jang, and Jong Wook Kim. 2025. Defending against knowledge poisoning attacks during retrieval-augmented generation.

Kennedy Edemacu and Mohammad Mahdi Shokri. 2026. Hidden in the metadata: Stealth poisoning attacks on multimodal retrieval-augmented generation.

Shahul Es, Jithin James, Luis Espinosa Anke, and Steven Schockaert. 2024. RAGAs: Automated evaluation of retrieval augmented generation. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, pages 150–158.

Ekaterina Fadeeva, Aleksandr Rubashevskii, Dzianis Piatrashyn, Roman Vashurin, Shehzaad Dhuliawala, Artem Shelmanov, Timothy Baldwin, Preslav Nakov, Mrinmaya Sachan, and Maxim Panov. 2025. Faithfulness-aware uncertainty quantification for fact-checking the output of retrieval augmented generation.

Feiteng Fang, Yuelin Bai, Shiwen Ni, Min Yang, Xiaojun Chen, and Ruifeng Xu. 2024. Enhancing noise robustness of retrieval-augmented language models with adaptive adversarial training. In *ACL*.

Manuel Faysse, Hugues Sibille, Tony Wu, Bilel Omrani, Gautier Viaud, Celine Hudelot, and Pierre Colombo. 2025. Colpali: Efficient document retrieval with vision language models. In *International Conference on Learning Representations*.

Huawen Feng, ZekunYao, Junhao Zheng, and Qianli Ma. 2025. Training large language models for retrieval-augmented question answering through backtracking correction. In *ICLR 2025*.

Jessica Foo, Pradyumna Shyama Prasad, and Shaun Khoo. 2025. Know or not: a library for evaluating out-of-knowledge base robustness.

Jorge Gabín, Anxo Perez, and Javier Parapar. 2026. Lost in the evidence? reproducing document position and context size effects in rag.

Chengcai Gao, Zhihong Sun, Xiaochuan Shi, Qiufeng Wang, and Chao Liang. 2026a. Bird: A bidirectional ranking defense mechanism for retrieval augmented generation.

Jingsheng Gao, Linxu Li, Ke Ji, Weiyuan Li, Yixin Lian, yuzhuo fu, and Bin Dai. 2025a. Smartrag: Jointly learn rag-related tasks from the environment feedback. In *ICLR 2025*.

Linfeng Gao, Qinggang Zhang, Baolong Bi, Bo Zeng, Zheng Yuan, Zerui Chen, Zhimin Wei, Shenghua Liu, Linlong Xu, Longyue Wang, Weihua Luo, and Jinsong Su. 2025b. Beyond black-box interventions: Latent probing for faithful retrieval-augmented generation.

Muhan Gao, Zih-Ching Chen, and Kuan-Hao Huang. 2026b. The first drop of ink: Nonlinear impact of misleading information in long-context reasoning.

Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng Wang, and Haofen Wang. 2024. Retrieval-augmented generation for large language models: A survey.

Ziyu Ge, Yuhao Wu, Daniel Wai Kit Chin, Roy Ka-Wei Lee, and Rui Cao. 2025. Resolving conflicting evidence in automated fact-checking: A study on retrieval-augmented llms.

Runpeng Geng, Yanting Wang, Ying Chen, and Jinyuan Jia. 2025. Unic-rag: Universal knowledge corruption attacks to retrieval-augmented generation.

Yuyang Gong, Miaokun Chen, Jiawei Liu, Zhuo Chen, Guoxiu He, Wei Lu, XiaoFeng Wang, and Xiaozhong Liu. 2026. Discourseflip: An oblique discourse-level opinion manipulation attack against black-box retrieval-augmented generation.

Yuyang Gong, Zhuo Chen, Jiawei Liu, Miaokun Chen, Fengchang Yu, Wei Lu, Xiaofeng Wang, and Xiaozhong Liu. 2025. Topic-fliprag: Topic-orientated adversarial opinion manipulation attacks to retrieval-augmented generation models.

Ishrith Gowda. 2026. Memsad: Gradient-coupled anomaly detection for memory poisoning in retrieval-augmented agents.

Haoze Guo and Ziqi Wei. 2026. Hidden-in-plain-text: A benchmark for social-web indirect prompt injection in rag.

Hyeonjeong Ha, Qiusi Zhan, Jeonghwan Kim, Dimitrios Bralios, Saikrishna Sanniboina, Nanyun Peng, Kai-Wei Chang, Daniel Kang, and Heng Ji. 2025. Mm-poisonrag: Disrupting multimodal rag with local and global poisoning attacks.

Idan Habler, Vineeth Sai Narajala, Stav Koren, Amy Chang, and Tiffany Saade. 2026. Adversarial hubness detector: Detecting hubness poisoning in retrieval-augmented generation systems.

Lovisa Hagström, Youna Kim, Haeun Yu, Sang goo Lee, Richard Johansson, Hyunsoo Cho, and Isabelle Augenstein. 2025. Cub: Benchmarking context utilisation techniques for language models.

Xiaoxin He, Yijun Tian, Yifei Sun, Nitesh V Chawla, Thomas Laurent, Yann LeCun, Xavier Bresson, and Bryan Hooi. 2024. G-retriever: Retrieval-augmented generation for textual graph understanding and question answering. In *NeurIPS 2024*.

Sebastian Hofstätter, Jiecao Chen, Karthik Raman, and Hamed Zamani. 2023. Fid-light: Efficient and effective retrieval-augmented text generation. In *ICLR 2023*.

Giwon Hong, Jeonghwan Kim, Junmo Kang, Sung-Hyon Myaeng, and Joyce Jiyoung Whang. 2023. Why so gullible? enhancing the robustness of retrieval-augmented models against counterfactual noise.

Yufang Hou, Alessandra Pascale, Javier Carnerero-Cano, Tigran Tchrakian, Radu Marinescu, Elizabeth Daly, Inkit Padhi, and Prasanna Sattigeri. 2024. Wikicontradict: A benchmark for evaluating llms on real-world knowledge conflicts from wikipedia.

Jennifer Hsia, Afreen Shaikh, Zora Zhiruo Wang, and Graham Neubig. 2025. Ragged: Towards informed design of scalable and stable rag systems. In *ICML 2025*.

Haoyang Hu, Zhejun Jiang, Yueming Lyu, Junyuan Zhang, Yi Liu, and Ka-Ho Chow. 2026. Confundo: Learning to generate robust poison for practical rag systems.

Yikuan Hu, Jifeng Zhu, Lanrui Tang, and Chen Huang. 2025. Remindrag: Low-cost llm-guided knowledge graph traversal for efficient rag. In *NeurIPS 2025*.

Zhibo Hu, Chen Wang, Yanfeng Shu, Helen, Paik, and Liming Zhu. 2024. Prompt perturbation in retrieval-augmented generation based large language models.

Pengcheng Huang, Zhenghao Liu, Yukun Yan, Haiyan Zhao, Xiaoyuan Yi, Hao Chen, Zhiyuan Liu, Maosong Sun, Tong Xiao, Ge Yu, and Chenyan Xiong. 2025a. Parammute: Suppressing knowledge-critical ffns for faithful retrieval-augmented generation. In *Advances in Neural Information Processing Systems*.

Yin Huang, Yifan Ethan Xu, Kai Sun, Vera Yan, Alicia Sun, Haidar Khan, Jimmy Nguyen, Jingxiang Chen, Mohammad Kachuee, Zhaojiang Lin, Yue Liu, Aaron Colak, Anuj Kumar, Wen tau Yih, and Xin Luna Dong. 2025b. Confrag: Confidence-guided retrieval-augmenting generation.

Yukun Huang, Sanxing Chen, Hongyi Cai, and Bhuwan Dhingra. 2024. To trust or not to trust? enhancing large language models' situated faithfulness to external contexts.

Zhiqi Huang, Vivek Datla, Chenyang Zhu, Alfy Samuel, Daben Liu, Anoop Kumar, and Ritesh Soni. 2025c. Confidence-based response abstinence: Improving llm trustworthiness via activation-based uncertainty estimation.

Nan Huo, Jinyang Li, Bowen Qin, Ge Qu, Xiaolong Li, Xiaodong Li, Chenhao Ma, and Reynold Cheng. 2025. Micro-act: Mitigating knowledge conflict in llm-based rag via actionable self-reasoning.

Malika Iratni, Mohand Boughanem, and Taoufiq Dkaki. 2025. Dynamic context selection for retrieval-augmented generation: Mitigating distractors and positional bias.

Chaeyun Jang, Deukhwan Cho, Seanie Lee, Hyungi Lee, and Juho Lee. 2025a. Reliable decision-making via calibration-oriented retrieval-augmented generation. In *Advances in Neural Information Processing Systems*.

Chaeyun Jang, Deukhwan Cho, Seanie Lee, Hyungi Lee, and Juho Lee. 2025b. Reliable decision-making via calibration-oriented retrieval-augmented generation. In *NeurIPS 2025*.

Austin Jia, Avaneesh Ramesh, Zain Shamsi, Daniel Zhang, and Alex Liu. 2025a. Ragrank: Using pagerank to counter poisoning in cti llm pipelines.

Yifan Jia, Kailin Jiang, Yuyang Liang, Qihan Ren, Yi Xin, Rui Yang, Fenze Feng, Mingcai Chen, Hengyang Lu, Haozhe Wang, Xiaoye Qu, Dongrui Liu, Lizhen Cui, and Yuntao Du. 2025b. Benchmarking multimodal knowledge conflict for large multimodal models.

Zijun Jia, Yuanchang Ye, Sen Jia, Yiyao Qian, Haoning Wang, Baojie Chen, Diyin Tang, Jinsong Yu, and Zhiyuan Wang. 2026. Balancerag: Joint risk calibration for cascaded retrieval-augmented generation.

Zhengbao Jiang, Frank Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. 2023. Active retrieval augmented generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7969–7992.

Yang Jiao, Xiaodong Wang, and Kai Yang. 2025. Prattack: Coordinated prompt-rag attacks on retrieval-augmented generation in large language models via bilevel optimization.

Bowen Jin, Jinsung Yoon, Jiawei Han, and Sercan O. Arik. 2024a. Long-context llms meet rag: Overcoming challenges for long inputs in rag.

Hongye Jin, Pei Chen, Jingfeng Yang, Zhengyang Wang, Fangran Mo, Jinghan Zhang, Meng Jiang, Yifan Gao, Binxuan Huang, Xinyang Zhang, Zheng Li, Tianyi Liu, Huasheng Li, and Bing Yin. 2025. End: Early noise dropping for efficient and effective context denoising.

Weifei Jin, Xilong Wang, Wei Zou, Jinyuan Jia, and Neil Gong. 2026. Cleanbase: Detecting malicious documents in rag knowledge databases.

Zhuoran Jin, Pengfei Cao, Yubo Chen, Kang Liu, Xiaojian Jiang, Jiexin Xu, Qiuxia Li, and Jun Zhao. 2024b. Tug-of-war between knowledge: Exploring and resolving knowledge conflicts in retrieval-augmented language models.

Zhuoran Jin, Pengfei Cao, Hongbang Yuan, Yubo Chen, Jiexin Xu, Huaijun Li, Xiaojian Jiang, Kang Liu, and Jun Zhao. 2024c. Cutting off the head ends the conflict: A mechanism for interpreting and mitigating knowledge conflicts in language models.

Hailey Joren, Jianyi Zhang, Chun-Sung Ferng, Da-Cheng Juan, Ankur Taly, and Cyrus Rashtchian. 2025. Sufficient context: A new lens on retrieval augmented generation systems. In *International Conference on Learning Representations*.

Li Ju, Junzhe Wang, and Qi Zhang. 2026. Faithfulness-qa: A counterfactual entity substitution dataset for training context-faithful rag models.

Mohammad Kachuee, Teja Gollapudi, Minseok Kim, Yin Huang, Kai Sun, Xiao Yang, Jiaqi Wang, Nirav Shah, Yue Liu, Aaron Colak, Anuj Kumar, Wen tau Yih, and Xin Luna Dong. 2025. Prismrag: Boosting rag factuality with distractor resilience and strategized reasoning.

Jaemin Kim, Jae O Lee, Sumyeong Ahn, and Seo Yeon Park. 2026. Neuro-rit: Neuron-guided instruction tuning for robust retrieval-augmented language model.

Minseok Kim, Hankook Lee, and Hyungjoon Koo. 2025a. Rescuing the unpoisoned: Efficient defense against knowledge corruption attacks on rag systems.

San Kim, Jonghwi Kim, Yejin Jeon, and Gary Geunbae Lee. 2025b. Safeguarding rag pipelines with gmtp: A gradient-based masked token probability method for poisoned document detection.

Singon Kim. 2025. Noise-robust abstractive compression in retrieval-augmented language models.

Youna Kim, Hyuhng Joon Kim, Cheonbok Park, Choonghyun Park, Hyunsoo Cho, Junyeob Kim, Kang Min Yoo, Sang goo Lee, and Taeuk Kim. 2024. Adaptive contrastive decoding in retrieval-augmented generation for handling noisy contexts.

Samuel Korn. 2026. Architecture matters: Comparing rag systems under knowledge base poisoning.

Evgenii Kortukov, Alexander Rubinstein, Elisa Nguyen, and Seong Joon Oh. 2024. Studying large language model behaviors under context-memory conflicts with real documents.

Tiziano Labruna, Jon Ander Campos, and Gorka Azkune. 2024. When to retrieve: Teaching llms to utilize information retrieval effectively.

Jungyeon Lee, Kangmin Lee, and Taeuk Kim. 2025. Magic: A multi-hop and graph-based benchmark for inter-context conflicts in retrieval-augmented generation.

Junhyeok Lee, Han Jang, and Kyu Sung Choi. 2026. Mpib: A benchmark for medical prompt injection attacks and clinical safety in llms.

Tobias Leemann, Periklis Petridis, Giuseppe Vietri, Dionysis Manousakas, Aaron Roth, and Sergul Aydore. 2025. Auto-gda: Automatic domain adaptation for efficient grounding verification in retrieval-augmented generation. In *ICLR 2025*.

Patrick Levi. 2026. Towards unsupervised adversarial document detection in retrieval augmented generation systems.

Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. In *NeurIPS*.

Bo Li, Tian Tian, Zhenghua Xu, Hao Cheng, Shikun Zhang, and Wei Ye. 2025a. Modeling uncertainty trends for timely retrieval in dynamic rag.

Chunyang Li, Junwei Zhang, Anda Cheng, Zhuo Ma, Xinghua Li, and Jianfeng Ma. 2025b. Cpa-rag: Covert poisoning attacks on retrieval-augmented generation in large language models.

Junchen Li, Chao Qi, Rongzheng Wang, Qizhi Chen, Liang Xu, Di Liang, Bob Simons, and Shuang Liang. 2026a. When safety becomes a vulnerability: Exploiting llm alignment homogeneity for transferable blocking in rag.

Kuan Li, Liwen Zhang, Yong Jiang, Pengjun Xie, Fei Huang, Shuai Wang, and Minhao Cheng. 2025c. Lara: Benchmarking retrieval-augmented generation and long-context llms – no silver bullet for lc or rag routing. In *ICML 2025*.

Mufei Li, Siqi Miao, and Pan Li. 2025d. Simple is effective: The roles of graphs and large language models in knowledge-graph-based retrieval-augmented generation. In *ICLR 2025*.

Shuowei Li, Haoxin Li, Wenda Chu, and Yi Fang. 2026b. How large language models balance internal knowledge with user and document assertions.

Tian Li, Bo Lin, Shangwen Wang, and Yusong Tan. 2025e. Exploring the security threats of retriever backdoors in retrieval-augmented code generation.

Xinze Li, Sen Mei, Zhenghao Liu, Yukun Yan, Shuo Wang, Shi Yu, Zheni Zeng, Hao Chen, Ge Yu, Zhiyuan Liu, Maosong Sun, and Chenyan Xiong. 2025f. Rag-ddr: Optimizing retrieval-augmented generation using differentiable data rewards. In *ICLR 2025*.

Yangning Li, Yinghui Li, Xinyu Wang, Yong Jiang, Zhen Zhang, Xinran Zheng, Hui Wang, Hai-Tao Zheng, Fei Huang, Jingren Zhou, and Philip S. Yu. 2025g. Benchmarking multimodal retrieval augmented generation with dynamic vqa dataset and self-adaptive planning agent. In *ICLR 2025*.

Yuepei Li, Kang Zhou, Qiao Qiao, Bach Nguyen, Qing Wang, and Qi Li. 2024a. Investigating context-faithfulness in large language models: The roles of memory strength and evidence style.

Zixuan Li, Jing Xiong, Fanghua Ye, Chuanyang Zheng, Jianqiao Lu, Zhongwei Wan, Xun Wu, Xiaodan Liang, Chengming Li, Zhenan Sun, Lingpeng Kong, and Ngai Wong. 2024b. Uncertaintyrag: Span-level uncertainty enhanced long-context retrieval-augmented generation.

Zizhong Li, Haopeng Zhang, and Jiawei Zhang. 2025h. Token-level precise attack on rag: Searching for the best alternatives to mislead generation.

Jiacheng Liang, Yuhui Wang, Changjiang Li, Tanqiu Jiang, Rongyi Zhu, Neil Gong, and Ting Wang. 2025a. Graphrag under fire.

Xun Liang, Simin Niu, Zhiyu Li, Sensen Zhang, Hanyu Wang, Feiyu Xiong, Jason Zhaoxin Fan, Bo Tang, Shichao Song, Mengwei Wang, and Jiawei Yang. 2025b. Saferag: Benchmarking security in retrieval-augmented generation of large language model.

Bo Lin, Shangwen Wang, Liqian Chen, and Xiaoguang Mao. 2025a. Exploring the security threats of knowledge base poisoning in retrieval-augmented code generation.

Chenyu Lin, Yilin Wen, Du Su, Hexiang Tan, Fei Sun, Muhan Chen, Chenfu Bao, and Zhonghou Lyu. 2025b. Resisting contextual interference in rag via parametric-knowledge reinforcement.

Gabrielle Kaili-May Liu, Bryan Li, Arman Cohan, William Gantt Walden, and Eugene Yang. 2025a. Investigating retrieval-augmented generation systems on unanswerable, uncheatable, realistic, multi-hop queries.

Huanshuo Liu, Hao Zhang, Zhijiang Guo, Jing Wang, Kuicai Dong, Xiangyang Li, Yi Quan Lee, Cong Zhang, and Yong Liu. 2025b. Ctrla: Adaptive retrieval-augmented generation via inherent control. In *Findings of ACL*.

Jiawei Liu, Zhuo Chen, Rui Zhu, Miaokun Chen, Yuyang Gong, Wei Lu, and Xiaofeng Wang. 2025c. Robustmask: Certified robustness against adversarial neural ranking attack via randomized masking.

Jiayi Liu, Jiaxing Zhang, Bowen Jin, and Jennifer Neville. 2026a. Generating leakage-free benchmarks for robust rag evaluation.

Jiayu Liu, Rui Wang, Qing Zong, Yumeng Wang, Cheng Qian, Qingcheng Zeng, Tianshi Zheng, Haochen Shi, Dadi Guo, Baixuan Xu, Chunyang Li, and Yangqiu Song. 2026b. Naacl: Noise-aware verbal confidence calibration for robust llms in rag systems.

Mingrui Liu, Sixiao Zhang, Cheng Long, and Kwok-Yan Lam. 2026c. Redvisor: Reasoning-aware prompt injection defense via zero-copy kv cache reuse.

Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. 2024. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics*, 12:157–173.

Shuyi Liu, Yuming Shang, and Xi Zhang. 2025d. Truthfulrag: Resolving factual-level conflicts in retrieval-augmented generation with knowledge graphs.

Tianci Liu, Haoxiang Jiang, Tianze Wang, Ran Xu, Yue Yu, Linjun Zhang, Tuo Zhao, and Haoyu Wang. 2025e. Roserag: Robust retrieval-augmented generation with small-scale llms via margin-aware preference optimization.

Yinuo Liu, Zenghui Yuan, Guiyao Tie, Jiawen Shi, Pan Zhou, Lichao Sun, and Neil Zhenqiang Gong. 2025f. Poisoned-mrag: Knowledge poisoning attacks to multimodal retrieval augmented generation.

Yongchao Long, Xian Wu, Yingying Zhang, Xianbin Wen, Yuxi Zhou, and Shenda Hong. 2025. Copy-paste to mitigate large language model hallucinations.

Linhao Luo, Zicheng Zhao, Gholamreza Haffari, Dinh Phung, Chen Gong, and Shirui Pan. 2025. Gfm-rag: Graph foundation model for retrieval augmented generation. In *NeurIPS 2025*.

Xingyu Lyu, Jianfeng He, Ning Wang, Yidan Hu, Tao Li, Danjue Chen, Shixiong Li, and Yimin Chen. 2026. Alden: Boosting private data extraction from retrieval-augmented generation systems via active learning and distribution estimation.

Shengjie Ma, Chengjin Xu, Xuhui Jiang, Muzhi Li, Huaren Qu, Cehao Yang, Jiaxin Mao, and Jian Guo. 2025. Think-on-graph 2.0: Deep and faithful large language model reasoning with knowledge-guided retrieval augmented generation. In *ICLR 2025*.

Xuhua Ma, Richong Zhang, and Zhijie Nie. 2026. Corect: Context-aware logit contrast for hidden state rectification to resolve knowledge conflicts.

Maria Marina, Nikolay Ivanov, Sergey Pletenev, Mikhail Salnikov, Daria Galimzianova, Nikita Krayko, Vasily Konovalov, Alexander Panchenko, and Viktor Moskvoretskii. 2025. Llm-independent adaptive rag: Let the question speak for itself.

Sara Vera Marjanović, Haeun Yu, Pepa Atanasova, Maria Maistro, Christina Lioma, and Isabelle Augenstein. 2024. Dynamicqa: Tracing internal knowledge conflicts in language models.

Dehai Min, Kailin Zhang, Tongtong Wu, and Lu Cheng. 2025. Quco-rag: Quantifying uncertainty from the pre-training corpus for dynamic retrieval-augmented generation.

Yifei Ming, Senthil Purushwalkam, Shrey Pandit, Zixuan Ke, Xuan-Phi Nguyen, Caiming Xiong, and Shafiq Joty. 2025. Faitheval: Can your language model stay faithful to context, even if "the moon is made of marshmallows". In *International Conference on Learning Representations*.

Viktor Moskvoretskii, Maria Lysyuk, Mikhail Salnikov, Nikolay Ivanov, Sergey Pletenev, Daria Galimzianova, Nikita Krayko, Vasily Konovalov, Irina Nikishina, and Alexander Panchenko. 2025. Adaptive retrieval without self-knowledge? bringing uncertainty back home.

Yanming Mu, Hao Hu, Feiyang Li, Qiao Yuan, Jiang Wu, Zichuan Liu, Pengcheng Liu, Mei Wang, Hongwei Zhou, and Yuling Liu. 2026. Towards secure retrieval-augmented generation: A comprehensive review of threats, defenses and benchmarks.

Vinh Nguyen, Cuong Dang, Jiahao Zhang, Hoa Tran, Minh Tran, Trinh Chau, Thai Le, Lu Cheng, and Suhang Wang. 2026. Urag: A benchmark for uncertainty quantification in retrieval-augmented large language models.

Bo Ni, Zheyuan Liu, Leyao Wang, Yongjia Lei, Yuying Zhao, Xueqi Cheng, Qingkai Zeng, Luna Dong, Yinglong Xia, Krishnaram Kenthapadi, Ryan Rossi, Franck Dernoncourt, Md Mehrab Tanjim, Nesreen Ahmed, Xiaorui Liu, Wenqi Fan, Erik Blasch, Yu Wang, Meng Jiang, and Tyler Derr. 2025. Towards trustworthy retrieval augmented generation for large language models: A survey.

Cheng Niu, Yuanhao Wu, Juno Zhu, Siliang Xu, Kashun Shum, Randy Zhong, Juntong Song, and Tong Zhang. 2024. Ragtruth: A hallucination corpus for developing trustworthy retrieval-augmented language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*.

Qingying Niu, Yuhao Wang, Ruiyang Ren, Bohui Fang, and Wayne Xin Zhao. 2026. Arbgraph: Conflict-aware evidence arbitration for reliable long-form retrieval-augmented generation.

Philhoon Oh, Jinwoo Shin, and James Thorne. 2025. Parallel key-value cache fusion for position invariant rag.

Sanchit Pandey. 2026. Can small language models use what they retrieve? an empirical study of retrieval utilization across model scale.

Seong-Il Park, Seung-Woo Choi, Na-Hyun Kim, and Jay-Yoon Lee. 2024. Enhancing robustness of retrieval-augmented language models with in-context learning.

Seong-Il Park and Jay-Yoon Lee. 2024. Toward robust ralms: Revealing the impact of imperfect retrieval on retrieval-augmented language models.

Dario Pasquini, Martin Strohmeier, and Carmela Troncoso. 2024. Neural exec: Learning (and learning from) execution triggers for prompt injection attacks.

Pankayaraj Pathmanathan, Michael-Andrei Panaitescu-Liess, Cho-Yu Jason Chiang, and Furong Huang. 2025. Ragpart & ragmask: Retrieval-stage defenses against corpus poisoning in retrieval-augmented generation.

Xiangyu Peng, Prafulla Kumar Choubey, Caiming Xiong, and Chien-Sheng Wu. 2024. Unanswerability evaluation for retrieval augmented generation.

Sezen Percin, Xin Su, Qutub Sha Syed, Phillip Howard, Aleksei Kuvshinov, Leo Schwinn, and Kay-Ulrich Scholl. 2025. Investigating the robustness of retrieval-augmented generation at the query level. In *GEM*.

Quang Hieu Pham, Hoang Ngo, Anh Tuan Luu, and Dat Quoc Nguyen. 2024. Who's who: Large language models meet knowledge conflicts in practice.

Zhisheng Qi, Utkarsh Sahu, Li Ma, Haoyu Han, Ryan Rossi, Franck Dernoncourt, Mahantesh Halappanavar, Nesreen Ahmed, Yushun Dong, Yue Zhao, Yu Zhang, and Yu Wang. 2026. Benchmarking knowledge-extraction attack and defense on retrieval-augmented generation.

Hongjin Qian, Yutao Zhu, Zhicheng Dou, Haoqi Gu, Xinyu Zhang, Zheng Liu, Ruofei Lai, Zhao Cao, Jian-Yun Nie, and Ji-Rong Wen. 2023. Webbrain: Learning to generate factually correct articles for queries by grounding on large web corpus. In *ICLR 2023*.

Zile Qiao, Wei Ye, Yong Jiang, Tong Mo, Pengjun Xie, Weiping Li, Fei Huang, and Shikun Zhang. 2024. Supportiveness-based knowledge rewriting for retrieval-augmented language modeling.

Jingxi Qiu, Zeyu Han, and Cheng Huang. 2026. Surerag: Sufficiency and uncertainty-aware evidence verification for selective retrieval-augmented generation.

Zexuan Qiu, Zijing Ou, Bin Wu, Jingjing Li, Aiwei Liu, and Irwin King. 2024. Entropy-based decoding for retrieval-augmented large language models.

Md Jahedur Rahman and Ihsen Alouani. 2026. Bypassing prompt injection detectors through evasive injections.

Ruiyang Ren, Yuhao Wang, Yingqi Qu, Wayne Xin Zhao, Jing Liu, Hao Tian, Hua Wu, Ji-Rong Wen, and Haifeng Wang. 2023. Investigating the factual knowledge boundary of large language models with retrieval augmentation.

Sara Rosenthal, Yannis Katsis, Vraj Shah, Lihong He, Lucian Popa, and Marina Danilevsky. 2026. Mtrag-un: A benchmark for open challenges in multi-turn rag conversations.

Jon Saad-Falcon, Omar Khattab, Christopher Potts, and Matei Zaharia. 2024. ARES: An automated evaluation framework for retrieval-augmented generation systems. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 338–354.

Jakob Schuster, Vagrant Gautam, and Katja Markert. 2026. Whose facts win? llm source preferences under knowledge conflicts.

Shrey Shah and Levent Ozgur. 2026. The synthetic web: Adversarially-curated mini-internets for diagnosing epistemic weaknesses of language agents.

Yingjia Shang, Yi Liu, Huimin Wang, Furong Li, Wenfang Sun, Wu Chengyu, and Yefeng Zheng. 2025. Medusa: Cross-modal transferable adversarial attacks on multimodal medical retrieval-augmented generation.

Ravi Shankar, Sheng Wong, Lin Li, Magdalena Bachmann, Alex Silverthorne, Beth Albert, and Gabriel Davis Jones. 2025. Energy landscapes enable reliable abstention in retrieval-augmented large language models for healthcare.

Yangguang Shao, Xinjie Lin, Haozheng Luo, Chengshang Hou, Gang Xiong, Jiahao Yu, and Junzheng Shi. 2025. Poisoncraft: Practical poisoning of retrieval-augmented generation for large language models.

Chaitanya Sharma. 2025. Retrieval-augmented generation: A comprehensive survey of architectures, enhancements, and robustness frontiers.

Zeyu Shen, Basileal Imana, Tong Wu, Chong Xiang, Prateek Mittal, and Aleksandra Korolova. 2025. Reliabilityrag: Effective and provably robust defense for rag-based web-search. In *Advances in Neural Information Processing Systems*.

Ezzeldin Shereen, Dan Ristea, Shae McFadden, Burak Hasircioglu, Vasilios Mavroudis, and Chris Hicks. 2025. One pic is all it takes: Poisoning visual document retrieval augmented generation with a single image.

Ibne Farabi Shihab, Fariya Afrin, Sanjeda Akter, and Anuj Sharma. 2026. Grounded decoding: Retrieval-anchored probability fusion for faithful rag.

Seongwoong Shim, Myunsoo Kim, Jae Hyeon Cho, and Byung-Jun Lee. 2025. Beyond rag vs. long-context: Learning distraction-aware retrieval for efficient knowledge grounding.

Sunguk Shin, Meeyoung Cha, Byung-Jun Lee, and Sungwon Park. 2026. Era: Evidence-based reliability alignment for honest retrieval-augmented generation.

Xiaonan Si, Meilin Zhu, Simeng Qin, Lijia Yu, Lijun Zhang, Shuaitong Liu, Xinfeng Li, Ranjie Duan, Yang Liu, and Xiaojun Jia. 2025. Secon-rag: A two-stage semantic filtering and conflict-free framework for trustworthy rag. In *Advances in Neural Information Processing Systems*.

Debu Sinha. 2025. The semantic illusion: Certified limits of embedding-based hallucination detection in rag systems.

Hongru Song, Yu an Liu, Ruqing Zhang, Jiafeng Guo, and Yixing Fan. 2025a. Chain-of-thought poisoning attacks against r1-based retrieval-augmented generation systems.

Hongru Song, Yu-An Liu, Ruqing Zhang, Jiafeng Guo, Maarten de Rijke, Yixing Fan, and Xueqi Cheng. 2026. Adversarialcot: Single-document retrieval poisoning for llm reasoning.

Hongru Song, Yu-An Liu, Ruqing Zhang, Jiafeng Guo, Jianming Lv, Maarten de Rijke, and Xueqi Cheng. 2025b. The silent saboteur: Imperceptible adversarial attacks against black-box retrieval-augmented generation systems.

Maojia Song, Shang Hong Sim, Rishabh Bhardwaj, Hai Leong Chieu, Navonil Majumder, and Soujanya Poria. 2025c. Measuring and enhancing trustworthiness of llms in rag through grounded attributions and learning to refuse. In *ICLR 2025*.

Heydar Soudani, Evangelos Kanoulas, and Faegheh Hasibi. 2025a. Why uncertainty estimation methods fall short in rag: An axiomatic analysis.

Heydar Soudani, Hamed Zamani, and Faegheh Hasibi. 2025b. Uncertainty quantification for retrieval-augmented reasoning.

Gaurang Sriramanan, Siddhant Bharti, Vinu Sankar Sadasivan, Shoumik Saha, Priyatham Kattakinda, and Soheil Feizi. 2024. Llm-check: Investigating detection of hallucinations in large language models. In *NeurIPS 2024*.

Saksham Sahai Srivastava and Haoyu He. 2025. Memorygraft: Persistent compromise of llm agents via poisoned experience retrieval.

Gianluca De Stefano, Lea Schönherr, and Giancarlo Pellegrino. 2024. Rag and roll: An end-to-end evaluation of indirect prompt manipulations in llm-based application frameworks.

Weihang Su, Yichen Tang, Qingyao Ai, Zhijing Wu, and Yiqun Liu. 2024. DRAGIN: Dynamic retrieval augmented generation based on the real-time information needs of large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12991–13013.

Zeli Su, Zhankai Xu, Tianlei Chen, Longfei Zheng, Xiaolu Zhang, Jun Zhou, and Wentao Zhang. 2026. The curse of helpfulness: Inverse scaling law in robustness to distractor instructions via distractionif.

Runqi Sui. 2025. Ctrlrag: Black-box document poisoning attacks for retrieval-augmented generation of large language models.

Yi Sui, Chaozhuo Li, Chen Zhang, Dawei song, and Qiuchi Li. 2025. Bridging external and parametric knowledge: Mitigating hallucination of llms with shared-private semantic synergy in dual-stream knowledge.

Xin Sun, Jianan Xie, Zhongqi Chen, Qiang Liu, Shu Wu, Yuehe Chen, Bowen Song, Weiqiang Wang, Zilei Wang, and Liang Wang. 2025a. Divide-then-align: Honest alignment based on the knowledge boundary of rag.

ZhongXiang Sun, Xiaoxue Zang, Kai Zheng, Jun Xu, Xiao Zhang, Weijie Yu, Yang Song, and Han Li. 2025b. Redeep: Detecting hallucination in retrieval-augmented generation via mechanistic interpretability. In *ICLR 2025*.

Pan Suo, Yu-Ming Shang, San-Chuan Guo, and Xi Zhang. 2025. Hoist with his own petard: Inducing guardrails to facilitate denial-of-service attacks on retrieval-augmented generation of llms.

Hexiang Tan, Fei Sun, Wanli Yang, Yuanzhuo Wang, Qi Cao, and Xueqi Cheng. 2024a. Blinded by generated contexts: How language models merge generated and retrieved contexts when knowledge conflicts?

Xue Tan, Hao Luan, Mingyu Luo, Xiaoyan Sun, Ping Chen, and Jun Dai. 2024b. Revprag: Revealing poisoning attacks in retrieval-augmented generation through llm activation analysis.

Zhehao Tan, Yihan Jiao, Dan Yang, Lei Liu, Jie Feng, Duolin Sun, Yue Shen, Jian Wang, Peng Wei, and Jinjie Gu. 2025. Prgb benchmark: A robust placeholder-assisted algorithm for benchmarking retrieval-augmented generation.

Zhen Tan, Chengshuai Zhao, Raha Moraffah, Yifan Li, Song Wang, Jundong Li, Tianlong Chen, and Huan Liu. 2024c. Glue pizza and eat rocks - exploiting vulnerabilities in retrieval-augmented generative models.

Qiaoyu Tang, Jiawei Chen, Zhuoqun Li, Bowen Yu, Yaojie Lu, ChengFu, Haiyang Yu, Hongyu Lin, Fei Huang, Ben He, Xianpei Han, Le Sun, and Yongbin Li. 2024. Self-retrieval: End-to-end information retrieval with one large language model. In *NeurIPS 2024*.

Giovanni Trappolini, Florin Cuconasu, Simone Filice, Yoelle Maarek, and Fabrizio Silvestri. 2025. Redefining retrieval evaluation in the era of llms.

Unknown. 2025. Follow my instruction and spill the beans: Scalable data extraction from retrieval-augmented generation systems. In *International Conference on Learning Representations*.

Cheng Wang, Yiwei Wang, Yujun Cai, and Bryan Hooi. 2025a. Tricking retrievers with influential tokens: An efficient black-box corpus poisoning attack.

Fei Wang, Xingchen Wan, Ruoxi Sun, Jiefeng Chen, and Sercan O. Arik. 2025b. Astute rag: Overcoming imperfect retrieval augmentation and knowledge conflicts for large language models. In *ACL*.

Haowei Wang, Rupeng Zhang, Junjie Wang, Mingyang Li, Yuekai Huang, Dandan Wang, and Qing Wang. 2025c. Joint-gcg: Unified gradient-based poisoning attacks on retrieval-augmented generation systems.

Haozhen Wang, Haoyue Liu, Jionghao Zhu, Zhichao Wang, Yongxin Guo, and Xiaoying Tang. 2026a. Pidp-attack: Combining prompt injection with database poisoning attacks on retrieval-augmented generation systems.

Jerry Wang and Fang Yu. 2025. Derag: Black-box adversarial attacks on multiple retrieval-augmented generation applications via prompt injection.

Jiatai Wang, Zhiwei Xu, Di Jin, Xuewen Yang, and Tao Li. 2025d. Accommodate knowledge conflicts in retrieval-augmented llms: Towards robust response generation in the wild.

Liang Wang, Haonan Chen, Nan Yang, Xiaolong Huang, Zhicheng Dou, and Furu Wei. 2025e. Chain-of-retrieval augmented generation. In *NeurIPS 2025*.

Song Wang, Zihan Chen, Peng Wang, Zhepei Wei, Zhen Tan, Yu Meng, Cong Shen, and Jundong Li. 2025f. Separate the wheat from the chaff: Winnowing down divergent views in retrieval augmented generation.

Xingliang Wang, Zemin Liu, Junxiao Han, and Shuiguang Deng. 2025g. Rag4gfm: Bridging knowledge gaps in graph foundation models through graph retrieval augmented generation. In *NeurIPS 2025*.

Yanting Wang, Runpeng Geng, Ying Chen, and Jinyuan Jia. 2025h. Attntrace: Contextual attribution of prompt injection and knowledge corruption.

Yike Wang, Shangbin Feng, Heng Wang, Weijia Shi, Vidhisha Balachandran, Tianxing He, and Yulia Tsvetkov. 2023a. Resolving knowledge conflicts in large language models.

Yufeng Wang, Lu wei, and Haibin Ling. 2025i. Retrieval as a decision: Training-free adaptive gating for efficient rag.

Yuhao Wang, Ruiyang Ren, Junyi Li, Wayne Xin Zhao, Jing Liu, and Ji-Rong Wen. 2024a. Rear: A relevance-aware retrieval-augmented framework for open-domain question answering.

Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md Rizwan Parvez, and Graham Neubig. 2023b. Learning to filter context for retrieval-augmented generation.

Zilong Wang, Zifeng Wang, Long Le, Steven Zheng, Swaroop Mishra, Vincent Perot, Yuwei Zhang, Anush Mattapalli, Ankur Taly, Jingbo Shang, Chen-Yu Lee, and Tomas Pfister. 2025j. Speculative rag: Enhancing retrieval augmented generation through drafting. In *ICLR 2025*.

Ziqiu Wang, Jun Liu, Shengkai Zhang, and Yang Yang. 2024b. Poisoned langchain: Jailbreak llms by langchain.

Ziye Wang, Guanyu Wang, and Kailong Wang. 2026b. Refinerag: Word-level poisoning attacks via retriever-guided text refinement.

Zhepei Wei, Wei-Lin Chen, and Yu Meng. 2025. Instructrag: Instructing retrieval-augmented generation via self-synthesized rationales. In *ICLR 2025*.

Jiayi Wen, Tianxin Chen, Zhirun Zheng, and Cheng Huang. 2025a. A few words can distort graphs: Knowledge poisoning attacks on graph-based retrieval-augmented generation of large language models.

Tongyu Wen, Chenglong Wang, Xiyuan Yang, Haoyu Tang, Yueqi Xie, Lingjuan Lyu, Zhicheng Dou, and Fangzhao Wu. 2025b. Defending against indirect prompt injection by instruction detection.

Di Wu, Jia-Chen Gu, Fan Yin, Nanyun Peng, and Kai-Wei Chang. 2024. Synchronous faithfulness monitoring for trustworthy retrieval-augmented generation. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*.

Hao Wu and Prateek Saxena. 2025. Epistemic bias injection: Biasing llms via selective context retrieval.

Peilin Wu, Mian Zhang, Xinlu Zhang, Xinya Du, and Zhiyu Zoey Chen. 2025a. Search wisely: Mitigating sub-optimal agentic searches by reducing uncertainty.

Peilin Wu, Xinlu Zhang, Wenhao Yu, Xingyu Liu, Xinya Du, and Zhiyu Zoey Chen. 2025b. Do retrieval-augmented language models adapt to varying user needs?

Yutao Wu, Xiao Liu, Yinghui Li, Yifeng Gao, Yifan Ding, Jiale Ding, Xiang Zheng, and Xingjun Ma. 2025c. Admit: Few-shot knowledge poisoning attacks on rag-based fact checking.

Meng Xi, Sihan Lv, Yechen Jin, Guanjie Cheng, Naibo Wang, Ying Li, and Jianwei Yin. 2025. Riprag: Hack a black-box retrieval-augmented generation question-answering system with reinforcement learning.

Xun Xian, Ganghua Wang, Xuan Bi, Jayanth Srinivasa, Ashish Kundu, Charles Fleming, Mingyi Hong, and Jie Ding. 2025a. On the vulnerability of applying retrieval-augmented generation within knowledge-intensive application domains. In *International Conference on Machine Learning*.

Xun Xian, Tong Wang, Liwen You, and Yanjun Qi. 2025b. Understanding data poisoning attacks for rag: Insights and algorithms.

Chong Xiang, Tong Wu, Zexuan Zhong, David Wagner, Danqi Chen, and Prateek Mittal. 2024. Certifiably robust rag against retrieval corruption.

Yilin Xiao, Jin Chen, Qinggang Zhang, Yujing Zhang, Chuang Zhou, Longhao Yang, Lingfei Ren, Xin Yang, and Xiao Huang. 2026. Logicpoison: Logical attacks on graph retrieval-augmented generation.

Jian Xie, Kai Zhang, Jiangjie Chen, Renze Lou, and Yu Su. 2023. Adaptive chameleon or stubborn sloth: Revealing the behavior of large language models in knowledge conflicts.

Roy Xie, Deepak Gopinath, David Qiu, Dong Lin, Haitian Sun, Saloni Potdar, and Bhuwan Dhingra. 2026. Over-searching in search-augmented large language models.

Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2023. Recomp: Improving retrieval-augmented lms with compression and selective augmentation.

Peng Xu, Wei Ping, Xianchao Wu, Chejian Xu, Zihan Liu, Mohammad Shoeybi, and Bryan Catanzaro. 2025. Chatqa 2: Bridging the gap to proprietary llms in long context and rag capabilities. In *ICLR 2025*.

Yongxin Xu, Ruizhe Zhang, Xinke Jiang, Yujie Feng, Yuzhen Xiao, Xinyu Ma, Runchuan Zhu, Xu Chu, Junfeng Zhao, and Yasha Wang. 2024. Parenting: Optimizing knowledge selection of retrieval-augmented language models with parameter decoupling and tailored tuning.

Yuming Xu, Mingtao Zhang, Zhuohan Ge, Haoyang Li, Nicole Hu, Yongqi Zhang, Zhiyuan Wen, Jason Chen Zhang, Qing Li, and Lei Chen. 2026. Securing retrieval-augmented generation: A taxonomy of attacks, defenses, and future directions.

Jiaqi Xue, Mengxin Zheng, Yebowen Hu, Fei Liu, Xun Chen, and Qian Lou. 2024. Badrag: Identifying vulnerabilities in retrieval augmented generation of large language models.

Shi-Qi Yan, Jia-Chen Gu, Yun Zhu, and Zhen-Hua Ling. 2024. Corrective retrieval augmented generation.

Shi-Qi Yan, Quan Liu, and Zhen-Hua Ling. 2025. Rpo: Retrieval preference optimization for robust retrieval-augmented generation.

Peiru Yang, Haoran Zheng, Tong Ju, Shiting Wang, Wanchun Ni, Jiajun Liu, Shangguang Wang, Yongfeng Huang, and Tao Qi. 2026. Knowledge poisoning attacks on medical multi-modal retrieval-augmented generation.

Shiping Yang, Jie Wu, Wenbiao Ding, Ning Wu, Shining Liang, Ming Gong, Hongzhi Li, Hengyuan Zhang, Angel X. Chang, and Dongmei Zhang. 2025. Quantifying and improving the robustness of retrieval-augmented language models against spurious features in grounding data.

Shu Yang, Jiayuan Su, Han Jiang, Mengdi Li, Keyuan Cheng, Muhammad Asif Ali, Lijie Hu, and Di Wang. 2024. Dialectical alignment: Resolving the tension of 3h and security threats of llms.

Ruobing Yao, Yifei Zhang, Shuang Song, Neng Gao, and Chenyang Tu. 2025. Ecosaferag: Efficient security through context analysis in retrieval-augmented generation.

Kai Ye, Liangcai Su, and Chenxiong Qian. 2025. Importsnare: Directed "code manual" hijacking in retrieval-augmented code generation.

Xiangyu Yin, Yi Qi, and Chih-Hong Cheng. 2026. Progrank: Probe-gradient reranking to defend dense-retriever rag from corpus poisoning.

Ori Yoran, Tomer Wolfson, Ori Ram, and Jonathan Berant. 2024. Making retrieval-augmented language models robust to irrelevant context. In *International Conference on Learning Representations*.

Hao Yu, Aoran Gan, Kai Zhang, Shiwei Tong, Qi Liu, and Zhaofeng Liu. 2024a. Evaluation of retrieval-augmented generation: A survey.

Junchi Yu, Yujie Liu, Jindong Gu, Philip Torr, and Dongzhan Zhou. 2025a. Can knowledge-graph-based retrieval augmented generation really retrieve what you need? In *NeurIPS 2025*.

Lei Yu, Yechao Zhang, Ziqi Zhou, Yang Wu, Wei Wan, Minghui Li, Shengshan Hu, Pei Xiaobing, and Jing Wang. 2025b. Spa-vlm: Stealthy poisoning attacks on rag-based vlm.

Wenhao Yu, Hongming Zhang, Xiaoman Pan, Kaixin Ma, Hongwei Wang, and Dong Yu. 2023. Chain-of-note: Enhancing robustness in retrieval-augmented language models.

Yue Yu, Wei Ping, Zihan Liu, Boxin Wang, Jiaxuan You, Chao Zhang, Mohammad Shoeybi, and Bryan Catanzaro. 2024b. Rankrag: Unifying context ranking with retrieval-augmented generation in llms. In *NeurIPS 2024*.

Zhe Yu, Wenpeng Xing, Gaolei Li, Shuguang Xiong, Hongzhi Wang, Xuyang Teng, and Meng Han. 2026. Cordon-mas: Defending rag against knowledge poisoning via information-flow control.

Dongyang Zeng, Yaping Liu, Wei Zhang, Shuo Zhang, Xinwang Liu, and Binxing Fang. 2025a. Eareranker: Efficient embedding adequacy assessment for retrieval augmented generation. In *NeurIPS 2025*.

Linda Zeng, Rithwik Gupta, Divij Motwani, Yi Zhang, and Diji Yang. 2025b. Worse than zero-shot? a fact-checking dataset for evaluating the robustness of rag against misleading retrievals.

Baolei Zhang, Yuxi Chen, Zhuqing Liu, Lihai Nie, Tong Li, Zheli Liu, and Minghong Fang. 2025a. Practical poisoning attacks against retrieval-augmented generation.

Baolei Zhang, Haoran Xin, Yuxi Chen, Zhuqing Liu, Biao Yi, Tong Li, Lihai Nie, Zheli Liu, and Minghong Fang. 2025b. Who taught the lie? responsibility attribution for poisoned knowledge in retrieval-augmented generation.

Baolei Zhang, Haoran Xin, Minghong Fang, Zhuqing Liu, Biao Yi, Tong Li, and Zheli Liu. 2025c. Traceback of poisoned texts in poisoning attacks to retrieval-augmented generation.

Baolei Zhang, Haoran Xin, Minghong Fang, Zhuqing Liu, Biao Yi, Tong Li, and Zheli Liu. 2025d. Traceback of poisoning attacks to retrieval-augmented generation.

Baolei Zhang, Haoran Xin, Jiatong Li, Dongzhe Zhang, Minghong Fang, Zhuqing Liu, Lihai Nie, and Zheli Liu. 2025e. Benchmarking poisoning attacks against retrieval-augmented generation.

Chenyang Zhang, Xiaoyu Zhang, Jian Lou, Kai Wu, Zilong Wang, and Xiaofeng Chen. 2025f. Poisonedeye: Knowledge poisoning attack on retrieval-augmented generation based large vision-language models. In *ICML 2025*.

Qinggang Zhang, Zhishang Xiang, Yilin Xiao, Le Wang, Junhui Li, Xinrun Wang, and Jinsong Su. 2025g. Faithfulrag: Fact-level conflict modeling for context-faithful retrieval-augmented generation. In *ACL*.

Ruizhe Zhang, Yongxin Xu, Yuzhen Xiao, Runchuan Zhu, Xinke Jiang, Xu Chu, Junfeng Zhao, and Yasha Wang. 2024a. Knowpo: Knowledge-aware preference optimization for controllable knowledge selection in retrieval-augmented language models.

Tianjun Zhang, Shishir G. Patil, Naman Jain, Sheng Shen, Matei Zaharia, Ion Stoica, and Joseph E. Gonzalez. 2024b. Raft: Adapting language model to domain specific rag.

Wentao Zhang, Yan Zhuang, ZhuHang Zheng, Mingfei Zhang, Jiawen Deng, and Fuji Ren. 2026a. Beyond explicit refusals: Soft-failure attacks on retrieval-augmented generation.

Xiaolei Zhang, Xiaojun Jia, Liquan Chen, and Songze Li. 2026b. Code: A contradiction-based deliberation extension framework for overthinking attacks on retrieval-augmented generation.

Yunxiang Zhang, Muhammad Khalifa, Lajanugen Logeswaran, Moontae Lee, Honglak Lee, and Lu Wang. 2023. Merging generated and retrieved knowledge for open-domain qa.

Yuxin Zhang, Yan Wang, Yongrui Chen, Shenyu Zhang, Xinbang Dai, Sheng Bi, and Guilin Qi. 2025h. Magic mushroom: A customizable benchmark for fine-grained analysis of retrieval noise erosion in rag systems.

Jun Zhao, Yongzhuo Yang, Xiang Hu, Jingqi Tong, Yi Lu, Wei Wu, Tao Gui, Qi Zhang, and Xuanjing Huang. 2025a. Understanding parametric and contextual knowledge reconciliation within large language models. In *NeurIPS 2025*.

Tianzhe Zhao, Jiaoyan Chen, Yanchi Ru, Haiping Zhu, Nan Hu, Jun Liu, and Qika Lin. 2025b. Rag safety: Exploring knowledge poisoning attacks to retrieval-augmented generation.

Tianzhe Zhao, Jiaoyan Chen, Shuxiu Zhang, Haiping Zhu, Qika Lin, and Jun Liu. 2026a. Exploring knowledge conflicts for faithful llm reasoning: Benchmark and method.

Yibo Zhao, Jiapeng Zhu, Zichen Ding, and Xiang Li. 2026b. Grace: Reinforcement learning for grounded response and abstention under contextual evidence.

Zexuan Zhong, Ziqing Huang, Alexander Wettig, and Danqi Chen. 2023. Poisoning retrieval corpora by injecting adversarial passages.

Huichi Zhou, Kin-Hei Lee, Zhonghao Zhan, Yue Chen, Zhenhao Li, Zhaoyang Wang, Hamed Haddadi, and Emine Yilmaz. 2025a. Trustrag: Enhancing robustness and trustworthiness in retrieval-augmented generation.

Huichi Zhou, Kin-Hei Lee, Zhonghao Zhan, Zhenhao Li, Yue Chen, Zhaoyang Wang, Hamed Haddadi, and Emine Yilmaz. 2025b. Trustrag: Enhancing robustness and trustworthiness in rag.

Jiawei Zhou and Lei Chen. 2025. Optimizing retrieval for rag via reinforcement learning. In *NeurIPS 2025*.

Xiaofan Zhou, Huy Nguyen, Bo Yu, Chenxi Liu, and Lu Cheng. 2026. Adaptive stopping for multi-turn llm reasoning.

Xingfu Zhou and Pengfei Wang. 2025. Reasoning-style poisoning of llm agents via stealthy style transfer: Process-level attacks and runtime monitoring in rsv space.

Xinyun Zhou, Xinfeng Li, Yinan Peng, Ming Xu, Xuanwang Zhang, Miao Yu, Yidong Wang, Xiaojun Jia, Kun Wang, Qingsong Wen, XiaoFeng Wang, and Wei Dong. 2025c. Emorag: Evaluating rag robustness to symbolic perturbations.

Youchao Zhou, Heyan Huang, Yicheng Liu, Rui Dai, Xinglin Wang, Xingchen Zhang, Shumin Shi, and Yang Deng. 2025d. Do retrieval augmented language models know when they don't know?

Yujia Zhou, Wenbo Zhang, Jingying Shao, Yan Liu, Xiaoxi Li, Jiajie Jin, Hongjin Qian, Zheng Liu, Chaozhuo Li, Jason Chen Zhang, Zhicheng Dou, Philip S. Yu, and Jiaxin Mao. 2024. Trustworthiness in retrieval-augmented generation systems: A survey.

Hanyu Zhu, Lance Fiondella, Jiawei Yuan, Kai Zeng, and Long Jiao. 2025. Neurogenpoisoning: Neuron-guided attacks on retrieval-augmented generation of llm via genetic optimization of external knowledge.

Junda Zhu, Lingyong Yan, Haibo Shi, Dawei Yin, and Lei Sha. 2024. Atm: Adversarial tuning multi-agent system makes a robust retrieval-augmented generator.

Xi Zhu, Ziqi Wang, Kai Mei, Wujiang Xu, Minghao Guo, Bangji Yang, Jiajun Fan, and Dimitris N Metaxas. 2026. Trust or abstain? a self-aware rag approach.

Wei Zou, Runpeng Geng, Binghui Wang, and Jinyuan Jia. 2025. Poisonedrag: Knowledge corruption attacks to retrieval-augmented generation of large language models. In *USENIX Security*.

Hanna Zubkova, Ji-Hoon Park, and Seong-Whan Lee. 2025. Sugar: Leveraging contextual confidence for smarter retrieval.

Kaiwen Zuo, Zelin Liu, Raman Dutt, Ziyang Wang, Zhongtian Sun, Fan Mo, and Pietro Liò. 2025. How to make medical ai systems safer? simulating vulnerabilities, and threats in multimodal medical rag system.

A Extended Survey by Failure Mode and Intervention

This appendix expands the compact synthesis in the main paper. Its purpose is not to add a citation dump, but to explain how the broader evidence map is organized by failure mode, intervention point, and evaluation target. We group papers by their primary role in the framework; many papers naturally span multiple categories.

A.1 Evidence-Centric Robustness: Noisy Retrieval and Distraction

The first branch of robust RAG studies what enters the context. Early work on irrelevant context established that retrieval errors do not merely lower recall; they can actively redirect generation (Yoran et al., 2024). Noise-aware training and robust RALM work then separated random negatives, hard negatives, counterfactual passages, and noisy retrieved evidence as different stressors rather than one generic perturbation (Fang et al., 2024; Park and Lee, 2024; Ding et al., 2025). Benchmark papers such as RGB and URAG made this decomposition operational by testing negative rejection, information integration, counterfactual evidence, and uncertainty under retrieval noise (Chen et al., 2024a; Nguyen et al., 2026). These works motivate the main-paper claim that "noise robustness" is not a single axis.

Distraction work focuses on negative marginal utility: a passage is harmful not simply because it is irrelevant, but because it changes the answer, confidence, attribution, or reasoning path. Long-context and context-utility studies show that more context can increase the probability of including plausible but misleading passages (Gao et al., 2026b; Jin et al., 2024a; Hagström et al., 2025). Utility-oriented retrieval and downstream-aware metrics therefore ask whether a passage helps the generator rather than whether it only matches the query (Trappolini et al., 2025; Zhu et al., 2024; Dai et al., 2026; Niu et al., 2026; Gao et al., 2025b). Context compression and filtering methods try to remove irrelevant spans or documents while preserving evidence needed for multi-hop reasoning (Wang et al., 2023b; Yu et al., 2023; Joren et al., 2025; Hong et al., 2023; Cho et al., 2024; Zeng et al., 2025b).

The later evidence-centric literature broadens the source of noise beyond the top-k ranking. Query-level robustness work studies sensitivity to paraphrase and wording changes (Percin et al., 2025); long-context RAG and context-position studies examine how ordering and context length alter evidence use (Kim et al., 2026; Gabín et al., 2026; Pandey, 2026; Wang et al., 2025f; Chen et al., 2025b; Liu et al., 2025e). Other papers study context construction, compression, and retrieval defects as pipeline-level problems rather than isolated retriever errors (Chen et al., 2025c; Yang et al., 2025; Kachuee et al., 2025; Chakraborty et al., 2025; Oh et al., 2025; Tan et al., 2025; Kim, 2025). More recent systems and benchmarks extend this line with stress tests for retrieval defects, context utility, and robust fine-tuning (Jin et al., 2025; Iratni et al., 2025; Sui et al., 2025; Qiao et al., 2024; Wang et al., 2024a; Zhang et al., 2024a; Qiu et al., 2024; Park et al., 2024; Abdumalikov et al., 2024; Kim et al., 2024; Xu et al., 2023). The common lesson is that retrieval should be evaluated as context construction.

Recent venue-accepted work reinforces the same trend outside the original evidence map. Efficient retrieval-augmented generation and reranking papers study how to reduce context cost or improve retrieval adequacy without changing the generator (Hofstätter et al., 2023; Chen et al., 2025f; Wang et al., 2025j). Graph and knowledge-guided retrieval papers extend the same evidence-construction problem to structured contexts, where the retrieved object may be a graph neighborhood rather than a passage (He et al., 2024; Luo et al., 2025; Ma et al., 2025; Yu et al., 2025a; Hu et al., 2025; Li et al., 2025d). Long-context and RAG capability benchmarks further compare whether longer inputs substitute for retrieval or merely move the bottleneck to evidence selection (Xu et al., 2025; Li et al., 2025c). These venue-linked additions strengthen the peer-reviewed backbone for the main paper's claim that retrieval should be treated as context construction rather than a recall-only

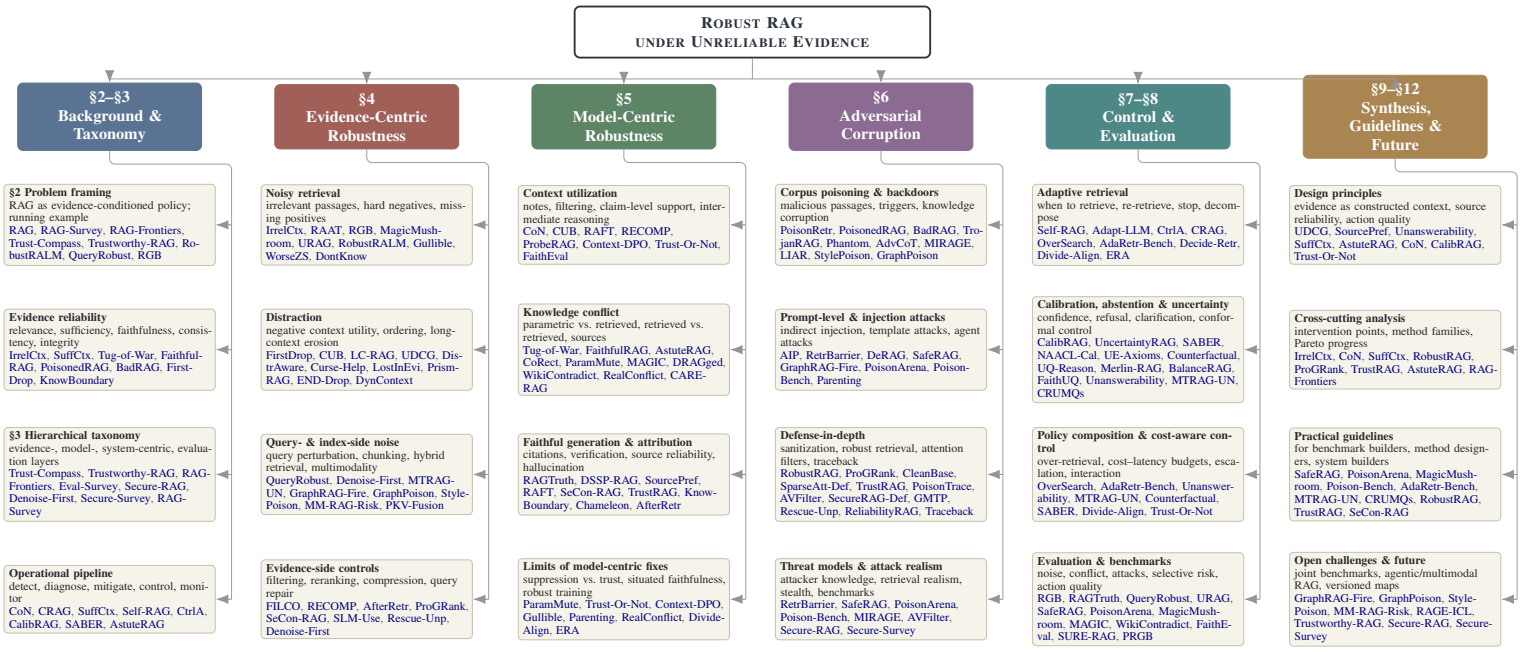


Figure 1: **Outline of this survey.** A top-down view of the paper structure. The root problem is robust RAG under unreliable evidence; the survey then moves from background and taxonomy to evidence-centric, model-centric, adversarial, system-control, evaluation, synthesis, and future-facing guidelines. Each leaf lists representative cited work using compact aliases.

component.

Additional accepted papers sharpen this point further. BTR is best read as background on efficient compressed evidence representations, while xRAG and Provence directly examine extreme compression or adaptive pruning of retrieved context (Cao et al., 2024; Cheng et al., 2024b; Chirkova et al., 2025). RankRAG and EARereranker tie reranking to generation utility, while SePer proposes a retrieval-utility metric based on semantic perplexity reduction rather than standalone IR relevance (Yu et al., 2024b; Zeng et al., 2025a; Dai et al., 2025a). RAGGED and C-3PO study scalable RAG system design, and InstructRAG teaches models to denoise retrieved content through self-synthesized rationales (Hsia et al., 2025; Chen et al., 2025a; Wei et al., 2025). Together, these accepted papers add venue-backed evidence that robust RAG depends on how evidence is represented, selected, compressed, and passed to the generator.

A.2 Model-Centric Evidence Use: Conflict, Faithfulness, and Attribution

Once evidence enters the prompt, robustness depends on how the generator uses it. Knowledge-conflict papers study contradictions between parametric memory and retrieved evidence, or among retrieved sources (Jin et al., 2024b; Zhang et al., 2025g; Wang et al., 2025b; Xie et al., 2023). These papers show that a model can over-trust retrieved evidence, resist correct retrieval because of parametric priors, or silently choose one source without exposing disagreement. Conflict-aware methods therefore localize discrepancies, compare internal and external knowledge, or introduce source-aware reasoning before generation (Ma et al., 2026; Zhou et al., 2025a; Si et al., 2025; Huang et al., 2025a; Lee et al., 2025; Cattan et al., 2025; Hou et al., 2024; Huang et al., 2024).

Faithfulness and attribution papers study whether generated claims are supported by evidence. RAGTruth and related grounding work provide fine-grained hallucination or support labels, while source-preference and entity-conflict studies examine whether models cite and trust the right evidence (Niu et al., 2024; Pham et al., 2024; Kortukov et al., 2024; Zhang et al., 2024b; Schuster et al., 2026). These papers connect robust RAG to citation verification: document-level citation is often too coarse, because a document can contain multiple claims, qualifiers, and contradictions. Claim-level or sentence-level attribution is more informative but increases annotation and verification cost (Zhao et al., 2026a; Shin et al., 2026; Lin et al., 2025b; Choi et al., 2025b; Wu et al., 2024; Dai et al., 2025b; Ge et al., 2025).

The broader conflict and faithfulness map includes work on source reliability, contextual faith-

fulness, real-document conflicts, and hidden-state or logit interventions (Jin et al., 2024c; Wang et al., 2023a; Li et al., 2026b; Shihab et al., 2026; Ju et al., 2026; Liu et al., 2025d; Yan et al., 2025; Huo et al., 2025). Newer papers extend conflict analysis to richer benchmark settings, source-aware generation, and practical RAG pipelines (Wu et al., 2025b; Long et al., 2025; Jia et al., 2025b; Wang et al., 2025d; Xu et al., 2024; Li et al., 2024a; Yang et al., 2024; Marjanović et al., 2024; Tan et al., 2024a; Zhang et al., 2023). Across these papers, the main-paper distinction between context availability and context use recurs: evidence can be present but ignored, cited but unsupported, or correct but less trusted than a stale parametric belief.

The venue-accepted faithfulness and attribution literature also adds support for this distinction. Grounded-attribution and refusal work studies whether systems can identify unsupported evidence use and decline unsafe answers (Song et al., 2025c). Context-faithfulness benchmarks test whether models remain faithful when external context is implausible or adversarially misleading (Ming et al., 2025). Hallucination detectors and mechanistic attribution methods examine whether unsupported generation can be detected after or during generation (Sun et al., 2025b; Sriramanan et al., 2024). Work on parametric and contextual knowledge reconciliation studies how models resolve conflict between internal knowledge and retrieved evidence (Zhao et al., 2025a). Together, these papers show that robust RAG needs both evidence-use diagnostics and source-reliability judgments.

Accepted work on retrieval-augmented factual generation also broadens the historical base. WebBrain studies factual article generation grounded in large web corpora, while FiD-Light revisits efficient retrieval-augmented text generation (Qian et al., 2023; Hofstätter et al., 2023). These papers are not always framed as robust RAG, but they study the same interface between retrieved evidence and generated text. They support the survey's decision to include older retrieval-augmented generation and grounding work as foundations, rather than treating robust RAG as a purely 2025–2026 preprint phenomenon.

A.3 Adversarial Evidence Corruption and Security

Adversarial RAG work asks what happens when evidence unreliability is created by an adaptive attacker. Corpus and retrieval poisoning papers show that small numbers of malicious passages can manipulate dense retrieval or steer final answers (Zhong et al., 2023; Zou et al., 2025; Xue et al., 2024; Geng et al., 2025; Zhang et al., 2025a). Certified and aggregation-based defenses study robustness under bounded corruption assumptions (Xiang et al., 2024; Cheng et al., 2025; Kim et al., 2025a), while reranking and detection defenses use gradient, attention, clustering, or anomaly signals to demote suspicious evidence (Yin et al., 2026; Jin et al., 2026; Dekel et al., 2026; Choudhary et al., 2025; Si et al., 2025).

Prompt-injection and backdoor work targets a different interface. Instead of inserting false facts, the attacker may insert instructions that the model treats as commands, or triggers that activate malicious behavior through retrieved contexts (Chaturvedi et al., 2025; Chang et al., 2026; Cheng et al., 2024a; Chaudhari et al., 2024; Song et al., 2026; Kim et al., 2025b). These attacks require retrieval realism: a malicious document must be retrieved under plausible queries, not only under attacker-crafted prompts. This is why the main paper separates factual poisoning, indirect prompt injection, backdoor triggers, and prompt-template attacks as different threat games even when they all appear as retrieved text.

The security evidence map is broad and fast-moving. It includes poisoning benchmarks and arenas (Liang et al., 2025b; Chen et al., 2025e; Zhang et al., 2025e; Tan et al., 2024c), trace-back and forensics (Zhang et al., 2025d,c), privacy and membership inference (Li et al., 2026a; Gao et al., 2026a; Song et al., 2025b; Shereen et al., 2025), opinion or fairness manipulation (Chen et al., 2025j; Bagwe et al., 2025), and graph, multimodal, or reasoning-style poisoning surfaces (Liang et al., 2025a; Wen et al., 2025a; Zhou and Wang, 2025). Many defenses and attacks are preprint-heavy (Pathmanathan et al., 2025; Jiao et al., 2025; Shao et al., 2025; Li et al., 2025b; Wang et al., 2025c; Chen et al., 2025h, 2024f; Wu et al., 2025c; Zhou et al., 2025b; Wu and Saxena, 2025; Gong et al., 2026; Hu et al., 2026; Xian et al., 2025b; Shah and Ozgur, 2026; Gowda, 2026; Yu et al., 2026; Zhang et al., 2026a; Korn, 2026; Yao et al., 2025; Dai et al., 2025c; Sui, 2025; Xian et al., 2025a; Yang et al., 2026; Choi et al., 2025a; Zhang et al., 2025b; Gong et al., 2025; Dhar et al., 2025; Liu et al., 2025f; Wen et al., 2025b; Wang and Yu, 2025; Song et al., 2025a; Stefano et al., 2024; Wang et al., 2024b; Pasquini et al., 2024; Clop and Teglia,

2024; Wang et al., 2025a; Li et al., 2025h; Xi et al., 2025; Zhao et al., 2025b; Chang et al., 2025; Ha et al., 2025; Suo et al., 2025; Tan et al., 2024b; Levi, 2026; Mu et al., 2026; Wang et al., 2026b; Liu et al., 2026c; Wang et al., 2026a; Lee et al., 2026; Xiao et al., 2026; Chen et al., 2026a; Guo and Wei, 2026; Edemacu and Shokri, 2026; Zhang et al., 2026b; Rahman and Alouani, 2026; Qi et al., 2026; Habler et al., 2026; Lyu et al., 2026; Datta et al., 2026; Castagnaro et al., 2025; Chen et al., 2025i; Liu et al., 2025c; Jia et al., 2025a; Zhu et al., 2025; Srivastava and He, 2025; Shang et al., 2025; Abdelnabi et al., 2025; Ye et al., 2025; Zuo et al., 2025; Li et al., 2025e; Lin et al., 2025a; Zhou et al., 2025c; Edemacu et al., 2025; Wang et al., 2025h; Chen et al., 2024d; Hu et al., 2024; Abdelnabi et al., 2024; Chen et al., 2024e; Yu et al., 2025b). The main use of this large set is not to rank attacks, but to motivate capability-normalized reporting.

Newer accepted security papers strengthen this point. Agent and memory poisoning work shows that the attack surface extends beyond a static document corpus (Chen et al., 2024f). Accepted RAG security papers study data extraction, medical-domain risk, robust web-search defenses, and semantic conflict-free filtering (Xian et al., 2025a; Shen et al., 2025; Si et al., 2025; Zhang et al., 2025f). These works are not directly comparable unless they specify whether the attacker controls the corpus, prompt, user query, model memory, or retrieved evidence. The venue-linked security additions therefore support the threat-model normalization rule rather than a single ranking of defenses.

A.4 System Control: Uncertainty, Calibration, and Abstention

System-control work converts evidence judgments into actions. Answerability and sufficient-context papers ask whether the retrieved context contains enough evidence to answer (Joren et al., 2025; Peng et al., 2024; Rosenthal et al., 2026; Liu et al., 2025a). Uncertainty and calibration work asks whether confidence reflects answer correctness, evidence sufficiency, retrieval usefulness, or selective risk (Jang et al., 2025a; Li et al., 2024b; Nguyen et al., 2026; Liu et al., 2026b; Soudani et al., 2025a; Qiu et al., 2026). Adaptive retrieval work asks when the system should retrieve, retrieve again, or answer from internal knowledge (Asai et al., 2024a; Labruna et al., 2024; Yan et al., 2024; Liu et al., 2025b; Moskvoretskii et al., 2025).

The control literature highlights a recurring failure: confidence is not the same as evidence sufficiency. A model can be confident in an unsupported answer, or uncertain even when evidence is present but hard to integrate. Trust-or-abstain and self-aware RAG methods therefore model whether to answer, abstain, retrieve more, or ask for clarification (Zhu et al., 2026; Xie et al., 2026; Chen et al., 2024b; Soudani et al., 2025b; Sun et al., 2025a; Chen et al., 2026c; Zhao et al., 2026b; Deiseroth et al., 2025; Jia et al., 2026; Fadeeva et al., 2025; Huang et al., 2025b). Multi-turn and underspecified-query benchmarks add another layer: the correct action may be clarification before retrieval, not direct answering (Rosenthal et al., 2026; Bazarova et al., 2026; Chen et al., 2026b).

Recent work extends control to cost-aware retrieval, conformal or set-valued prediction, risk-sensitive abstention, and adaptive policies over multiple retrieval steps (Zhou et al., 2026; Sinha, 2025; Wu et al., 2025a; Zubkova et al., 2025; Wang et al., 2025i; Chen et al., 2025d; Li et al., 2025a; Marina et al., 2025; Foo et al., 2025; Shankar et al., 2025; Huang et al., 2025c; Min et al., 2025). These papers motivate the main paper's action-control view: robust RAG is not only about reducing errors, but about choosing the right response under uncertainty and cost.

Recent accepted work also makes control more explicit. Calibration-oriented RAG frames reliable decision-making as a retrieval-and-answer control problem rather than only a confidence-estimation problem (Jang et al., 2025b). Self-RAG and related adaptive retrieval papers learn when to retrieve, critique, or answer (Asai et al., 2024b). Routing and long-context/RAG comparison work studies when queries should be sent to different RAG systems or to long-context processing (Jin et al., 2024a; Xu et al., 2025; Li et al., 2025c). These papers support the main paper's claim that calibration, retrieval, abstention, and routing should be evaluated as action policies under evidence uncertainty.

Recent accepted papers add more control variants. Chain-of-Retrieval treats retrieval as a multi-step generation process, while Self-Retrieval is better viewed as background on end-to-end LLM-driven retrieval architecture (Wang et al., 2025e; Tang et al., 2024). SmartRAG uses environment feedback to learn when to retrieve, rewrite, and answer, while backtracking-correction work provides training-time correction signals for document assessment (Gao et al., 2025a; Feng et al., 2025). Reinforcement-learning and differentiable-reward

approaches optimize retrieval or RAG behavior against downstream objectives (Zhou and Chen, 2025; Li et al., 2025f). These papers suggest that action control is becoming a central design axis in venue-published work, not only an agenda item in preprints.

A.5 Evaluation, Benchmarks, and Survey Context

Evaluation papers provide the diagnostic infrastructure for robust RAG. RGB decomposes RAG reliability into multiple abilities (Chen et al., 2024a); RAGTruth provides fine-grained hallucination annotations (Niu et al., 2024); query-robustness and context-utility work stress retrieval interfaces (Percin et al., 2025; Trappolini et al., 2025); security benchmarks and arenas evaluate poisoning and defense assumptions (Liang et al., 2025b; Chen et al., 2025e; Tan et al., 2024c); and uncertainty benchmarks evaluate whether systems know when their answers are reliable (Nguyen et al., 2026; Qiu et al., 2026). Survey papers on RAG, trustworthy RAG, secure RAG, and evaluation provide the broader landscape (Gao et al., 2024; Sharma, 2025; Yu et al., 2024a; Zhou et al., 2024; Ni et al., 2025; Xu et al., 2026; Mu et al., 2026; Liu et al., 2026a).

Accepted benchmark and evaluation papers broaden this infrastructure. Grounding-verification and hallucination-detection papers study whether generated answers can be checked against retrieved evidence (Leemann et al., 2025; Sun et al., 2025b; Sriramanan et al., 2024). Multimodal and graph RAG benchmarks are mostly boundary evidence for this text-focused survey, but they show that the same reliability questions reappear when the evidence object is a graph, image, or table rather than a passage (Wang et al., 2025g; He et al., 2024; Luo et al., 2025; Li et al., 2025g). We cite these papers as boundary and future-direction evidence, not as the empirical backbone for text RAG.

What is still missing is joint evaluation. Existing benchmarks often isolate one failure mode: noise, conflict, poisoning, or unanswerability. Real systems face combinations. A benchmark that includes a stale source, a hard negative, insufficient evidence, and a malicious document will test a different capability from any single-axis benchmark. This motivates the action-trace blueprint: robust-RAG evaluation should score evidence state, answer correctness, action choice, cost, and threat assumptions together.

B Prior Survey Positioning

C Detailed Background and Taxonomy

D Evaluation Details

E Exploratory Map Statistics

Adjacent survey line	Typical organizing unit	Missing decision field for comparison	What this paper adds
General RAG surveys (Gao et al., 2024)	Retriever/generator architectures, augmentation stages, applications, and broad challenges.	Whether a robustness result tests relevance, sufficiency, consistency, provenance, or integrity; whether the required action is answer, retrieve, filter, verify, or abstain.	A five-coordinate comparison tuple that separates evidence state from module location and final action.
Comprehensive RAG/frontier surveys (Sharma, 2025)	Enhancements, optimization modules, and robustness frontiers.	Whether two methods are substitutes or composable pipeline interventions under the same evidence assumption.	A decision rule that labels comparisons as valid, partial, invalid, or under-specified.
RAG evaluation surveys (Yu et al., 2024a)	Datasets, metrics, automatic evaluation, and benchmark design.	Whether answer accuracy, citation support, evidence sufficiency, calibration, action quality, utility loss, and cost are measuring the same target.	A survey reading guide that separates metric targets and treats action labels as necessary context for interpreting benchmark claims.
Trustworthiness surveys (Zhou et al., 2024; Ni et al., 2025)	Factuality, safety, privacy, fairness, explainability, accountability, and user trust.	Which immediate evidence failure causes the trustworthy-AI risk and which control action should be rewarded.	Evidence-reliability dimensions that connect broad trust axes to concrete RAG failure states.
Security-focused RAG surveys (Xu et al., 2026)	Attack surfaces, poisoning, prompt injection, privacy leakage, and defenses.	Corpus write access, query control, retriever visibility, generator access, insertion budget, retrieved malicious evidence, and attack objective.	Threat-model normalization before comparing attack success, prevention, detection, traceback, or recovery.
Faithfulness and hallucination-oriented work	Unsupported claims, attribution, citation quality, and factual consistency.	Whether the system had sufficient evidence, used the evidence, cited supporting spans, or should have refused.	A separation between answer correctness, evidence support, citation faithfulness, confidence, and action policy.

Table 9: Delta relative to adjacent RAG survey lines. The contribution is a survey synthesis and reading guide that specifies which decision fields must be aligned before robust-RAG results are interpreted as competing evidence.

Common survey-level shortcut	Why it is misleading	Our re-interpretation	Design implication
Treating IrrelCtx, RAAT, Chain-of-Note, Sufficient Context, and RGB as one "noise robustness" line.	They test different evidence states and actions: filtering, noise-aware training, generator evidence reading, sufficiency prediction, and benchmark abilities.	The field has decomposed noise robustness rather than ranked one best method.	Benchmarks should cross negative type, rank, support availability, context budget, and answer/abstain/retrieve actions.
Grouping RAGTruth-style attribution resources with FaithfulRAG/AstuteRAG conflict methods.	Span-level support, fact-level conflict reasoning, document-level evidence reading, and final answer correctness are different targets.	Faithfulness, conflict, and attribution are complementary diagnostics, not interchangeable metrics.	Evaluation should report claim support, source reliability, and action under conflict, not only citation presence.
Comparing conflict methods with poisoning defenses because both involve contradictory retrieved text.	Natural or diagnostic contradiction differs from attacker-created integrity failure with corpus access, insertion budget, and attack objective.	Conflict and poisoning share annotation needs but define different scientific games.	Poisoning defenses require threat-model-indexed evaluation; conflict methods require source reconciliation and disclosure metrics.
Ranking prompt-injection defenses, certified defenses, traceback, and poisoning detectors by one attack-success score.	They answer different roles: prevention, demotion, detection, certification, traceback, and recovery.	Security results transfer only inside a capability envelope and an action policy.	Reports should include corpus write access, query control, retriever visibility, budget, objective, clean utility, and defense action.
Treating multimodal, graph, table, agentic, and medical RAG as ordinary text RAG applications.	Evidence objects differ: image crops, graph neighborhoods, table cells, memory states, tool calls, and medical sources have different validity conditions.	Modality/scenario RAG is a core extension layer with typed evidence states.	Benchmarks need modality-specific grounding labels and actions before cross-modal results are compared.

Table 10: Concrete survey deltas. Each row gives an example of a comparison or synthesis shortcut that adjacent surveys may leave underspecified, and the practical consequence of applying our comparability lens.

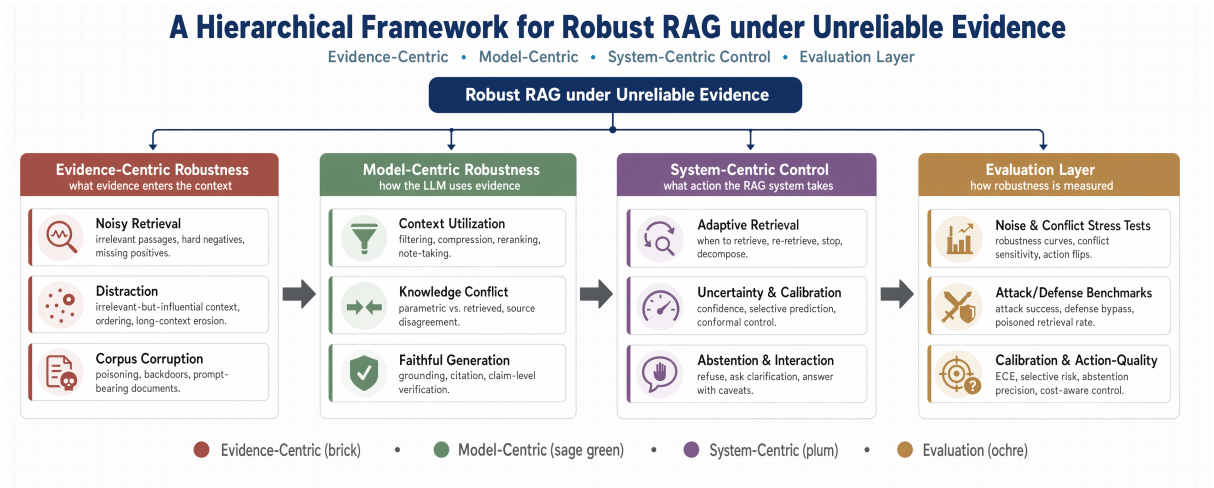


Figure 2: Research landscape map for robust RAG. The figure organizes the literature by where robustness problems and methods sit in the RAG stack: evidence-centric work controls the reliability of retrieved inputs, model-centric work controls how the generator uses evidence, system-centric work studies control decisions, and evaluation work measures robustness and action quality.

Coordinate	Controlled values	Equivalence / boundary rule	Verdict effect
Failure type	Relevance/noise; sufficiency; consistency/conflict; provenance/freshness; integrity/adversarial corruption; uncertainty/OOD.	Code the evidence property being tested, not the paper's motivation. If a paper only says "robustness" without an evidence property, code the coordinate as unobtainable (U).	Valid comparison requires the same failure type. Same broad area but different failure property gives partial at best.
Evidence assumption	Benign retrieval error; benchmark-constructed stressor; naturally occurring conflict; stale or low-quality source; attacker-created evidence; privacy or extraction threat.	Natural contradiction and attacker-created contradiction are different assumptions even if the context text looks similar. For security, record corpus write access, query control, retriever visibility, generator access, insertion budget, and objective when reported.	Different assumption classes usually make a leaderboard comparison invalid; missing attacker capability caps the verdict at under-specified.
Intervention point	Corpus/index; retriever; reranker; context assembly/compression; generator prompting or training; verifier; system-control policy; evaluation-only artifact.	Code the first component that changes system behavior. If two methods target different components under the same failure type, compare as pipeline components, not substitutes.	Same failure but different intervention point yields partial unless the paper explicitly studies composition.
Metric target	Answer correctness; retrieval recall; evidence support; citation faithfulness; attack success; calibration error; selective risk/coverage; cost/latency; human preference.	Metrics are equivalent only when they measure the same target object. Answer correctness, citation support, and attack success are not interchangeable even on the same dataset.	Different metric families yield partial; conflicting target objects yield invalid for ranking by one scalar.
Action policy	Answer; abstain; re-retrieve; filter; verify; expose conflict; ask clarification; escalate; quarantine; recover; unreported.	The action must be explicitly stated or evaluated. It may not be inferred from task setup for a valid verdict.	Unreported action caps the verdict at under-specified. Different explicit actions under the same failure type yield partial.
Final verdict	Valid; partial; invalid; under-specified.	Valid = all five coordinates align under the rules above. Partial = same failure but a non-fatal mismatch in intervention, metric, or action. Invalid = assumption or objective defines a different game. Under-specified = at least one required coordinate is U.	The verdict is conservative: under-specification blocks valid comparison even if the papers appear topically similar.

Table 11: Executable decision procedure for the comparability protocol. The table replaces informal "close enough" matching with coordinate-level equivalence and conservative verdict caps.

Boundary case	Rule used in this paper	Verdict consequence	Example implication
Noisy retrieval vs. distraction	Retrieval imperfection alone is coded as relevance/noise; harmful influence on generation, confidence, or reasoning is coded as distraction.	Same broad topic but different measured effect is partial.	Random negatives and hard distractors should not be pooled into one score.
Natural conflict vs. adversarial corruption	Code by the source of contradiction, not by surface form. Naturally occurring or diagnostic contradiction is conflict; attacker-created contradiction is integrity/adversarial corruption.	Natural-conflict and poisoning results are invalid as a direct ranking unless the threat model is redefined.	Faithfulness or source-preference methods are not poisoning defenses by default.
Intervention mismatch	Code the first component that changes system behavior. Different first components under the same failure are complementary unless composition is evaluated.	Same failure with retriever-side and generator-side interventions is partial.	A filter and a note-taking prompt can both address distraction but should not be ranked as substitutes.
Metric overlap	Metric targets must match the object being measured. Accuracy, citation support, attack success, calibration, and selective risk are separate families.	Shared dataset but different metric family is partial; mutually incompatible targets are invalid for one-scalar ranking.	A correct answer with unsupported citation should not pass a faithfulness comparison.
Unreported action policy	Action policy must be explicit in the method, benchmark label, or reported metric. It cannot be inferred from a QA setup for a valid verdict.	Missing action policy caps the verdict at under-specified.	A system that merely outputs an answer is not automatically an "answer" policy for unreliable evidence.
Security capability missing	If an attack or defense omits corpus write access, query control, retriever visibility, generator access, insertion budget, or objective, mark the missing capability as U.	Missing capability caps security comparisons at under-specified; incompatible capabilities make them invalid.	Low attack success under a bounded budget does not transfer to open-corpus prompt injection.
Benchmark vs. method	Code benchmark if the reusable artifact is the main contribution; otherwise code the intervention.	Benchmark-method comparison is partial unless the method is evaluated on the benchmark under aligned assumptions.	RGB is benchmark-first; RAAT is training-first.

Table 12: Hard boundary rules for applying the protocol. These rules address cases where topical similarity is insufficient for a valid comparison.

Stage	Question	Typical signals	Representative actions
Detect	Is the current evidence unreliable?	Low retrieval confidence, high contradiction, low sufficient-context score, suspicious document patterns	Flag query/evidence, route to stronger checks, log risk state
Diagnose	What kind of unreliability is present?	Irrelevance, distraction, conflict, poisoning, ambiguity, unanswerability, stale evidence	Assign failure type; separate benign noise from adversarial risk
Mitigate	Can the evidence be repaired before answering?	Alternative retrieval results, filter scores, reranker utility, provenance, source agreement	Re-rank, filter, compress, re-query, retrieve from trusted sources, remove malicious passages
Control	What should the system do now?	Calibrated confidence, selective risk, cost budget, user risk tolerance	Answer, abstain, ask clarification, expose conflict, escalate to human review
Monitor	Did the system fail or get attacked?	User feedback, traceback signals, poisoned-document clusters, drift over time	Update index, quarantine sources, revise prompts, retrain filters, update audit logs

Table 13: An operational pipeline for robust RAG. The pipeline turns the survey taxonomy into actionable system design steps.

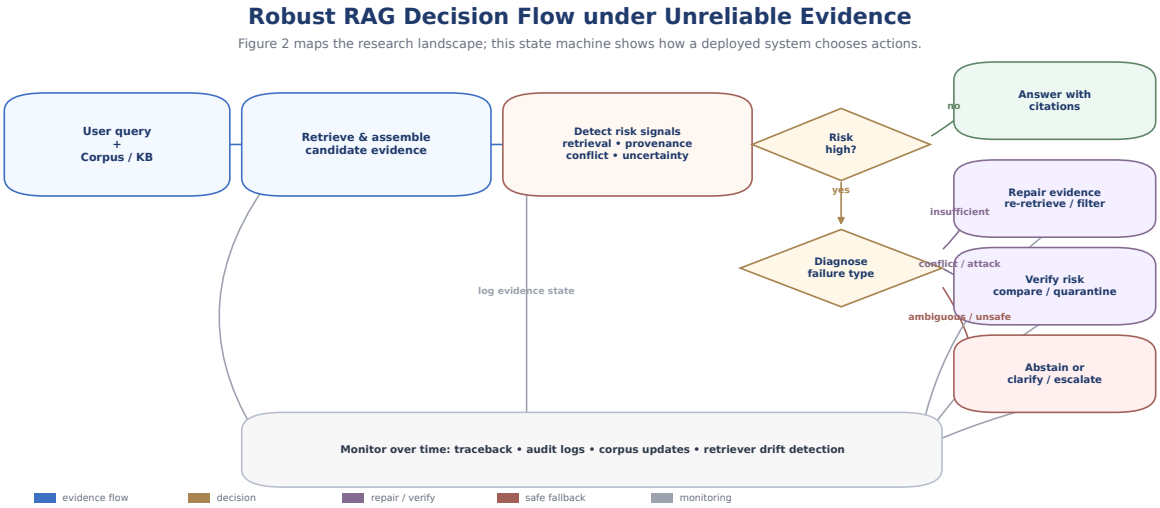


Figure 3: Operational decision flow for robust RAG. Unlike the taxonomy in Figure 2, this state-machine view describes the branching actions a deployed system can take when unreliable evidence is encountered: answer, repair evidence, verify risk, abstain, clarify, escalate, or monitor.

Theme	Representative work	Core idea	What it reveals for robust RAG
Irrelevant context	IrrelCtx	Analyze and mitigate irrelevant retrieved context with filtering and robust training	Even answerable questions degrade when irrelevant passages enter the context; robustness is not equivalent to retrieval recall.
Retrieval-noise training	RAAT	Categorize retrieval noise and train with adaptive adversarial objectives	Noise types should be separated: irrelevant, relevant-but-insufficient, and counterfactual evidence have different effects.
Generator note-taking	CoN	Generate per-passage notes before answering	Robust generation benefits from intermediate relevance judgments rather than direct answer generation.
Fine-grained noise benchmark	MagicMushroom	Configurable benchmark for distracting, low-quality, inconsequential, and irrelevant noise	"Noise" is not monolithic; evaluation should vary type, amount, and placement of bad evidence.
Nonlinear distraction	FirstDrop	Study disproportionate effect of small amounts of misleading information	A few strong distractors can dominate long-context reasoning, so average noise rate is insufficient.
Long-context RAG	LC-RAG	Analyze long-input RAG and hard negatives	More retrieved context can hurt unless ordering, filtering, or training adapts to long-context failure modes.
Sentence-level filtering	FILCO	Filter retrieved context before generation	Filtering can be more fine-grained than document reranking and can remove local distractors inside otherwise useful passages.
Retrieval evaluation	UDCG	Utility-aware retrieval metric for LLMs	RAG retrieval should be evaluated by downstream utility, including negative utility from distracting passages.

Table 14: Representative evidence-centric work on noisy retrieval and distraction.

Problem	Representative work	Mechanism	Limitation or open issue
Parametric–retrieved conflict	Tug-of-War	Construct and analyze conflicts between internal and external knowledge	Conflict behavior depends on model, prompt, evidence coherence, and task framing.
Fact-level conflict modeling	FaithfulRAG	Extract parametric self-facts, align them with retrieved facts, and reason before answering	Requires reliable fact extraction and alignment; complex claims remain difficult.
Source-aware consolidation	AstuteRAG	Elicit internal knowledge and consolidate it with retrieved sources using reliability comparison	Training-free but still depends on LLM self-assessment and source-quality cues.
Hidden-state rectification	CoRect	Locate layers where parametric suppression occurs and contrast contextual/non-contextual logits	Promising for model-centric control, but model internals and transferability remain open.
Context utilization benchmarks	CUB	Test gold, conflicting, and irrelevant contexts across models	Benchmarks reveal whether a model uses context, but not always why a model chooses one source.
Real-document conflict	RealConflict	Study behavior under context-memory conflicts with real documents	Realistic evidence can be messier than synthetic conflicts and harder to label.
Source preference	SourcePref	Analyze which sources win under conflict	Source preference may encode bias, recency effects, or authority priors.

Table 15: Representative model-centric work on knowledge conflict and contextual faithfulness.

Attack/defense surface	Representative work	Threat or defense	Implication
Retriever poisoning	PoisonRetr	Inject adversarial passages to manipulate dense retrievers	Retrieval security can fail before generation begins.
RAG knowledge corruption	PoisonedRAG	Craft malicious passages that steer generated answers	End-to-end RAG needs corpus integrity and generation safeguards.
Backdoor attacks	TrojanRAG; Phantom	Triggered retrieval/generation behavior via poisoned contexts	RAG can act as a backdoor carrier without modifying model weights.
Prompt template attacks	AIP	Weaponize shared instructional prompts to steer retrieval and generation	Prompt templates are part of the attack surface, not just implementation details.
Indirect prompt injection	RetrBarrier	Optimize trigger fragments so malicious instructions are retrieved in the wild	Real attacks must overcome the retrieval barrier, not merely place malicious text in a corpus.
Certified defense	RobustRAG	Isolate-and-aggregate answers for robustness certificates	Certification gives stronger guarantees but typically assumes specific attack budgets.
Reranking defense	ProGRank	Use probe-gradient instability to demote poisoned passages	Defense can be inserted retriever-side without retraining the LLM.
Attention defense	AVFilter	Detect poisoning via normalized attention variance	Internal attention signals may expose poisoned evidence, but adaptivity remains a concern.

Table 16: Representative adversarial corruption attacks and defenses.

Threat class	Corpus	Query	Retr.	Gen.	Objective	Boundary
Dense-retriever poisoning (Zhong et al., 2023)	write	train set	white/gray	no	retrieve bad passages	Not always end-to-end.
RAG knowledge corruption (Zou et al., 2025; Xue et al., 2024)	write	target topic	black/gray	black	answer steering	Stealth/dynamics vary.
Backdoor-style RAG (Cheng et al., 2024a; Chaudhari et al., 2024)	write	trigger	gray	black	latent behavior	Normal queries may pass.
Indirect prompt injection (Chaturvedi et al., 2025; Chang et al., 2026)	write/share	natural	black	black	instruction hijack	Must overcome retrieval.
Opinion/fairness manipulation (Chen et al., 2025j; Bagwe et al., 2025)	write	group/topic	black/gray	black	bias steering	QA metrics miss social harm.
Defense setting (Xiang et al., 2024; Yin et al., 2026; Choudhary et al., 2025; Zhang et al., 2025c)	bounded	varies	assumed	black/gray	detect/demote/trace	Depends on budget/visibility.

Table 17: Attacker-capability matrix for adversarial RAG. The same "attack success rate" can mean different things depending on corpus write access, query control, retriever visibility, generator access, and objective.

Comparison	Why it looks comparable	Hidden mismatch	Metric pitfall	Normalized reading
PoisonedRAG vs. dense-retriever poisoning	Both insert malicious evidence into a retrieval corpus.	One evaluates end-to-end answer steering; the other may evaluate retriever ranking before generation.	Retrieval success and answer attack success are not the same target.	Compare only after recording whether poisoned evidence is retrieved and whether the generator changes the final answer.
Certified RAG defense vs. prompt-injection defense	Both are RAG defenses against corrupted retrieved content.	Certification assumes a bounded number of corrupted passages; prompt injection exploits instruction following rather than only false facts.	A certificate under bounded corruption may not imply instruction-hijack resistance.	Treat certification, instruction isolation, and document sanitization as complementary defenses.
Traceback vs. prevention	Both reduce harm after poisoning.	Traceback identifies influential poisoned documents after failure; prevention attempts to block harmful output before response.	Lower post-hoc traceback error does not equal lower user-facing attack success.	Report prevention, detection, demotion, traceback, and recovery as separate outcome variables.
Backdoor trigger vs. natural query attack	Both can produce targeted malicious behavior.	Trigger attacks may rely on rare phrases; natural-query attacks must survive ordinary retrieval and ranking.	Attack success under attacker-crafted triggers overstates risk under natural user queries.	Require query-control and trigger-frequency fields before comparing attack strength.

Table 18: Concrete examples of threat-model normalization. These cases show how reported attack or defense success can reverse when attacker access, retrieval realism, and evaluation target differ.

Control/evaluation question	Representative work	Signal or decision	Why it matters
When to retrieve	Self-RAG; Adapt-LLM; CtrlA	Reflection tokens, special retrieval tokens, or representation-based confidence/honesty directions	Retrieval is an action with costs and risks, not a fixed preprocessing step.
When retrieval is weak	CRAG; SuffCtx	Retrieval evaluator or sufficient-context signal	A system should repair or abstain rather than answer from insufficient evidence.
Calibration	CalibRAG; UncertaintyRAG; NAACL-Cal	Decision calibration, span uncertainty, verbal confidence calibration	Robustness requires confidence to reflect both model and evidence uncertainty.
Unanswerability	Unanswerability; MTRAG-UN	Unanswerable and underspecified RAG benchmarks	Real users often ask questions the corpus cannot answer; refusal and clarification need direct evaluation.
RAG capabilities	RGB	Noise robustness, negative rejection, integration, counterfactual robustness	Multi-axis evaluation exposes failures hidden by answer accuracy.
Hallucination detection	RAGTruth	Word-level hallucination annotations for RAG outputs	Fine-grained labels support detection and attribution beyond answer-level scoring.
Query robustness	QueryRobust	Perturb query wording and measure pipeline sensitivity	Robustness must include the query-to-retrieval interface.

Table 19: Representative work on system-centric control and evaluation.

Lineage	Classical question	RAG-specific version	Why it matters for robust RAG
Selective prediction	When should a model abstain to control risk?	Abstain when retrieved evidence is insufficient, conflicting, stale, or corrupted.	Selective risk must condition on evidence state, not only answer confidence.
Calibration	Does confidence match correctness?	Does confidence match answer correctness, evidence sufficiency, citation support, and retrieval usefulness?	A calibrated answer probability can still hide unreliable evidence.
Active clarification	When should the system ask a user for more information?	Ask clarification before retrieval when the query is ambiguous or underspecified.	Clarification can be the correct action even when retrieval could produce a plausible answer.
Cost-sensitive retrieval	When is additional computation worth it?	Decide whether to retrieve, re-retrieve, verify, rerank, or escalate under latency/cost budgets.	Robustness gains should be reported with action cost and coverage, not only accuracy.
Decision-theoretic control	Which action minimizes expected risk?	Choose among answer, abstain, expose conflict, cite uncertainty, retrieve again, or quarantine evidence.	Action quality is the bridge between evidence reliability estimates and user-facing behavior.

Table 20: Action-control lineage. The framework imports ideas from selective prediction, calibration, clarification, and cost-sensitive decision-making, but makes retrieved evidence state the object being controlled.

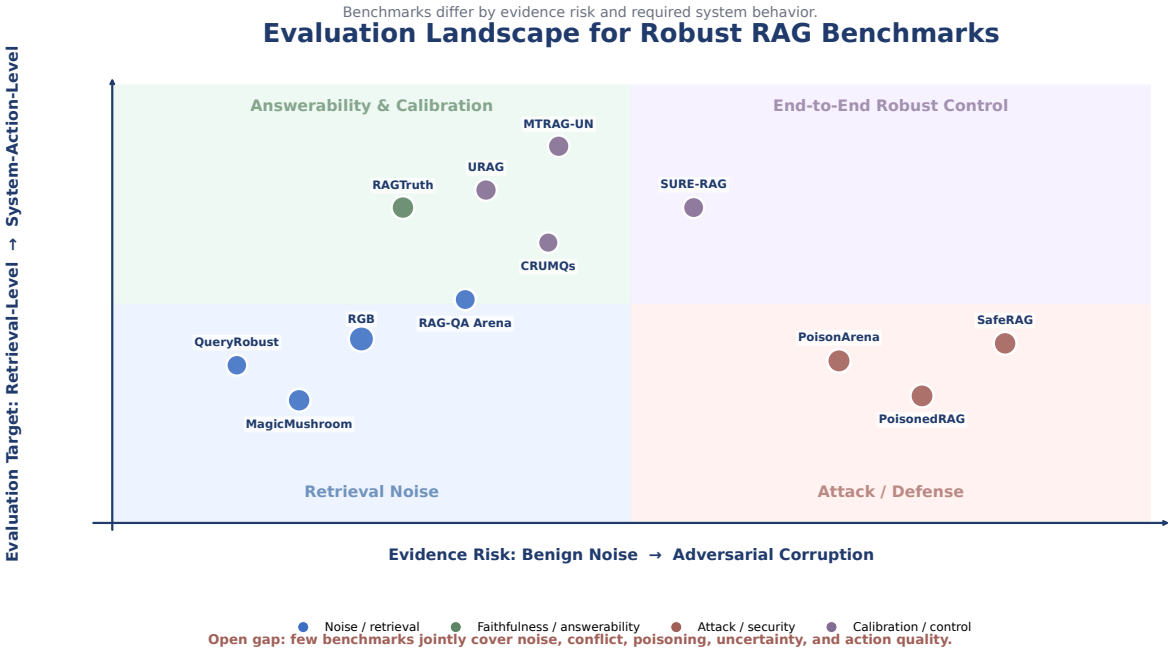


Figure 4: Evaluation landscape for robust RAG benchmarks. Existing benchmarks differ in the type of evidence risk they simulate and whether they evaluate retrieval-level behavior, generation-level behavior, or system-action-level robustness.

Benchmark	Risk focus	Task / data	Perturbation or threat	Metrics	Boundary
RGB (Chen et al., 2024a)	noise, rejection, integration, counterfactuality	English/Chinese QA	noisy passages, false evidence, negative evidence	accuracy, ability-specific scores	Broad diagnostic benchmark but not adaptive attack-oriented.
RAGTruth (Niu et al., 2024)	hallucination / faithfulness	QA, data-to-text, summarization	naturally generated unsupported spans	word-level hallucination labels	Strong annotation granularity; less focused on retrieval-side threat models.
Sufficient Context (Joren et al., 2025)	answerability	QA with context sufficiency labels	insufficient retrieved evidence	selective generation / abstention	Captures answerability but not adversarial corruption.
MagicMushroom (Zhang et al., 2025h)	retrieval noise	configurable RAG stress tests	distracting, low-quality, inconsequential, irrelevant noise	robustness under noise types	Fine-grained noise; limited conflict/security coverage.
URAG (Nguyen et al., 2026)	uncertainty	RAG as MCQA / conformal prediction	irrelevant/noisy retrieval and uncertainty sets	coverage, set size, calibration	Good for uncertainty; less direct for free-form generation.
QueryRobust (Percin et al., 2025)	query robustness	QA with query perturbations	wording variation at query–retrieval interface	retrieval and end-task degradation	Focuses on query perturbation, not corpus corruption.
PoisonArena (Chen et al., 2025e)	adversarial poisoning	RAG attack competition setting	competing poisoning attacks	attack success, retrieval effects	Strong security focus; benign uncertainty is secondary.
SafeRAG (Liang et al., 2025b)	RAG security	security benchmark for RAG	poisoning / malicious retrieval contexts	attack and defense metrics	Security-oriented; not a full evidence reliability suite.
MTRAG-UN (Rosenthal et al., 2026)	multi-turn unanswerability	multi-turn RAG conversations	unanswerable, underspecified, non-standalone questions	abstention / clarification quality	Covers interaction; less focused on adversarial evidence.
CRUMQs (Liu et al., 2025a)	unanswerable multi-hop RAG	realistic multi-hop queries	unanswerable and uncheatable questions	answerability and robustness	Useful for abstention; not a broad attack/noise benchmark.

Table 21: Benchmark-level comparison for robust RAG evaluation. The table makes explicit what each benchmark perturbs, what it measures, and which failure modes remain outside its scope.

Benchmark component	Required annotation	Metric suite	Why it is needed
Evidence reliability	relevance, sufficiency, freshness, provenance, support span	retrieval recall, sufficient-context accuracy, support precision	Distinguishes merely related passages from answer-supporting evidence.
Distraction and conflict	distractor type, conflicting claim pair, source agreement	answer flip rate, conflict sensitivity, context-utilization score	Reveals whether models ignore harmful context or silently pick a source.
Adversarial corruption	attacker access, insertion budget, trigger type, poisoned document ID	attack success, poisoned retrieval rate, stealth, defense bypass	Makes security results comparable across threat models.
Unanswerability and ambiguity	answerability label, ambiguity type, clarification target	selective risk, abstention precision/recall, clarification accuracy	Evaluates robust action selection, not just answer generation.
Cost and system action	number of retrievals, verifier calls, latency, final action trace	cost-adjusted accuracy, action utility, coverage–risk curve	Prevents methods from hiding robustness gains behind unbounded computation.

Table 22: A proposed benchmark blueprint for robust RAG under unreliable evidence. This is a research agenda rather than a validated leaderboard; existing benchmarks cover parts of the schema.

Axis	Typical variation across papers	Why conclusions fail to transfer	Minimum reporting requirement
Retriever/generator setting	BM25 vs dense vs hybrid retrieval; small vs frontier generators; frozen vs fine-tuned models	A defense may work by compensating for one retriever or one model scale rather than solving the failure mode.	Retriever, index, top-k, reranker, generator, prompt, decoding, and context length.
Attack budget and access	Poisoned-document count, corpus write access, query control, retriever visibility, generator access	Attack success rates are incomparable when one attacker edits a corpus and another only controls the query.	Capability matrix, insertion budget, target set, stealth objective, and whether malicious evidence is retrieved.
Metric target	EM/F1, faithfulness, citation support, attack success, calibration error, selective risk, cost	Improving answer accuracy can worsen citation faithfulness; improving abstention can reduce coverage; reducing attacks can lower utility.	Report utility, evidence support, risk, calibration, cost, and security as a Pareto surface.
Statistical and reproducibility evidence	Single seed/model vs multiple seeds/models; code/data availability varies	Small prompt or model changes can reverse robustness rankings, especially for LLM-as-judge or attack benchmarks.	Seeds, confidence intervals or bootstrap tests where feasible, released prompts, data splits, and code or exact API settings.
Long-context baseline	RAG-only comparisons vs long-context LLMs with the same documents	A robustness gain may reflect retrieval compression rather than evidence reliability control.	Include a long-context or full-context baseline when context length permits, and report latency/cost.
Attribution vs answer accuracy	Some tasks score only final answer; others require evidence-supported citations	A model can answer correctly for the wrong reason, cite irrelevant evidence, or ignore retrieved support.	Claim-level support labels, citation precision/recall, and answer correctness reported separately.

Table 23: Evaluation-assumption matrix for robust RAG. The table summarizes why benchmark results often cannot be compared without aligning system setup, threat model, metric target, reproducibility evidence, and long-context baselines.

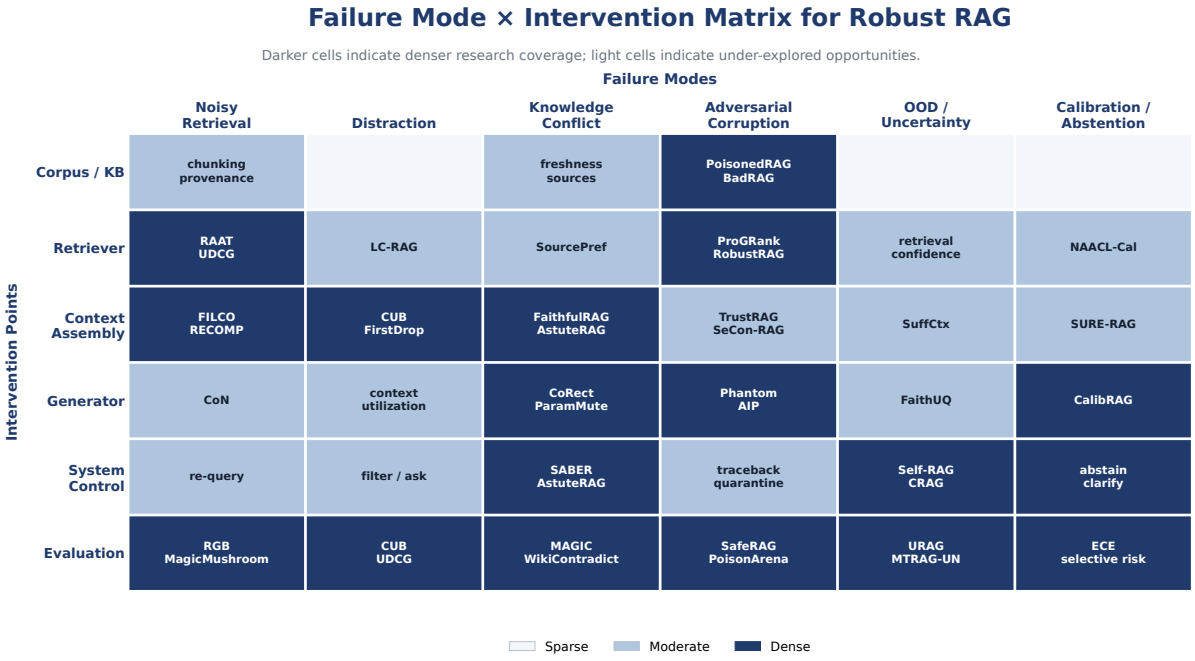


Figure 5: Failure mode × intervention matrix for robust RAG. Rows indicate where a method intervenes in the pipeline, while columns indicate the failure mode being addressed. Darker cells denote denser research coverage and lighter cells indicate under-explored opportunities.

Work	Failure	Task / setup	Key assumption	Metric	Boundary
IrrelCtx	irrelevant context	Open-domain QA	Irrelevance can be filtered or learned against	Robust accuracy	No adversarial/conflict setting.
RAAT	retrieval noise	Noisy QA training	Noise-aware training improves generation	F1/EM	Needs deployment-like noise.
RGB	multi-ability RAG	Bilingual benchmark	RAG reliability decomposes into abilities	Ability accuracy	Not adversarially adaptive.
FaithfulRAG	conflict	Fact-level conflict	Conflicts can be localized and reasoned over	Faithfulness	Needs reliable fact extraction.
AstuteRAG	imperfect retrieval	Training-free consolidation	Internal/external knowledge can be reliability-compared	Robust QA	Depends on LLM self-assessment.
PoisonedRAG	poisoning	Injected passages	Few crafted passages can dominate retrieval	Attack success	Targeted corruption focus.
RobustRAG	defense	Bounded corruption	Isolate-and-aggregate can certify robustness	Certificate, accuracy	Assumes attack budget.
Self-RAG / CtrlA	adaptive retrieval	Retrieve-or-answer	Model state can trigger retrieval	Trigger quality	Calibration can shift.
CalibRAG / URAG	calibration	Decision/MCQA	Confidence should reflect evidence uncertainty	ECE, coverage	Does not repair evidence.
PoisonArena / SafeRAG	security eval.	Poisoning benchmark	Threat models must be explicit	ASR, bypass	Still isolates attacks.

Table 24: Analytical matrix of representative robust RAG work. Compared with a citation list, the matrix highlights each work's task setup, central assumption, metric focus, and boundary of applicability.

Case	Released rows / papers	Audited comparison fields	Metric or failure conflict	Synthesis / artifact boundary
Noise / distraction robustness	5 rows: IrrelCtx, RAAT, Chain-of-Note, Sufficient Context, RGB	Assumption, QA dataset or benchmark slice, generator / reader setup, negative type, rank and gold-evidence availability.	EM/F1, rejection, selective risk, and ability-specific benchmark scores answer different questions.	Treat filtering, noise-aware training, generator reading, sufficiency prediction, and benchmark diagnosis as different mechanisms; artifact status is recorded per paper in the released worksheet.
Faithfulness, conflict, and attribution	5 rows: RAGTruth, FaithfulRAG, AstuteRAG, Tug-of-War, Chain-of-Note	Unit of support, source-conflict assumption, attribution granularity, model-side reasoning setup, artifact availability.	Span-level support, fact-level conflict resolution, source preference, and final answer accuracy can disagree.	Citation faithfulness should not be collapsed into conflict robustness; the worksheet records where artifact evidence is dataset-level, code-level, or paper-only.
Adversarial corruption and RAG security	6 rows: PoisonedRAG, corpus poisoning, BadRAG, certified defense, TrojanRAG, traceback	Corpus write access, insertion budget, retriever visibility, query control, generator access, stealth, retrieved malicious evidence, defense timing.	Attack success, certified robust accuracy, detection, traceback, and clean utility are not one defense score.	Compare only inside a capability envelope; prevention, demotion, detection, traceback, recovery, and certification remain separate outcomes.
Calibration, abstention, and adaptive control	5 rows: Sufficient Context, Self-RAG, CRAG, CalibRAG, uncertainty RAG	Confidence target, evidence sufficiency labels, retrieval trigger, action set, cost budget, model/policy setup.	ECE, selective risk, coverage, retrieval-trigger quality, and answer utility can move in different directions.	Separate belief estimation from action selection; report coverage, cost, and final action alongside correctness.
Evaluation and benchmark comparability	5 rows: RGB, RAGTruth, Sufficient Context, query robustness, RAG security benchmark	Evidence-state labels, perturbation source, model outputs scored, threat model, benchmark artifact availability.	Harder scores may reflect retrieval instability, unsupported spans, unanswerability, or adversarial steering.	Evaluation resources are diagnostic slices, not a universal robustness scale; benchmark comparisons require aligned evidence state and action policy.

Table 25: Deeper case-study synthesis. The released 26-row worksheet compares assumptions, datasets or benchmark settings, model/evidence setup, metrics, failure modes, artifact availability, and comparison implications for the same five C1–C5 cases.

Case	Naive reading	Normalization coordinate that changes it	Revised conclusion
IrrelCtx (Yoran et al., 2024) vs. RAAT (Fang et al., 2024)	Both are "noise-robust RAG" methods.	IrrelCtx targets naturally retrieved irrelevant context and filtering/back-off; RAAT trains on constructed relevant/irrelevant/counterfactual mixtures.	They are complementary context-filtering vs. noise-training regimes, not one leaderboard.
IrrelCtx (Yoran et al., 2024) vs. Chain-of-Note (Yu et al., 2023)	Both reduce distractor harm.	Intervention point differs: context filtering/fine-tuning vs. generator-side document reading.	A valid comparison must hold context state fixed and report whether the action is filter, answer, or unknown.
Sufficient Context (Joren et al., 2025) vs. Self-RAG (Asai et al., 2024a)	Both decide when retrieval is useful.	Evidence-sufficiency labeling vs. retrieve/generate/critique action policy.	Sufficiency prediction is an evidence-state signal; adaptive retrieval is a policy over actions and costs.
RAGTruth (Niu et al., 2024) vs. FaithfulRAG/AstuteRAG (Zhang et al., 2025g; Wang et al., 2025b)	All are faithfulness/conflict papers.	Unit of support differs: generated span support vs. fact/source conflict resolution.	Detector F1 and conflict-resolution accuracy should not be pooled as one faithfulness score.
Tug-of-War (Jin et al., 2024b) vs. ParamMute (Huang et al., 2025a)	Both study parametric-vs-contextual knowledge.	Source-preference analysis vs. parametric-knowledge suppression/intervention.	The conclusion shifts from "trust context or model" to reporting source reliability and update policy.
Poisoning corpora (Zhong et al., 2023) vs. PoisonedRAG (Zou et al., 2025)	Both are RAG poisoning attacks.	Corpus-write access, query control, retriever visibility, and target objective differ.	Attack success rates transfer only inside a shared capability envelope.
PoisonedRAG (Zou et al., 2025) vs. CertifiedRAG (Xiang et al., 2024)	Attack and defense appear directly comparable.	Defense guarantee assumes bounded retrieved corruption and an aggregation/abstention policy.	Certification is meaningful only under the stated budget; it is not a universal defense to open-web insertion.
AgentPoison (Chen et al., 2024f) vs. document poisoning (Zou et al., 2025)	Both corrupt retrieved evidence.	Persistent memory/tool state vs. static corpus passages.	Agentic poisoning needs memory-update and tool-call action labels, not only answer steering.
Spill-Beans/privacy (Unknown, 2025) vs. steering attacks (Zou et al., 2025)	Both are security failures.	Objective differs: data extraction or privacy leakage vs. answer manipulation.	Privacy, extraction, steering, traceback, and recovery require separate outcome columns.
RAGAS/ARES (Es et al., 2024; Saad-Falcon et al., 2024) vs. RAGTruth (Niu et al., 2024)	All evaluate grounded RAG.	LLM-as-judge metric toolkit vs. human-annotated hallucination/support resource.	Automated evaluation and corpus labels are different evidence artifacts; agreement with one does not validate the other.
RGB (Chen et al., 2024a) vs. Sufficient Context (Joren et al., 2025)	Both benchmark unreliable evidence.	Diagnostic ability axes vs. answerability/sufficiency labels and selective risk.	A benchmark score is interpretable only after stating the evidence state and required action.
Lost-in-the-Middle (Liu et al., 2024) vs. long-context retrieval	More context seems to solve retrieval misses.	Evidence availability differs from evidence selection and citation.	Full-context access can still fail if the model cannot select or ground the supporting span.
ColPali/Table/Graph RAG (Faysse et al., 2025; Chen et al., 2024c; He et al., 2024) vs. passage RAG	Extension papers look like new application areas.	Evidence object changes: page image, table cell/schema, graph neighborhood, or tool memory.	They are retained as extension-layer stress tests of typed evidence states, not as broad co-equal survey scope.

Table 26: Concrete conclusions that change after five-coordinate normalization. Each row is grounded in released case-study or Map-B records and shows why a common citation-list comparison becomes invalid, partial, or more specific once failure, assumption, intervention, metric, and action are aligned.

Naive comparison	Tuple summary (F/A/I/M/Act)	Breaking coordinate(s)	Verdict	What a valid comparison would require	Changed interpretation
IrrelCtx vs. RAAT vs. RGB as "noise robustness"	Shared relevance/noise; benign or benchmark stressors; generator sensitivity vs. training vs. benchmark; accuracy/ability metrics; action mostly unreported.	Intervention, metric, action.	Partial / under-specified	Fix negative type, rank, gold-evidence availability, generator, metric family, and explicit answer/abstain policy.	They map different operating regions: generator selectivity, noise-aware training, and diagnostic benchmark design.
Context filtering vs. Chain-of-Note as distraction mitigation	Shared distraction; benign context noise; context assembly vs. generator reasoning; answer robustness; answer action implicit.	Intervention and action.	Partial	Evaluate both on the same retrieved contexts with the same generator, answer policy, and evidence-support metric.	A filter and a reasoning prompt can compose; ranking them as substitutes hides pipeline position.
Sufficient Context vs. Self-RAG as control	Sufficiency vs. retrieval-need uncertainty; benign missing evidence; sufficiency predictor vs. learned retrieve/critique policy; selective risk vs. utility/cost; abstain vs. retrieve/answer.	Failure, intervention, metric, action.	Partial	Hold evidence-sufficiency labels fixed and score the same action set: answer, abstain, retrieve, or critique.	One estimates whether evidence is enough; the other learns a broader control policy.
Calibration methods vs. abstention methods	Uncertainty; benign or OOD setting; confidence estimator vs. action policy; calibration error vs. selective risk; action often absent vs. abstain.	Metric and action.	Partial / under-specified	Define whether confidence targets answer correctness, evidence sufficiency, retrieval usefulness, or action utility, then report coverage and risk.	Better calibration is not automatically better abstention.
Knowledge-conflict methods vs. PoisonedRAG	Consistency conflict vs. integrity corruption; natural/diagnostic contradiction vs. attacker-created evidence; source reasoning vs. attack/defense; reconciliation vs. attack success; answer/expose conflict vs. resist steering.	Assumption, metric, action.	Invalid	Recast both under the same threat class and objective, or evaluate conflict detection separately from adversarial steering.	Conflict annotations can help both areas, but metrics and threat games differ.
Corpus poisoning vs. prompt injection	Integrity corruption; corpus insertion vs. instruction-bearing retrieved text; retrieval/corpus defense vs. instruction-following defense; attack success; prevention/demotion/refusal.	Assumption and objective.	Invalid	Specify whether the attacker controls documents, user query, prompt instructions, or model memory, and evaluate the same objective.	Both use malicious text, but factual steering and instruction hijacking are different security games.
PoisonedRAG vs. certified defenses	Shared integrity corruption; empirical corpus injection vs. bounded corruption budget; attack benchmark vs. certified aggregation; attack success vs. certified robust accuracy; prevention implicit.	Assumption, metric, action.	Under-specified / invalid for ranking	Align corruption budget, corpus access, retrieval success, generator access, utility loss, and defense action.	A certificate under one budget does not imply robustness to open-ended poisoning or prompt-bearing documents.
RAGTruth vs. answer-accuracy benchmarks	Generated-output evaluation; natural unsupported claims vs. task correctness; evaluation artifact; citation/support vs. exact answer correctness; action unreported.	Metric and action.	Partial	Score the same system outputs with both answer correctness and claim-level support, and define how unsupported correct answers are handled.	Correct answers can still be unreliable if unsupported or falsely cited.
Long-context RAG vs. retrieval-noise benchmarks	Evidence selection under many tokens vs. top-k retrieval noise; context-length manipulation vs. retrieval perturbation; accuracy/utility; action usually answer-only.	Failure construction, intervention, action.	Partial	Match evidence position, distractor density, retrieval requirement, context budget, and action labels.	Long context changes the bottleneck from retrieval recall to evidence selection and attention.
Two poisoning defenses with missing utility reporting	Shared integrity corruption may hold; threat capabilities may be incomplete; detection/demotion/prevention may differ; attack success reported without clean-utility loss; action implicit.	Missing capability, metric, action.	Under-specified	Report attacker budget, retriever visibility, query control, clean accuracy, latency, and whether the defense prevents, detects, demotes, traces, or recovers.	Low attack success is not portable without utility and capability normalization.

Table 27: Normalized re-analysis worksheet. Each row records the five-coordinate tuple, the coordinate that blocks direct comparison, the conservative verdict, and the information required to make a valid comparison. The table is a reproducible coding artifact, not a re-run of the original systems.

Reliability-check metric	**Value**
Paper pairs	75
Likely comparable / near-miss / negative	25 / 25 / 25
Agreement	97.3%
Cohen's κ	0.94
Comparable by source 1	25
Comparable by source 2	27

Table 28: Decision-procedure reliability check. Pairwise comparability labels were derived from two human coding sources by requiring aligned coded fields; this supports reproducibility of coded verdicts, not independent expert-use validation.

Apparent conclusion	What the framework changes	Non-trivial finding	Implication
"Method A is more robust to noise than method B."	Aligns noise type, rank position, gold-evidence availability, and intervention point.	Some methods solve generator distraction while others solve retriever defects; their scores are not competing estimates of the same property.	Report noise source and intervention point before ranking methods.
"Defense X lowers attack success."	Separates prevention, demotion, detection, traceback, and recovery.	A defense can improve traceback without lowering user-facing attack success, or certify bounded corruption without handling prompt-bearing documents.	Security papers should report outcome type, not only attack success rate.
"Calibration improves reliability."	Separates confidence in answer correctness from evidence sufficiency and action utility.	A calibrated answerer can still answer from insufficient evidence; an abstaining system can lower risk while reducing coverage.	Calibration metrics should be paired with evidence and action metrics.
"Benchmark Y is harder."	Compares evidence state, required action, cost budget, and metric target.	A benchmark can be hard because retrieval fails, because evidence conflicts, or because the correct action is refusal; these failures should not be pooled.	Leaderboards should expose diagnostic sub-scores instead of one robust-RAG score.

Table 29: Distilled classes of non-trivial findings produced by the comparability framework. Main Table 26 gives the concrete paper-pair cases; this appendix table groups them into reusable interpretation rules.

Main claim	Human-checked evidence basis	What the evidence supports	Boundary
Irrelevant or noisy context can harm generation.	Irrelevant-context robustness, RAAT, RGB, and counterfactual-noise papers were checked at method/evaluation level.	Noise affects both retrieval quality and generator context use.	Does not imply one robustness score covers all noise types.
Knowledge conflict differs from adversarial corruption.	Conflict papers and poisoning papers were checked for source of contradiction and evaluation target.	Natural disagreement and attacker-created contradiction require different assumptions.	Conflict-resolution results should not be read as poisoning-defense results.
RAG attacks require capability normalization.	Poisoning, backdoor, prompt-injection, traceback, and certification papers were checked for attacker access and metric target.	Attack/defense results are incomparable without corpus write access, query control, retriever visibility, and budget.	The survey does not rank attacks by real-world prevalence.
Calibration, abstention, and retrieval control are distinct.	Sufficient-context, uncertainty, adaptive-retrieval, and calibration papers were checked for decision target.	Confidence estimation, evidence sufficiency, retrieval triggering, and abstention optimize different quantities.	Does not validate a single universal control policy.
Action-trace evaluation is a benchmark agenda.	Existing benchmarks were checked for answer, evidence, action, cost, and threat fields.	Existing benchmarks cover pieces of the proposed schema.	No new leaderboard or empirical system ranking is claimed.

Table 30: Core-claim verification ledger. LLM-assisted citation audits were used only as internal triage; the claims above are stated at the level supported by human inspection of central cited papers.

Overlapping work	Typical interpretation in adjacent surveys	Reinterpretation under evidence reliability + action control	Different conclusion enabled
RGB / RAG evaluation benchmarks	A benchmark measuring multiple RAG abilities.	A diagnostic split between noisy evidence, negative rejection, integration, and counterfactual evidence states.	A single RAG score hides which system action failed: ignore, integrate, reject, or expose conflict.
Irrelevant-context robustness	A robustness method or context-filtering problem.	A generator-selectivity failure conditioned on retrieved but harmful context.	It should not be compared directly with retriever training unless the intervention point and context hardness are fixed.
Sufficient Context / answerability work	An abstention or uncertainty benchmark.	A control-policy problem: evidence sufficiency determines answer vs re-retrieve vs abstain.	Abstention accuracy is incomplete without evidence sufficiency and action-cost labels.
PoisonedRAG / RAG poisoning	A security attack surface.	An integrity failure whose strength depends on corpus write access, retrieval success, generator access, and insertion budget.	Attack success rates are not comparable until capability fields are normalized.
RAGTruth / hallucination evaluation	A faithfulness or hallucination annotation resource.	A separation between answer correctness, claim support, citation support, and evidence sufficiency.	Correct answers can still fail evidence reliability; citation faithfulness and answer accuracy should be reported separately.
Self-RAG / adaptive retrieval	A retrieval-augmented generation method.	A system-control policy that chooses retrieve, critique, answer, or continue under uncertainty.	The relevant evaluation target is not only answer quality but whether the policy chose the right action at the right cost.

Table 31: How the same papers are interpreted differently under the proposed framework. This table grounds the novelty claim in concrete reinterpretations rather than broad positioning statements.

Dimension	Distribution in the 342-paper adjudicated Map B
Publication year	2025: 170; 2024: 92; 2026: 65; 2023: 12; 2021: 2; 2022: 1
Source / venue type	arXiv/preprint: 207; venue/proceedings-linked: 126; workshop/challenge: 5; other/unclear: 4
Primary failure category	adversarial corruption: 120; knowledge conflict: 57; calibration/control: 55; evaluation/benchmark: 43; noisy retrieval: 34; distraction: 18; extension layer: 7; survey/background: 6; OOD/uncertainty: 2
Method family	defense/mitigation: 119; attack: 75; benchmark/evaluation: 67; control/calibration: 27; method/evaluation: 21; analysis: 21; survey background: 6; conflict modeling: 4; method: 2
Intervention point	generator: 81; corpus/KB: 67; evaluation: 51; context assembly: 48; mixed: 43; system control: 36; retriever/context: 15; not applicable: 1

Table 32: Descriptive corpus statistics for the canonical 342-row adjudicated Map B. These are map statistics, not field-wide prevalence estimates. Map A remains the IAA/adjudication snapshot.

Evidence stratum	Count
arXiv / preprint	207
venue / proceedings-linked	126
workshop / challenge	5
other / unclear	4

Table 33: Source strata in the canonical 342-row adjudicated Map B. Venue-linked coverage is now substantial relative to Map A, but the map remains a scoping corpus rather than a venue-complete census.

	Noise	Distract	Conflict	Attack	OOD	Control	Eval.	Ext.
Noise	86	39	27	10	3	26	19	0
Distract	39	51	11	3	0	5	11	0
Conflict	27	11	104	22	5	20	34	1
Attack	10	3	22	135	1	10	21	0
OOD	3	0	5	1	40	34	10	0
Control	26	5	20	10	34	85	22	2
Eval.	19	11	34	21	10	22	90	1
Ext.	0	0	1	14	0	2	1	26

Table 34: Category overlap in the 342-row adjudicated Map B. Extension-layer labels merge the historical `modality_scenario` and `multimodal_agentic_code` names; counts are map diagnostics, not field prevalence.

Method family	Noise	Distract	Conflict	Attack	Control	Eval.	Ext.	Survey
defense/mitigation	27	12	33	37	9	0	1	0
attack	0	0	0	75	0	0	0	0
benchmark/evaluation	3	1	11	8	4	40	0	0
control/calibration	0	0	0	0	26	0	0	0
method/evaluation	3	1	1	0	8	2	6	0
analysis	1	4	8	0	6	1	0	0
other/background	0	0	4	0	2	0	0	6

Table 35: Primary method-family by primary failure-type cross-tabulation over the 342-row adjudicated Map B. The table describes the map, not field-wide prevalence.

F Detailed Audit Artifacts

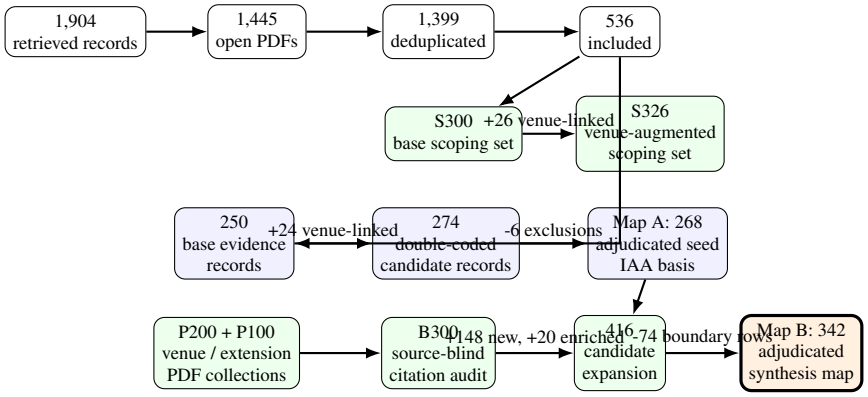


Figure 6: Corpus lineage. The 416-row venue-expanded candidate map is second-coded and adjudicated into Map B (342 rows), the canonical synthesis evidence map. Map A (268 rows) is the double-coded adjudicated seed used for IAA and adjudication audit. S300/S326 are scoping sets, while B300 is a different 300-paper source-blind citation-audit batch over the P200/P100 PDF collections.

Name	Count	Construction rule	Role in this paper
Retrieved/open corpus	1,904 → 1,445 → 1,399 → 536	Search records, open PDFs, deduplicated candidates, then relevant included papers.	Candidate universe; not a prevalence denominator.
S300 base scoping set	300 papers	Core reading set plus representative supporting work across failure categories.	Early survey scaffold; distinct from the B300 citation audit.
S326 venue-augmented scoping set	326 papers	S300 plus 26 venue-linked additions from follow-up triage.	Boundary and recall-risk check; not the evidence-map denominator.
Map-A candidates	274 records	250 base evidence records plus 24 venue-linked evidence additions.	Double-coded by two human sources before adjudication.
Map A adjudicated seed	268 records	Map-A candidates after six final exclusions.	IAA/adjudication basis and provenance snapshot, not the canonical synthesis map.
P200 venue PDF collection	200 local PDFs	Venue/proceedings-linked open PDFs from ACL-family, ICLR, ICML, NeurIPS, and related sources.	Venue-backed reading/audit collection; future census substrate.
P100 extension PDF collection	100 local PDFs	Multimodal, graph, table, agentic/tool, code/symbolic, domain, and long-context RAG PDFs.	Extension-layer coverage, used only when tied to evidence-state/action-control claims.
B300 citation audit	300 decisions	Source-blind human citation decisions over P200+P100: 115 main, 25 case-study, 110 appendix, 22 background, 28 exclude.	Human audit for which venue/extension papers enter main text, case studies, appendix, or exclusion.
Map B adjudicated synthesis map	**342 records**	Map A (268) plus 74 retained venue/extension additions after C02/C03 second coding and final adjudication; 74 candidate additions were excluded.	**Primary evidence map for current survey synthesis, source-strata analysis, and venue sensitivity.**

Table 36: Canonical corpus story. All synthesis counts in the main text refer to the 342-row adjudicated Map B unless a table explicitly says it reports Map A IAA/adjudication evidence or the 416-row pre-adjudication candidate map.

Audit item	Observed count	Rule / source	Use in main claims
Screening flow	1,904 records → 1,445 open PDFs → 1,399 deduplicated candidates → 536 included	Keyword and curated-list retrieval over arXiv, ACL Anthology, OpenReview, USENIX, AAAI/ACM pages with open versions; deduplicated by normalized title and identifiers.	Defines the initial corpus snapshot; not used as field-wide prevalence.
Map A adjudicated seed	268 records	Human-coded candidate set after round-2 adjudication. Source strata: 42 venue/proceedings-linked, 222 arXiv-only/emerging preprints, and 4 other records.	Preserved as the original adjudicated snapshot and IAA basis; not the canonical synthesis denominator.
Map B adjudicated synthesis map	342 records	Map A plus 74 adjudicated venue/extension additions retained from the 148 candidate additions; 74 candidate additions were excluded after C02/C03 second coding and final adjudication. Source strata: 126 venue/proceedings-linked, 207 arXiv/preprint, 5 workshop/challenge, 4 other/unclear.	Current survey evidence map for source-stratified synthesis; venue-linked papers form a substantial backbone but not a venue-complete census.
Venue recall audit	51 venue-linked candidates surfaced; 26 added to scoping set; 24 added to evidence extension; 9 excluded; 2 duplicates	ACL Anthology scan plus DBLP/OpenAlex/OpenReview/PMLR-style metadata passes and manual triage.	Quantifies recall risk rather than claiming venue-complete coverage.
Venue-linked backbone by primary label	126 venue/proceedings-linked rows: 28 evaluation, 26 adversarial corruption, 22 noisy retrieval, 20 calibration/control, 16 knowledge conflict, 6 distraction, 6 extension-layer, and 2 OOD/uncertainty rows.	Counted from adjudicated Map B after C02/C03 second coding and final adjudication.	Shows that the text/document perspectives have venue-linked support while extension rows remain typed-evidence stress tests; method rankings remain claim- and assumption-specific.

Table 37: Main-text corpus and source-strata audit. Detailed query logs, exclusions, and reconciliation tables remain in the appendix and supplement.

Collection item	Count / location	Construction	Use and limitation
Venue-linked PDF collection	200 local PDFs	Open PDFs copied or downloaded from ACL/TACL, ICLR, ICML, NeurIPS, and related proceedings-linked sources.	Strengthens the venue-backed reading set and feeds the B300 citation audit; it is a PDF collection, not itself the Map-B denominator.
Selection sources	97 foundations; 103 accepted/proceedings papers	Deduplicated by normalized title and filtered by RAG, retrieval, faithfulness, security, calibration, and evaluation terms.	Reduces dependence on arXiv-only discovery, but still reflects open-PDF and keyword bias.
Venue concentration	49 NeurIPS; 38 ICLR; 16 ICML; plus ACL-family venues	Manifest records venue, year, source URL, local path, bytes, and SHA-256 checksum for each PDF.	Provides an auditable venue-linked supplement; manual proceedings-level inclusion/exclusion coding remains future work.
Machine-readable files	Manifest, summary, builder script	Built by the venue-200 collection script.	The PDF directory is local due to size; manifests and script are included in the release package.

Table 38: Venue-linked 200-paper PDF collection. This collection addresses venue-backed coverage weakness by creating a local open-PDF corpus for citation audit and future venue-complete follow-up, while preserving the distinction between downloaded PDFs, the 416-row candidate expansion, and the canonical 342-row adjudicated Map B.

Map-B field group	Coverage	Coding / audit source	Use and caveat
Canonical identifiers and source flags	342/342 title, year, URL, source stratum, Map-A membership, Map-B version, core-reading flag	Deterministic merge from Map A, P200/P100 manifests, B300 decisions, and C02/C03 adjudication.	Defines the canonical adjudicated row set and source strata.
Core taxonomy fields	342/342 failure type, taxonomy categories, method family, intervention point, contribution note, limitation note	Map-A adjudicated labels for original rows; C02/C03 adjudicated labels for retained additions.	Used for Map-B synthesis and sensitivity counts.
Task / metric metadata	High coverage after adjudication	Map-A labels plus human-audit rationales and manifest metadata for retained additions.	Missing rows are not imputed for metric-level claims.
Author / venue metadata	Source/venue strata complete; author metadata incomplete for some additions	Proceedings metadata and paper manifests.	Venue/source strata are complete; author normalization remains an artifact-release cleanup item.
B300 human-audited rows retained in Map B	94 retained rows with human citation-audit metadata	74 retained additions plus 20 enriched Map-A rows.	Citation-audit metadata supports source-stratified synthesis; 74 excluded candidate additions remain in the release as boundary rows.
Second-coding/adjudication boundary	Map A: 274 candidates $\rightarrow$ 268 adjudicated rows; Map-B additions: 148 candidates $\rightarrow$ 74 retained additions	Map A has two-source independent coding and final adjudication; Map-B additions have C02/C03 independent second coding and final adjudication.	C02/C03 agreement is strong, and adjudication is now applied to the canonical 342-row Map B.

Table 39: Coding protocol and field coverage for the 342-row adjudicated Map B. The table separates Map-A adjudicated IAA, B300 citation audit metadata, and the C02/C03 second-coding/adjudication pass over the 148 candidate additions.

Stage	Count	Rule
Initial retrieval	1,904 records	Keyword search over arXiv, ACL Anthology, OpenReview, USENIX, AAAI/ACM landing pages where open versions were available, plus curated robust/trustworthy RAG paper lists.
Open full-text corpus	1,445 PDFs	Downloaded only open PDFs; removed failed downloads, inaccessible files, and non-PDF artifacts.
Deduplicated candidates	1,399 papers	Deduplicated by normalized title and arXiv/proceedings identifiers; retained the most complete metadata record when preprint and proceedings versions overlapped.
Relevance screening	536 included papers	Included papers that study RAG robustness, reliability, uncertainty, calibration, faithfulness, attack/defense, or evaluation under unreliable evidence; excluded application-only RAG papers.
Core pool	112 papers	Papers directly shaping the taxonomy, threat/failure model, intervention mechanisms, or evaluation framework.
Core reading set	100 papers	Core papers used as main narrative anchors; the remaining 12 core-pool papers stay in the broader survey set.
Base survey set	300 papers	Core papers plus representative supporting work across all taxonomy branches before venue follow-up triage.
Venue-augmented scoping set	326 papers	Base survey set plus 26 venue-linked additions after follow-up triage.
Candidate evidence records	274 papers	Base evidence map of 250 papers plus 24 venue-linked additions, double-coded and adjudicated.
Map A adjudicated seed	268 papers	Candidate evidence records retained after final adjudication; used for IAA/adjudication provenance.
Map-B candidate expansion	416 papers	Map A plus 148 source-blind human-citation-audit additions and 20 enriched original rows; used for second-coding review.
Map B adjudicated synthesis map	342 papers	Map A plus 74 retained additions after C02/C03 second coding and final adjudication; used for current synthesis statistics.

Table 40: Screening-flow summary for the current corpus snapshot. The supplementary material provides exact query strings, source-wise counts, deduplication rules, taxonomy codebook, per-paper metadata, exclusion log, Map-A adjudication records, and the adjudicated Map-B evidence map.

Set	N	Audit artifact	Selection rule and role
Retrieved records	1,904	`search_protocol.json`	Initial keyword and curated-list retrieval before PDF availability, deduplication, or relevance screening.
Open full-text PDFs	1,445	`pdfs/`	Records with open PDFs available for full-text inspection; inaccessible or non-PDF artifacts removed.
Deduplicated candidates	1,399	`all_reviewed_deduped.csv`	Normalized-title and identifier deduplication; one record retained for preprint/proceedings overlaps.
Relevant included papers	536	`all_reviewed_deduped.csv`	Papers with decision `core` (112) or `include` (424); background-adjacent papers (289) and excluded papers (574) are tracked separately.
Core pool	112	`decision=core` in `all_reviewed_deduped.csv`	Papers judged central to taxonomy, threat/failure models, intervention mechanisms, or evaluation design.
Core reading set	100	`core100_full.csv`	Main narrative anchors. The 12 core-pool papers not in this set remain in the base survey set rather than being discarded.
Base survey set	300	`survey300_full.csv`	Core pool plus representative supporting work across failure categories, method families, and evaluation settings before venue follow-up triage.
Venue-augmented scoping set	326	`survey_set_venue_audited.csv`	Base survey set plus 26 venue-linked papers added after follow-up triage.
Base evidence map	250	`evidence_map.csv`	Original structured map used before venue follow-up triage.
Candidate evidence records	274	round2 full adjudication CSV	Base map plus venue-linked additions, double-coded by humans and adjudicated.
Map A adjudicated seed	268	`evidence_map_adjudicated.csv`	Candidate evidence records with final `include_in_evidence_map=1`; used for IAA/adjudication provenance.
Citation-audit batch B	300	`citation_annotations.csv`	Source-blind human citation decisions over P200+P100; distinct from the S300 base scoping set.
Map-B candidate expansion	416	candidate expansion CSV	Map A plus 148 B300-supported candidate additions and 20 enriched original rows; used for C02/C03 second coding.
Map B adjudicated synthesis map	342	adjudicated Map-B CSV	Map A plus 74 retained additions after C02/C03 adjudication; used for current synthesis statistics.

Table 41: Corpus-set ledger. Exact memberships are released as CSV files for Map A, the 416-row candidate expansion, and the 342-row adjudicated Map B.

Artifact / claim source	Verification performed	What is coding- or metadata-assisted	How it is used in the paper
Main narrative claims and central citations	Author inspection of full paper text for papers used to support central claims, tables, and figures.	Initial prioritization and category suggestions were LLM-assisted.	Used for qualitative synthesis and case-study comparisons.
Core reading set	100 papers curated from the 112-paper core pool after full-text relevance checks for narrative fit.	Core-pool creation used relevance scores and pre-labels as triage signals.	Used as the main reading backbone; not claimed to be a reproducible top-100 ranking without author judgment.
Map A, 268-paper adjudicated seed	Metadata and structured fields manually cleaned; venue-candidate triage completed; 274 candidate records independently double-coded and adjudicated into 268 included evidence-map papers.	Initial candidate discovery and pre-labeling were LLM-assisted, but final Map-A labels use human adjudication for coder disagreements.	Used for IAA/adjudication provenance, with the caveat that it is not the current synthesis denominator.
Map-B candidate expansion, 416 rows	Map A merged with source-blind human citation audit over P200/P100; 148 new candidate rows added and 20 original rows enriched.	Candidate additions use human citation-audit decisions and deterministic field completion before second coding.	Used as the candidate pool for C02/C03 second coding, not as the final synthesis denominator.
Map B, 342-paper adjudicated synthesis map	C02 and C03 independently second-coded all 148 additions; final adjudication retained 74 and excluded 74.	The retained additions use adjudicated labels; excluded boundary rows remain available in the release package.	Used for current source-stratified synthesis and venue sensitivity; still not a field census.
Human double-coding package	Two anonymized human sources independently coded all 274 candidate evidence records before discussion; round-2 agreement is strong across taxonomy, intervention, evidence-strength, relevance, core, and inclusion fields.	Disagreements were resolved in the final adjudication file.	Used to report pre-adjudication IAA and produce final adjudicated evidence-map labels.
Venue metadata pass and triage	ACL Anthology title/abstract scan plus DBLP/OpenAlex query logs, title matching, and follow-up triage decisions.	Discovery is metadata-based; inclusion/exclusion decisions are author triage rather than independent double coding.	Used to update venue-linked coverage and quantify remaining systematic-review limits.

Table 42: Verification and annotation provenance. The table separates full-text author inspection, coding-assisted labels, metadata-derived venue candidates, and non-adjudicated consistency diagnostics.

Item	What was done	What was hidden from annotators	What we do not claim
Round-2 coders	Two anonymized human annotation sources independently coded the same 274 candidate evidence records.	Machine pre-labels, prior evidence-map labels, previous adjudication logs, and the other source's labels.	We do not reveal personal identities in the submission; anonymized provenance is reported instead.
Training / codebook	Coders used the human double-coding protocol and codebook defining scope, failure type, method family, intervention point, evidence strength, and inclusion fields.	Prior LLM rationales and model confidence scores.	We do not claim the codebook is final for all RAG subareas; adjudication notes can still motivate revisions.
Independence	Round-2 IAA was computed before adjudication using independently completed CSV files.	Post-discussion labels were not used for IAA.	We do not use adjudicated labels to inflate agreement.
Adjudication	A final adjudication file resolved 469 field-level disagreements and produced the 268-paper Map-A seed.	Source labels were preserved and not overwritten.	We do not apply Map-A IAA to the 148 later Map-B additions.
B300 citation audit	One source-blind human citation-audit batch coded 300 P200/P100 papers; 168 audited rows entered or enriched Map B after de-duplication and relevance checks.	Paper IDs were source-normalized and the audit did not use Map-A disagreement labels.	We do not claim 416-row double-coding or inter-annotator agreement for the venue-expanded additions.

Table 43: Annotation transparency for the human coding round. The table reports what can be audited from the blind annotation package without disclosing annotator identities.

Claim	Status under venue-linked / peer-reviewed evidence	What changes without preprints	Interpretation
Retrieved evidence can harm generation even when relevant evidence exists.	Holds: supported by venue-linked work on irrelevant/noisy context, noise-robust training, counterfactual noise, and imperfect retrieval.	The range of stress-test variants shrinks.	This is a stable mechanism-level claim.
RAG security results require attacker-capability normalization.	Holds partially: venue-linked security work covers poisoning, traceback, membership inference, and backdoor-style corpus attacks.	Many fine-grained attack variants and defenses remain preprint-heavy.	The capability matrix is stable; detailed landscape counts are emerging trends.
Calibration, abstention, and retrieval control are distinct decisions.	Holds conceptually with venue-linked answerability, relevance-assessment, and calibration/control papers.	Specific method rankings and benchmark prevalence become sparse.	The conceptual separation remains; empirical prevalence is not settled.
The evidence map is attack- and benchmark-heavy.	Does not become a field-wide claim.	Under peer-reviewed-only evidence, the sample is much smaller and more evaluation-heavy.	Treat distributional cross-tabs as corpus diagnostics, not prevalence estimates.
Action-trace benchmark blueprint should score answer, evidence state, action, and cost.	Supported as a design synthesis, not validated as a benchmark standard.	The proposal becomes less empirical and more normative.	Keep as a research agenda unless a full benchmark is built and evaluated.

Table 44: Peer-reviewed / venue-linked sensitivity analysis. The table states which conclusions survive when preprint-only evidence is downweighted and which remain hypothesis-generating.

Pass	Scope	Observed yield	Interpretation
ACL Anthology metadata scan	ACL, EMNLP, NAACL, COLING; 2020–2026; full anthology BibTeX with abstracts	12,924 entries scanned; 181 RAG candidates; 30 robust-RAG candidates	A reproducible proceedings-level metadata scan for core NLP venues, not just backfilled metadata.
DBLP/OpenAlex metadata queries	15 robust-RAG query strings over venue-linked metadata for SIGIR, WWW, WSDM, KDD, USENIX Security, CCS, NDSS, ICLR, NeurIPS and overlaps	31 query rows; 51 unique venue-linked candidate titles after deduplication	Surfaced missing venue-linked candidates; all 51 were subsequently triaged.
Follow-up venue triage	51 venue-linked candidates	23 new evidence-map additions; 3 background additions; 9 exclusions; 2 duplicates; 13 already represented	Closes the unprocessed venue-candidate gap, while still not claiming complete manual proceedings coverage.
Map A adjudicated seed	268 evidence-map papers	42 venue/proceedings-linked; 222 arXiv-only or emerging preprints; 4 other strata	IAA/adjudication basis before venue expansion.
Map-B candidate expansion	416 evidence-map candidates	194 venue/proceedings-linked; 207 arXiv/preprint; 11 workshop/challenge; 4 other/unclear	Pre-adjudication candidate map after B300 citation audit.
Map B adjudicated synthesis map	342 evidence-map papers	126 venue/proceedings-linked; 207 arXiv/preprint; 5 workshop/challenge; 4 other/unclear	Current source-stratified synthesis map after C02/C03 second coding and final adjudication.

Table 45: Venue-oriented search, coverage audit, and follow-up triage summary. Full query logs, candidate titles, decisions, and limitations are in `venue_systematic_queries.csv`, `venue_systematic_candidates.csv`, `venue_coverage_audit.csv`, and `venue_triage_decisions.csv`.

Coverage check	Count	Artifact	Interpretation
Venue-linked robust-RAG candidates found by metadata pass	51 unique titles	candidate CSV	Candidate pool from ACL Anthology, DBLP, and OpenAlex metadata queries.
Already in core100	6 / 51	coverage audit CSV	Core narrative captures only a small subset of venue-linked candidates.
Already in survey300	14 / 51	coverage audit CSV	The current survey set misses or intentionally excludes many venue-linked candidates.
Already in evidence map	13 / 51	coverage audit CSV	Cross-tabs should be interpreted as map statistics, not field statistics.
Not in original survey300	37 / 51	coverage audit CSV	These papers were subsequently triaged; see Table 48.

Table 46: Venue-coverage audit after the metadata pass. The audit quantifies residual coverage risk by matching venue-linked candidates against the original core, survey, and evidence-map sets. Files: `venue_systematic_candidates.csv` and `venue_coverage_audit.csv`.

Recall check	Observed result	What it controls	Residual risk
ACL Anthology metadata scan	12,924 entries scanned for ACL/EMNLP/NAACL/COLING; 181 RAG candidates; 30 robust-RAG candidates	Reduces reliance on arXiv-only discovery for core NLP venues.	Title/abstract terms can miss papers using older QA/IR terminology.
Cross-venue metadata pass	DBLP/OpenAlex queries yielded 51 venue-linked robust-RAG candidates	Adds IR, web, security, and ML venue-linked records.	API ranking, metadata naming, and transient query errors limit recall.
Follow-up triage	51 candidates triaged; 26 added to scoping set; 24 added to evidence map; 9 excluded; 2 duplicates	Closes the known unprocessed venue-candidate gap.	Does not prove complete coverage of every proceedings volume.
Evidence-strength sensitivity	Main conclusions separated into venue-linked backbone vs preprint trend evidence	Prevents preprint-heavy map statistics from becoming field-level claims.	Some emerging security/control subtopics remain too new for strong consensus.

Table 47: Venue-recall risk analysis. The venue pass improves auditability and adds missed venue-linked papers, but it is still not a manual venue-complete proceedings review.

Triage outcome	Count	Action	Reasoning
Already represented in base evidence map	13	retain	Candidate was already included; metadata pass only improved venue visibility.
New evidence-map additions	23	add to evidence extension	Directly studies robust RAG, RAG evaluation, evidence reliability, security, calibration, or robust generation.
Survey-set paper promoted to evidence extension	1	add to evidence extension	Already in the survey set but not the base map; venue audit identified it as relevant to trust/calibration.
Background additions	3	add to venue-augmented scoping set only	Relevant boundary papers on domain, multilingual, or multimodal RAG, but not central text evidence-reliability evidence.
Excluded false positives / applications	9	exclude with reason	Application or adjacent RAG papers without robustness/evidence-reliability analysis.
Duplicate venue records	2	deduplicate	Same work already represented through another metadata record.
Venue-augmented scoping set	**326**	base 300 + 26 additions	Updated scoping set after follow-up triage.
Map A adjudicated seed	**268**	274 candidates - 6 exclusions	IAA/adjudication snapshot after human adjudication of double-coded candidate evidence records.
Map-B candidate expansion	**416**	Map A + 148 B300-supported additions	Pre-adjudication candidate map after source-blind citation audit.
Map B adjudicated synthesis map	**342**	Map A + 74 retained additions	Current evidence map for synthesis after C02/C03 second coding and adjudication.

Table 48: Follow-up triage of all 51 venue-linked candidates from the metadata pass. The 37 candidates outside the original survey set are no longer unprocessed; decisions and reasons are in `venue_triage_decisions.csv`.

Artifact / set	Count	Count definition	Use in this paper
Map-A double-coded candidates	274	Candidate records coded by two human sources before final inclusion adjudication.	Used for human-human agreement and adjudication; six records were excluded from Map A.
Map A adjudicated seed	268	Included records after adjudication: 42 venue/proceedings-linked, 222 arXiv-only or emerging preprints, 2 preprints with year tags, 1 review-platform record, and 1 other/uncategorized record.	Used as the IAA/adjudication provenance snapshot, not the current synthesis denominator.
S326 venue-augmented scoping set	326	Original S300 base scoping set plus 26 triaged venue-linked additions.	Used for broader scoping and boundary checks; not all rows are evidence-map records.
B300 source-blind citation audit	300	Human citation decisions over P200 venue PDFs and P100 extension PDFs.	Determines which audited papers enter the main text, case studies, appendix, background, or exclusion set; distinct from S300.
Map-B candidate expansion	416	Map A plus 148 B300-supported candidate additions; 20 original rows enriched with B300 metadata.	Pre-adjudication expansion candidate map used for second-coding review.
Map B adjudicated synthesis map	342	Map A plus 74 retained additions after C02/C03 second coding and final adjudication.	Current evidence map for source-stratified synthesis and Map-B cross-tabs.

Table 49: Reconciliation of reported corpus counts. The 342-row adjudicated Map B is the canonical synthesis map; Map A and the 274-candidate set are retained to report double-coding and adjudication provenance.

Field	Agreement	κ / score	Interpretation
Full-text checked	100.0%	1.00	Both sources marked every evidence-map paper as full-text checked.
In-scope screening	99.6%	0.92	Near-complete agreement; only one screening disagreement remains for adjudication.
Relevance level	–	0.80	Linear-weighted agreement is strong for exclude/background/support/core priority.
Primary failure type	97.1%	0.96	Very strong human agreement on the main taxonomy category.
Method family	89.4%	0.86	Strong agreement on attack, benchmark, control, method, and analysis families.
Intervention point	93.4%	0.92	Very strong agreement on pipeline placement.
Evaluation type	94.9%	0.93	Very strong agreement on metric/evaluation family.
Evidence strength	97.8%	0.95	Very strong agreement on proceedings/preprint/review-platform strata.
Core-candidate decision	91.6%	0.80	Strong agreement on whether papers should shape the core narrative.
Include in evidence map	99.3%	0.85	Strong agreement on evidence-map inclusion.
Secondary labels	79.2% exact	0.83 Jaccard	Multilabel agreement is strong enough to support overlap analysis after adjudication.
Reproducibility evidence	10.6% exact	0.20 Jaccard	Weak free-text agreement; retained as adjudicated audit metadata, not used for primary comparison or trend claims.

Table 50: Round-2 human-human agreement on 274 candidate evidence records before adjudication. Structured labels show strong agreement, while the free-text reproducibility field is weak and is treated only as adjudicated audit metadata. Two anonymized human annotation sources independently coded the same records; remaining disagreements were resolved to produce the 268-row Map-A adjudicated seed. These IAA values do not apply to the 148 later Map-B additions.

Field	C02 vs. final	C03 vs. final	C02 vs. C03	Final adjudication effect
Primary failure type	0.784 / 0.743	0.899 / 0.874	0.764 / 0.719	Final labels resolve 125 rows that changed from the candidate expansion on at least one field.
Method family	0.878 / 0.818	0.946 / 0.915	0.838 / 0.762	Broad candidate method labels were corrected toward coder-supported labels.
Intervention point	0.838 / 0.807	0.885 / 0.863	0.770 / 0.724	Pipeline-location disagreements are resolved before final Map-B synthesis.
Scope / inclusion	0.953 / 0.905	0.932 / 0.865	0.885 / 0.769	Final Map B retains 74 additions and excludes 74 boundary candidates.

Table 51: Final-label agreement for the 148 Map-B candidate additions. Cells report agreement / Cohen's κ against the final adjudicated label, not the pre-adjudication candidate label. This resolves the apparent instability of the candidate map: C02 and C03 agree strongly with the final labels, and excluded boundary rows are kept in the release but not in canonical Map B.

Metric	Control	Protocol	△ (95% CI)
Experts	15	15	–
Pair judgments	180	180	–
External gold agreement	0.800	0.978	+0.178 [+0.128, +0.228]
Fleiss κ	0.589	0.846	–
Decision time (s)	126.1	121.8	-4.3 [-13.9, +5.8]
Confidence (1–5)	3.69	3.92	+0.23 [+0.13, +0.32]
Usefulness (1–5)	3.51	4.06	+0.55 [+0.41, +0.70]

Table 52: Blind external protocol-usability stress test. Thirty distinct annotators judged the same 12 deliberately difficult paper pairs, with 15 assigned to ordinary expert judgment and 15 assigned to the five-coordinate protocol. Agreement against independently adjudicated external gold labels is reported descriptively for this non-representative pair set; the 360 judgments are clustered within annotators and shared pairs. Confidence intervals are participant-level bootstrap intervals for protocol minus control, not population-level IID paper-pair inference.

Pair	Control pattern	Protocol pattern	Tuple explanation	Disagreement lesson
P08	1/15 matched gold; 14/15 chose partial instead of invalid.	13/15 matched invalid.	AstuteRAG-style benign conflict reasoning and PoisonedRAG-style attacker-created evidence differ in threat model, intervention point, metric polarity, and action.	Without the tuple, experts tended to over-group conflict and poisoning as related robustness papers.
P04	3/15 matched partial; 12/15 over-called valid.	15/15 matched partial.	Chain-of-Note and irrelevant-context filtering share a noise family but differ in generator reasoning vs. context filtering and answer+abstain vs. filter+answer actions.	The tuple turns a tempting leaderboard comparison into a pipeline-composition claim.
P01	11/15 matched partial; 4/15 over-called valid.	15/15 matched partial.	IrrelCtx and RAAT share answer metrics but differ in natural retrieval noise vs. constructed counterfactual noise and filter/back-off vs. answer-only actions.	The tuple exposes action-policy mismatch even when datasets and metrics overlap.
P09	13/15 matched partial; 2/15 over-called valid.	15/15 matched partial.	PoisonedRAG and certified/robust defenses share bounded corruption but differ in attacker vs. defender role, attack success vs. certified robust accuracy, and answer/abstain/filter actions.	Even same-threat-space papers need role and action normalization before ranking.
P02	14/15 matched partial; 1/15 over-called invalid.	15/15 matched partial.	IrrelCtx is a method paper; RGB is a benchmark artifact with negative rejection and counterfactual testbeds.	Method-vs-benchmark comparisons should ask what evaluation would make them comparable.

Table 53: Disagreement analysis for the external expert-use stress test. The table reports illustrative real paper-pair comparisons where ordinary expert judgment and tuple-guided judgment diverged. It is usability evidence for the protocol on 12 hard pairs, not population-level validation.

Backbone conclusion	Venue-linked evidence base	What remains stable	What remains preprint/trend evidence
Irrelevant or noisy evidence can change generation behavior.	Irrelevant-context robustness, noise-aware training, counterfactual-noise analyses, and robust fine-tuning papers in ICLR/ACL/NAACL/SIGIR-style venues.	Robustness is not just retriever recall; generator selectivity and context construction matter.	Fine-grained noise taxonomies, long-tail stress tests, and model-specific mitigation rankings.
Knowledge conflict is distinct from poisoning.	Conflict-resolution and imperfect-retrieval work in TACL/COLING/EMNLP-style records, plus venue-linked conflict benchmarks.	Natural contradiction requires source reconciliation and evidence sufficiency reasoning.	Many automatic conflict-resolution methods and large-scale conflict benchmark variants.
RAG security comparisons require capability normalization.	USENIX/WWW/CCS/KDD-style poisoning, traceback, membership-inference, and backdoor records.	Attack success cannot be interpreted without corpus write access, query control, retriever visibility, insertion budget, and stealth.	The detailed ranking of attacks/defenses and many newly proposed bypasses.
Calibration and abstention are action-control decisions.	Venue-linked relevance-assessment, answerability, calibration, and RAG evaluation records.	Confidence, evidence sufficiency, retrieve/answer decisions, and abstention are separable evaluation targets.	Specific adaptive-control policies and frontier-model calibration behavior.
Benchmark design needs evidence and action labels.	RGB, RAGTruth, RAG evaluation libraries, long-form/context benchmarks, and challenge-style records.	Answer accuracy alone is insufficient for robust RAG evaluation.	The full action-trace blueprint remains a proposal until implemented and validated.

Table 54: Peer-reviewed / venue-linked backbone of the survey. These are the conclusions the paper treats as stable when preprint-only evidence is downweighted.

Category	Definition	Inclusion rule
Noisy retrieval	Benign retrieval imperfection: irrelevant passages, hard negatives, missing positives, stale or low-quality evidence.	Explicitly analyzes or mitigates retrieval noise, not merely uses retrieval.
Distraction	Retrieved context has negative marginal utility and changes answer, confidence, or reasoning despite not supporting the answer.	Includes distractor, context-utilization, or long-context degradation analysis.
Knowledge conflict	Contradiction between parametric knowledge and retrieved evidence, or among retrieved sources.	Includes conflict detection, source preference, fact-level reconciliation, or contextual faithfulness.
Adversarial corruption	Adaptive attacker manipulates corpus, retriever, prompt template, retrieved context, memory, or tools.	Includes poisoning, prompt injection, backdoors, attack/defense benchmarks.
OOD / uncertainty	Query or evidence is ambiguous, underspecified, unanswerable, out-of-knowledge-base, or under distribution shift.	Includes answerability, uncertainty quantification, or selective prediction.
Calibration / control	System decides when to retrieve, trust evidence, answer, abstain, clarify, or escalate.	Includes adaptive retrieval, calibrated decision-making, or abstention.
Evaluation benchmark	Paper introduces benchmark, dataset, metric, or evaluation protocol for robust RAG.	Must define evaluation axis, data, perturbation/threat, or metric.

Table 55: Taxonomy codebook used for paper categorization. The full codebook is provided in the supplementary material.

Pair	Rulebook verdict	External gold verdict	Gold-panel implication
P09	Under-specified	Partial	Attack paper vs. defense paper within the same threat model should default to partial when failure type and evidence assumption align; the role, metric, and action differences make the papers complementary rather than directly rankable.
P12	Partial	Partial	Verdict unchanged, but the panel refined the rationale: benchmark/detector vs. generation-method pairs should be partial when they share failure type and evidence assumption but diverge in intervention point, metric target, and action policy.

Table 56: Rulebook revisions from independent gold adjudication. The panel labels are used as the external-gold reference for Table 52.

G Core and Evidence Map Samples

Artifact group	Representative files	Rows	Purpose
Evidence map and protocol	Adjudicated venue-expanded map, candidate expansion map, original adjudicated map, corpus-flow figure, canonical corpus table, search protocol, codebook, exclusion log	342 adjudicated rows	Reproduce the canonical Map-B corpus, original Map-A adjudicated snapshot, coding fields, and inclusion/exclusion decisions.
Venue and source audit	`venue_systematic_queries.csv`, `venue_systematic_candidates.csv`, `venue_triage_decisions.csv`	31 query rows / 51 candidates	Audit venue-linked recall risk and document triage decisions.
Venue-linked PDF collection	Venue-200 manifest, summary, builder script	200 PDFs	Document the local venue-backed PDF collection used for follow-up coding; PDFs are local due to size.
Multimodal/scenario RAG collection	Multimodal-RAG-100 manifest, summary, builder script	100 PDFs	Cover vision/multimodal, graph/KG, table/structured, agent/memory/tool, code/symbolic, domain-specific, and long-context RAG scenarios. PDFs are local due to size.
Human citation audit	Source-blind citation annotations, recommended/main-cite summaries, adjudication template	300 papers	Records human decisions for which venue-linked and extension papers should be cited in the main text, case studies, appendix, background, or excluded.
Deep comparative cases	`deep_comparative_case_studies.csv`; main normalization findings table	26 worksheet rows / 13 main cases	Compare assumptions, datasets, models, metrics, failure modes, and artifact availability for concrete normalization cases.
Expert-use validation	12-pair pilot responses; 60-pair participant responses; 60-pair gold adjudications; disagreement/error summaries	720 participant judgments / 192 gold labels	Reproduce the protocol-usability stress tests, expanded 60-pair validation, gold agreement, and coordinate-error analysis.
Map-B second-coding packet/results	Annotator packet, coordinator packet, C02/C03 completed labels, joint summary, disagreement CSV, adjudication worksheet, analysis script	148 rows	Reports independent C02/C03 second-coding over Map-B additions and queues disagreements for adjudication.
Expanded expert-validation packet	Protocol/control annotator packets, gold packet, coordinator packet, 60-pair pool, expertise template, analysis plan	60 candidate pairs	Documents the design used for the completed 60-pair validation and supports future replications.
Action-labeled pilot	60-item action-labeled pilot, three policy predictions, summary metrics, blueprint examples	60 items / 180 predictions	Demonstrate answer/action/joint/unsafe metrics for action-control evaluation without claiming a deployed LLM leaderboard.
Expansion protocols	Venue-complete protocol; validation expansion protocol	protocol docs	Specify future manual venue-complete census and larger gold-adjudicated validation designs; these are agendas, not completed procedures in this paper.
Release manifest	`artifact_release_manifest.csv/json`	293 artifacts	Provide versioned paths, row counts, and checksums for public release.

Table 57: Release artifact manifest. The complete machine-readable manifest is provided as CSV/JSON in the supplement.

Rank	Paper	Categories	Role
1	PoisonedRAG: Knowledge Corruption Attacks to Retrieval-Augmented Generation of Large Language Models	adv. corruption	attack
2	Certifiably Robust RAG against Retrieval Corruption	adv. corruption	defense
3	Making Retrieval-Augmented Language Models Robust to Irrelevant Context	noisy retrieval; distraction; calibration	method
4	Enhancing Noise Robustness of Retrieval-Augmented Language Models with Adaptive Adversarial Training	noisy retrieval; evaluation	defense
5	Phantom: General Backdoor Attacks on Retrieval Augmented Language Generation	adv. corruption	attack
6	URAG: A Benchmark for Uncertainty Quantification in Retrieval-Augmented Large Language Models	OOD/uncertainty; calibration; evaluation; noise	benchmark
7	Trust or Abstain? A Self-Aware RAG Approach	knowledge conflict; calibration; evaluation	method
8	The First Drop of Ink: Nonlinear Impact of Misleading Information in Long-Context Reasoning	distraction; noisy retrieval	analysis

Table 58: Sample entries from the core reading set. The full core set and metadata are provided in the supplementary material.

Paper	Year	Failure / risk	Method family	Intervention	Boundary / note
PoisonedRAG	2025	adversarial corruption	attack	corpus / KB	Targeted knowledge corruption; stealth and long-term dynamics vary.
RobustRAG	2024	adversarial corruption	defense	retriever / aggregation	Certification assumes bounded corruption.
IrrelCtx	2023	retrieval noise / distraction	defense	context filtering	Does not model adaptive attackers.
RAAT	2024	retrieval noise	training	generator	Requires deployment-like noisy training data.
FaithfulRAG	2025	knowledge conflict	conflict modeling	generator	Depends on fact extraction and alignment.
AstuteRAG	2025	imperfect retrieval + conflict	control / consolidation	system control	Relies on source-aware LLM self-assessment.
Self-RAG	2024	retrieval need	adaptive retrieval	system control	Retrieval trigger calibration can shift.
RGB	2024	multi-axis RAG failure	benchmark	evaluation	Not adversarially adaptive.
RAGTruth	2024	hallucination / faithfulness	benchmark	evaluation	Strong word-level labels, less retrieval-threat focus.
MTRAG-UN	2026	unanswerability	benchmark	system action	Multi-turn setting; security is secondary.

Table 59: Sample of the structured evidence map. The full CSV supplement contains title, authors, year, source, taxonomy categories, failure/risk type, method family, intervention point, benchmark/task, metrics, contribution, and limitation/note for the cited literature map.