



UNIVERZITA J. SELYEHO  
SELYE JÁNOS EGYETEM

Fakulta ekonómie a informatiky

Gazdaságtudományi és Informatikai Kar

Real-time stock market price data analysis  
using neural networks

Diplomamunka

Bc. Eugen Fekete

ISBN 000-00-000-0000-0

2025, Komárno

UNIVERZITA J. SELYEHO  
SELYE JÁNOS EGYETEM

NÁZOV FAKULTY

Fakulta ekonómie a informatiky  
Gazdaságtudományi és Informatikai Kar

NÁZOV PRÁCE

Analýza údajov o cenách na burze v reálnom čase pomocou  
neurónových sietí

Ide jön az

Študijný program:	Aplikovaná informatika
Tanulmányi program:	Alkalmazott Informatika
Študijný odbor:	Informatika
Tanulmányi szak:	Informatika
Školiteľ:	László Marák, PhD.
Témavezető:	László Marák, PhD.
Školiace pracovisko:	Katedra informatiky
Tanszék megnevezése:	Informatikai Tanszék

Označenie typu práce - Diplomamunka

Bc. Eugen Fekete

ISBN 000-00-000-0000-0

2025, Komárno

---

aláírt témakiírás

# Contents

Ábrák jegyzéke .....	5
Feladatkiírás .....	6
Opis práce .....	7
Abstrakt .....	8
Absztrakt .....	9
Abstract .....	10
<b>Introduction .....</b>	<b>11</b>
<b>1 Elméleti rész .....</b>	<b>12</b>
1.1 Machine Learning .....	12
1.1.1 Types of learning .....	13
1.1.2 Neural networks .....	16
1.2 Mégeggy alfejezet .....	16
1.2.1 AI-alfejezet .....	16
1.2.2 Így szedjük helyesen a C# nyelvet .....	16
<b>2 Gyakorlati rész .....</b>	<b>18</b>
<b>Befejezés .....</b>	<b>19</b>
<b>Resumé .....</b>	<b>20</b>
<b>References .....</b>	<b>21</b>

## List of Figures

1.1	Utasítás felépítése .....	17
-----	---------------------------	----

## Feladatkiírás

## Opis práce

## Abstrakt

ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie,  
ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie, ešte trošku dlhšie

**Kľúčové slová:** klúč1, klúč2, klúč3,



## Absztrakt

A szerző egy feladatot oldott meg. Még egy kicsit hosszabb, még egy kicsit hosszabb, még egy  
kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb,  
még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit  
hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még  
egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit  
hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még  
egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit  
hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még  
egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit  
hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még  
egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb, még egy kicsit  
hosszabb, még egy kicsit hosszabb, még egy kicsit hosszabb,

**Kulcsszavak:** kulcs1, kulcs2, kulcs3

# Abstract

Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer, Little longer, Little longer, Little longer, Little longer, Little longer, Little longer,  
Little longer,

**Keywords:** key1, key2, key3

# Introduction

Machine learning (ML) plays a pivotal role in many areas of modern sciences, whether in industry, healthcare, finance and other fields. It can be used to provide a better service for the users of a search engine, a social media site or a media service provider by learning from the behaviour of the average user, predict stock prices within a specific time interval based on company performance measures and economic data, identify the risk factors for certain health conditions derived from clinical and demographic variables, identify the characters in a handwritten address from a digitized image, and so on. [3]

The main objective of ML is to find rules or patterns in data to achieve certain goals. In the financial world, for example, this might involve extracting useful information from the available data to support or automate investment activities. These activities include observing the market and placing buy or sell orders based on the conclusions drawn. [5]

# 1. Elméleti rész

Lorem ipsum dolor

## 1.1 Machine Learning

The more common way of making a computer do work is to execute a computer program created by a human programmer. This program contains the steps and rules that turn input data into the appropriate answers, called output data. Machine learning mixes up these steps: the machine examines the input and output data, and tries to figure out what the rules should be. A system working like this is said to be trained rather than programmed. It is during the training process that the system identifies these rules by learning the patterns and relationships in the available data. [1]

Learning can be described using the definition provided by the renowned computer scientist and machine learning researcher, Tom Michael Mitchell:

"A computer program is said to learn from experience  $E$  with respect to some class of tasks  $T$  and performance measure  $P$ , if its performance at tasks in  $T$ , as measured by  $P$ , improves with experience  $E$ ." (Tom M. Mitchell, 1997, p. 2)[7]

As an example, a text recognition program, a so called Optical Character Recognition (OCR) software can be presented. The main goal of such a program is to correctly recognize and convert handwritten characters into digitized text. A collection of texts written in various styles is presented to the OCR software. This collection, which the system uses to learn, is called the training set, where each instance is labeled appropriately. The actual machine learning part of the software that learns and makes predictions is called the model. In this example, the task  $T$  is to recognize handwritten characters and correctly classify them, the experience  $E$  is the training set provided for learning and the performance measure  $P$  could be the accuracy of the recognition.

## 1.1 Machine Learning

The example mentioned described a ML system performing supervised learning and solving a classification problem. We talk about supervised learning when a training set with appropriately labeled data is available for the learning process. Two other well known types of learning are unsupervised learning, where no training set with labeled data is available, and reinforcement learning, where a software agent learns rules by interacting with its environment. A classification problem is a problem where each input can be sorted into discrete number of classes. In the previous example each letter in a text can be classified as one of the letters of the alphabet. In contrast, when predicting land prices, we do not expect discrete labels as outputs, so we can't speak of classification problems. This is known as a regression problem and we expect continuous numerical values as outputs, for which a regression algorithm is used.

### 1.1.1 Types of learning

Machine learning systems can be grouped based on the type and amount of supervision received during the training. The most common types of learning are:

- Supervised learning
- Unsupervised learning
- Reinforcement learning

[2]

#### 1.1.1.1 Supervised learning

For supervised learning a training set is available. The training set consists of numerous observations with predefined inputs and a corresponding output. The inputs are called predictors (also called features) and the output is referred to as the response. The observations represents individual data instances. [3]

As an example lets say we want to predict house prices and we have the following training set:

Housing type	Size ( $m^2$ )	Number of rooms	Location	Price (€)
Single-family home	250	4	Bratislava	412000
Single-family home	390	6	Komárno	186000
Apartment	55	2	Trnava	118900
Single-family home	180	4	Košice	375000
...				

Table 1.1: Example training set with arbitrary values

In Table 1.1 each row corresponds to a single house for sale. These houses are the observations and each column (excluding the last column) of the table, which represents the attributes of

the houses, is an input, or a predictor. The last column is the output or the response.

The variables (be that predictor or response) can be described as either quantitative or qualitative. Quantitative variables are numerical values, like the size, number of rooms and price of a house in Table 1.1. Qualitative variables take values in one of  $K$  different categories, like the type of housing in Table 1.1. Problems with a quantitative response are referred to as regression problems, while problems with qualitative a response are referred to as classification problems. [4]

For each predictor measurement vector  $x_i$  (where  $i = 1, \dots, n$ ), there is a corresponding response measurement  $y_i$ . The goal of learning is to fit a model that links the response to the predictors, either to predict the response for future observations or to gain a deeper understanding of the relationship between the response and the predictors. [4]

### Algorithms

CONTINUE: EXPLAIN THE FITTING METHOD USED IN THE FINISHED PROGRAM OR OTHER COMMON METHODS IN DEPTH

#### 1.1.1.2 Unsupervised learning

If we only have a set of unlabeled measurement vectors  $x_i$  (where  $i = 1, \dots, n$ ) with no corresponding  $y_i$  response, we talk about unsupervised learning. Since we don't have an associated response, the goal of unsupervised learning is not to make predictions, but rather to analyze and discover patterns in the available data, which makes often makes working with unsupervised learning algorithms subjective. Furthermore, the lack of a corresponding response makes evaluating the obtained results difficult, as there is no way to check our work without knowing the true answer. This method of learning is often used as part of an exploratory data analysis. For example, a researcher might analyze gene expression levels in patients with certain health conditions to identify relationships or subgroups among the genes. A webstore could perform sales analyses to identify groups of customers with similar purchase histories for targeted advertisements and service customization. Similarly, a search engine might customize search results for users based on the click histories of other users with similar search patterns. [4]

For applications like these, where groups of objects or persons are identified, clustering algorithms are used. Another frequently used method in unsupervised learning is data visualization, which transforms complex, unlabeled data into a format suitable for plotting or further analysis. A related task is dimensionality reduction, where the aim is to simplify data with minimal information loss by performing feature extraction and merging correlated features. Anomaly detection algorithms can be used to detect fraudulent actions or to remove outliers from datasets during preprocessing. [2]

### Algorithms

CONTINUE: EXPLAIN COMMON ALGORITHMS MORE IN DEPTH

#### 1.1.1.3 Reinforcement learning

In reinforcement learning, a virtual object called an agent can make observation of its environment, commit actions resulting in rewards or penalties (usually defined as negative rewards) based on the outcome. [2]

In reinforcement learning, the goal is to figure out a strategy (called a policy) that tells the agent what actions to take in different situations, in order to get the most reward over time. The policy can either be deterministic, where the the agent always picks the same action for a given situation, or stochastic, where the action is chosen probabilistically. The agent needs to learn how actions and rewards are connected, which means it needs to explore the policy space through trial and error. Policy space refers to the set of all possible policies that an agent can adopt. [6]

More precisely, this policy could be a neural network, which takes observations as inputs and outputs the resulting action. Alternatively, the policy could be a genetic algorithm, where each generation consists of multiple policies and new generations of policy offsprings are created based on the genetic algorithm used. Reinforcement learning is commonly used in robotics and smart home appliances like thermostats. We can also find financial securities trading support systems using reinforcement learning. [2]

A good example of a common approach in algorithmic trading can be illustrated by the "Stock Trading Bot using Deep Q-Learning" project created by Prabhsimran Singh. This project demonstrates an automatic stock trading bot using Deep Q-Learning, a type of reinforcement learning algorithm utilizing a deep neural network to approximate the optimal action-value function (also known as Q-function), which determines the best action to take in a given state. [8]. At any moment, the agent observes its current state (an n-day window of stock prices, which shows the stock prices of the last n days), selects and performs a buy/hold/sell action. The next state is evaluated and the agent receives a reward accordingly, based on changes in the portfolio value. The agent then updates its parameters by minimizing the computed loss, which refers to the difference between the target Q-value and the predicted Q-value, with the Q-value defining the optimal state-action (quality) values [2]. [9]

<https://neptune.ai/blog/7-applications-of-reinforcement-learning-in-finance-and-trading>

<https://github.com/selimamrouni/Deep-Portfolio-Management-Reinforcement-Learning>

<https://github.com/doncat99/StockRecommendSystem>

### Algorithms

CONTINUE: EXPLAIN COMMON ALGORITHMS MORE IN DEPTH





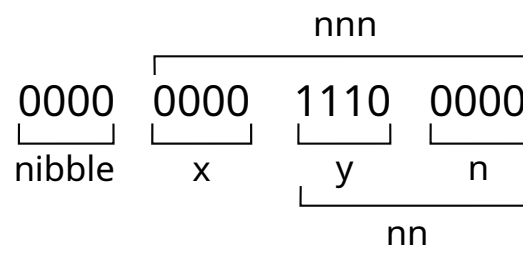


Figure 1.1: Utasítás felépítése

## 2. Gyakorlati rész

---

<sup>1</sup>lábjegyzet

## Befejezés

<sup>2</sup>lábjegyzet

## Resumé

## References

- [1] Francois Chollet. *Deep Learning with Python, Second Edition*. Manning, 2021. ISBN: 9781617296864 (cited on page 12).
- [2] Aurélien Géron. *Hands-On Machine Learning with Scikit-Learn, Keras, and TensorFlow: Concepts, Tools, and Techniques to Build Intelligent Systems, Third Edition*. O'Reilly Media, 2022. ISBN: 9781098125974 (cited on pages 13–15).
- [3] Trevor Hastie, Robert Tibshirani, and Jerome Friedman. *The Elements of Statistical Learning: Data Mining, Inference, and Prediction, Second Edition*. Springer, 2009. ISBN: 9780387848570 (cited on pages 11, 13).
- [4] Gareth James et al. *An Introduction to Statistical Learning: with Applications in Python*. Springer, 2023. ISBN: 9783031387463 (cited on page 14).
- [5] Stefan Jansen. *Machine Learning for Algorithmic Trading: Predictive models to extract signals from market and alternative data for systematic trading strategies with Python, Second Edition*. Packt Publishing, 2020. ISBN: 9781839217715 (cited on page 11).
- [6] Jens Kober, J. Bagnell, and Jan Peters. “Reinforcement Learning in Robotics: A Survey”. In: *The International Journal of Robotics Research* 32 (Sept. 2013), pages 1238–1274. DOI: [10.1177/0278364913495721](https://doi.org/10.1177/0278364913495721) (cited on page 15).
- [7] Tom Michael Mitchell. *Machine Learning*. McGraw-Hill Education, 1997. ISBN: 9780070428072 (cited on page 12).
- [8] Volodymyr Mnih et al. “Human-level control through deep reinforcement learning”. In: *Nature* 518 (Feb. 2015), pages 529–33. DOI: [10.1038/nature14236](https://doi.org/10.1038/nature14236) (cited on page 15).
- [9] Prabhsimran Singh. *Stock Trading Bot using Deep Q-Learning*. <https://github.com/pskrunner14/trading-bot>. 2018. (Visited on 01/05/2025) (cited on page 15).

ISBN 000-00-000-0000-0

