


Title: Database Assignment 2

Your Name: Jack Saunders

Date: 9/22/2026

Jack Saunders

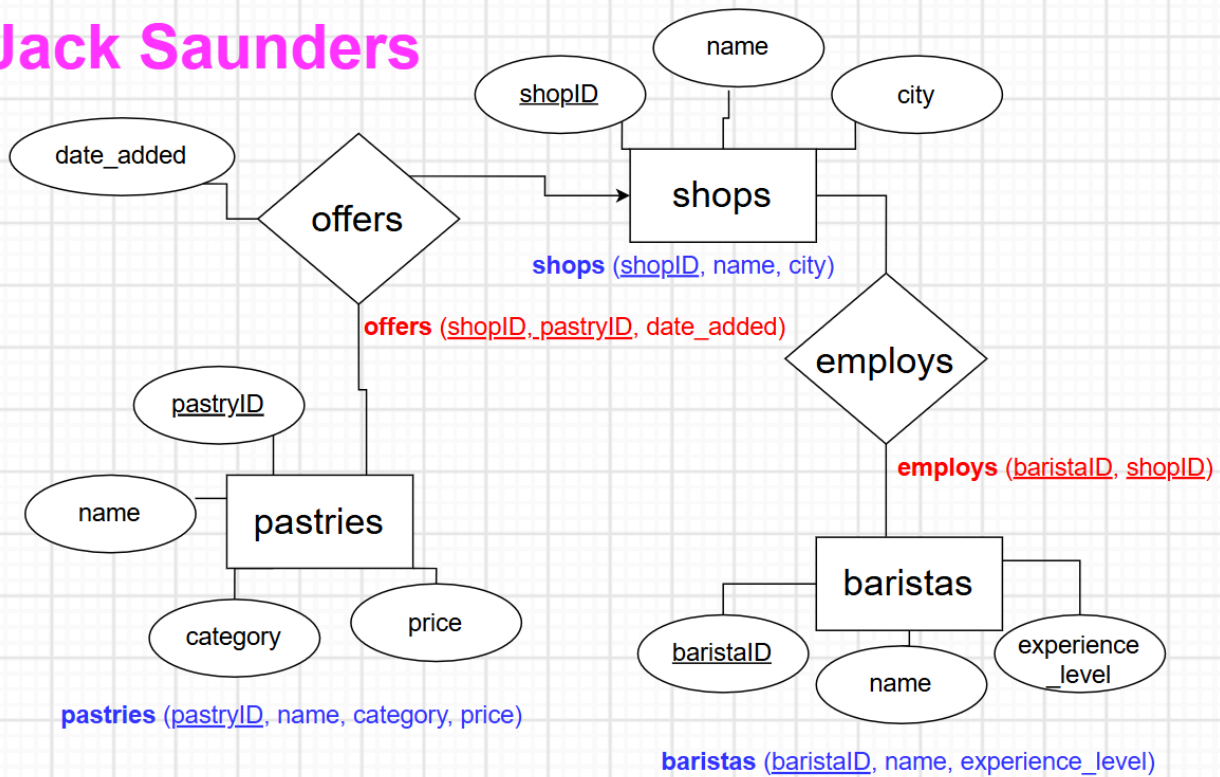

Assumptions:

A) **offers** is a one-to-many relationship due to each shop offering two different pastries

B) How can any barista get to work on time?!?! They are working across America according to **employs**! They must be teleporting!

1. Find the average price of pastries for each category from the pastries table

Line 11 shows the restaurant name and **average food price** per restaurant.

```
Select category, avg(price)
From pastries
Group by category;
```

```
10      -- 1) Find the average price
11 •    Select category, avg(price)
12      From pastries
13      Group by category;
14
```

Result Grid |   Filter Rows:

	category	avg(price)
	Pastry	4.666666666666667
	Muffin	3.625
	Bakery	4.25
	Scone	3.85
	Breakfast	8
	Cake	3.875

Answer:

La Trattoria 13.5000

2. Find the total number of baristas at each experience level from the baristas table

This is nearly identical to the first question, except line 18.

```
Select experience_level, count(*)  
as "# baristas"  
From baristas  
Group by experience_level;
```

```
16 • Select experience_level, count(*) as "# baristas"  
17 From baristas  
18 Group by experience_level;
```

Result Grid |  Filter Rows: | Export:  | Wrap Cell (

experience_level	# baristas
Junior	2
Senior	2
Mid-Level	2

Answer:

3. Count the total number of shops located in each city from the shops table

This

```
Select city, count(*) as "# shops"
From shops
Group by city;
```

```
21 • Select city, count(*) as "# shops"
22 From shops
23 Group by city;
```

Result Grid |   Filter Rows: | Export

city	count(*)
Seattle	1
Portland	1
Austin	1
Chicago	1
Denver	1
Boston	1

Answer:

4. Find the maximum price among pastries for each category from the pastries table

Line 32

```
Select category, max(price)
From pastries
group by category;
```

Answer:

5. Count how many pastries have been added by each shop using the shopID column from the offers table

Line Select shopID as “shop”, count(shopID) as “# pastries” From offers Group by shopID;	Answer:
--	---------

6. Find the name, category, and price of any pastry whose price matches the maximum price within its category

Line select max(price), category from pastries group by category;	Answer:
--	---------

7. Find the unique shop IDs from the offers table that have offered at least one pastry whose price is strictly greater than the overall average price of all pastries

Line Select pastries.pastryID	Answer:
--------------------------------------	---------

From pastries where price > (select avg(price) From pastries);	
---	--

8. Find the shop ID and pastry ID for the records in the offers table that have the earliest **date_added** (minimum date)

Line Select * From offers Having date_added <= all (select * From offers);	Answer:
---	----------------

9. Find the shop ID(s) that offer the highest number of pastries, utilizing a subquery to evaluate the maximum count per shop

Line Select shopID, count(shopID) as “# pastries” From offers Group by shopID Having count(*) >= (select count(*) From offers Group by shopID);	Answer:
---	----------------

10. Find the names of baristas who work at shops located in 'Seattle' using nested subqueries

Line	
------	--

```
Select name
From baristas
Where baristas.shopID =
  (Select employs.shopID
   From employs
   Where employs.shopID =
     (Select shop.shopID
      From shops
      Where city = "Seattle"));
```

Answer: