

Raptor-Hunty

Stealth Recon & Vulnerability Assessment Framework

→[ls]

List the directory contents to locate the target folder.

```
(root@RedRaptor-Hunt)-[~]
# ls
AuRLepFA.html      lab_log.txt      nu.rc  lab_menu.rc  run.sh
db_status          lab_msf         putty_0429.exe
debiانشpass.txt    les.sh          putty.exe
debiانشshusers.txt linux-exploit-suggester-2.pl
definitions.zip     linux-exploit-suggester-2.pl.1
Desktop            Metalbin
dirtycow           msi_troyano
Documents          Music
Downloads          myself_troyano
freeFTPDService.exe password_041326.txt
GhostPack          payfile_macro.vba
hijackme.dll       Pictures
hijackme.dll.c.save printer_meterpreter.elf
hola_042126.exe    program.exe
Projects
Public
putty_0429.exe
putty.exe
QRadar
Raptor
reporte_lab.xml
result_system_windw.txt
resumen_lab.txt
security_ojo_update.exe
systeminfo.txt
Templates
troya_042026_elf
troy_class-servicio.exe
unicorn
update_final.exe
user_041326.txt
userssh.txt
Videos
wes.py
Wind_042226_LPE.exe
wind08_042926.ps1
Wind8_Class_042326_LPE.exe
Wind8_SHIKA_042326_LPE.exe
Wind_MINERIA_042126_1_LPE.exe
windows_dll.c
ZkfiolXa.jpeg
zphisher
```

→[cd]

To access the directory containing the program

```
(root@RedRaptor-Hunt)-[~/Raptor]
# ls
authorized_users.txt  lab_menu.rc  lab_menu.rc.sha512  run.sh
```

→[cat]

Verify its content beforehand

1. authorized_users.txt

```
(root@RedRaptor-Hunt)-[~/Raptor]
# cat authorized_users.txt
root
```

NOTE: Whitelist of system usernames permitted to run the tool.

II. [lab_menu.rc]

```
(root@RedRaptor-Hunt)-[~/Raptor]
# cat lab_menu.rc
<ruby>
require 'ipaddr'

def valid_ip_or_cidr?(s)
  begin
    IPAddr.new(s)
    true
  rescue
    false
  end
end

lhost = ENV['LHOST'].to_s
rhosts = ENV['RHOSTS'].to_s
os_mode = ENV['OS_MODE'].to_s
noise_mode = ENV['NOISE_MODE'].to_s
report_file = ENV['REPORT_FILE'].to_s
nmap_opts = ENV['NMAP_OPTS'].to_s

unless valid_ip_or_cidr?(lhost)
  print_error("LHOST inválido: #{lhost}")
  exit
end

unless valid_ip_or_cidr?(rhosts)
  print_error("RHOSTS inválido: #{rhosts}")
  exit
end

selected_os = case os_mode
when '1' then 'windows'
when '2' then 'linux'
when '3' then 'macos'
when '4' then 'android'
else 'auto'
end

selected_noise = case noise_mode
when '1' then 'noisy'
when '2' then 'semi-noisy'
when '3' then 'quiet'
```

NOTE: Metasploit RC file with embedded Ruby. Performs scanning and reporting.

III. [lab_menu.rc.sha512]

```
(root@RedRaptor-Hunt)-[~/Raptor]
# cat lab_menu.rc.sha512
92251dc6e71dc0bd30b5a2d740699902e0393b9f983db7247f4150104c5ac91c4aaaf306393184969e2f1e5e3a25f2c08c5d610f45eabf916c618b5
ab_menu.rc
```

NOTE: SHA-512 integrity hash of lab_menu.rc. Auto-generated on setup.

IV. [run.sh]

```
(root@RedRaptor-Hunt)-[~/Raptor] rc lab_menu.rc.sha512 run.sh
# cat run.sh
#!/bin/bash
set -euo pipefail

SCRIPT_DIR="$(cd "$(dirname "${BASH_SOURCE[0]}")" && pwd)"
RC_FILE="$SCRIPT_DIR/lab_menu.rc"
HASH_FILE="$SCRIPT_DIR/lab_menu.rc.sha512"
AUTH_FILE="$SCRIPT_DIR/authorized_users.txt"
DESKTOP_DIR="$HOME/Desktop"
REPORT_FILE="$DESKTOP_DIR/raptor_report.txt"
LOG_FILE="$DESKTOP_DIR/raptor_log.txt"

export LC_ALL=C

center_text() {
    local text="$1"
    local cols
    cols=$(tput cols 2>/dev/null || echo 80)
    local len=${#text}
    local pad=$(( (cols - len) / 2 ))
    (( pad < 0 )) && pad=0
    printf "%*s%s\n" "$pad" "" "$text"
}

show_banner() {
    clear
    echo -e "\e[31m"
    center_text " "
    center_text " / _)"
    center_text " .-^^-^-"
    center_text " /      \\"
    center_text "|        |"
    center_text " \\__ _/"
    center_text "Raptor-Hunty Modo Furtivo"
    center_text "Andres LB"
    echo -e "\e[0m"
    echo
}
}
```

NOTE: Main entry point (Bash). Handles UI, validation, and launches msfconsole.

2. Interactive Session

I. →[./run.sh]

```
(root@RedRaptor-Hunt) - [~/Raptor]
# ./run.sh
```

NOTE: Run the tool.

II. →[Language Selection]

The screenshot shows a terminal window titled "root@RedRaptor-Hunt: ~/Raptor". The menu bar includes "Session", "Actions", "Edit", "View", and "Help". The main area displays a red ASCII art logo of a raptor's head. Below it, the text reads "Raptor-Hunt Mode Furtivo" and "Andres LB". Further down is the separator "=== Laboratorio Metasploit ===". At the bottom left, there is a list: "1) Español", "2) English", followed by a prompt ">" and a cursor.

NOTE: place the number 2

III. →[ip a] para saber la ip de kali linux

```
inet 192.168.10.100/24
```

IV. →[Set LHOST and Network range]

```
place the number LHOST: 192.168.10.100
```

```
place the number Network range: 192.168.10.100/24
```

V. →[Choose OS:]

place the number: 5) Automatic

VI. →[Choose noise level]

place the number: 2) Semi-noisy

```


valid_lft forever preferred_lft forever
A: fe80::208:1ac:1b1:80 brd ff::ff:ff:ff
link/ether 12:34:56:78:90 brd ff:ff:ff:ff:ff:ff
inet 192.168.1.100/24 brd 192.168.1.255 scope global docker0
    valid_lft forever preferred_lft forever

root@kali:~/Raptor# ./Raptor
[*] Nmap -sS -O -Pn 192.168.1.100/24
Starting Nmap 7.99 ( https://nmap.org ) at 2026-05-26 02:02
Nmap scan report for 192.168.1.100
Host is up (0.00076s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    OPEN  SSH
Your local IP (LHOST): 192.168.10.100
Network range (RHOSTS, e.g. 10.0.2.0/24): 192.168.10.100/24
Choose OS: 1) Windows 2) Linux 3) macOS 4) Android 5) Automatic (C)
> 5
Choose noise level: 1) Noisy 2) Semi-noisy 3) Quiet
> 1
[*] OS CPE: cpe:/o:linux:linux_kernel:4 cpe:/o:linux:linux_kernel:5 cpe:/o:mikrotik:routeros

```




VII. →[Starting]

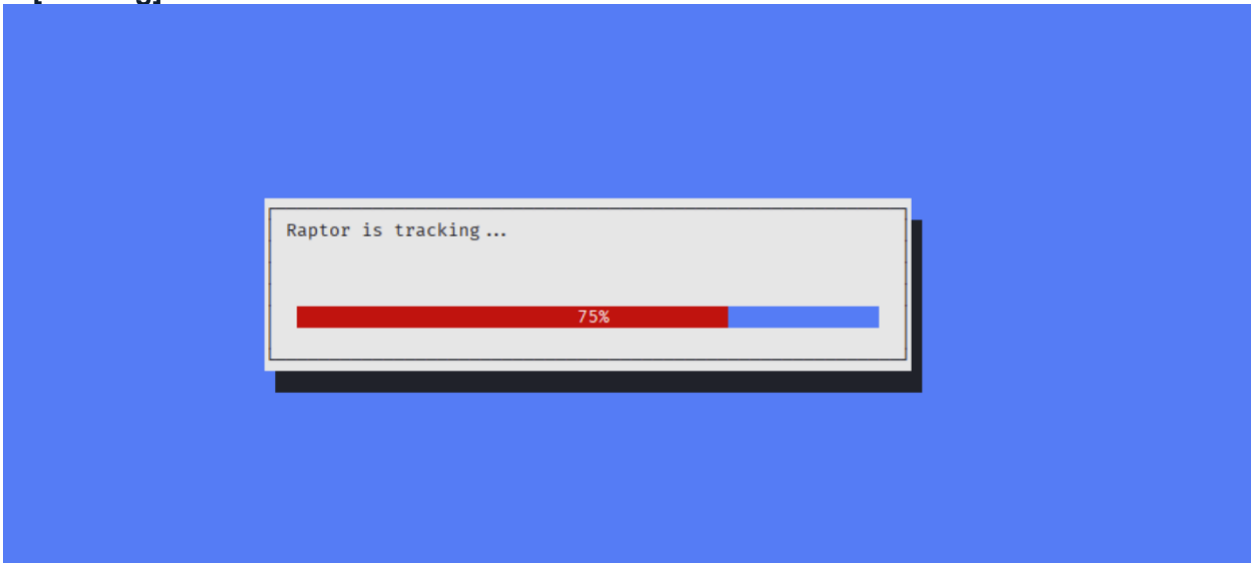

3. Output Files

File	Location	Content
raptor_report.txt	~/Desktop/	Structured summary of hosts, services, and vulnerabilities.
raptor_log.txt	~/Desktop/	Full msfconsole session output for review.

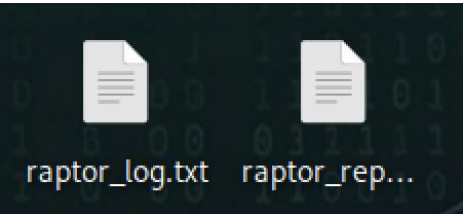

→[cat]

Verify its content beforehand

```
(root@RedRaptor-Hunt)-[~/Desktop]
# ls
04-14-2026..txt '2026-03-26 12:36:05' class_04_13_26.txt home raptor_log.txt raptor_report.txt 'scrips NOTES'

(root@RedRaptor-Hunt)-[~/Desktop]
# cat raptor_log.txt
[*] Processing /root/Raptor/lab_menu.rc for ERB directives.
[*] resource (/root/Raptor/lab_menu.rc)> Ruby Code (918 bytes)
[*] OS: auto
[*] Noise: semi-noisy
[*] LHOST: 192.168.10.100
[*] RHOSTS: 192.168.10.100/24
[*] Nmap: -sV -O --osscan-limit -T3 --script vuln
resource (/root/Raptor/lab_menu.rc)> spool /tmp/raptor_msf.log
[*] Spooling to file /tmp/raptor_msf.log...
resource (/root/Raptor/lab_menu.rc)> db_status
[*] Connected to msf. Connection type: postgresql.
resource (/root/Raptor/lab_menu.rc)> hosts -d
[-] Invalid host parameter, .

Hosts
=====
address      mac      name      os_name      os_flavor  os_sp  purpose  info  comments
-----
192.168.1.222      PrinterJetDirect9100.myquest.hp9100.org  Debian 13.5 (Linux 6.12.88+deb13-amd64)  printer  time export of a
192.168.10.222

(root@RedRaptor-Hunt)-[~/Desktop]
# cat raptor_report.txt
===== RAPTOR REPORT =====
Date: 2026-05-26 02:36:55 -0700
LHOST: 192.168.10.100
RHOSTS: 192.168.10.100/24
OS: 5
NOISE: 2

Hosts:
- 192.168.10.100

Services:
```