



Intro to Competitive Programming - Quiz

Hosted by KJSCE CodeCell


What is the result of `int 5 / 2` in C++?

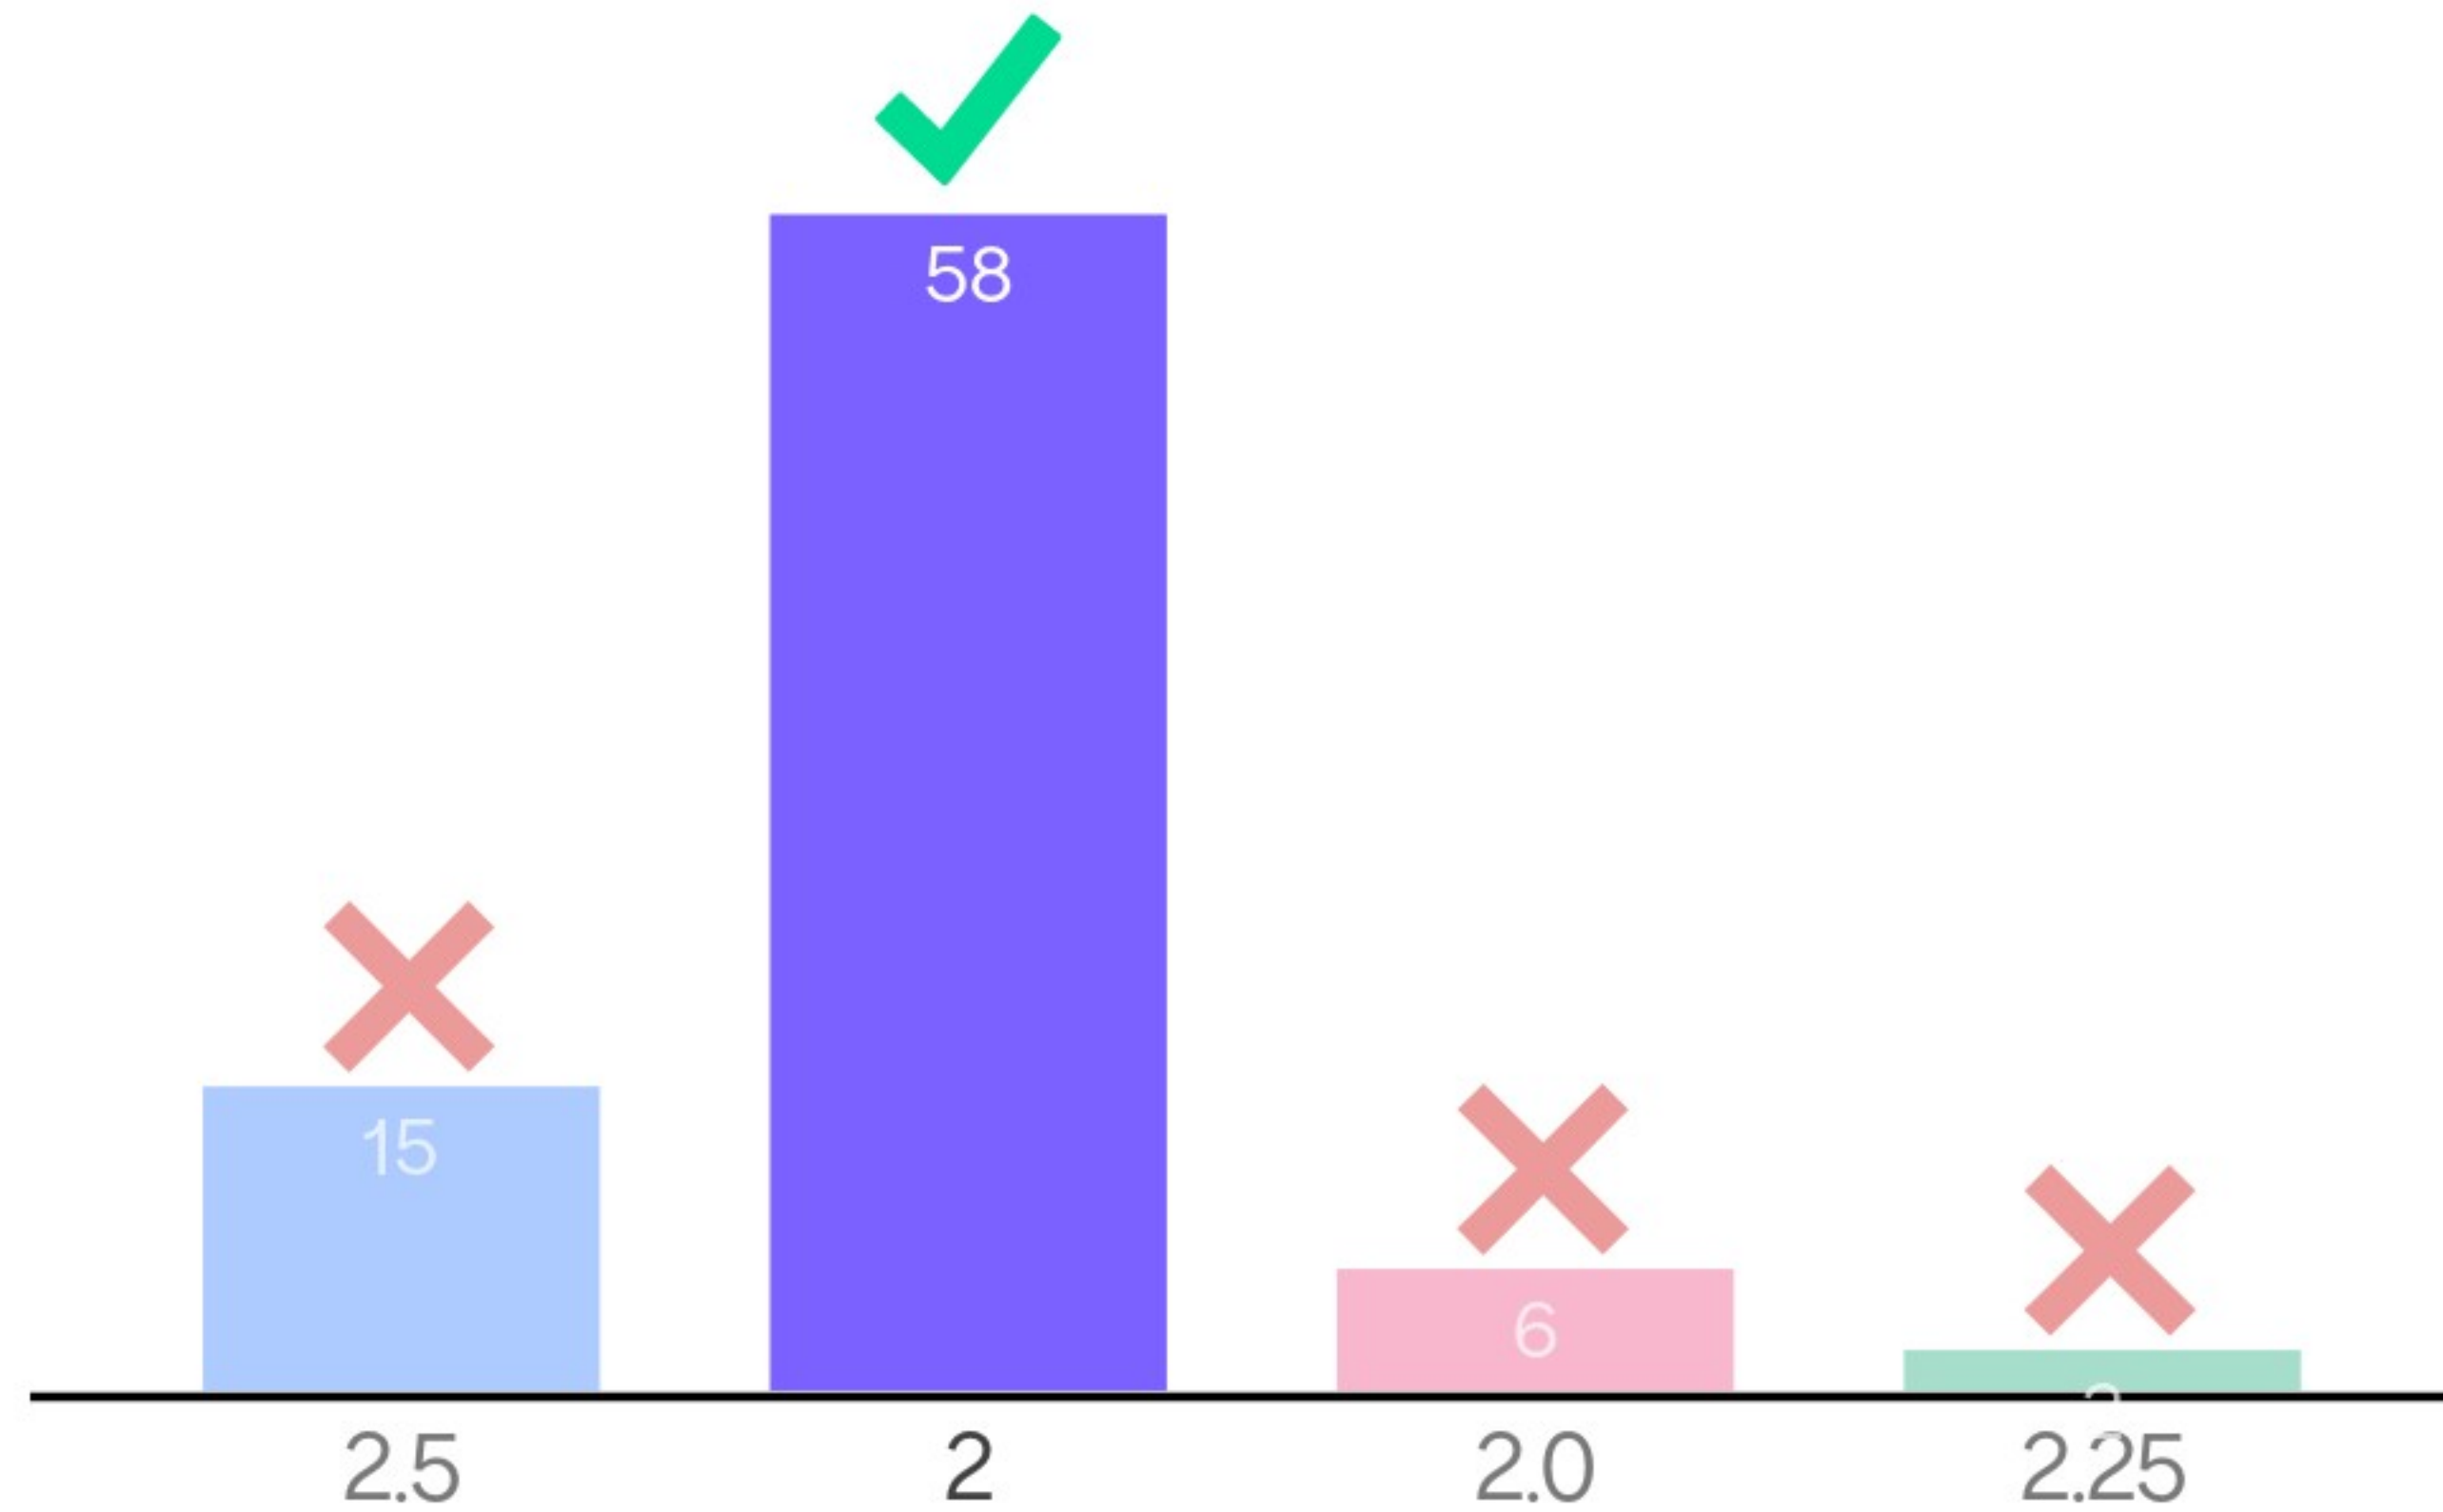


Leaderboard

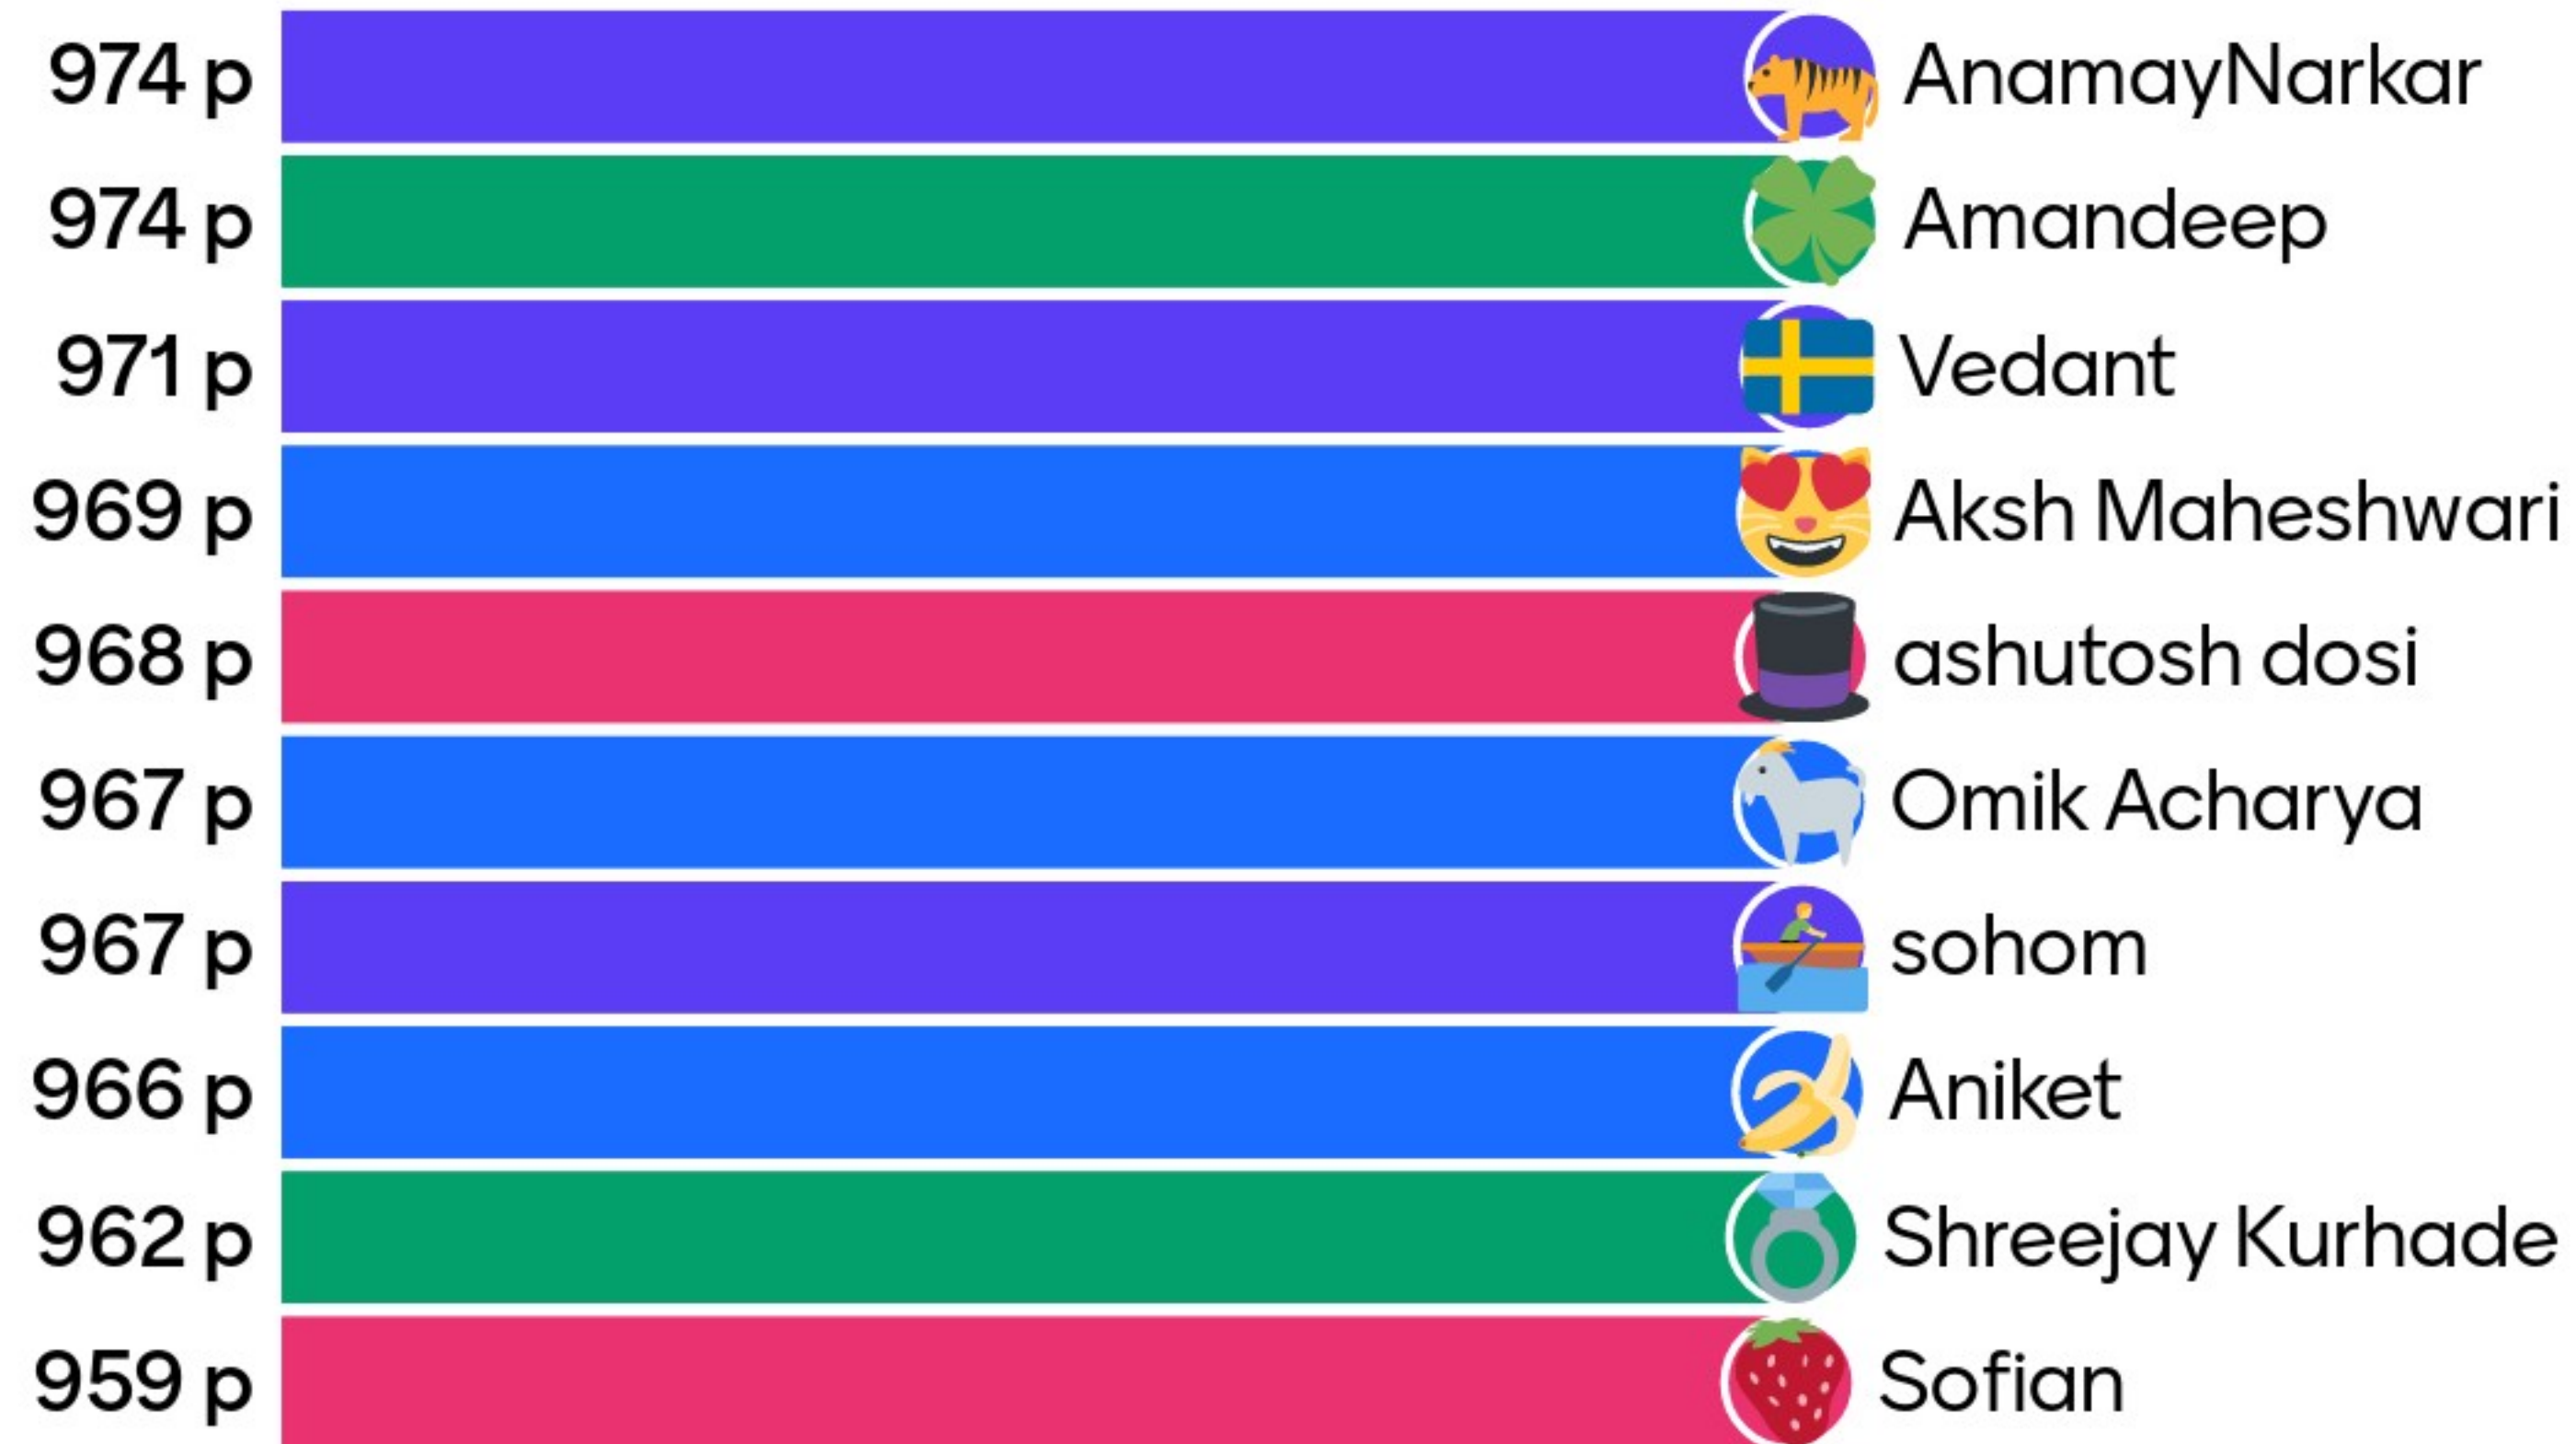


Why do you use the "break" keyword in C++?

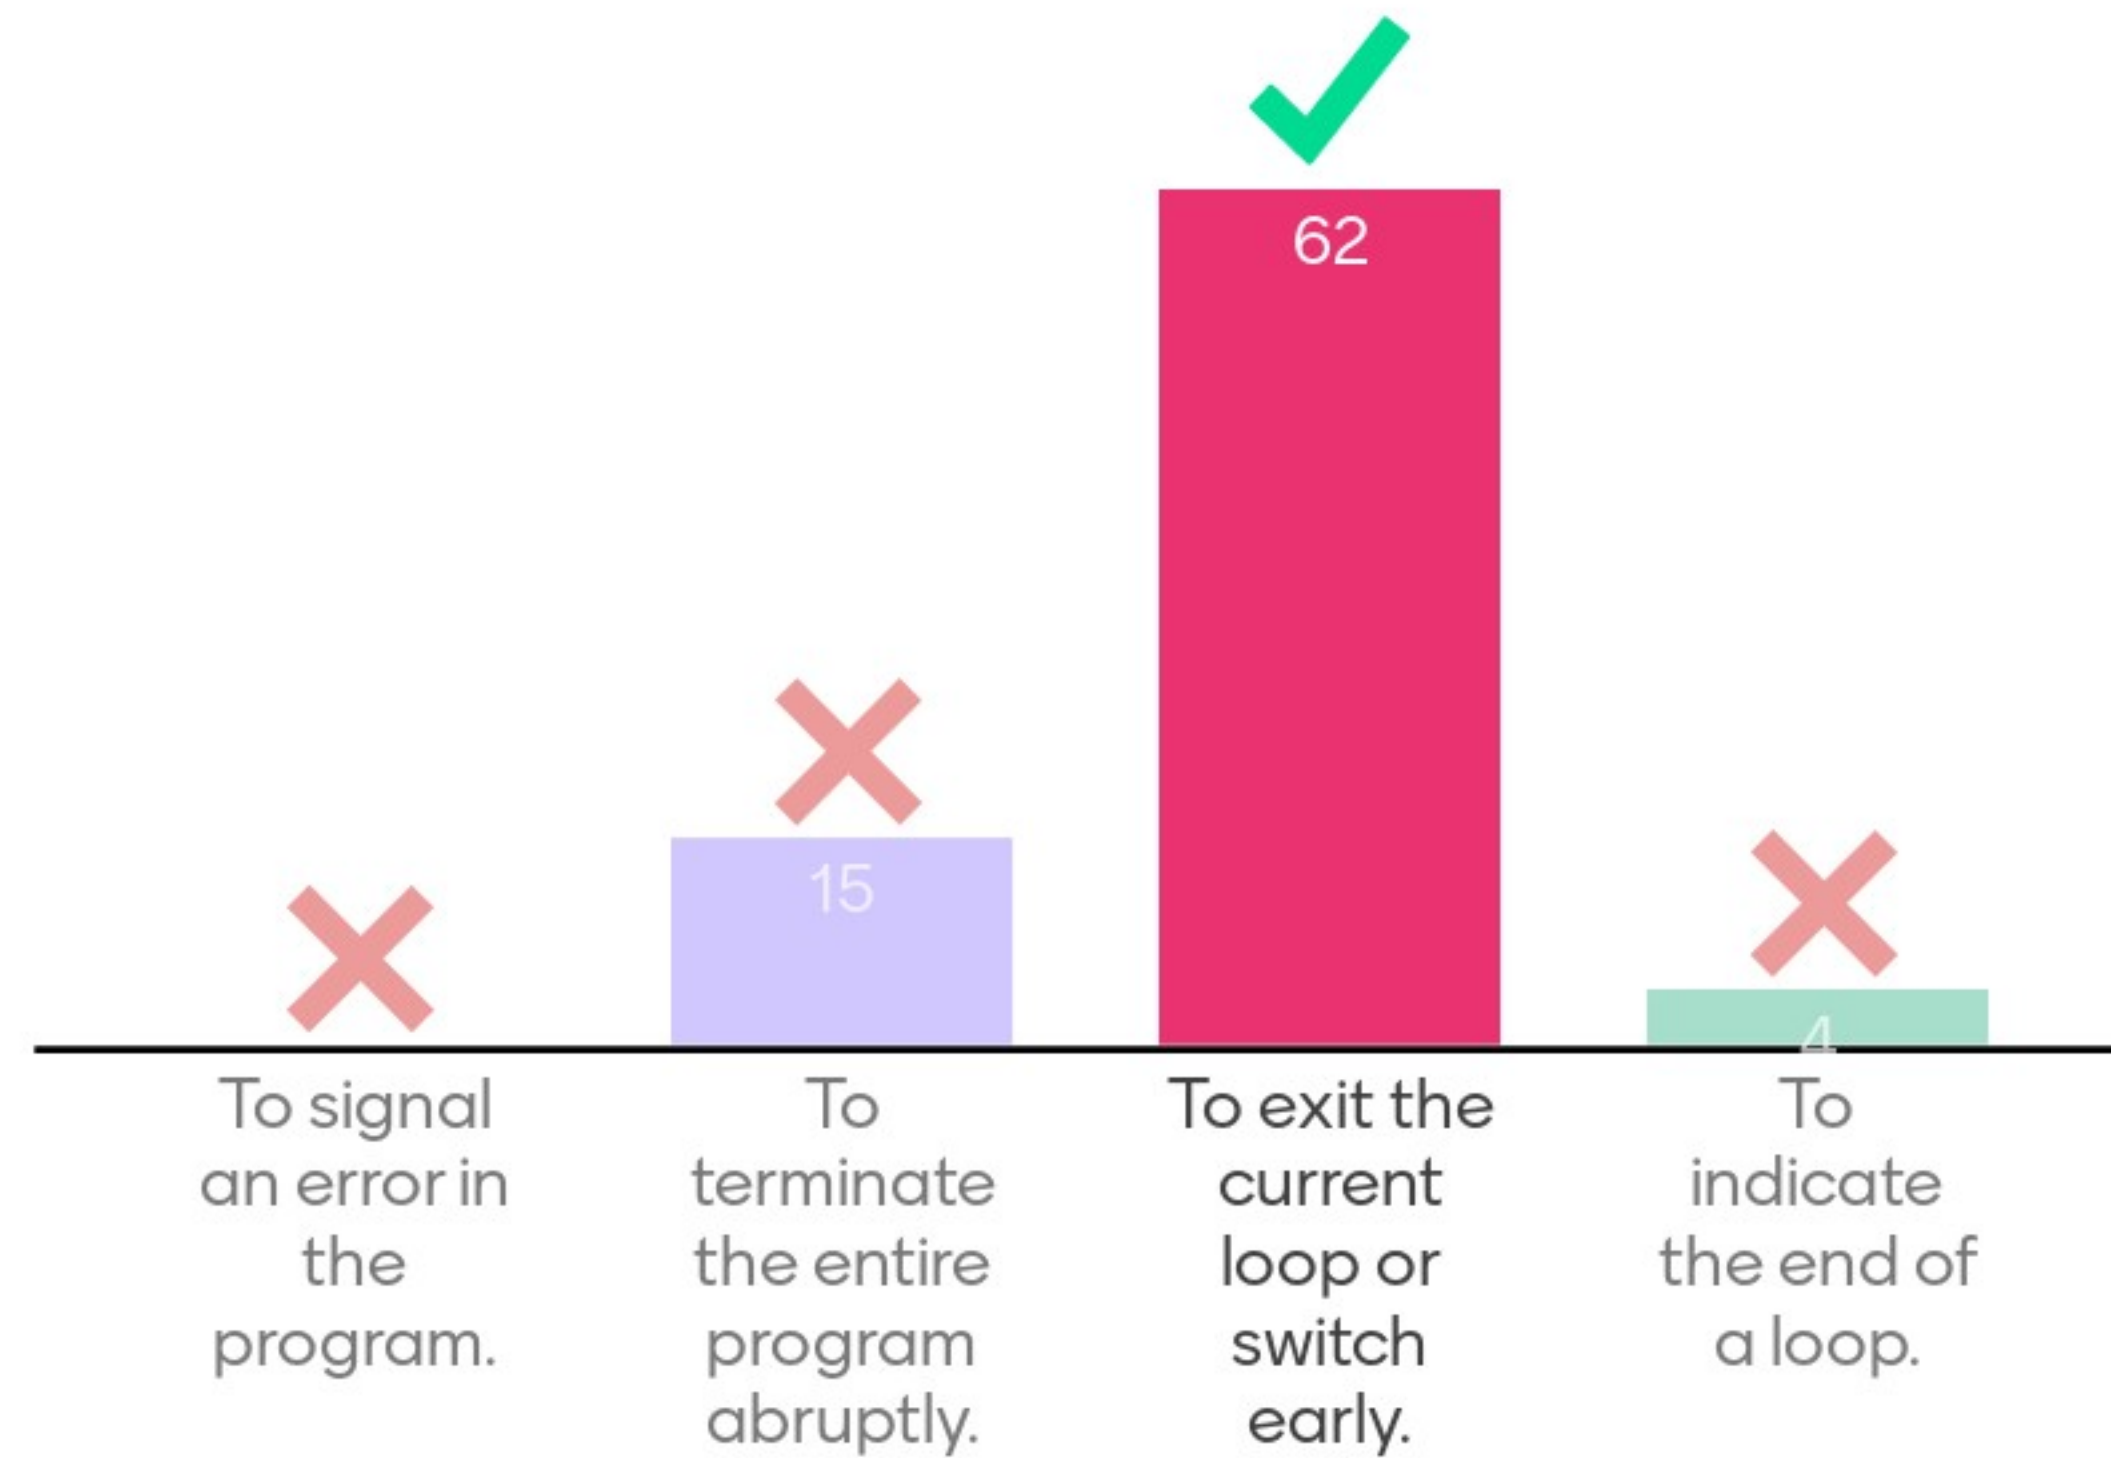


Leaderboard

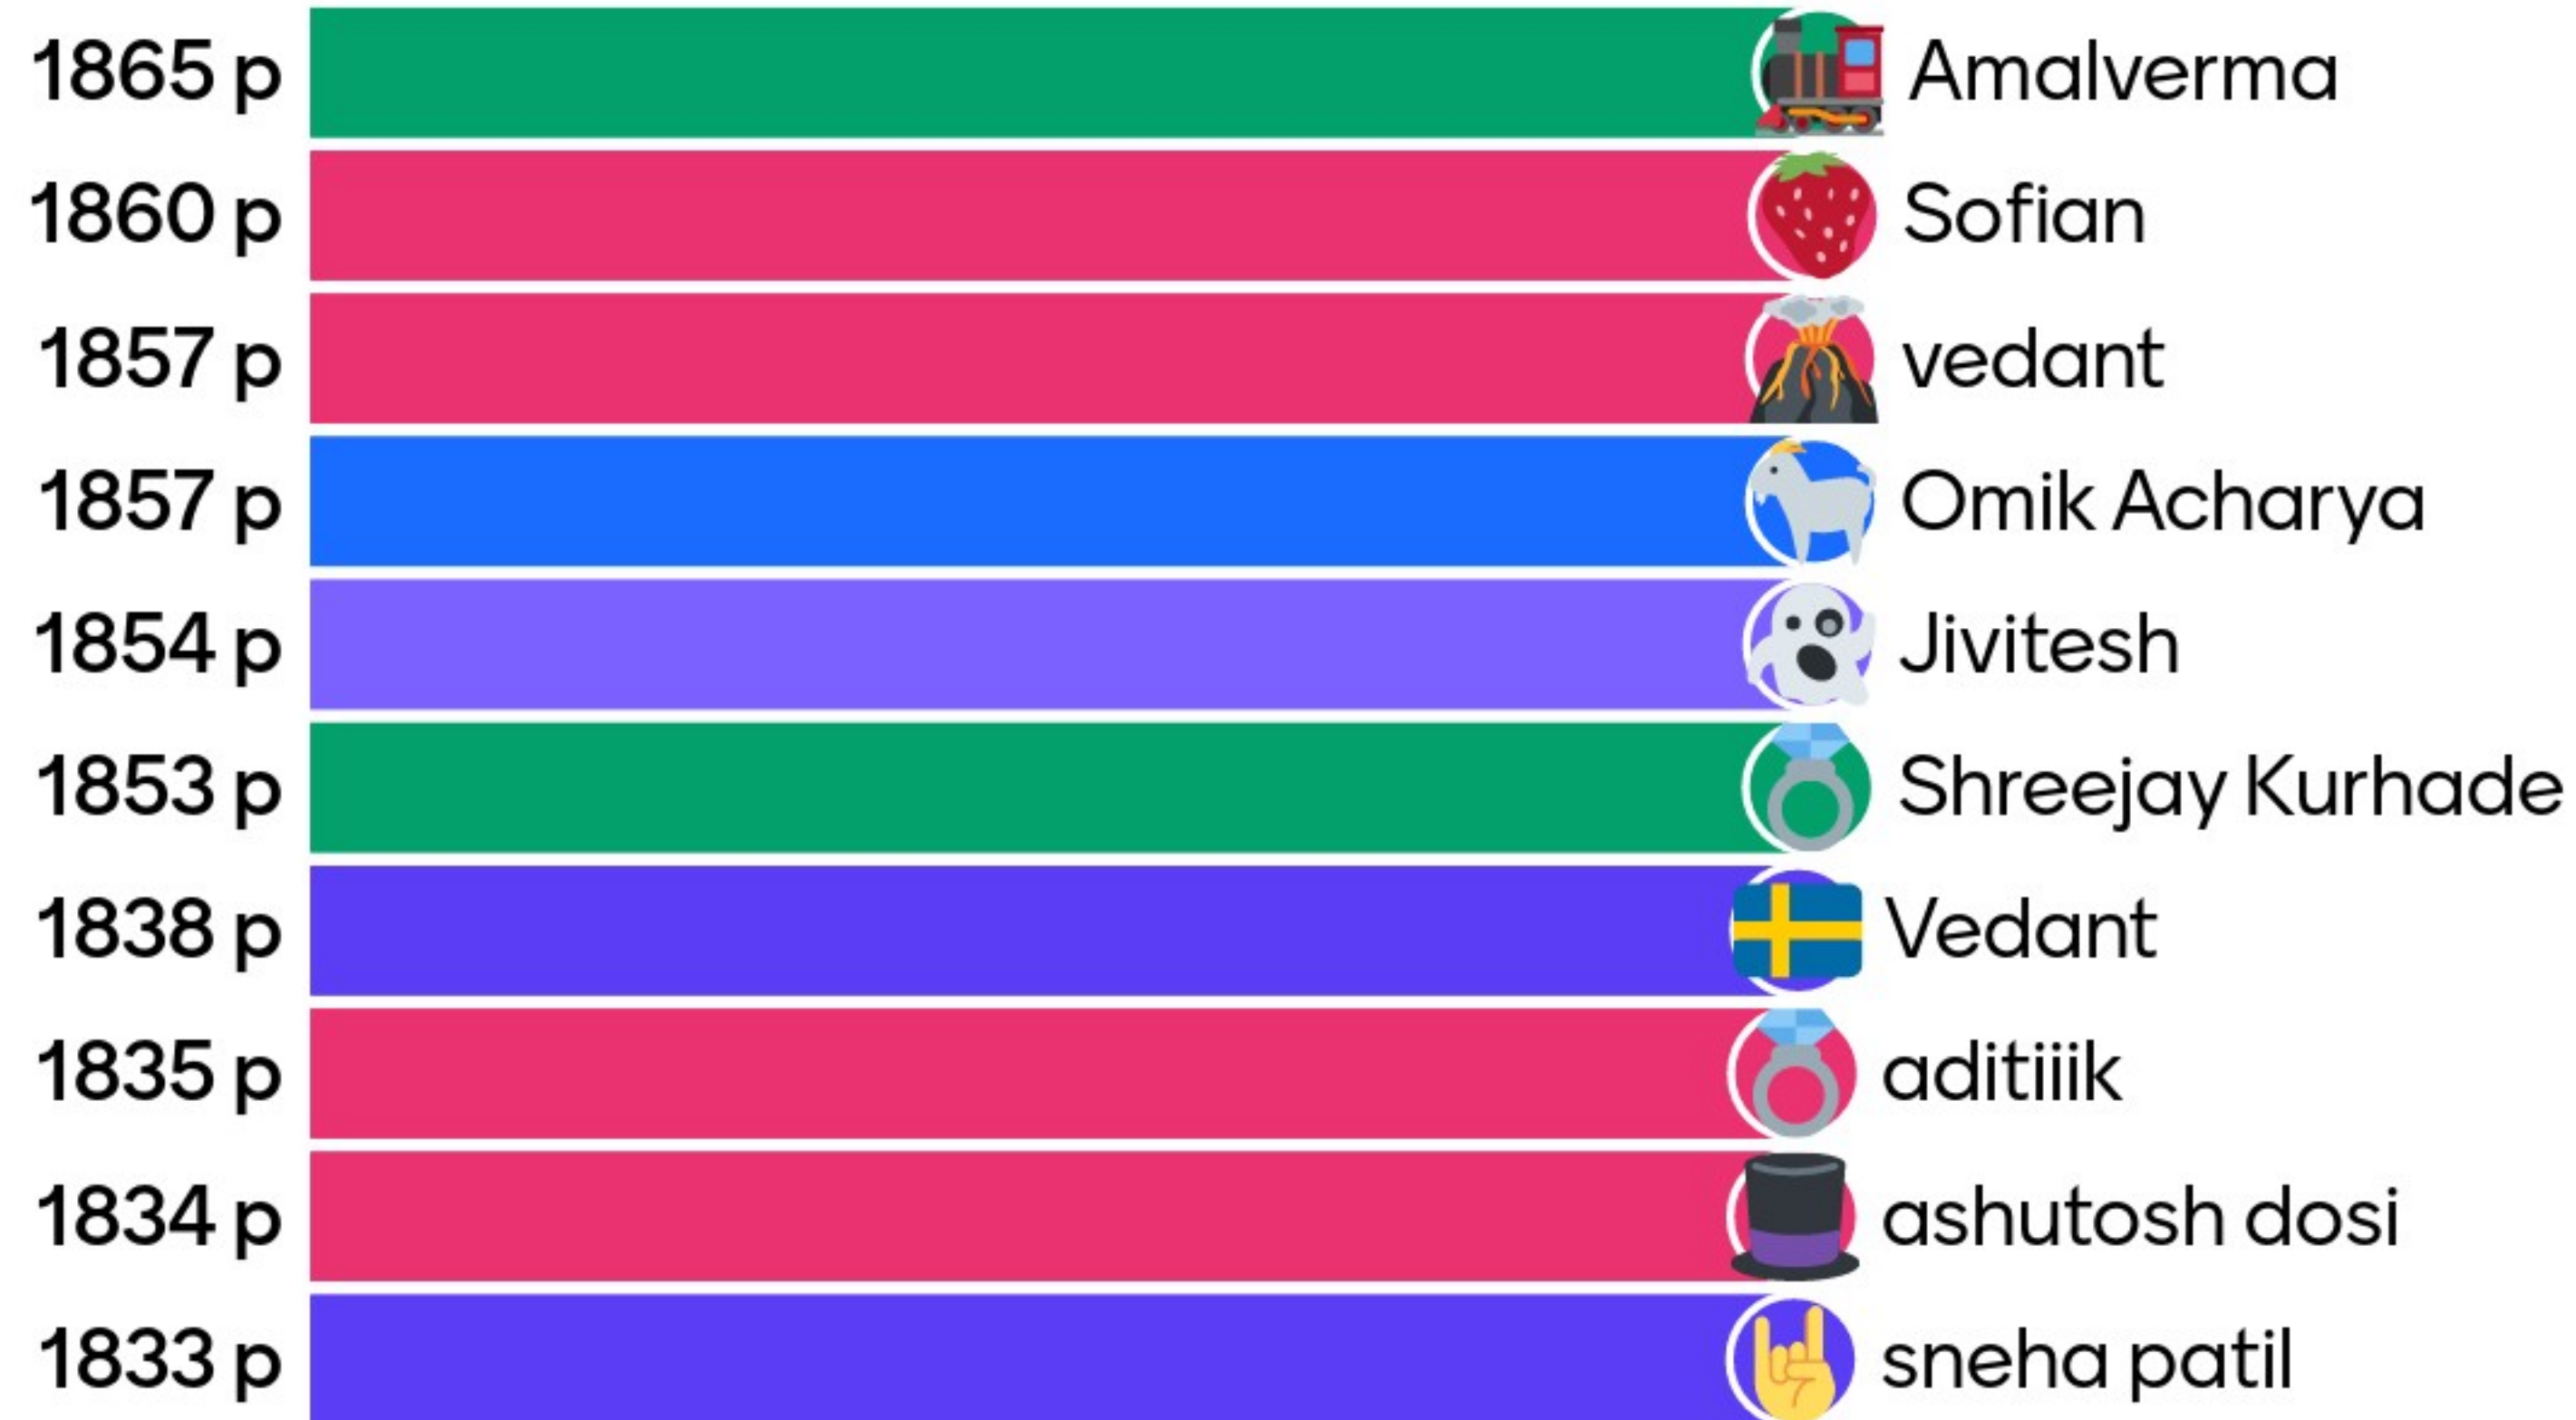


Which loop is used for executing code a specific number of times in C++?

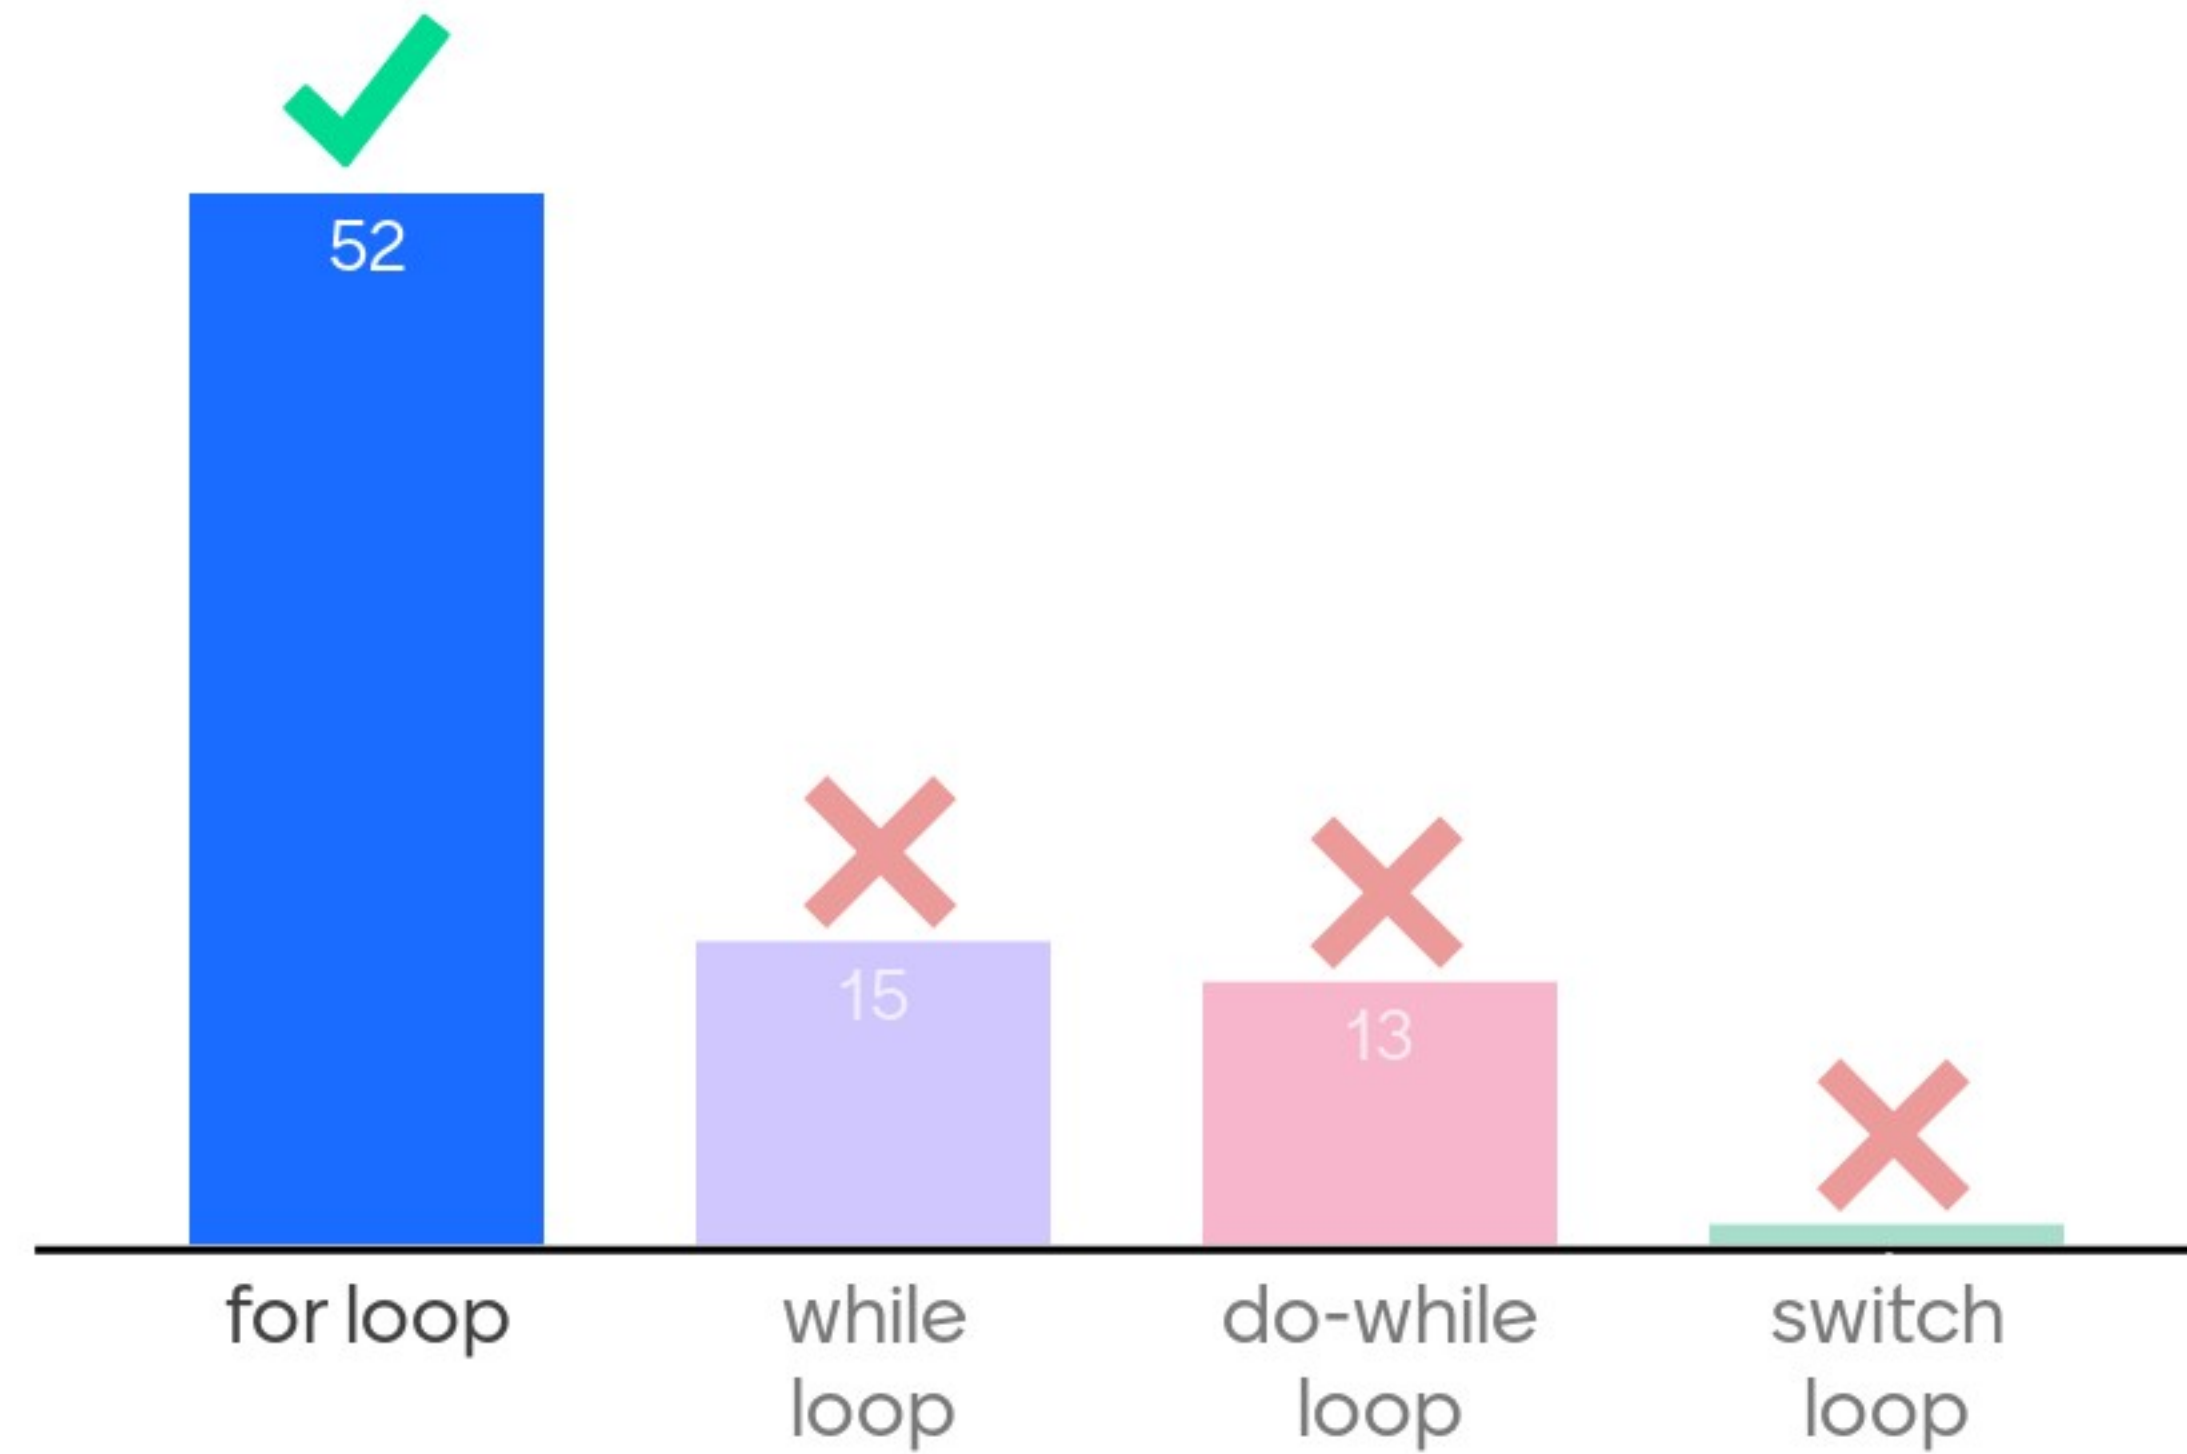


Leaderboard

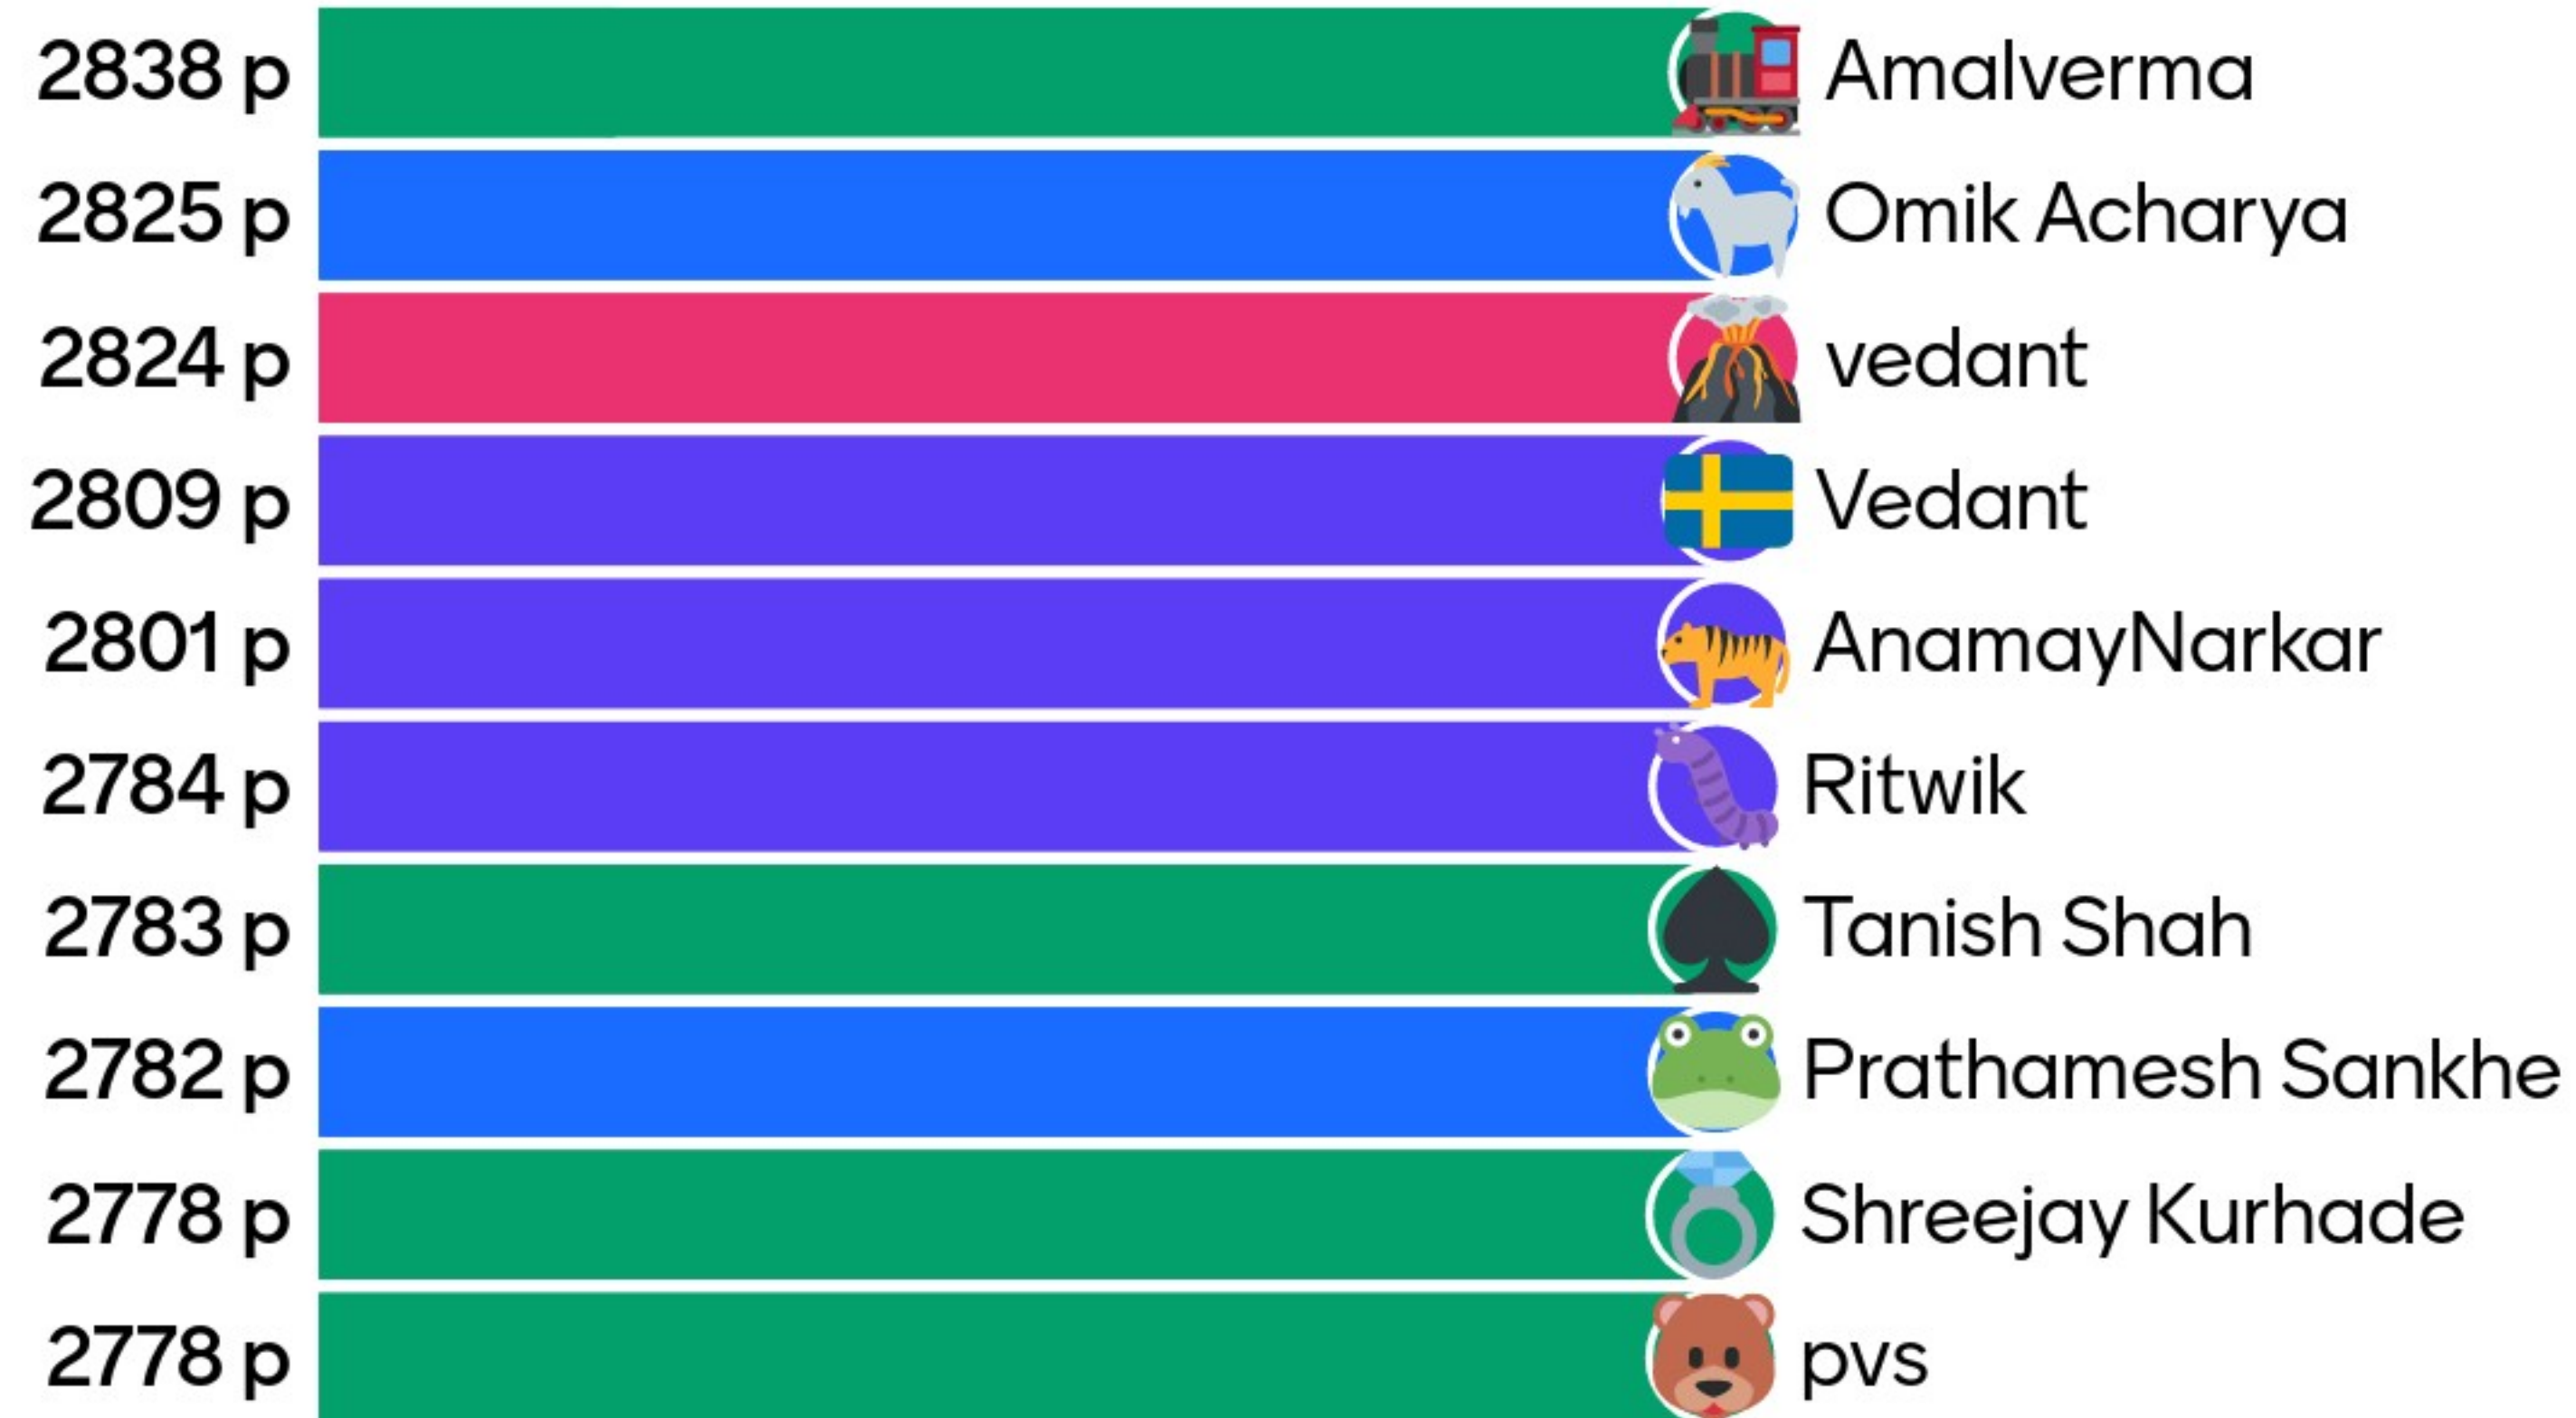


How do you declare a pointer to an integer in C++?

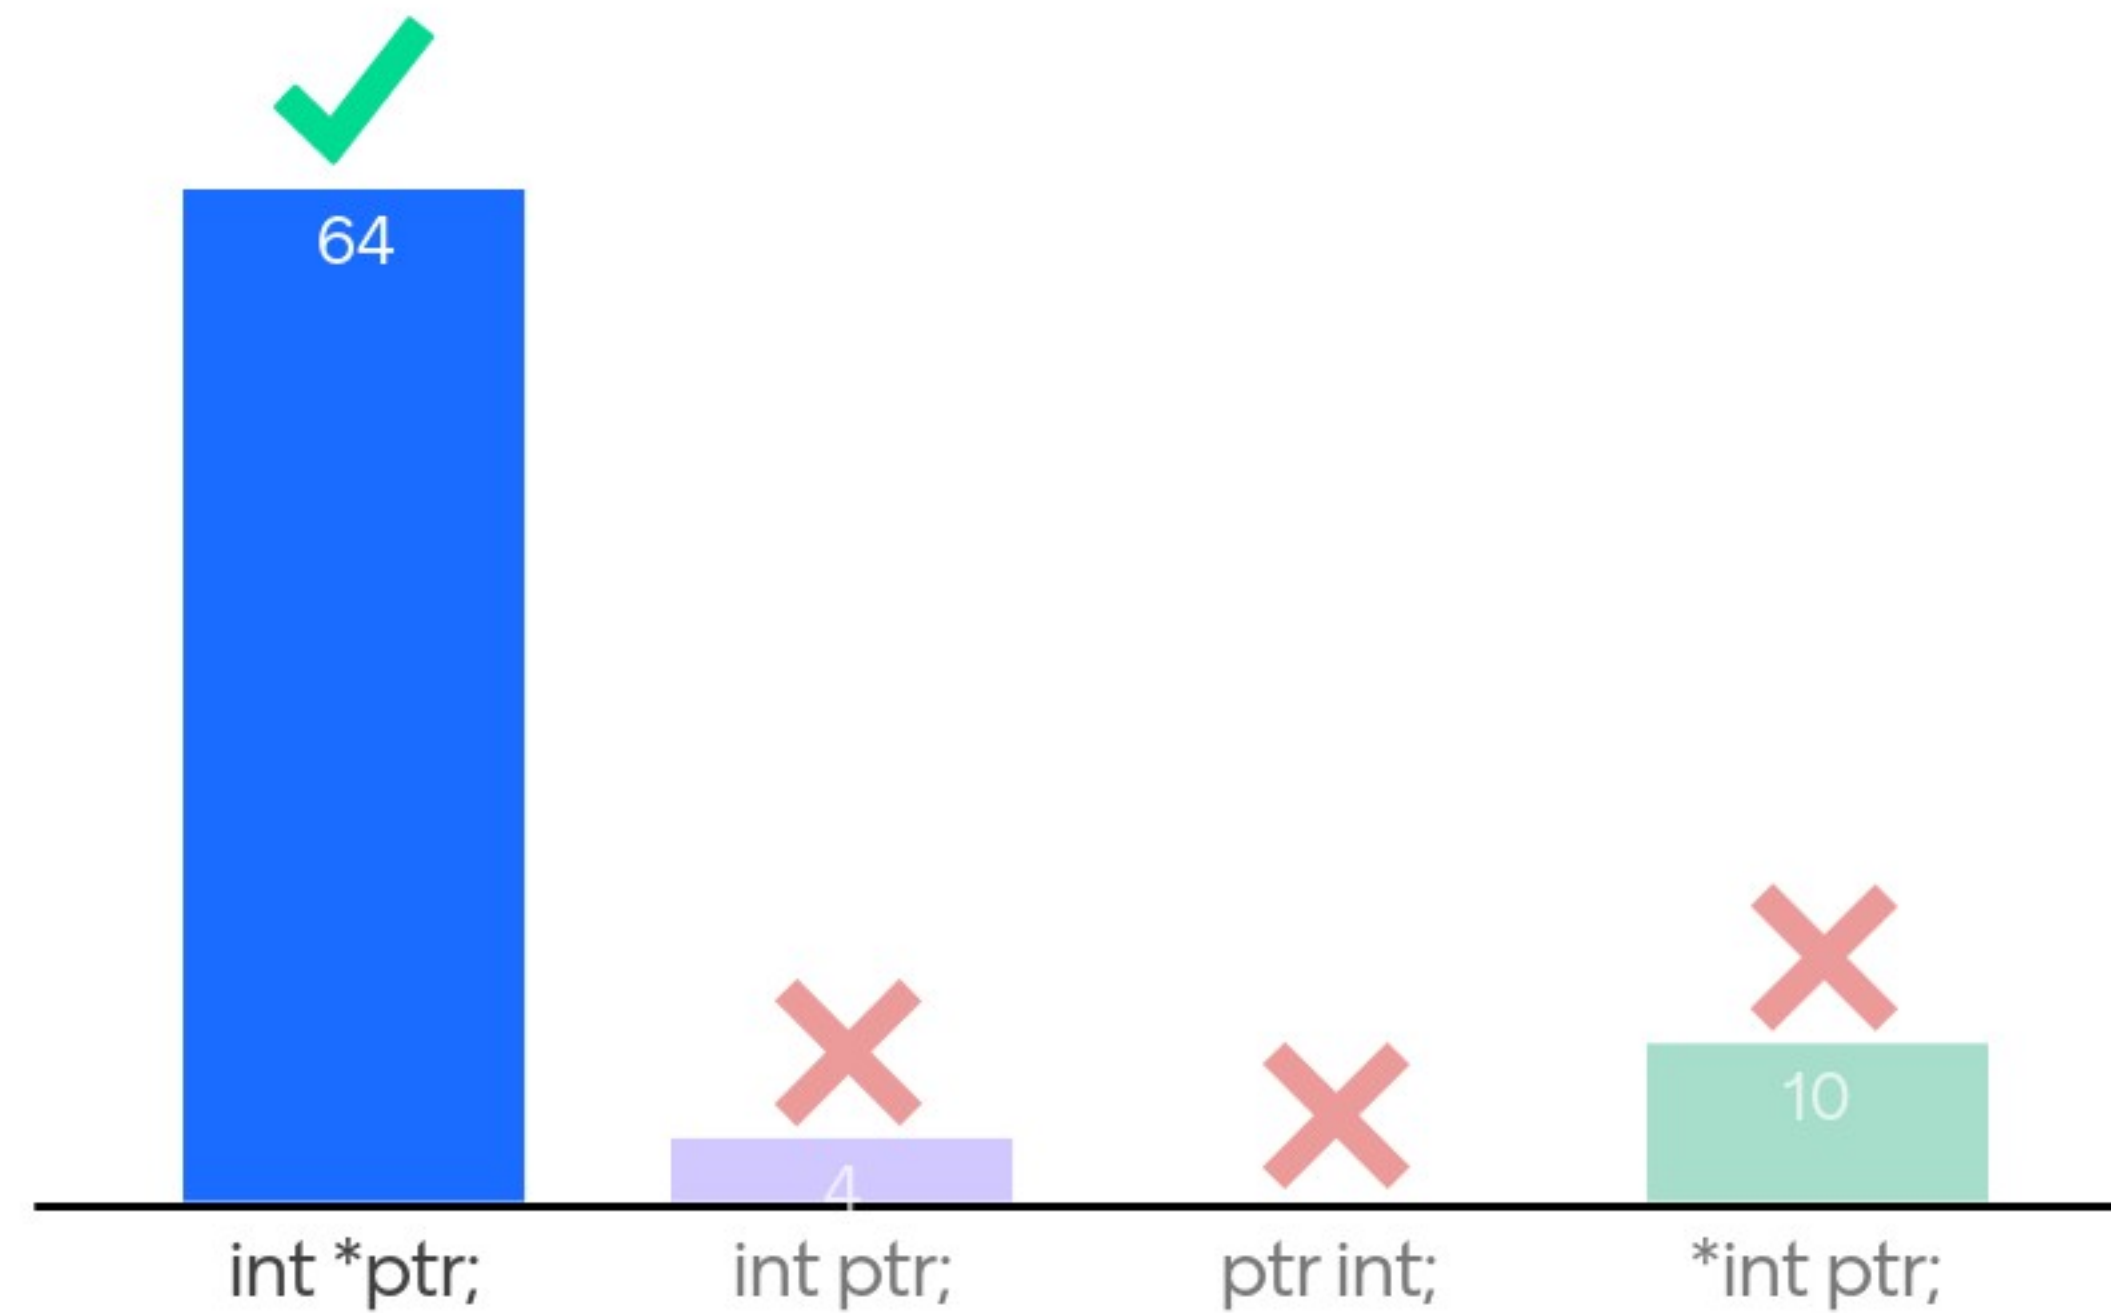

Leaderboard

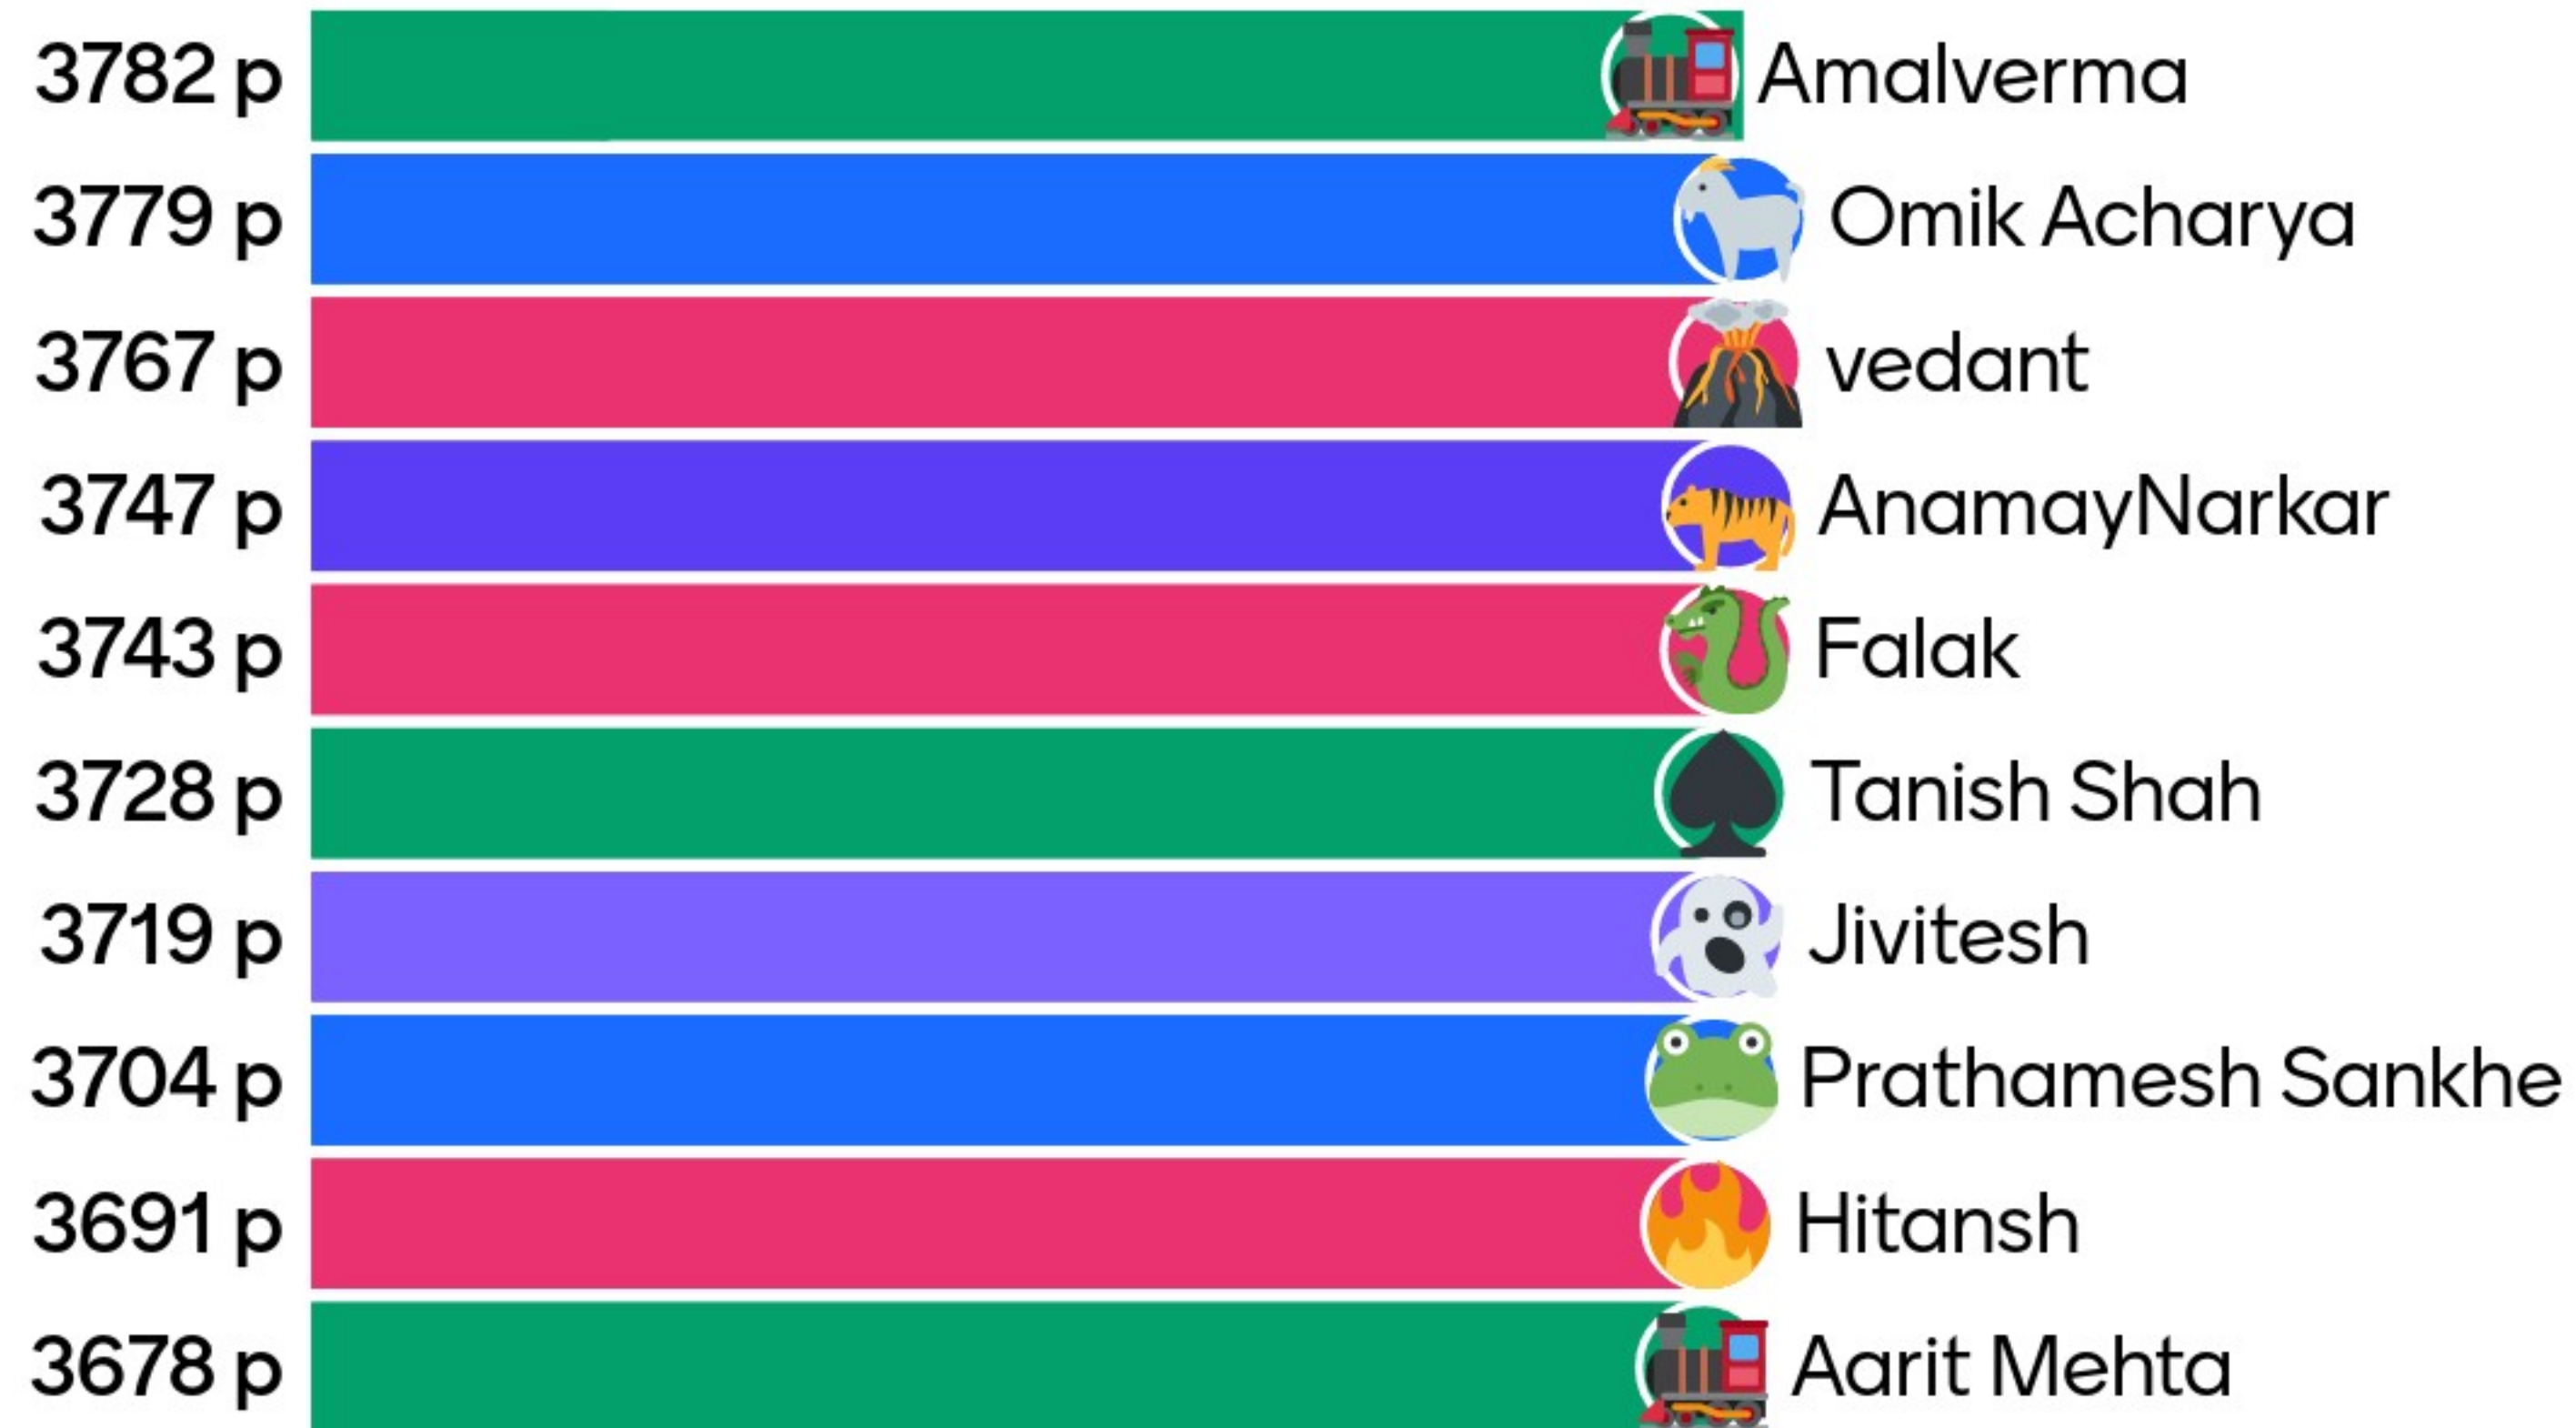

What is the purpose of the "auto" keyword in C++?

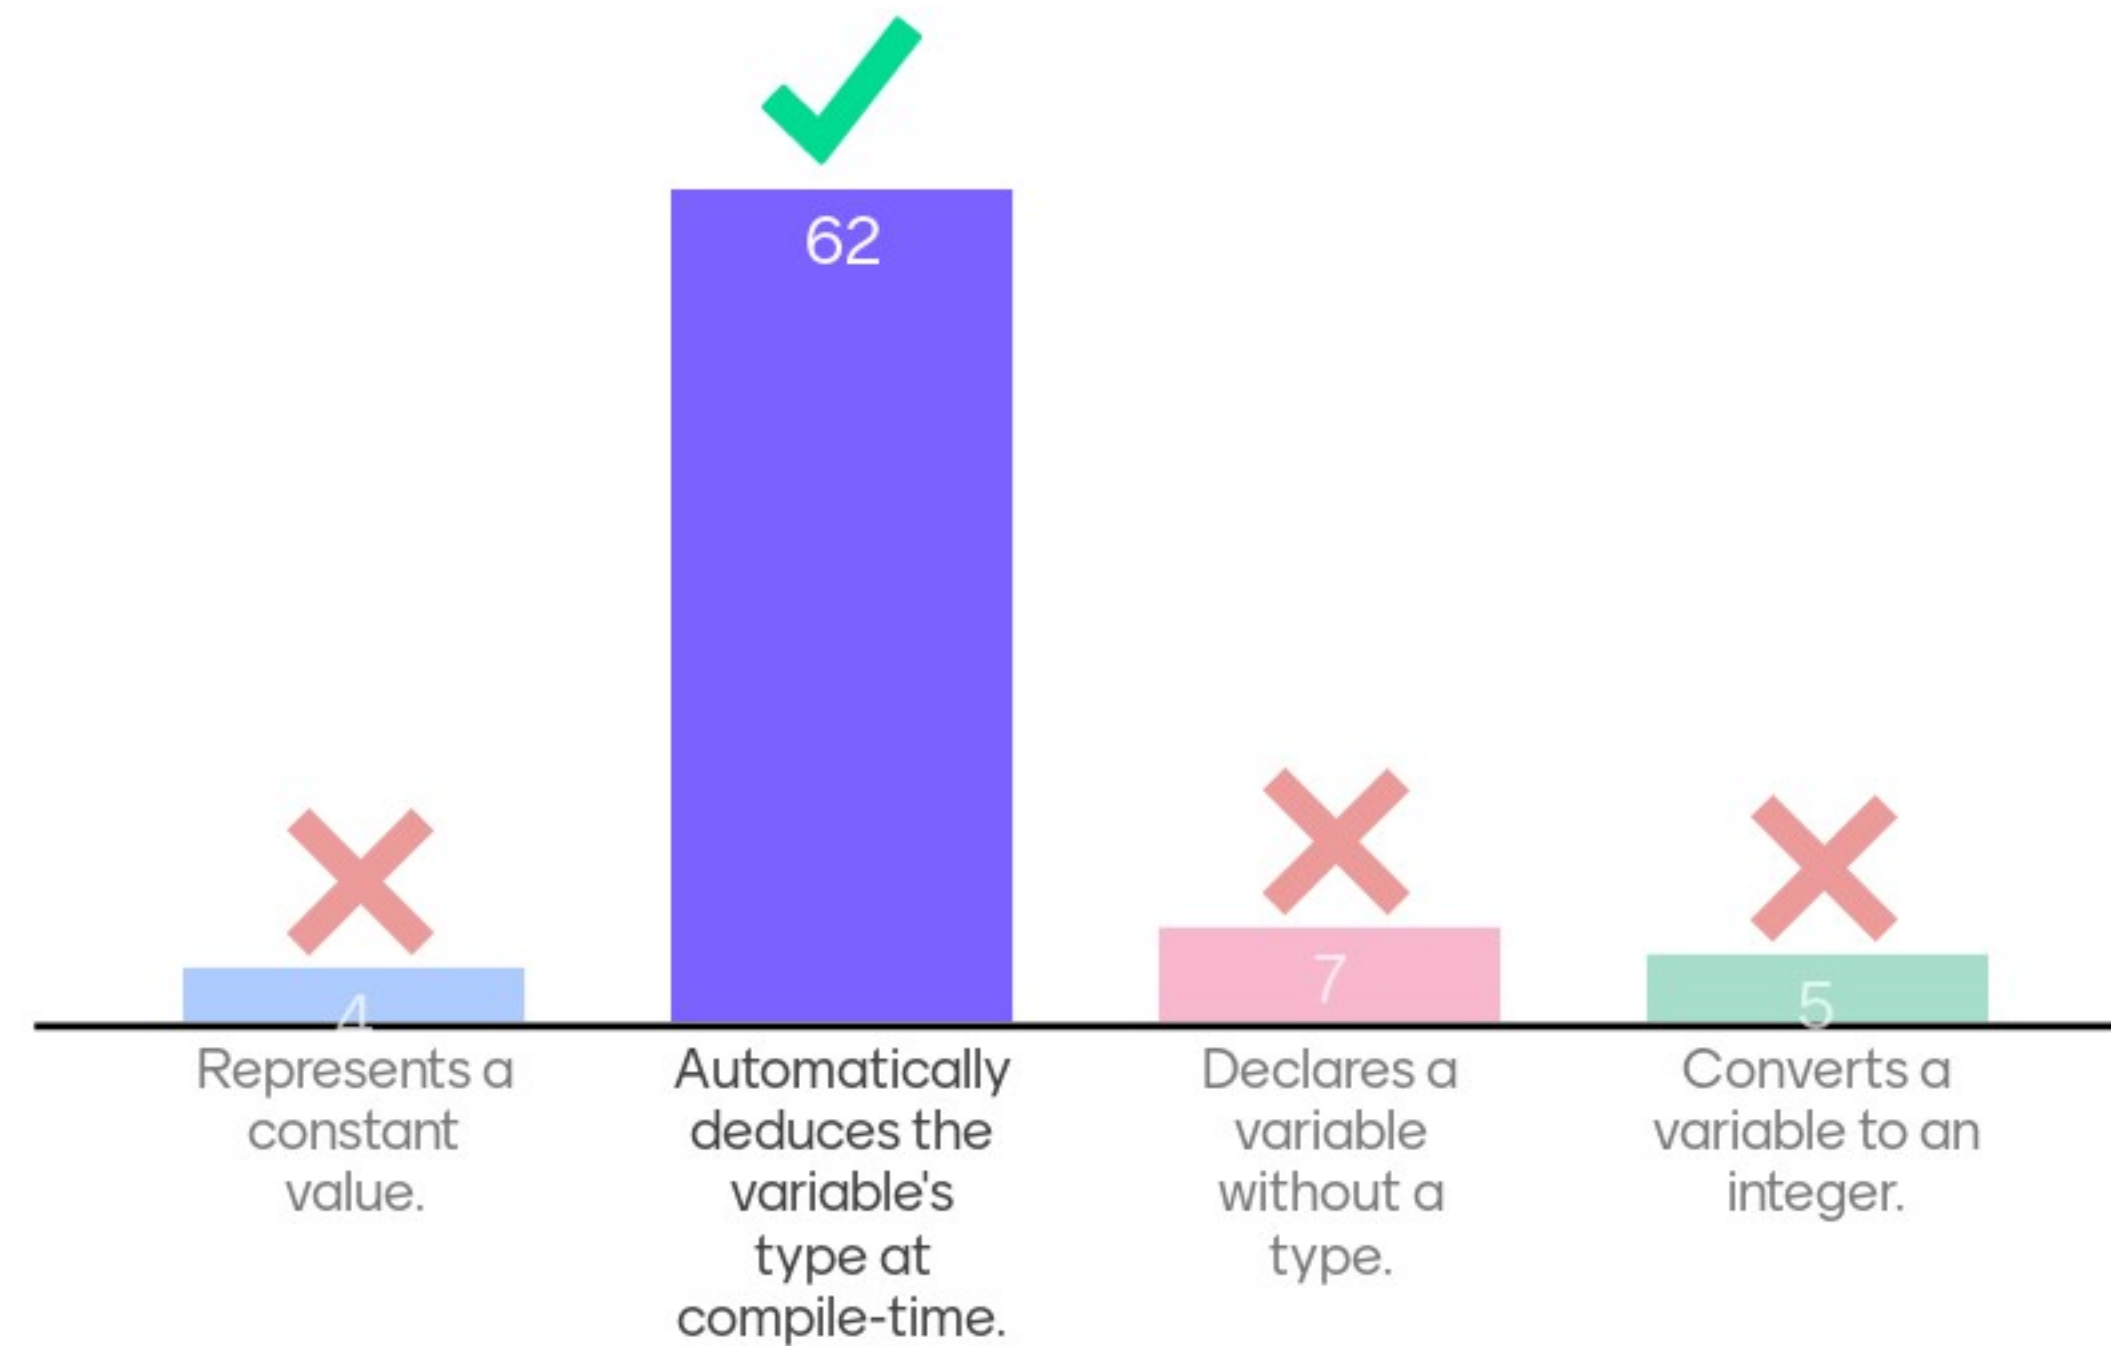

Drum roll

Leaderboard

