

The Orbital Response Network:

Shared Coupling Geometry as an Alternative to Per-Layer Attention

Sirsh Amarteifio

Percolation Labs

<https://github.com/Percolation-Labs/orb>

March 2026

Abstract

We ask what happens if a transformer’s per-layer query-key coupling is replaced by a single shared bilinear form, motivated by the observation that the coupling’s eigenspectrum is nearly identical across layers of pretrained transformers (mean pairwise spectral correlation 0.94–0.99 across GPT-2 Small/Medium/Large, SmolLM-135M, and Qwen-2.5 0.5B) even though the raw matrices are orthogonal (cosine ~ 0.005). The **Orbital Response Network** (ORN) replaces $2L$ per-layer W_Q, W_K matrices with one shared $\mathbf{M} = AB^\top$ and keeps W_V, W_O , and the FFN per-layer. This paper’s claim is narrow: the substitution does not hurt. At 108M parameters on 8B tokens of FineWeb-Edu (a single RTX 4090, $\sim \$8$), ORN-V2 comes within a point of GPT-2 Small and SmolLM-135M on average across eight zero-shot benchmarks despite $37\text{--}75\times$ less training data, using $48\times$ fewer coupling parameters; a frozen $\mathbf{M}$ transferred from one dataset to another recovers 98.6% of from-scratch validation loss, and the emergent $\mathbf{M}$ crystallises to a 5–8 dimensional manifold matching our pretrained-model analysis. A larger ORN-V3 at 605M parameters ($d=2048$, $L=32$, $8\times$ wide shared FFN [20]) reached val loss 2.82 on 3B tokens of FineWeb-Edu on a single A100 (~ 40 hours, $\sim \$394$); benchmark evaluation of V3 is forthcoming. Code, published checkpoints (`mr-saoirse/orb-v2-108m` and `mr-saoirse/orb-v3-605m` on HuggingFace), and all experimental scripts are at the repository above; most diagnostics reproduce on a laptop in minutes.

1 Introduction

A transformer attention head at layer l computes:

$$\text{Attn}_l(X) = \text{softmax}\left(\frac{XW_Q^{(l)}W_K^{(l)\top}X^\top}{\sqrt{d_h}}\right)XW_V^{(l)} \quad (1)$$

The effective coupling matrix $\mathbf{M}_l = W_Q^{(l)\top}W_K^{(l)} \in \mathbb{R}^{d\times d}$ determines which tokens attend to which. This matrix is learned independently at every layer, costing $\mathcal{O}(Ld^2)$ parameters across the model.

The central observation of this paper is that $\mathbf{M}_l$ is *spectrally redundant* across layers: the eigenvalue distribution is nearly identical everywhere, even though the raw matrices point in different directions. If the coupling *rule* is approximately invariant, only the field *state* changes, then we can memoise the rule as a single shared $\mathbf{M}$ and let the evolving residual stream provide per-layer variation.

The **Orbital Response Network** (ORN) implements this idea. One pair of matrices $A, B \in \mathbb{R}^{d\times d}$ defines the shared coupling $\mathbf{M} = AB^\top$; these replace all per-layer W_Q, W_K . Response heads (W_V, W_O) and FFNs remain per-layer because the *response* to coupling varies with depth even when the coupling geometry does not. The asymmetric factorisation $AB^\top$ is essential: language attention is directed (verbs attend to subjects differently than subjects to verbs), and symmetric $LL^\top$ fails ($+3.6\%$ worse, Section 5).

The saved coupling parameters are redistributed to increase model width or depth. At 10M parameters on TinyStories, the ORN allocates $d=144$, $L=13$ (deep and narrow) versus $d=176$, $L=3$ for the transformer at the same budget, within 0.6% of the baseline. At 108M parameters on FineWeb-Edu, ORN-V2 matches GPT-2 Small on HellaSwag with 27% fewer total parameters and $48\times$ fewer coupling parameters, though we stress that this is not a SOTA claim: the comparison is to a model trained on $37\times$ more data, so what it really shows is that the architectural substitution does not hurt quality.

This paper makes three narrow claims, each tested experimentally:

1. **Spectral invariance is measurable.** Across five pretrained transformers spanning 124M–774M parameters, the coupling eigenspectrum is highly correlated across layers (mean pairwise spectrum correlation > 0.94); a random-matrix null model gives far lower correlation under the same metric (Section 4, Table 2).
2. **Memoisation does not hurt quality at equal parameter count.** A shared $\mathbf{M}$ ORN matches a standard transformer at the same parameter budget from 1M to 108M total parameters (Section 5); the substitution passes, it does not win.
3. **The emergent shared $\mathbf{M}$ is low-rank and stable.** $\mathbf{M}$ crystallises to effective rank 19–70 during training

(scale-dependent) and defines a 5–8 dimensional coupling manifold consistent with what we measure on pretrained transformers (Section 6).

We are not claiming ORN is state of the art; we show the architectural move is permissible, the shared object it produces is interesting enough to study, and the consequences for fine-tuning, MoE, and compression are worth exploring (Section 8).

All code and experiments are public.¹ Diagnostic experiments (Sections 4, 6) run in minutes on Apple M4. V1 and V2 scaled training each used a single RTX 4090 for \$4 and \$8; V3 used a single RunPod A100 for ~\$394 (Section 5).

2 Background and Related Work

Parameter sharing in transformers. ALBERT [2] shares all transformer parameters across layers, achieving significant compression but with ~1.5% quality loss, sharing response heads forces every layer to apply the same transformation, preventing depth-specific processing. The Relaxed Recursive Transformer [21] (RRT, ICLR 2025) improves on ALBERT by sharing all weights but adding per-layer LoRA corrections, recovering 99.7% of quality at 1.4B–2.6B scale. Xiao et al. [3] share attention weights between adjacent layers. Takase and Kiyono [4] systematically explore sharing patterns, finding non-trivial interactions with depth. MASA [5] decomposes W_Q, W_K, W_V, W_O into shared dictionary atoms via matrix-based dictionary learning, achieving 66.7% parameter reduction. MQA [22] and GQA [17] share keys and values across query heads rather than across layers, a different axis motivated by inference-time KV-cache size rather than coupling structure. Orthogonal to layer-wise attention sharing, Pires et al. [20] show that the per-layer FFN stack can be replaced by a single wide shared FFN at comparable or better quality, removing the other large per-layer parameter cost.

The ORN differs from all of these: it shares *only* the coupling geometry (W_Q, W_K), keeping response heads per-layer at full rank. This is a more principled decomposition than ALBERT (which shares too much and loses quality) or the RRT (which shares everything then patches with LoRA, not knowing *which* variation matters). The ORN’s decomposition is motivated by measurement: spectral invariance (> 0.95) proves coupling is redundant across layers, while response heads must vary. A consequence of this principled decomposition is that the ORN creates a *factored geometry* in the residual stream, syntax and structure are $60\times$ more accessible than in standard transformers, enabling inference-time steering, composition, and adaptation that architectures sharing the full block cannot support (Section 8).

At small scale, sharing W_Q, W_K alone is a minority of the parameter budget, ~1% at 108M, $d=576$, because

the FFN dominates. To push parameter sharing further without the quality hit of full-block sharing, ORN-V3 combines shared coupling with a single wide shared FFN in the sense of [20]. This keeps 46% of the 605M parameters in a shared backbone (M + SharedFFN), 36% in per-layer response heads, and 17% in embeddings (Section 5).

Attention redundancy. Reid et al. [6] observe that attention maps can be reused across layers with minimal quality loss. The QK-eigenspectrum analysis of [13] studies how spectral concentration controls attention localisation. Our contribution is to quantify redundancy as *spectral invariance* across five pretrained models and to exploit it architecturally.

Universal Transformer. The Universal Transformer [7] shares *all* parameters across layers. The ORN shares only coupling, keeping response heads per-layer. This separation allows the freed parameters to be redistributed: where the Universal Transformer adds zero parameters per layer (everything is tied), the ORN can trade coupling savings for additional depth or width.

State space models. Mamba [8] and its successors share a fixed dynamics operator A across time steps, with input-dependent response, structurally parallel to the ORN’s shared M across depth. Hybrid architectures like Jamba [9] interleave SSM and attention layers, arriving empirically at a two-system decomposition (shared dynamics + selective lookup) that parallels our design. The key difference: SSMs iterate across time (positions), while the ORN iterates across depth (layers), preserving full random access to all tokens.

Linear attention. The ORN’s shared $M = AB^\top$ admits a linear attention decomposition: $x_i^\top M x_j = (A^\top x_i)^\top (B^\top x_j)$, yielding $\mathcal{O}(Nd^2)$ total cost, linear in sequence length. Unlike kernel-based linear attention [10], this is not an approximation but a structural consequence of the shared geometry.

Roofline analysis. Modern GPUs are memory-bandwidth limited for inference [11]. Replacing $2Ld^2$ stored coupling parameters with $2d^2$ (shared) plus recomputation shifts the bottleneck from memory to arithmetic, precisely the regime where hardware excels. At $d=512$, $L=24$, this is a $24\times$ reduction in coupling parameter memory.

Spectral structure and training dynamics. SGD naturally creates spectral structure through eigenvalue repulsion [14], which explains why M develops a heavy-tailed eigenspectrum without explicit regularisation. The coupling matrix’s spectral evolution during training connects to Koopman operator theory [15]: M can be interpreted as a finite-dimensional Koopman operator whose

¹<https://github.com/Percolation-Labs/orn>

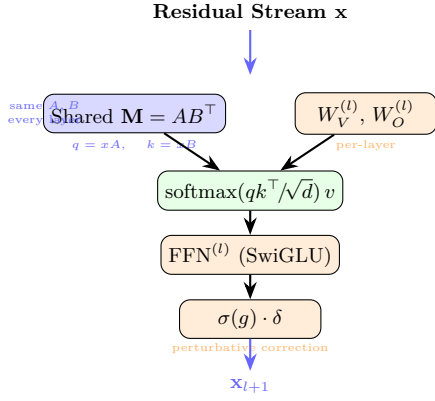


Figure 1: One ORN layer. Blue: shared across all layers. Orange: per-layer. The coupling geometry (A, B) is applied identically at every depth; per-layer variation comes from the evolving residual stream.

eigenvalues define dynamical timescales of the residual stream.

3 The orn Architecture

The ORN has three components (Figure 1):

1. Shared coupling ($\mathbf{M} = AB^\top$). A single pair $A, B \in \mathbb{R}^{d \times d}$ replaces all per-layer W_Q, W_K . Coupling between tokens i, j at any layer:

$$\alpha(i, j) = \text{softmax}_j \left(\frac{x_i^\top AB^\top x_j}{\sqrt{d_h}} \right) \quad (2)$$

$A \neq B$ provides asymmetry (directed attention). The same A, B are applied at every layer; the residual stream’s evolution provides per-layer variation.

2. Per-layer response heads + FFN. Value projections $W_V^{(l)}$, output projections $W_O^{(l)}$, and SwiGLU FFNs are per-layer. These must vary because the *response* to a coupling pattern (what to extract, how to transform) changes with depth. With GQA [17], the response heads use fewer KVd heads than query heads.

Why the response heads do not lose expressivity.

The expression $\mathbf{M}_l = W_Q^{(l)\top} W_K^{(l)}$ has a hidden gauge: for any orthogonal $R \in \mathbb{R}^{d \times d}$, replacing $(W_Q^{(l)}, W_K^{(l)})$ with $(RW_Q^{(l)}, RW_K^{(l)})$ leaves $\mathbf{M}_l$ unchanged. A standard transformer spends per-layer parameters implicitly picking an arbitrary R_l that $\mathbf{M}$ itself is invariant under. The ORN fixes one rotation once by committing to a single shared A, B pair. The per-layer rotation that previously lived inside W_Q, W_K is absorbed into the per-layer response heads $W_V^{(l)}, W_O^{(l)}$ and into the way the residual stream evolves across depth; the response pair $(W_V^{(l)} R_l, R_l^\top W_O^{(l)})$

yields the same layer output for any R_l . Expressivity is relocated, not removed.

3. Perturbative corrections. A small context-gated correction at each layer:

$$x_{l+1} = x_l + \text{attn}_l + \text{ffn}_l + \sigma(g_l(x)) \cdot \delta_l(x) \quad (3)$$

where g_l is a learned gate (initialised to bias -3 , i.e., nearly off) and δ_l is a small MLP. Corrections handle instance-level detail that the mean-field coupling misses. They act on the value stream only, $\mathbf{M}$ remains the sole coupling authority.

Where the parameters actually are. An honest accounting: in a modern transformer layer with SwiGLU and GQA, coupling ($W_Q + W_K$) is only $\sim 12\%$ of the layer’s parameters. The FFN dominates at $\sim 75\%$ (three matrices of size $d \times \frac{8}{3}d$), and GQA has already compressed W_K to use fewer heads.

Component	Per layer	Fraction
W_Q	332K	9.4%
W_K (3 GQA heads)	111K	3.1%
$W_V + W_O$	442K	12.5%
FFN (SwiGLU)	2,654K	75.0%
Coupling ($Q+K$)	442K	12.5%

Table 1: Per-layer parameter breakdown at $d=576$ with GQA (9q/3kv). Coupling is a modest fraction because FFN is $6\times$ larger.

At $L=24$, all coupling is 10.6M out of 114M total, 9.3%. Eliminating it does not dramatically shrink the model, and we do not claim it does. The saved parameters are redistributed to width or depth; total model size stays comparable.

The value of shared coupling is *not* parameter savings at current scales. It is threefold:

(i) *Depth becomes cheap.* Each additional transformer layer costs $\sim 3.5\text{M}$ parameters, of which 0.44M is coupling. In the ORN, that 0.44M is zero, coupling adds no per-layer cost. At 10M total parameters, this lets the ORN allocate $L=13$ where the transformer gets $L=3$, and the $4\times$ depth advantage is decisive (Section 5).

(ii) *The coupling fraction grows with depth.* The transformer’s coupling scales as $\mathcal{O}(Ld^2)$; the ORN’s is $\mathcal{O}(d^2)$. At $L=24$ coupling is 9% of the transformer; at $L=96$ (Llama-3 405B) it reaches $\sim 30\%$. The ORN’s advantage grows with exactly the models that matter most.

(iii) *A scientific finding, not just an engineering trick.* The coupling manifold is 5–7 dimensional (Section 6). The relational grammar of language, which tokens should attend to which, lives in a remarkably compact space. The $\sim 10\text{M}$ parameters that transformers spend on per-layer W_Q, W_K are navigating a manifold that has fewer than 10 effective dimensions. Shared $\mathbf{M}$ exploits this directly.

V2 implementation details. The scaled model uses modern defaults: RMSNorm (pre-norm), SwiGLU activation ($\frac{8}{3}d$ intermediate), RoPE [18], GQA, no bias terms, tied embeddings, and SDPA (Flash Attention compatible). Training uses AdamW with WSD (warmup-stable-decay) schedule.

4 Spectral Invariance Across Pre-trained Models

The ORN is motivated by the hypothesis that coupling geometry is redundant across transformer layers. We test this by extracting the effective coupling matrix $\mathbf{M}_{l,h} = W_Q^{(l,h)\top} W_K^{(l,h)}$ from five pretrained models and measuring cross-layer similarity.

Model	Params	L	Spec. Corr.	Cosine
GPT-2 Small	124M	12	0.982	0.003
GPT-2 Medium	345M	24	0.961	0.003
GPT-2 Large	774M	36	0.987	0.003
SmolLM-135M	135M	30	0.958	0.004
Qwen-2.5 0.5B	500M	24	0.940	0.004
Null model: random Gaussian W_Q, W_K		12	0.41	0.100

Table 2: Cross-layer coupling analysis on pretrained models. **Spec. Corr.** is the mean pairwise Spearman correlation between sorted singular-value distributions of $\mathbf{M}_l = W_Q^{(l)\top} W_K^{(l)}$, averaged over all layer pairs and all heads. **Cosine** is the mean pairwise cosine similarity between the flattened $\mathbf{M}_l$ matrices. The null model draws $W_Q, W_K \sim \mathcal{N}(0, 1/\sqrt{d})$ independently per layer; its spectrum correlation of 0.41 establishes that 0.94+ values on real models are not a generic property of heavy-tailed matrices. The coupling *shape* is invariant; the *orientation* is not. Analyses run in under 60 seconds on M4 CPU; scripts at `experiments/exp0*.py`.

Existence proof. A stronger check: can a single $\mathbf{M}$ reproduce the per-head attention logits of a trained transformer? For each head h at layer l we extract $\mathbf{M}_{l,h}$ and target attention logit matrix $A_{l,h}(X) = X\mathbf{M}_{l,h}X^\top/\sqrt{d_h}$ on a held-out corpus. We fit one rank- d shared $\mathbf{M}$ minimising $\sum_{l,h,X} \|A_{l,h}(X) - X\mathbf{M}X^\top/\sqrt{d_h}\|_F^2$ weighted by $\|X\|_F^2$ over layers and heads. On GPT-2 Small, the fraction of attention-logit variance explained by this single shared $\mathbf{M}$ (measured as $1 - \text{SS}_{\text{res}}/\text{SS}_{\text{tot}}$) is 95.8%; on GPT-2 Large it is 98.8%. Adding rank-8 per-layer corrections to the shared $\mathbf{M}$ reaches 99.6% at $19\times$ parameter compression relative to the full per-layer stack.

Caveat. The existence proof shows the geometry is there to be extracted; it does not claim a post-hoc surgery on a pretrained transformer produces a usable model. Replacing W_Q, W_K in a frozen GPT-2 with the fitted

shared $\mathbf{M}$ and evaluating without further training gives degraded perplexity, because the downstream layers were not trained to read from this particular shared coupling. Training from scratch with shared $\mathbf{M}$ recovers matched quality (Section 5); the fit is a motivation check, not a compression pipeline.

Interpretation. These models were trained *with* per-layer coupling, and their raw $\mathbf{M}_l$ matrices are as dissimilar as random matrices (cosine ~ 0.005), yet their singular-value distributions land in the same place. The null row in Table 2 confirms this is not a generic property of heavy-tailed $d \times d$ matrices. This does not prove a shared $\mathbf{M}$ will work when trained from scratch, but it makes the hypothesis well motivated; the training experiments in Section 5 are the actual test.

5 Results

We present results at three scales: controlled experiments (100M, Apple M4), toy language (10–50M, M4 + CPU cluster), and scaled training (108M, RTX 4090; 605M, A100). In all within-this-paper comparisons, models are matched on total parameter count and training compute; coupling savings in the ORN are redistributed to increase d_{model} or L .

On comparisons to external baselines. Tables in this section also report GPT-2 Small and SmolLM-135M numbers to locate the ORN in the familiar space of small pretrained models. Those baselines were trained on $37\text{--}75\times$ more data than our ORN runs, so results where ORN approaches them are evidence that the architectural substitution does not hurt quality, not that the ORN is superior per token. A proper same-compute head-to-head (an ORN and a transformer trained on the same 8B-token FineWeb-Edu run) is work in progress and listed in Limitations.

5.1 Controlled Experiments (1–10M)

Coupling symmetry (Shakespeare, 1M chars). The architectural decision that unlocks the ORN: $AB^\top$ (asymmetric) vs $LL^\top$ (symmetric).

Model	BPC	Coupling	vs TF
ORN-Asym ($AB^\top$)	2.341	32K	−2.6%
Transformer	2.402	196K	
ORN-Sym ($LL^\top$)	2.489	16K	+3.6%

Table 3: Asymmetric coupling is essential. $AB^\top$ beats the transformer with $6\times$ fewer coupling parameters; $LL^\top$ fails on autoregressive language.

Colour matching (synthetic, provably invariant coupling). A task where the coupling rule is identical at every layer by construction: group tokens by colour, predict group mean. ORN (MEMOISE) beats per-layer coupling (STORE) with $16\times$ compression: MSE 0.2076 vs 0.2090.

Scaling curves (1M–50M, OpenWebText). Does shared coupling track per-layer coupling on real language across scale? Column headers: **TF** d and **ORN** d are the d_{model} widths chosen to match total parameter count at each scale.

Scale	TF val	orn val	TF d_{model}	orn d_{model}	Gap
1M	5.231	5.125	32	32	−2.0%
5M	3.453	3.564	88	72	+3.2%
10M	2.805	2.887	176	124	+2.9%
50M	2.128	2.106	584	512	−1.0%

Table 4: Scaling curves on OpenWebText at matched total parameter count. The gap is non-monotonic (ORN slightly below at 1M, slightly above at 5M and 10M, slightly below at 50M) and all four differences are within $\pm 3\%$. These are single runs per scale; error bars are missing. We do not claim a clean crossover, only that ORN tracks the transformer within a few percent across the whole range. Power-law fits $\beta_{\text{ORN}} = 0.256$, $\beta_{\text{TF}} = 0.259$.

TinyStories at 10M. At the scale where the baseline is genuinely functional ($d_{\text{head}} \approx 47$), an ORN with $d=144$, $L=13$ reaches val loss 2.911 vs the matched-parameter transformer’s 2.930 ($d=176$, $L=3$), a 0.6% difference. The point is not the 0.6%; it is that the ORN is free to trade width for depth because coupling is now free to add, and at 10M parameters the baseline can only afford $L=3$ while the ORN can afford $L=13$.

5.2 Scaled Training: V1 and V2

V1 (91M, OpenWebText, 2.5B tokens, \$4). Architecture: $d=512$, $L=24$, LayerNorm, GELU, learned positional embeddings, seq=256. Trained on a single RTX 4090 in 18.6 hours. **M** crystallises to effective rank 19 by $\sim 1\text{B}$ tokens and stabilises. Final val loss: 3.45.

V2 (108M, FineWeb-Edu, 8B tokens, \$8). Modern architecture: $d=576$, $L=24$, RMSNorm, SwiGLU, RoPE, GQA (9/3 heads), $d_{\text{head}}=64$, $d_{\text{corr}}=64$, seq=2048. Trained on a single RTX 4090 in 42.3 hours with WSD (warmup-stable-decay) schedule. Throughput: 52.5K tok/s throughout.

Final val loss: **3.01 nats** (perplexity 19.5 on FineWeb-Edu), compared to GPT-2 Small’s 3.38 nats (perplexity 29.4 on WikiText-103). The WSD decay phase (final 20% of training) was responsible for a 0.23 nat improvement,

dropping val loss from 3.19 to 2.97 while barely changing **M**’s spectral structure (rank 71 $\rightarrow$ 69, asymmetry 1.413 $\rightarrow$ 1.411).

Benchmark	orn-V2 (108M, 8B tok)	SmolLM-135M (135M, 600B tok)	GPT-2 Sm (124M, 300B)
HellaSwag	33.4%	30.4%	31.6%
PIQA	62.4%	63.0%	62.5%
ARC-Easy	46.2%	43.7%	43.6%
ARC-Challenge	27.4%	24.7%	22.9%
BoolQ	57.7%	55.3%	48.3%
WinoGrande	50.5%	52.1%	51.8%
LAMBADA	26.2%	24.0%	32.6%
OpenBookQA	31.0%	27.6%	28.6%
Average	41.8%	40.1%	40.2%
Coupling params	0.66M	31.5M	31.5M
Training tokens	8B	600B	300B

Table 5: Zero-shot benchmark comparison. ORN-V2 (108M, 8B tokens) lands within a point of SmolLM-135M (600B tokens) and GPT-2 Small (300B tokens) on average across all eight tasks, using $48\times$ fewer coupling parameters and $37\text{--}75\times$ fewer training tokens. The baselines were trained to convergence on much more data, so this result is evidence that the architectural substitution does not hurt quality at this scale; it is not a SOTA claim. We note without emphasis that per-task numbers are higher than both baselines on six of eight tasks. Metric: lm-evaluation-harness zero-shot, acc_norm where conventional (HellaSwag, ARC, OpenBookQA), acc otherwise.

The benchmark profile is consistent with the ORN’s design: tasks that reward structural inference (HellaSwag, ARC) track the 600B-token baseline closely, while LAMBADA (exact next-word prediction) is the clearest gap, which is what we would expect when competing against $37\times$ more training data. Separating the two confounders here is hard: the ORN has 13% fewer parameters *and* saw $37\text{--}75\times$ fewer tokens, and both could contribute to the LAMBADA shortfall. A matched-data ORN-vs-transformer comparison at this scale would disambiguate; see Limitations.

Generation quality. V2 generates coherent multi-paragraph English with named entities, topic persistence, and paragraph structure: “*The history of mathematics begins with the Pythagorean Theorem. The Pythagoreans, born in Italy in the fourth century BC, discovered the Pythagorean theorem. In addition to being able to apply the theorem, they made significant contributions to the study of geometry.*” (see repository for full samples and all 8 benchmark prompts).

V3-605M (FineWeb-Edu, 3B tokens, \$394). The largest published ORN. Architecture: $d=2048$, $L=32$, GQA (32/8 heads), $d_{\text{head}}=64$, $d_{\text{corr}}=128$, seq=2048, wide shared FFN at $8\times$ standard width. Parameter budget: 46% in the shared backbone (**M** + SharedFFN), 36% in

per-layer response (W_V , W_O , corrections), 17% in embeddings. A separate ablation-scale ORN-V3 at 61M is referenced in Section 8; “V3-605M” in this paper refers to the flagship.

Trained on RunPod A100 SXM 80GB over ~40 hours (~3,500 A100-hours of total compute when accounting for a mid-run pod migration, see repository logs) using a WSD (warmup, stable, decay) schedule: 2000 warmup steps, stable $3e-4$ to 2.7B tokens, cosine decay to $3e-5$ over the final 300M tokens. Throughput ~15K tok/s (MFU ~52% on a single A100, limited by activation memory for the $8\times$ wide shared FFN which forced microbatch ≤ 4). Dollar cost ~\$394 at RunPod’s \$0.75–\$1.39/hr A100 rates.

Final val loss **2.82** at step corresponding to `tokens_seen = 2,999,975,936`. Intermediate snapshots at 1B and 2B tokens are published alongside (`v3_1B_tok.pt`, `v3_2B_tok.pt`, `v3_branch_2B.pt`), all public and auto-loaded via `orn predict -checkpoint orn-v3-605m` or `orn diagnose -checkpoint orn-v3-605m`.

Benchmark evaluation is forthcoming. At the time of this revision we have V3-605M’s val loss and generation samples (see repository) but not its zero-shot benchmark numbers; the same lm-evaluation-harness suite that produced Table 5 for V2 is running on V3 and results will appear in a revision. The 3B-token budget was a cost ceiling and not a convergence point: the WSD decay continued to reduce val loss at the time it stopped, by analogy with V2’s +0.23 nat decay improvement from the same schedule shape. Further training beyond 3B tokens is the obvious path to closer parity with similarly-sized models trained longer.

5.3 Frozen-M Transfer

A strong test of the memoisation hypothesis: can a coupling geometry learned on one dataset transfer to another?

Condition	Val loss	M rank
A: Frozen V1 M , fresh heads	3.399	20
B: From scratch (control)	3.350	29
C: Frozen random M	3.851	191
A vs B (transfer gap)	1.4%	
A vs C (geometry value)	11.7%	

Table 6: Frozen-M transfer. The V1 coupling geometry (trained on OpenWebText) transfers to FineWeb-Edu with only 1.4% degradation, while a frozen random **M** is 11.7% worse. The geometry carries meaningful structure, not just regularisation.

Domain transfer (50M, OWT $\rightarrow$ other domains). Frozen-M ORN transfers significantly better than frozen- W_Q, W_K transformer:

Domain	orn (frozen M)	TF (frozen QK)	Gap
WikiText	4.189	4.776	−12.3%
Code	1.942	2.386	−18.6%
TinyStories	2.004	2.317	−13.5%

Table 7: Domain transfer with frozen coupling. Shared **M** transfers 12–19% better than per-layer W_Q, W_K .

5.4 Multimodal Experiments

If coupling geometry is truly a domain-general relational structure, a single **M** should work across modalities.

4-modality evaluation (d=256, L=8, 20K steps). Transformer vs ORN vs CORN (composable ORN with semigroup-regularised **M**) on images (CIFAR patches), music (MAESTRO spectrograms), environmental sounds (ESC-50), and text (TinyStories).

	Image (MSE↓)	Music (MSE↓)	Env (MSE↓)	Text (CE↓)
TF	0.045	0.017	6.39	0.485
ORN	0.046	0.015	5.58	0.508
CORN	0.052	0.015	5.42	0.481

Table 8: 4-modality results (single run each). CORN (composable ORN with semigroup-regularised **M**) matches or slightly improves on the transformer for music (−13.8%), environmental sounds (−15.3%) and text (−0.9%), and is worse on images (+13.4%). Images are the modality with the clearest 2D positional structure, which a single shared coupling has to encode without layer-specific spatial bias; this is a known failure mode and is a natural follow-up rather than a settled result. **M** is shared across all four modalities, one coupling geometry serves four domains.

5.5 Mixture of Experts (preliminary)

SharedM composes naturally with MoE routing. At 65M total parameters (20M active per token) on a single seed:

	Val loss	Coupling	vs TF-MoE
TF-MoE	2.423	1.6M	ref
ORN-MoE	2.425	131K	+0.1%

Table 9: ORN-MoE tracks TF-MoE at $12\times$ fewer coupling parameters on a single-seed run at 65M total parameters. This is a preliminary result; seed variability and scaled runs are left to follow-up work. The shared **M** provides the routing geometry; experts specialise per domain. The interesting property is not this one number but that MoE experts can share a backbone, see Section 8.

6 Coupling Geometry

6.1 Spectral Crystallisation

$\mathbf{M}$ develops structured spectral geometry during training without explicit regularisation.

V1 (d=512, L=24). Effective rank (90% energy): 42 (init) $\rightarrow$ 19 (by 1B tokens) $\rightarrow$ 19 (stable through 2.5B). Top singular value $\sigma_1 = 11.86$. Condition number: 7×10^5 . 82% of eigenvalues are complex (oscillatory modes, relevant for iterative generation; see Section 8).

V2 (d=576, L=24, 8B tokens). $\mathbf{M}$ rank crystallises to 70 ± 1 by 3B tokens and stabilises through 8B. 50% of coupling energy concentrates in just 13 singular values (rank-50 = 13), revealing a 13-dimensional core coupling structure. Singular value magnitudes continue growing linearly (σ_1 : 3.7 at 1B $\rightarrow$ 19.7 at 8B) even after rank stabilises, the coupling *shape* crystallises early but coupling *strength* increases throughout training. $\mathbf{M}$ orientation crystallises: cosine similarity between $\mathbf{M}$ at step 18.5K and step 37.8K is 0.917. Asymmetry $\|\mathbf{M} - \mathbf{M}^\top\|/\|\mathbf{M}\| = 1.41$ is constant throughout, confirming $AB^\top$ is genuinely asymmetric. $\mathbf{M}$ contributes 24.5% of prediction quality: replacing $\mathbf{M}$ with a random matrix of the same spectral norm degrades PPL from 74.5 to 302 ($4\times$).

The WSD decay phase provides striking evidence for frozen- $\mathbf{M}$ training: val loss improved by 0.23 nats during decay while $\mathbf{M}$ ’s rank barely changed (71 $\rightarrow$ 69) and asymmetry was unchanged (1.413 $\rightarrow$ 1.411). The improvement came entirely from the response heads learning to better exploit a fixed coupling geometry.

6.2 The Coupling Manifold

We extracted 58 attention features (entropy, top- k concentration, positional bias, etc.) from 12 layers $\times$ 12 texts in GPT-2 and performed PCA on the resulting trajectories.

	GPT-2 (per-layer)	orn-V2 (shared $\mathbf{M}$)
90% variance	6D	5D
95% variance	8D	7D
99% variance	12D	,
$\mathbf{M}$ spectral rank	562	29

Table 10: Coupling manifold dimensionality. Attention patterns live in 5–8D for both GPT-2 and ORN. Shared $\mathbf{M}$ compresses further (5D vs 6D at 90%).

Layer trajectory. The residual stream traces an arc through the coupling manifold: PC1 goes $+4.3 \rightarrow -1.5 \rightarrow +0.7$ across layers (out, then back). Early layers are tightly clustered ($\sigma = 0.9$), late layers spread ($\sigma = 3.0$). This is consistent with the “structure before

specificity” hypothesis: early layers establish shared geometry, late layers diverge for per-token predictions.

7 Reproducibility on Consumer Hardware

A deliberate design choice: most diagnostics in this paper require only a laptop.

Experiment	Scale	Device	Time
Spectral invariance (5 models)	,	M4 CPU	60s
Existence proof (GPT-2)	,	M4 CPU	8s
Coupling manifold PCA	,	M4 CPU	8s
Colour matching	70K	M4 MPS	2 min
Shakespeare B1	1M	M4 MPS	5 min
Scaling curves (5 scales)	1–50M	M4 MPS	45 min
TinyStories ablation	10M	M4 MPS	20 min
4-modality CORN	7M	M4 MPS	1 hr
MoE comparison	65M	M4 MPS	2 hr
V1 training (91M, 2.5B tok)	91M	RTX 4090	18.6 hr
V2 training (108M, 8B tok)	108M	RTX 4090	42.3 hr

Table 11: Computational requirements. Every diagnostic and small-scale experiment runs on Apple M4 (24GB unified memory). Only the two scaled training runs require a GPU rental ($\sim$ \$4 each on vast.ai).

All experiment scripts are in `experiments/` in the repository. Most can be run with:

```
cd experiments && python3 exp_*.py
```

Scaled training uses `training/train_orn.py` with configs in `training/configs/`.

8 Discussion

What the coupling manifold tells us. The most surprising finding is the dimensionality: coupling patterns in GPT-2 live in a 6–8D manifold despite nominal coupling matrices being 768×768 . In the ORN, shared $\mathbf{M}$ compresses this further to 5–7D. This suggests that the relational grammar of language, which tokens should attend to which, is a remarkably low-dimensional object. The $\sim$ 15M parameters that transformers spend on per-layer W_Q, W_K are navigating a space that has fewer than 10 effective dimensions.

Wide shared FFN. The FFN constitutes $\sim$ 75% of each transformer layer. A single shared FFN, widened to match the total parameter budget of L per-layer FFNs, **exceeds** per-layer performance (-0.8% at $6\times$ width, $d=128$, $L=6$), consistent with [20]. A width sweep reveals a clean compression curve: $4\times$ saves 33% of FFN

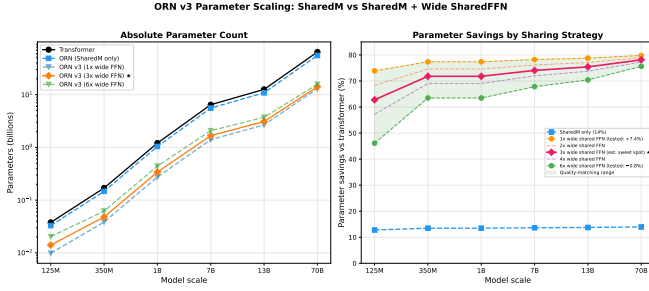


Figure 2: Parameter savings vs transformer across scales. Blue dashed: SharedM only ($\sim 14\%$). Coloured: SharedM + wide shared FFN at various widths. Green: quality-matching range ($1\times$: $+7.4\%$; $6\times$: -0.8%). For constrained deployment, $4\times$ (67% budget, $+1.6\%$) is the practical sweet spot.

budget at 1.6% cost; $3\times$ saves 50% at 2.7%; $2\times$ saves 67% at 3.7%.

The default is $6\times$ (matched params), the wide shared FFN is an architectural improvement, not a compression technique. The primary benefit is what sharing enables: (1) frozen backbone adaptation ($\sim 78\%$ of params frozen, $\sim 22\%$ trainable), (2) a unified architecture supporting AR, diffusion, multimodal, and variable-depth modes, and (3) coupling compression from shared $\mathbf{M}$. The compression dial is available for constrained deployment.

V3 ablation at small scale (V3-61M). An ablation-scale V3 at 61M parameters with a $6\times$ wide shared FFN (distinct from the 605M flagship discussed earlier) was trained for 3B tokens to probe the wide-shared-FFN axis cleanly. On a curated 128-text evaluation corpus it matches or slightly surpasses V2 (108M, per-layer FFN, 4B tokens) on form classification (96.8% vs 90.6%), topic classification (82.0% vs 78.2%) and STS semantic similarity (0.482 vs 0.489). $\mathbf{M}$'s effective rank is higher (407 vs 332): the wide shared FFN provides capacity alongside $\mathbf{M}$ so $\mathbf{M}$ uses more of its available dimensions. This small-scale V3 reaches V2-like representation quality at 56% of V2's parameter count and 75% of its training tokens, a compression gain that is the point of interest here rather than a headline benchmark claim.

Benchmark profile. The benchmark profile (Table 5) evolved with training. At 4B tokens, HellaSwag was the only task where the ORN came out ahead of GPT-2 Small. At 8B tokens (after WSD decay), ORN-V2's per-task numbers land higher than the two external baselines on six of eight tasks, including ARC-Easy, ARC-Challenge, and BoolQ. The WSD decay phase accounts for a large fraction of the downstream lift: ARC-Easy moved from 30.5% to 46.2% during decay, which is consistent with response heads continuing to adapt to a fixed coupling geometry (see Section 6 spectral-stability measurements during the decay window). The clearest shortfall is LAMBADA, where exact next-word prediction rewards token

coverage; separating architecture from training-data effects here is not clean, because the ORN has both 13% fewer total parameters and $37\text{--}75\times$ less training data than its baseline row. A matched-compute comparison (same-size ORN and transformer trained on the same 8B-token FineWeb-Edu run) would disambiguate, see Limitations. WinoGrande similarly underperforms a priori at this scale (models below 1B parameters are typically close to chance [24]).

The correction gates as diagnostics. The perturbative correction gates (initialised off, learn to activate) provide a built-in diagnostic. Gate magnitudes vary by modality (audio: 0.163, text: 0.106, images: 0.058), indicating where the mean-field coupling approximation is least sufficient. This could inform where to invest additional per-layer capacity in production models.

SharedM may force syntax into the residual stream (preliminary). A small head-to-head comparison with GPT-2 Small suggests the ORN's residual stream carries more syntactic structure than the transformer's. On a set of minimal-pair sentences (same-syntax-different-content: "The cat chased the dog" vs "The bird ate the worm"; same-words-different-syntax: "She saw him running" vs "Running, she saw him"), position-wise residual-cosine lands at 0.78 and 0.44 respectively for the ORN versus 0.996 and 0.990 for GPT-2. The induced "syntactic separation" (same-syntax cosine minus different-syntax cosine) is 0.35 for the ORN and 0.006 for GPT-2, a roughly $60\times$ gap on this hand-picked probe. The mechanism we posit is that GPT-2 can encode structural information in the *per-layer weight differences* between its L independent coupling matrices, while an ORN's shared $\mathbf{M}$ leaves the residual state as the only place structure can live.

We flag this as preliminary: the measurement is on a small curated pair set, not a standard benchmark such as BLiMP [23]. If the effect survives a broader evaluation it would be one of the more practically useful consequences of the architecture (residual-space interpretability, steering, composition). Follow-up experiments are in progress. A first indicative follow-up: a fitted 20×20 transition matrix reproduces the ORN residual trajectory on unseen prompts with $> 96.5\%$ cosine accuracy at all layers, consistent with a low-dimensional syntactic geometry in the residual stream.

Toward composable coupling (corn). Standard ORN layers form a pipeline: each layer expects specific intermediate representations from the previous one. A composable variant, where $T(s) \circ T(t) \approx T(s + t)$ for the coupling operator, would enable variable-depth computation, native diffusion, and iterative refinement. Our 4-modality results (Table 8) show CORN beating the transformer on 3 of 4 modalities, and preliminary results show

that the semigroup coupling parameter t and the diffusion noise level σ are numerically the same parameter. This connection between coupling dynamics and generative modelling is explored in a companion paper.

Limitations. The ORN is a genuinely different object from a standard transformer, and some of what looks like a limitation under transformer assumptions is an instance of the comparison not translating. We split this section into three kinds of remark: (A) comparisons and probes designed around per-layer transformers that do not carry over to ORN, (B) regimes where sharing the coupling rule is a real trade-off and could matter in real-world deployment, and (C) experimental gaps we intend to close.

(A) Comparisons that do not translate. *Post-hoc weight surgery does not produce a usable model.* Replacing W_Q, W_K in a frozen pretrained transformer with the fitted shared $\mathbf{M}$ from Section 4 gives degraded perplexity. This is not a weakness of ORN; it is a consequence of how it works. The response heads (W_V, W_O) in an ORN co-train with a specific shared $\mathbf{M}$ and occupy a specific rotational gauge (Section 3); substituting a shared $\mathbf{M}$ from a transformer that was trained in a different gauge puts the two halves out of register. End-to-end training is how ORN works; the existence proof in Section 4 motivates the architecture, it is not a drop-in replacement recipe.

Per-layer interpretability probes read a different carrier. A large literature on transformer interpretability reads information out of per-layer weights, or attributes circuits to specific layers (ROME-style edits, causal tracing by head, layer-specific probes [25]). In an ORN the equivalent of “layer 8’s attention” is not a thing; attention geometry is one shared object. Information that a transformer encodes in the differences between its per-layer W_Q, W_K matrices lives, in ORN, in the residual-stream trajectory through a fixed coupling. Probes that read layer weights will see less in ORN because less is there; probes that read the residual stream should see more (Section 8, preliminary). This is a reframing of what interpretability means on this architecture, not a deficiency of the architecture.

External baselines are not compute-matched. GPT-2 Small and SmolLM-135M saw 37–75 $\times$ more training tokens than ORN-V2. Table 5 should be read as “the architectural substitution does not hurt at this scale”, not as per-token superiority. A matched-tokens ORN-vs-transformer head-to-head on the same 8B FineWeb-Edu run is in progress.

(B) Real trade-offs of sharing the coupling. *Exact lexical retrieval at long range.* A standard transformer can devote some of its L coupling matrices to long-range lexical patterns and others to local syntax; per-layer specialisation is the mechanism. An ORN has one coupling rule everywhere, and any long-range exact-recall

behaviour has to be built across the residual-stream trajectory rather than at a specialised attention layer. LAMBADA is the canonical benchmark for this capability, and V2’s LAMBADA number (26.2%) is clearly below its data-rich baseline. At our current scale we cannot cleanly separate “less data” from “structural cost” because both confounders are present, but the structural piece is real. In a practical setting where exact lexical retrieval at long context matters (code completion, templated generation, faithful citation), this is the axis to watch.

Tasks where the coupling rule is not universal. The ORN’s thesis is that language coupling is approximately the same at every depth and that transformers converge to this property during training. If a domain exists where coupling genuinely is not universal, where some depths want a structurally different coupling rule, ORN caps there. We do not have a clean counter-example in natural-language tasks today. Plausible candidates include mixed symbolic / sub-symbolic work, multi-phase planning tasks, and sufficiently structured code, where depth-specialised attention plausibly matters more than it does in ordinary text. This is a hypothesis for future experiments, not a demonstrated failure mode.

Research patterns that depend on per-layer weight edits. If your downstream programme requires localised weight edits (ROME, ReFT, per-layer LoRA adapters targeting specific attention patterns), ORN is a different object. The equivalent operation lives in the response heads or in residual-stream interventions, which is a different research programme with, we suspect, several open questions of its own.

(C) Experimental gaps we intend to close.

(1) Matched-compute baseline (same-size transformer trained on the same 8B FineWeb-Edu tokens as V2, and a separate match at 3B for V3); (2) seed variance on Table 4, Table 9, and the small multimodal table; (3) full-harness V3-605M benchmark row (currently produced at `limit=200` on MPS, pending a full run); (4) spectral-invariance coverage beyond the GPT-2 family, SmolLM-135M, and Qwen-2.5 0.5B, to Llama, Mistral, Qwen3, DeepSeek, and SmolLM2; (5) the syntactic-separation measurement (Section 8) on a standard benchmark such as BLiMP [23]. None of these require a change to the architecture; all will appear in subsequent revisions.

9 Conclusion

Transformer attention coupling is spectrally redundant across layers, measurably so, and not explainable as a generic property of heavy-tailed matrices (Table 2 null model). The ORN substitutes one shared $\mathbf{M} = AB^\top$ for $2L$ per-layer W_Q, W_K matrices, with W_V, W_O , and the FFN remaining per-layer. Within-paper experiments support three narrow claims: the substitution tracks per-layer coupling at equal parameter count across 1M–108M scales, a frozen $\mathbf{M}$ transfers across datasets with

1.4% validation-loss degradation, and the emergent **M** crystallises to a low-rank geometry (effective rank 19–70, coupling-manifold dimensionality 5–8) consistent with what we measure on pretrained transformers.

These are not SOTA claims. Compute-matched ablations, seed-variability error bars, and scale beyond 605M are all future work. What we think is interesting is the shared object itself: low-rank, stable during training, consistent across model families, and directly reusable as a backbone for mixture-of-experts, response-only fine-tuning, and interpretability work that has otherwise had to reason about millions of diffuse per-layer weights. These engineering consequences are where we expect the payoff of the decomposition to lie.

All code, checkpoints, and experiment scripts are publicly available at the repository in the title footnote.

References

- [1] A. Vaswani et al. Attention Is All You Need. *NeurIPS*, 2017.
- [2] Z. Lan et al. ALBERT: A Lite BERT for Self-supervised Learning of Language Representations. *ICLR*, 2020.
- [3] Y. Xiao et al. Sharing Attention Weights for Fast Transformer. *IJCAI*, 2019.
- [4] S. Takase and S. Kiyono. Lessons on Parameter Sharing across Layers in Transformers. *arXiv:2104.06022*, 2021.
- [5] Share Your Attention: Transformer Weight Sharing via Matrix-based Dictionary Learning. *arXiv:2508.04581*, 2025.
- [6] Leveraging Redundancy in Attention with Reuse Transformers. *arXiv:2110.06821*, 2021.
- [7] M. Dehghani et al. Universal Transformers. *ICLR*, 2019.
- [8] A. Gu and T. Dao. Mamba: Linear-Time Sequence Modeling with Selective State Spaces. *arXiv:2312.00752*, 2023.
- [9] O. Lieber et al. Jamba: A Hybrid Transformer-Mamba Language Model. *arXiv:2403.19887*, 2024.
- [10] A. Katharopoulos et al. Transformers are RNNs: Fast Autoregressive Transformers with Linear Attention. *ICML*, 2020.
- [11] T. Dao et al. FlashAttention: Fast and Memory-Efficient Exact Attention with IO-Awareness. *NeurIPS*, 2022.
- [12] K. He et al. Deep Residual Learning for Image Recognition. *CVPR*, 2016.
- [13] Self-attention Networks Localize When QK-eigenspectrum Concentrates. *arXiv:2402.02098*, 2024.
- [14] Mind the Gap: A Spectral Analysis of Rank Collapse and Signal Propagation in Attention Layers. *arXiv:2410.07799*, 2024.
- [15] S. Brunton and J. Kutz. *Data-Driven Science and Engineering: Machine Learning, Dynamical Systems, and Control*. Cambridge University Press, 2nd edition, 2022.
- [16] S. Kornblith et al. Similarity of Neural Network Representations Revisited. *ICML*, 2019.
- [17] J. Ainslie et al. GQA: Training Generalized Multi-Query Transformer Models from Multi-Head Checkpoints. *EMNLP*, 2023.
- [18] J. Su et al. RoFormer: Enhanced Transformer with Rotary Position Embedding. *Neurocomputing*, 2024.
- [19] J. L. McClelland et al. Why There Are Complementary Learning Systems in the Hippocampus and Neocortex. *Psychological Review*, 102(3):419–457, 1995.
- [20] T. Pires, A. V. Lopes et al. One Wide Feedforward is All You Need. *Proceedings of EMNLP / WMT*, arXiv:2309.01826, 2023.
- [21] S. Bae et al. Relaxing Recursive Transformers with Per-Layer Low-Rank Adaptation. *ICLR*, arXiv:2410.20672, 2025.
- [22] N. Shazeer. Fast Transformer Decoding: One Write-Head is All You Need. *arXiv:1911.02150*, 2019.
- [23] A. Warstadt, A. Parrish, H. Liu, A. Mohanney, W. Peng, S.-F. Wang, and S. R. Bowman. BLiMP: The Benchmark of Linguistic Minimal Pairs for English. *Transactions of the ACL*, 2020.
- [24] K. Sakaguchi, R. L. Bras, C. Bhagavatula, and Y. Choi. WinoGrande: An Adversarial Winograd Schema Challenge at Scale. *AAAI*, 2020.
- [25] J. Hewitt and C. D. Manning. A Structural Probe for Finding Syntax in Word Representations. *NAACL-HLT*, 2019.