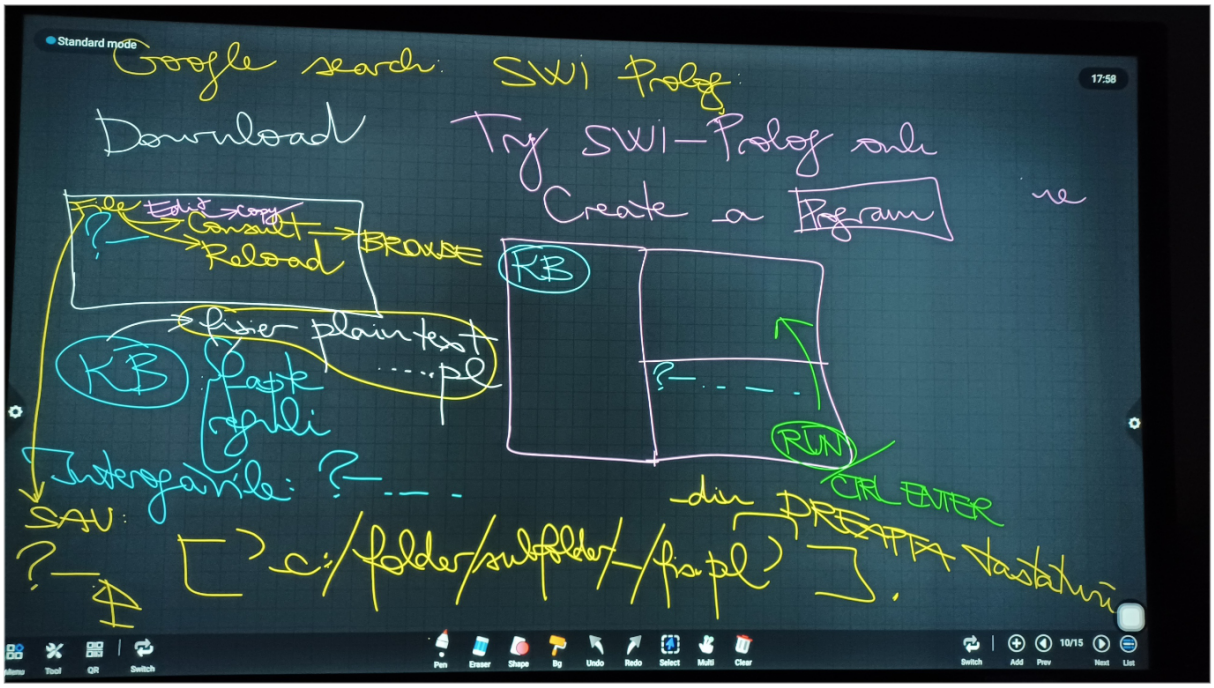
Standard mode
Google search: SWI Prolog
Download
Try SWI-Prolog only
Create a Program
File Edit Consult Reload
BROWSE
KB
fisier plain text .....pl
fapt.pl
Interogarile: ?-
SAU
?- [c:/folder/subfolder/fis.pl].
RUN / CTRL ENTER
17:58

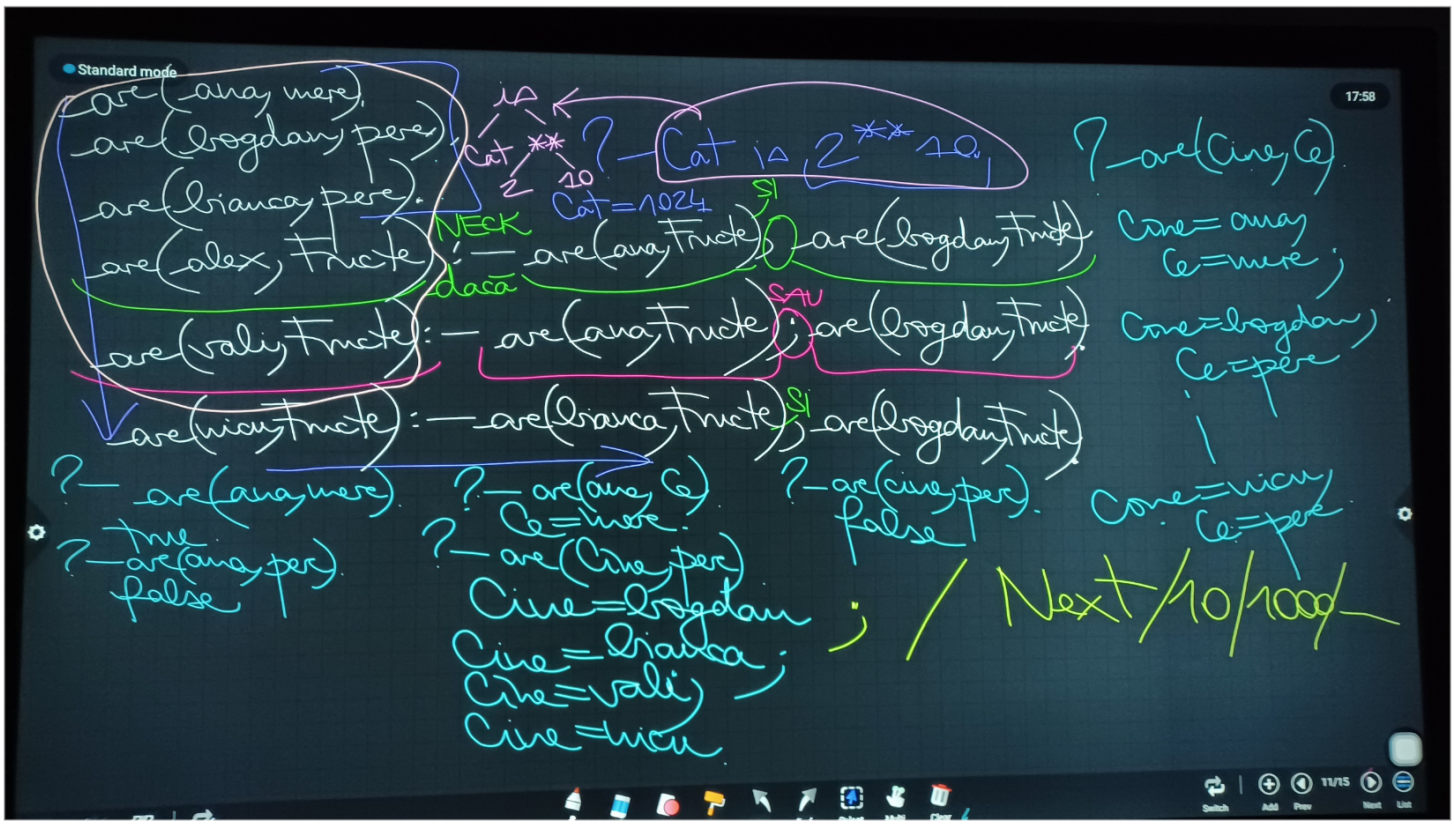
Standard mode
are(ana,mere).
are(bogdan,pere).
are(bianca,pere).
are(alex,fructe).
are(vali,fructe):-are(ana,fructe),are(bogdan,fructe).
are(nicu,fructe):-are(bianca,fructe),are(bogdan,fructe).
NECK
daca
SAU
SI
Cat ** 10 = 1024
?- Cat is 2**10.
?- are(cine,ce).
cine=ana ce=mere;
cine=bogdan ce=pere;
cine=nicu ce=pere
?- are(ana,mere). true
?- are(ana,pere). false
?- are(ana,ce). ce=mere.
?- are(cine,pere). cine=bogdan; cine=bianca; cine=vali; cine=nicu
?- are(cine,pere). false
Next/10/1000
17:58

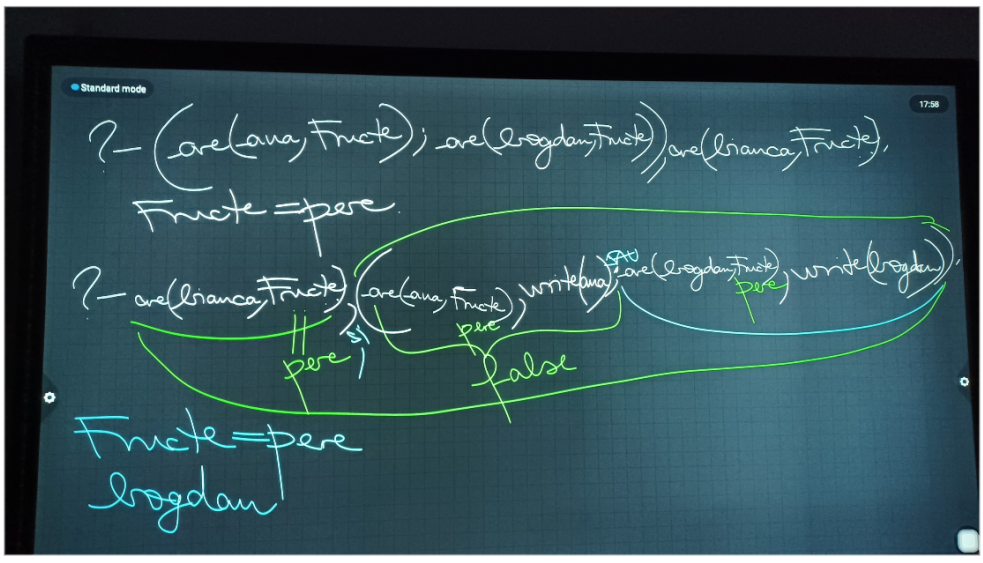
Standard mode
?- (are(ana,fructe), are(bogdan,fructe)), are(bianca,fructe).
fructe=pere
?- are(bianca,fructe), (are(ana,fructe), write(ana), SAU are(bogdan,fructe), write(bogdan)).
pere
SI
pere
false
fructe=pere
bogdan
17:58

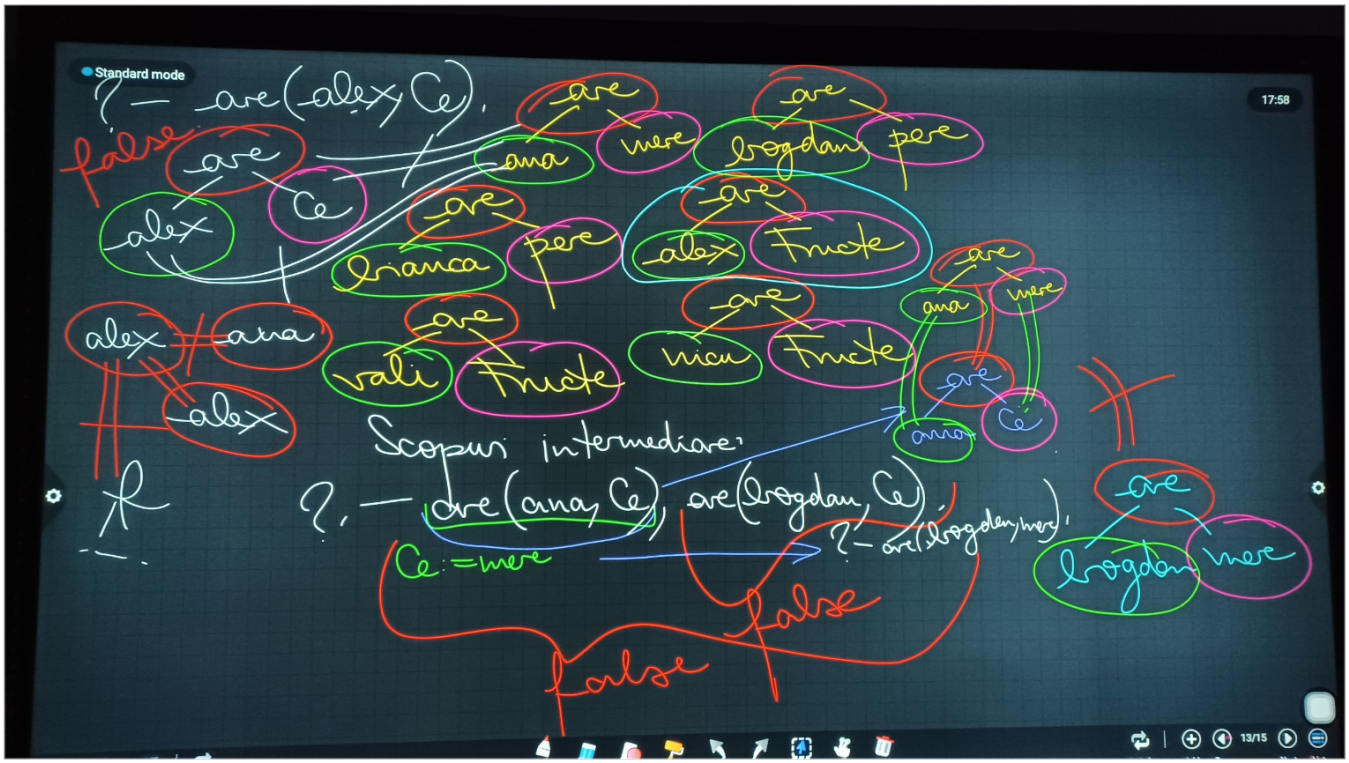
Standard mode
17:58
?- are(alex, Ce).
false
are
alex
Ce
ana
mere
bogdan
pere
bianca
Fructe
vali
nicu
Scopuri intermediare:
?- are(ana, Ce), are(bogdan, Ce).
Ce:=mere
?- are(bogdan, mere).
13/15

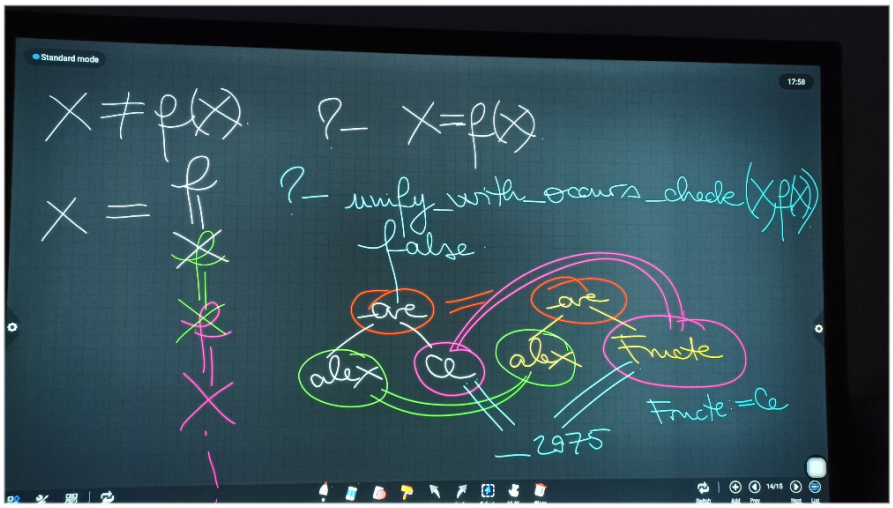
Standard mode
17:58
X ≠ f(X)
?- X=f(X).
X = f
?- unify_with_occurs_check(X,f(X))
false
are
alex
Ce
Fructe
Fructe:=Ce
_2975
14/15

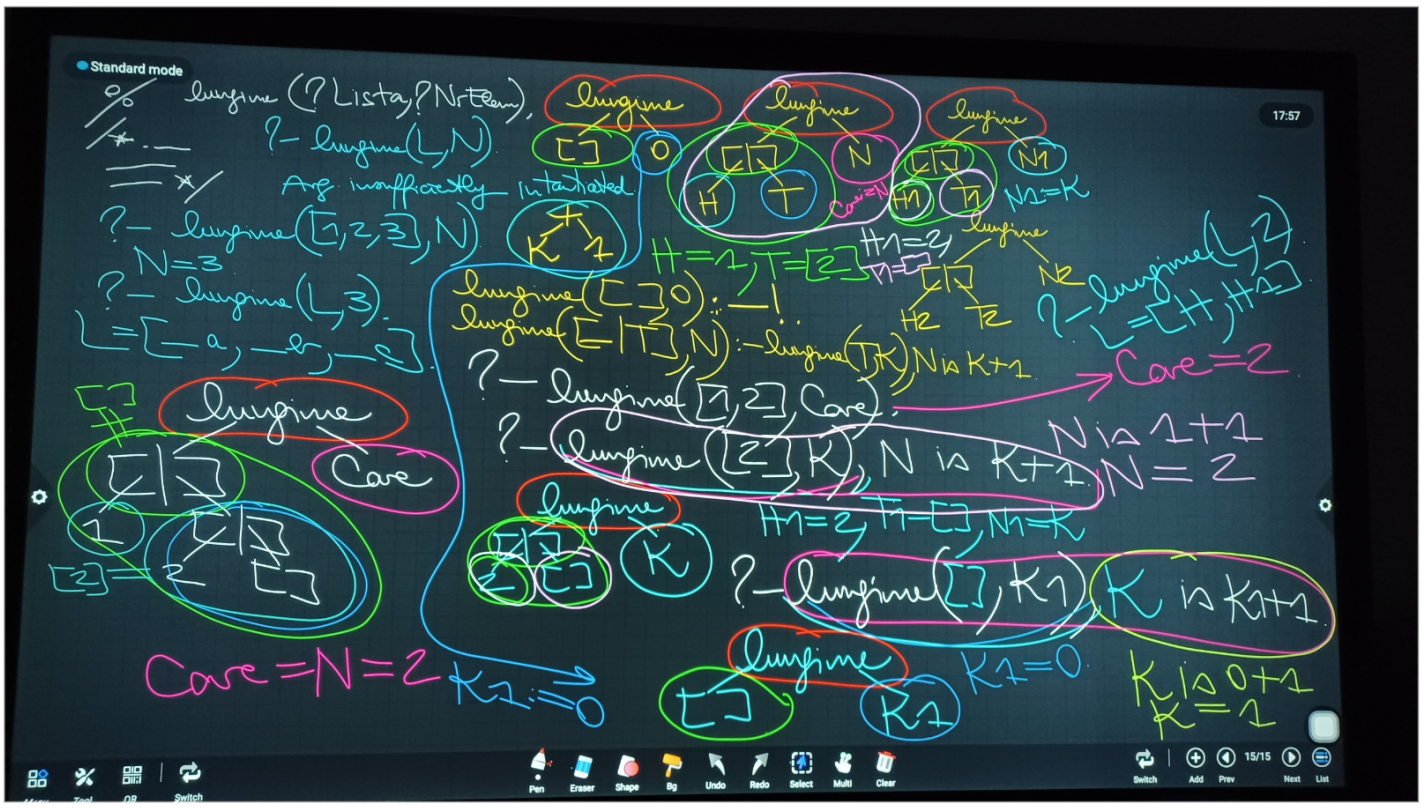
Standard mode
17:57
lungime(?Lista,?Nr_elem).
?- lungime(L,N).
Arg insuficient instantiated
?- lungime([1,2,3],N).
N=3
?- lungime(L,3).
L=[_a,_b,_c].
lungime([],0).
lungime([H|T],N):-lungime(T,K),N is K+1.
?- lungime([1,2],Care).
Care=2
?- lungime([1],K),N is K+1.
N=2
?- lungime([],K1),K is K1+1.
Care=N=2
K1:=0
K1=0
K is 0+1
K=1
Switch
Add
Prev
Next
List
15/15
Pen
Eraser
Shape
Bg
Undo
Redo
Select
Multi
Clear