



Guidelines for implementing WSPay using WSPayForm 2.0

Documentation version: 7.1.12

Table of contents

1. Change logs.....	4
2. About document and instructions	8
3. WSPayForm	9
3.1. Introduction to WSPayForm	9
3.2. How to use WSPayForm.....	10
3.3. Address for the POST request.....	11
3.4. HTML form parameters.....	12
3.4.1. Mandatory parameters.....	13
3.4.2. Optional parameters.....	16
3.5. Examples of HTML form.....	19
3.6. Parameters which WSPayForm returns to web shop	20
3.6.1. ReturnURL	20
3.6.2. ReturnErrorURL	22
3.6.3. CancelURL.....	24
3.7. WSPayForm sizes.....	25
4. Transaction report – CallbackURL.....	26
4.1. Example of POST data	26
5. Additional merchant services API.....	33
5.1. Web API “Completion” method	33
5.1.1. “Completion” request	34
5.1.2. “Completion” response	35
5.2. Web API “Refund” method	37
5.3. Web API “Void” method	38
5.4. Web API “Status Check” method.....	39
5.4.1. “Status Check” request.....	40
5.4.2. “Status Check” response.....	42
5.5. Web API “Installment check” method	48
5.5.1. “Installment Check” request.....	49
5.5.2. “Installment Check” response.....	51
5.6. Web API “Authorization Announce” method	53
5.6.1. “Authorization Announce” request	54
5.6.2. “Authorization Announce” response	56
5.7. Web API “Create Transaction” method	58
5.7.1. “Create Transaction” request	59
5.7.2. “Create Transaction” response	62
6. WSPayForm tokenization	63
6.1. Introduction to WSPayForm tokenization	64

6.2. Tokenization on WSPayForm.....	65
6.3. WSPayForm payment using token.....	65
6.4. Direct payment using token	66
6.4.1. "Direct payment using token" request	67
6.4.2. "Direct payment using token" response	71
7. WSPayForm inside iframe	74
8. Marketplace	76
8.1. "Marketplace" request	77
8.2. "Marketplace" response	80
8.3. Marketplace settlement	82
8.3.1. "Marketplace settlement" – request.....	82
8.3.2. "Marketplace settlement" – response.....	84
8.4. Marketplace completion.....	85
8.5. Marketplace refund	85
9. Document Appendix.....	86
9.1. Language	86
9.2. Credit card brands	87
9.3. Payment methods.....	88
9.4. Partners	88
9.5. Error codes	89
9.6. Payment with tokenized card.....	95
9.7. Payment type codes and groups	98

1. Change logs

Documentation version	Change date	Change description	Changed by
6.0.1	08.04.2020.	Updated content – updated information - Payment using token	Meri Terihaj Ćelić
6.0.2	09.04.2020.	Updated content - „additional ShopID” in Chapter 7. Payment using token – JSON	Meri Terihaj Ćelić
6.0.2-1	22.04.2020.	Small changes: Amount format Added languages for BiH and Montenegro	Meri Terihaj Ćelić
6.0.3	23.04.2020.	Updated SIGNATURE – Hash generator	Meri Terihaj Ćelić
6.0.4	24.04.2020.	Updated CallBackURL and StatusCheck	Meri Terihaj Ćelić
6.0.5	28.04.2020.	Updated information about the second ApprovalCode in Web API “Completion” method and Web API “Refund” method	Meri Terihaj Ćelić
7.0.0	20.05.2020.	Updated info for WSPayForm Version 2.0: - Signature generation using SHA512 instead of MD5 - New WSPayForm and API services parameter “Version”:“2.0”	Meri Terihaj Ćelić
7.0.1	21.05.2020.	Added JSON installments check in case of Tokenized checkout Added AuthorizationAnnounce method	Meri Terihaj Ćelić
7.0.2	24.06.2020.	Document redesigned for better readability.	Ivan Zubak

7.0.3	01.07.2020.	Edited signature generation for ReturnErrorUrl. Added new parameters to CancelURL: ApprovalCode, Success Edited signature generation for CancelUrl.	Ivan Zubak
-------	-------------	---	------------

7.0.4	08.07.2020.	Error codes added.	Ivan Zubak
7.0.5	15.07.2020.	ShoppingCartID parameter added to Web API "Status Check" response. Web API "Create Transaction" method added.	Ivan Zubak
7.0.6	27.07.2020.	New Error codes added.	Ivan Zubak
7.0.7	03.09.2020.	ShoppingCartId parameter changed to ShoppingCartID for system consistency. WSPayOrderId parameter in examples changed to WsPayOrderId for documentation consistency. Deprecation notice for Success parameter in Transaction report – CallbackURL and Web API "Status Check" response added.	Ivan Zubak
7.0.8	08.09.2020.	New Error codes added. New optional parameter added: IFrameResponseTarget.	Ivan Zubak

7.0.9	03.10.2020.	OnSite parameter added to TransactionReport – CallbackURL and Web API “StatusCheck” response. Available ports for TransactionReport – CallbackURL added. New Error codes added. New section added: WSPayForm inside Iframe.	Ivan Zubak
7.1.0	20.10.2020.	URL to Signature Generator (https://signature.wspay.info) added. CustomerCountry parameter updated to use “ISO 3166-1 alpha2” two letter country code. IMPORTANT: WSPayForm tokenization has been expanded with new rules according to PSD2 regulations starting from 01.01.2021.	Ivan Zubak
7.1.1	04.12.2020.	ShoppingCartID validation added VALU added as possible Payment method. New error codes added. Additional note for using WSPayForm payment using token added: WSPay must provide an additional ShopID that will be used for WSPayForm payment using token. Iframe parameter added for WSPayForm inside iframe implementation.	Ivan Zubak
7.1.2	15.02.2020.	CurrencyCode parameter added to Transaction Report – CallbackURL and StatusCheck response.	Ivan Zubak

7.1.3	01.03.2021.	KEKS Pay, Aircash and PayCek added as possible Payment methods. New error codes added.	Ivan Zubak
7.1.4.	19.05.2021.	Description for Lang parameter changed. Note for Maestro tokenization added.	Ivan Zubak
7.1.5.	23.07.2021.	Marketplace implementation added. Marketplace settlement added.	Ivan Zubak
7.1.6.	13.09.2021.	Marketplace refund added. Marketplace completion added.	Ivan Zubak
7.1.7.	06.04.2022.	Note for M prefix when using "Direct payment using token" method added.	Ivan Zubak
7.1.8.	03.05.2022.	"PaymentMethods" property added to "Authorization Announce" request.	Ivan Zubak
7.1.9.	29.05.2022.	New languages added: Bulgarian, Romanian, Greek.	Ivan Zubak
7.1.10.	03.11.2022.	"CurrencyCode" parameter added to HTML form optional parameters.	Ivan Zubak
7.1.11.	09.01.2023.	New payment method added: GooglePay	Ivan Zubak
7.1.12.	16.07.2025.	Optional accessibility parameters added for the WSPayForm. Updated ReturnURL and the Transaction report. Additional languages added.	Bruno Bezjak

2. About document and instructions

This document contains instructions for implementation, functioning and internet data exchange between web shop and WSPay in real-time card authorization process.

In this document you can find the instructions for implementing communication between web shop and WSPay.

Using TLS 1.2 and SSL is required to protect data transmissions between web shop and WSPay and this is all included within WSPayForm.

WSPay is PCI DSS L1 certified.

It's important to emphasize that WSPayForm uses all recommended security methods in order to protect the participants in the transmission process (i.e. customers, web shop etc.).

3. WSPayForm

Detailed instructions for communication implementation between web shop and WSPayForm system is described in the following chapters.

3.1. Introduction to WSPayForm

WSPayForm integration method provides web shops with a complete solution for secure authorization and charging orders, invoices and other selling types.

WSPayForm contains the complete functionality which web shops need to implement, in order to satisfy technical and safety requirements:

- Validation of customer personal and credit card data
- Generating encrypted signature in order to prevent unwanted data exchange
- 3D Secure authentication in accordance to 3DS 2.1
- Secure connection through TLS 1.2 protocol
- Compliance with the PCI DSS standards

3.2. How to use WSPayForm

After the merchant fills in an application form and registers with WSPay, the parameters which are needed for implementation will be provided:

- ShopID - unique identification of web shop.
- SecretKey - secret key used for generating signature.

Important: SecretKey must be kept in secrecy to protect the privacy of online shop.

Warning: Do not put SecretKey into web form or in any public document.

In order to charge goods or services, web shops need to implement HTML form inside HTML document. This form can contain mandatory and optional information about the web shop, customer and customer order. This form must be posted to one of the addresses depending on shop status.

HTML form can contain information about one or several products, but in either case the total amount needs to be sent to WSPayForm.

After successful, unsuccessful or cancelled transaction - WSPayForm depending on status of transaction redirects customer to URL defined by web shop.

3.3. Address for the POST request

When sending a request, care must be taken that the application sends data to the following addresses, depending on the current shop status:

<https://formtest.wspay.biz/authorization.aspx> - when the shop is in **TEST** mode

<https://form.wspay.biz/authorization.aspx> - when the shop is in **PRODUCTION** mode

Test and production environments are programmatically identical, except when it comes to possibilities of payment with test cards or real cards.

3.4. HTML form parameters

There are two kinds of parameters: Mandatory parameters and Optional parameters.

Mandatory parameters are those which customers cannot change once they get on WSPayForm and that data represents mandatory transaction data.

Optional parameters are those that can be sent to WSPayForm in order to speed up the buying process since customers do not need to enter their personal information again.

3.4.1. Mandatory parameters

These are the parameters that the web shop must send to WSPayForm in order to start communication.

Parameter	Example
ShopID	MYSHOP
ShoppingCartID	78
Version	2.0
TotalAmount	17,00
ReturnURL	https://myshop.com/success
ReturnErrorURL	https://myshop.com/error
CancelURL	https://myshop.com/cancel
Signature	23455eaf0029bac73613eb00d5242dcf 2a5e39fa8d65b26905974dcf61bfbccda af0963d79dd73adae117ef108378a2b6 61faaba5c5ff4c33935fae13fad90a7

ShopID

ShopID represents a unique identification of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

ShoppingCartID is unique identification of shopping basket or product.

It must be unique. In case there is already a successful transaction with the same ShoppingCart ID, that ID cannot be used again for future transactions.

ShoppingCartID should not contain any character different from:

- Letters:
ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz
- Numbers: 0123456789 • Special characters: _-.

Version

Version parameter represents version of WSPay form to be used. For successful communication version parameter must be **2.0**.

TotalAmount

TotalAmount is amount for which the customer will be charged, expressed in agreed currency (HRK, RSD, BAM, EUR, USD...), TotalAmount parameter must be formatted without dots as thousand separators. **Decimal point can only be defined as comma**. For example, if Amount is in EUR, after the decimal point, only the first two digits indicating the amount in cents will be considered.

Example 1
Number: 3.650,35

Final format of TotalAmount parameter: **3650,35**

Example 2

Number: 27.488,00

Final format of TotalAmount parameter: **27488,00**

ReturnURL

ReturnURL represents https address where the customer will be redirected after successful transaction.

WSPayForm redirects to page defined in ReturnURL parameter and returns parameters based on concrete transaction. HTTP method that will be used for sending these parameters depends on ReturnMethod parameter as described in [Optional parameters](#) chapter.

Parameters that are returned to web shop are described in chapter [Parameters which WSPayForm returns to web shop - ReturnURL](#).

ReturnErrorURL

Represents https address where customer will be redirected in case of communication or transaction error.

WSPayForm redirects to page defined in ReturnErrorURL parameter and returns parameters based on concrete transaction. HTTP method that will be used for sending these parameters depends on ReturnMethod parameter as described in [Optional parameters](#) chapter.

Parameters that are returned to web shop are described in chapter [Parameters which WSPayForm returns to web shop - ReturnErrorURL](#).

CancelURL

Represents https address where customer will be redirected in case the customer cancelled the transaction process or in the case of the form data entrance timeout.

WSPayForm redirects to page defined in CancelURL parameter and returns parameters based on concrete transaction. HTTP method that will be used for sending these parameters depends on ReturnMethod parameter as described in [Optional parameters](#) chapter.

Parameters that are returned to web shop are described in chapter [Parameters which WSPayForm returns to web shop - CancelURL](#).

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
TotalAmount
SecretKey

Note that TotalAmount parameter needs to be converted into string without dots and commas.

Example of TotalAmount 1:

Amount: 7.250,88

Final format of TotalAmount parameter for hashing: 725088

Example of TotalAmount 2:

Amount: 35,00

Final format of TotalAmount parameter for hashing: 3500

Example of signature generation if values for signature are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

ShoppingCartID = "78" Amount
= "1700"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEh17003DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d79dd73adae117e
f108378a2b661faaba5c5ff4c33935fae13fad90a7

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

3.4.2. Optional parameters

Web shop can optionally send parameters to WSPayForm in order to include additional configuration or to speed up buying process.

Parameter	Example
Lang	EN
CustomerFirstName	John
CustomerLastName	Doe
CustomerAddress	Street address 10
CustomerCity	City
CustomerZIP	51000
CustomerCountry	HR
CustomerEmail	john@doe.com
CustomerPhone	0911111111
PaymentPlan	0603
CreditCardName	VISA
PaymentMethod	CreditCard
IntAmount	100,00
IntCurrency	EUR
ReturnMethod	GET
CurrencyCode	191
LargeFont	true
DyslexiaFont	true
HighContrast	true
EnableAccessibilityOptions	true

Some optional parameters, except in "Shorter version of WSPayForm" described in chapter [WSPayForm sizes](#), can be changed by customer once he is on the WSPayForm. Therefore, it is not recommended to use optional parameters as reference in the identification process. Instead, ShoppingCartID should be used for order identification.

Lang

Lang value defines language that will be used as WSPayForm user interface language. If Lang parameter is not sent from the web shop - default user interface language will be the one defined by WSPay in Shop configuration. Possible values are available in chapter [Document appendix - Language](#).

CustomerFirstName

Customer first name.

CustomerLastName

Customer last name.

CustomerAddress

Customer street address.

CustomerCity

Customer city.

CustomerZIP

Customer postal code.

CustomerCountry

Customer country represented in "ISO 3166-1 alpha-2" two letter country code.

CustomerPhone

Customer phone number.

CustomerEmail

Customer e-mail address.

PaymentPlan

Value of PaymentPlan is a field that contains two sub-fields. Every sub-field has two digits. First subfield represents number of payments, and second field represents the grace period.

Examples:

„0000" – no payment plan (installments are not allowed), only payment at once.

„0600" – payment through 6 installments and without grace period.

„0602" – payment through 6 installments, first installment postponed for 2 months.

If PaymentPlan is not sent from the web shop, the customer will be able to pay in installments only if the shop has agreed installment payments with the bank, and if his credit card allows him to choose installments.

CreditCardName

Name of card brand that must be used for this transaction. Sending this parameter blocks choosing any other card brand at WSPayForm. Possible values of CreditCardName parameter are available in chapter [Document appendix - Credit card brands](#).

PaymentMethod

Name of payment method that must be used for this transaction. Sending this parameter blocks choosing any other payment method at WSPayForm. Possible values of PaymentMethod parameter are available in chapter [Document appendix – Payment methods](#).

IntAmount and **IntCurrency**

IntAmount and IntCurrency parameters represent an informative amount in other converted currency. For example, if TotalAmount of 750,00 is sent to WSPayForm; then IntAmount could be 100,00 and IntCurrency could be EUR which will result in an informative amount shown to customer as ~100,00 EUR.

ReturnMethod

ReturnMethod parameter will tell WSPayForm which HTTP method will be used for redirecting customer to ReturnURL, ReturnErrorURL and CancelURL. Possible values of ReturnMethod parameter are GET or POST. If ReturnMethod parameter is not sent, WSPayForm will use GET method as default.

If GET method is used WSPayForm will send transaction information through query parameters. If POST method is used, then transaction information will POST form to provided URL-s.

CurrencyCode

CurrencyCode parameter will identify whether currency code configured for merchant is the same as the one being sent. If is not the case, payment will be unsuccessful.

CurrencyCode must be formatted as ISO 4217 numeric code.

This is useful for merchants in countries undergoing currency migration.

LargeFont

Boolean flag (true/false) indicating whether the WSPayForm should use a larger font size for improved readability.

DyslexiaFont

Boolean flag (true/false) that enables a font type designed to improve readability for users with dyslexia.

HighContrast

Boolean flag (true/false) that enables a high-contrast visual theme on the WSPayForm to enhance visibility for user with visual impairments.

EnableAccessibilityOptions

Boolean flag (true/false) that enables accessibility support on the WSPayForm.

3.5. Examples of HTML form

Example 1:

This is an example of HTML form which contains only mandatory information needed to successfully start the transaction process.

Values used:

Web shop (ShopID): MYSHOP

Secret key: 3DfEO2B5Jm4VC1Q3vEh

Shopping basket id: 78

Transaction amount: 17,00

Signature:

23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d79dd73adae117ef108378a2b661faaba5c5ff4c33935fae13fad90a7

```
<form name="pay" action="https://form.wspay.biz/authorization.aspx" method="POST">
  <input type="hidden" name="ShopID" value="MYSHOP">
  <input type="hidden" name="ShoppingCartID" value="78"> <input
type="hidden" name="Version" value="2.0">
  <input type="hidden" name="TotalAmount" value="17,00">
  <input type="hidden" name="Signature"
value="23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d
79dd73adae117ef108378a2b661faaba5c5ff4c33935fae13fad90a7">
  <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
  <input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
  <input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
  <input type="submit" value="Pay">
</form>
```

Example 2:

This is an example of HTML form which contains additional information about order, customer and web shop.

Values used:

ShopID: MYSHOP

Secret key: 3DfEO2B5Jm4VC1Q3vEh

Shopping cart id: 78 Transaction

amount: 750,00 Signature:

eeec66cb27ef849bbf241527fb05911865c2e84b287bb24dbf34180f700ed62204ef27173ddb685e1a58f245005c6f76dc0ae0cd813e843167033aa7a2655431

Language: English

Customer name: John

Customer last name: Doe

Customer address: Street address 10

Customer city: City

Customer postal code: 51000

Customer country: HR

Customer e-mail: john@doe.com

Customer contact phone: 0911111111
Payment installments: 6

Grace period: 3
CreditCardName: VISA
IntAmount: 100,00
IntCurrency: EUR

```
<form name="pay" action="https://form.wspay.biz/authorization.aspx" method="POST">
  <input type="hidden" name="ShopID" value="MYSHOP">
  <input type="hidden" name="ShoppingCartID" value="78">
  <input type="hidden" name="Version" value="2.0">
  <input type="hidden" name="TotalAmount" value="750,00">
  <input type="hidden" name="Signature" value="
eeec66cb27ef849bbf241527fb05911865c2e84b287bb24dbf34180f700ed62204ef27173ddb685
e1a58f245005c6f76dc0ae0cd813e843167033aa7a2655431">
  <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
  <input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
  <input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
  <input type="hidden" name="Lang" value="EN">
  <input type="hidden" name="CustomerFirstName" value="John">
  <input type="hidden" name="CustomerLastName" value="Doe">
  <input type="hidden" name="CustomerEmail" value="john@doe.com">
  <input type="hidden" name="CustomerAddress" value="Street address 10">
  <input type="hidden" name="CustomerCity" value="City">
  <input type="hidden" name="CustomerZIP" value="51000">
  <input type="hidden" name="CustomerCountry" value="HR">
  <input type="hidden" name="CustomerPhone" value="0911111111">
  <input type="hidden" name="PaymentPlan" value="0603">
  <input type="hidden" name="CreditCardName" value="VISA">
  <input type="hidden" name="IntAmount" value="100,00">
  <input type="hidden" name="IntCurrency" value="EUR">
  <input type="submit" value="Pay">
</form>
```

3.6. Parameters which WSPayForm returns to web shop

3.6.1. ReturnURL

ApprovalCode, Success and Signature represents three most important parameters for checking successful transaction process.

So, if the transaction was successful, ApprovalCode parameter must not be empty, Success parameter must be 1 and returned signature must match the signature generated on web shop side.

CustomerFirstName – customer first name

CustomerSurname – customer last name

CustomerAddress – customer street address

CustomerCity - customer city

CustomerZIP - customer postal code

CustomerCountry - customer country

CustomerPhone - customer phone number

CustomerEmail - customer e-mail address

ShoppingCartID - unique identification of shopping basket or product

Lang - language used of WSPayForm

DateTime - date and time of transaction

Amount - charging amount

ECI - represents result of 3D Secure authentication (Electronic Commerce Indicator)

STAN - alphanumeric field that indicates the sequence of transaction

Partner - representing partner which has processed the transaction. Possible values of Partner parameters are available in chapter [Document appendix - Partners](#)

WsPayOrderId - alphanumeric field that indicates the sequence of the transaction in the WSPay. It's recommended that this value is saved at web shop's side

PaymentType - name of credit card brand which customer used in process. Possible values of credit card brands are available in chapter [Document appendix - Credit card brands](#)

CreditCardNumber - masked number of credit card used for this transaction

PaymentPlan - number of installments and deferred payments chosen by user

ShopPostedPaymentPlan - the original value of the PaymentPlan parameter if sent by the merchant

Success - value of Success parameter will be 1 for successful transaction

ApprovalCode - transaction approval code

ErrorMessage - value of ErrorMessage parameter will be empty for successful transaction

LargeFont - value is 1 if the large font setting was applied, or 0 if it was not

DyslexiaFont - value is 1 if the dyslexia-friendly font was applied, or 0 if it was not

HighContrast - value is 1 if the high-contrast theme was applied, or 0 if it was not

Completed - indicates whether the transaction has been successfully completed

PaymentTransactionType - value representing the type of transaction (CIT, MoTo, MIT)

Signature - SHA512 hash that is used to verify the authenticity of this request.
Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID

SecretKey

ShoppingCartID

SecretKey Success

SecretKey

ApprovalCode SecretKey

Merchant should validate this signature to make sure that the request is originating from WSPayForm.

Signature example:

Example of signature generation if values are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

ShoppingCartID = "78"

Success = "1"

ApprovalCode = "961792"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEh13DfEO2B5Jjm4VC1Q3vEh9617923DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

57cf8a5c7b611b9d53579166fe4ad2f2260924a2713279760ed7b758ec623d6f0d7e28224996c59cfe6d5e50e36736e604ca2e727d4ee5016b513bc8a85cace4

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

3.6.2. ReturnErrorURL

CustomerFirstName – customer first name

CustomerSurname – customer last name

CustomerAddress – customer street address

CustomerCity - customer city

CustomerZIP - customer postal code

CustomerCountry - customer country

CustomerPhone - customer phone number

CustomerEmail - customer e-mail address

ShoppingCartID - unique identification of shopping basket or product

Lang – language used on WSPayForm

DateTime – date and time of transaction

Amount – charging amount

ECI - represents result of 3D Secure authentication (Electronic Commerce Indicator)

PaymentType – name of credit card brand which customer used in process. Possible values of credit card brands are available in [Document appendix – Credit card brands](#).

PaymentPlan - number of installments and deferred payments chosen by user

ShopPostedPaymentPlan - the original value of the PaymentPlan parameter if sent by the merchant

ShopPostedLang – the original value of the Lang parameter if sent by the merchant

ShopPostedCreditCardName - the original value of the CreditCardName parameter if sent by the merchant

Success – value of Success parameter will be 0 if transaction is unsuccessful *

ApprovalCode - transaction approval code, it will be empty in unsuccessful transaction

ErrorMessage - value of ErrorMessage parameter will be „ODBIJENO“ or „DECLINED“ if transaction is unsuccessful. *

* In case where customer does some unexpected browser manipulation while doing FULL 3DS authentication it is possible that user initiates two or more different payment processing threads where one of them gets processed and another gets rejected. This will result in a situation where customer will be redirected to ReturnErrorURL where ApprovalCode will be available and Success will equal 1. If this, rare but possible situation, happens it is recommended to implement status check of that specific transaction using our Status Check API and act according to API response. Instead of using Status Check API, this situation can also be resolved by using CallbackURL integration.

ShopPostedPaymentMethod - the original value of the PaymentMethod parameter if sent by the merchant

ErrorCodes - error codes represent a reason why was customer redirected to ReturnErrorURL. Errors are described in chapter [Document appendix – Error codes](#).

If multiple errors occur, then query parameters (if GET ReturnMethod is used) or key-value pairs (if POST ReturnMethod is used) will have multiple instances of ErrorCodes parameter.

LargeFont – value is 1 if the large font setting was applied, or 0 if it was not

DyslexiaFont – value is 1 if the dyslexia-friendly font was applied, or 0 if it was not

HighContrast – value is 1 if the high-contrast theme was applied, or 0 if it was not

Signature - SHA512 hash that is used to verify the authenticity of this query. Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey Success
SecretKey
ApprovalCode SecretKey

Merchant should validate this signature to make sure that the request is originating from WSPayForm.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jm4VC1Q3vEh"
ShoppingCartID = "78"
Success = "0" ApprovalCode
= null

String before hashing:

MYSHOP3DfEO2B5Jm4VC1Q3vEh783DfEO2B5Jm4VC1Q3vEh03DfEO2B5Jm4VC1Q3vEh3DfEO2B5Jm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

51065bd82eeb69f8f3e458e969d251f3f6b9c464a28f654df586a89078c0fde45b6e38c9f379750f9c5cac8036c27cf76706c8f5fe200df7596398d8c73fd486

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

3.6.3. CancelURL

ResponseCode – code that represents reason why was customer redirected to CancelURL. ResponseCode will be 15 if user cancels transaction by himself or 16 if timeout happens.

A timeout for data entry can be overridden by setting time until customer can pay through AuthorizeAnnounce method as described in chapter [Web API "Authorize Announce" method](#).

ShoppingCartID - unique identification of shopping basket or product

ApprovalCode - transaction approval code, it will be empty in unsuccessful transaction

Success – value of Success parameter will be 0 if transaction is unsuccessful

LargeFont – value is 1 if the large font setting was applied, or 0 if it was not

DyslexiaFont – value is 1 if the dyslexia-friendly font was applied, or 0 if it was not

HighContrast – value is 1 if the high-contrast theme was applied, or 0 if it was not

Signature - SHA512 hash that is used to verify the authenticity of this request.

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey Success
SecretKey
ApprovalCode SecretKey

Merchant should validate this signature to make sure that the request is originating from WSPayForm.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ShoppingCartID = "78"
Success = "0" ApprovalCode
= null

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEh03DfEO2B5Jjm4VC1Q3vEh3DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

51065bd82eeb69f8f3e458e969d251f3f6b9c464a28f654df586a89078c0fde45b6e38c9f379750f9c5cac8036c27cf76706c8f5fe200df7596398d8c73fd486

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

3.7. WSPayForm sizes

There is an option for merchant to change size of WSPayForm using shop administration.

Possible WSPayForm sizes are:

- Standard WSPayForm
- WSPayForm without user data
- WSPayForm with card data, amount and order number only
- WSPayForm with card data only
- WSPayForm with logo, header and card data only

If web shop uses a non-standard WSPayForm size and does not send customer information data (Optional parameters), then all data sent to further processing will be shops company data.

If web shop uses a non-standard WSPayForm size and sends customer information data, then web shop should check customer data before sending to WSPayForm as credit card processors may sometimes decline payment if customer information is in invalid format. Rules for customer information data are given in the table below.

Parameter	Rule
CustomerFirstName	• Maximum length: 50 characters • No special characters allowed expect: -
CustomerLastname	• Maximum length: 50 characters • No special characters allowed expect: -
CustomerAddress	• Maximum length: 100 characters • No special characters allowed expect: - . / ()
CustomerCity	• Maximum length: 50 characters • No special characters allowed expect: - /
CustomerZIP	• Maximum length: 20 characters • No special characters allowed expect: -

CustomerCountry	• "ISO 3166-1 alpha-2" two letter country code should be used.
CustomerPhone	• Maximum length: 20 characters • Only numeric characters
CustomerEmail	• Maximum length: 254 characters • Valid e-mail address

4. Transaction report – CallbackURL

Merchant can offer an URL endpoint where data will be sent, using HTTP POST method, on every successful change of transaction status. So, if the transaction is preauthorized, authorized, completed, voided or refunded, WSPay will send relevant information at provided URL.

After merchant has implemented the endpoint on their side, they must deliver URL endpoint to WSPay so it can be configured.

WSPay can send transaction report through standard ports for HTTP and HTTPS. If custom port must be used, then available ports are the ones in range from 50001 to 50010.

4.1. Example of POST data

Example of data that will be sent to given URL using HTTP POST method:

```
{
  "WsPayOrderId": "21c1fe57-4784-47a0-a941-0b3e3784efc2",
  "UniqueTransactionNumber": 46370,
  "Signature": "590ealde4c6ca66c2908dae58c083...",
  "STAN": "38967",
  "ApprovalCode": "198620",
  "ShopID": "MYSHOP",
  "ShoppingCartID": "1c731772-e407-45f8-b576-7e20b0e8642d",
  "Amount": 78,
  "CurrencyCode": 191,
  "ActionSuccess": "1",
  "Authorized": "1",
  "Completed": "0",
  "Voided": "0",
  "Refunded": "0",
  "PaymentPlan": "0000",
  "Partner": "Pbz",
  "OnSite": "1",
  "CreditCardName": "AMEX",
  "CreditCardNumber": "377500*****1007",
  "ECI": null,
  "CustomerFirstName": "John",
```

```
"CustomerLastName": "Doe",
"CustomerAddress": "Street address 10",
"CustomerCity": "City",
"CustomerCountry": "HR",
"CustomerPhone": "0911111111111111",
"CustomerZIP": "51000",
"CustomerEmail": "john@doe.com",
"TransactionDateTime": "20200423102457",
"IsLessThan30DaysFromTransaction": true,
"CanBeCompleted": true,
"CanBeVoided": true,
"CanBeRefunded": false,
"ExpirationDate": "2006",
"History": [
  "ActionDate": "20250716092218",
  "ActionType": "Authorization",
  "ActionAmount": 39.99,
  "ActionCurrencyCode": "946"
],
"TerminalID": "17744608",
"MerchantID": "105948369",
"PaymentTransactionType": 1
}
```

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay.

UniqueTransactionNumber

UniqueTransactionNumber is a legacy parameter that will be deprecated so it should not be used for any identification process.

This parameter will be deprecated from this response as of 03.09.2021.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ActionSuccess
ApprovalCode
SecretKey
ShopID
ApprovalCode
WsPayOrderId

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

ActionSuccess = "1"

ApprovalCode = "961792"

WsPayOrderId = "96a5f58f-764c-4640-90ea-591280893bff"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh19617923DfEO2B5Jjm4VC1Q3vEhMYSHOP96179296a5f58f-764c4640-90ea-591280893bff

Result signature after hashing using SHA512 algorithm:

719cbb3ea1edb3cde1bf839c39be2be9fc43f96d317f862007b341862e623870110c1e2b27d556394ae76543d18a10120f6f9ea9753af4086aca036ef75010c1

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

STAN

Alphanumeric field that indicates the sequence of transaction.

ApprovalCode

Authorization number of the purchase.

ShopID

Represents a unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

Unique identification of shopping basket or product.

Amount

Charging amount.

CurrencyCode

Transaction currency represented in ISO 4217 numeric code.

ActionSuccess

ActionSuccess parameter represents status of this action. In the event of successful action ActionSuccess value will be 1, and if the action was unsuccessful the parameter will be 0.

Authorized

Authorized parameter can have two possible values: 1 or 0. 1 means that transaction was authorized, 0 means that transaction was not authorized.

Completed

Completed parameter can have two possible values: 1 or 0. 1 means that transaction is completed, 0 means that transaction is incomplete.

Voided

Voided parameter can have two possible values: 1 or 0. 1 means that transaction is voided, 0 means that transaction is not voided.

Refunded

Refunded parameter can have two possible values: 1 or 0. 1 means that transaction is refunded, 0 means that transaction is not refunded.

PaymentPlan

Number of installments and deferred payments used.

Partner

Represents a partner who has processed the transaction. Possible values of Partner parameters are available in [Document appendix – Partners](#).

OnSite

OnSite parameter can have two possible values: 1 or 0. 1 means that partner who has processed the transaction is the one that has issued credit card used in this transaction to customer. 0 means that partner who has processed the transaction is not the one that has issued credit card used in this transaction to customer.

CreditCardName

Name of card brand that was be used for this transaction. Possible values of CreditCardName parameter are available in [Document appendix – Credit card brands](#).

CreditCardNumber

Number of credit card used for this transaction.

ECI

Represents result of 3D Secure authentication (Electronic Commerce Indicator).

CustomerFirstName

Customer first name.

CustomerLastname

Customer last name.

CustomerAddress

Customer street address.

CustomerCity

Customer city.

CustomerZIP

Customer postal code.

CustomerCountry

Customer country.

CustomerPhone

Customer phone number.

CustomerEmail

Customer e-mail address.

TransactionDateTime

Date and time of transaction.

IsLessThen30DaysFromTransaction

IsLessThen30DaysFromTransaction parameter can have two possible values: true or false. true means that transaction was created in less than 30 days from today, false means that transaction was created in more than 30 days from today.

CanBeCompleted

CanBeCompleted parameter can have two possible values: true or false. true means that transaction can be completed, false means that transaction cannot be completed.

CanBeVoided

CanBeVoided parameter can have two possible values: true or false. true means that transaction can be voided, false means that transaction cannot be voided.

CanBeRefunded

CanBeRefunded parameter can have two possible values: true or false. true means that transaction can be refunded, false means that transaction cannot be refunded.

ExpirationDate

Expiration date of credit card used for this transaction. (YYMM format).

History

An array of historical actions performed on the transaction, including the date, type, amount and currency code of each action. Used for tracking the lifecycle of a transaction.

- ActionDate: The date and time when the action was performed.
- ActionType: Type of action taken.
- ActionAmount: Amount involved in this particular action.
- ActionCurrencyCode: Currency code for the action

TerminalID

The ID of the terminal used to initiate the transaction.

MerchantID

A unique identifier assigned to the merchant.

PaymentTransactionType

Numeric indicator of the type of payment transaction (CIT – 1, MoTo – 2, MIT - 3).

5. Additional merchant services API

5.1. Web API “Completion” method

Authorized (Pre-authorized) transactions can be completed using WSPay Web API service.

If the authorization was successful, the values of parameters used for sending Completion request are obtained from the previous authorization step.

If the authorization is not successful, or the ApprovalCode is missing, it is impossible to make the completion.

The transaction can be completed to the maximum extent of 30 days from the moment of purchase/pre-authorization.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/completion> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/completion> - when the shop is in **PRODUCTION** mode

5.1.1. "Completion" request

All parameters, except Version and Signature, used for sending request are received from previous authorization step from WSPayForm.

Request example:

```
{
  "Version": "2.0",
  "WsPayOrderId": "c1c7ad40-6293-417e-9dff-8390822efcb6",
  "ShopID": "MYSHOP",
  "ApprovalCode": "559974",
  "STAN": "38400",
  "Amount": "200",
  "Signature":
  "c25927ec98e95808d720ac4c2a6f2d49363bd643d1b549d84fc61131aae84a30b2ae585d0a9576a
  adfa5df23af92c0e6a01869e3c23b4d156073f991e229fadf"
}
```

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be 2.0.

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay.

ShopID

Unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ApprovalCode

Transaction approval code.

STAN

Alphanumeric field that indicates the sequence of transaction.

Amount

Charging amount, in text format without decimal separator character where last two digits represent minor units.

Example:

Number: 3.650,35

Final format of Amount parameter: 365035

The amount must be less or equal to the amount by which the pre-authorization was made.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
WsPayOrderId
SecretKey
STAN
SecretKey
ApprovalCode
SecretKey
Amount
SecretKey
WsPayOrderId

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
WsPayOrderId = "96a5f58f-764c-4640-90ea-591280893bff"
STAN = "84177"
Amount = "365035"
ApprovalCode = "961792"

String before hashing:

MYSHOP96a5f58f-764c-4640-90ea-
591280893bff3DfEO2B5Jjm4VC1Q3vEh841773DfEO2B5Jjm4VC1Q3vEh9617923DfEO2B5Jjm4VC1Q3vE
h3650353DfEO2B5Jjm4VC1Q3vEh96a5f58f-764c-4640-90ea-591280893bff

Result signature after hashing using SHA512 algorithm:

5d013cf085428ae87b34b9f118c6564dc2001a593bc76c28a12e907ce6c165984504e726b933a4cf56ea2
11deb9aad909b38ee10c5e8c6bce2f196b120d4ca

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.1.2. "Completion" response

Response example:

```
{  
  "WsPayOrderId": "c1c7ad40-6293-417e-9dff-8390822efcb6",  
  "ShopID": "MYSHOP",  
  "ApprovalCode": "559974",  
  "STAN": "38400",
```

```
"ErrorMessage": "",
"ActionSuccess": "1",
"Signature":
"c25927ec98e95808d720ac4c2a6f2d49363bd643d1b549d84fc61131aae84a30b2ae585d0a9576a
adfa5df23af92c0e6a01869e3c23b4d156073f991e229fadf"
}
```

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay.

ShopID

Represents a unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ApprovalCode

Authorization number from the previous step of the purchase.

Some credit card processors will return different ApprovalCode after transaction status change. In such case, shop must record ApprovalCode which is sent in response; not the one from preauthorization.

STAN

Alphanumeric field that indicates the sequence of transaction.

ErrorMessage

Error description in this field is informative and depends on credit card processor.

ActionSuccess

ActionSuccess parameter represents status of this action (Completion). In the event of successful action ActionSuccess value will be 1, and if the action was unsuccessful the parameter will be 0.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
STAN
ActionSuccess
SecretKey
ApprovalCode
WsPayOrderId

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

STAN = "84177"

ActionSuccess = "1"

ApprovalCode = "961792"

WsPayOrderId = "96a5f58f-764c-4640-90ea-591280893bff"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh8417713DfEO2B5Jjm4VC1Q3vEh96179296a5f58f-764c-4640-90ea591280893bff

Result signature after hashing using SHA512 algorithm:

354ee9ec1716f7da181536c1fdgcd17b358d8610dcc8c8d52c21c5caaa46018b894be5c0f2de60bd3f5a30220cdebc1a6ce5f0848593565402e4baca26ab6a4d

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.2. Web API "Refund" method

Completed transactions can be refunded in specified period, depending on the payment type.

Process is the same as for the Web API "Completion" method described in chapter Web API "Completion" method with only difference in POST URL.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/refund> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/refund> - when the shop is in **PRODUCTION** mode

5.3. Web API "Void" method

Authorized transactions can be voided in specified period, depending on the payment type. The amount must be equal to the amount by which the pre-authorization was made.

Process is the same as for the Web API "Completion" method described in chapter Web API "Completion" method with only difference in POST URL.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/void> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/void> - when the shop is in **PRODUCTION** mode

5.4. Web API "Status Check" method

The service is provided for merchants who want to check the status of the transaction.

Request for status check of the transaction can be accomplished within 90 days from the moment of the transaction creation.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/statusCheck> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/statusCheck> - when the shop is in **PRODUCTION** mode

5.4.1. "Status Check" request

Request example:

```
{
  "Version": "2.0",
  "ShopID": "MYSHOP",
  "ShoppingCartID": "12345",
  "Signature":
    "8558feba175d8ce3f5bc5ec8158abed5903d3d9c296d431befccb6d63e80759c14ffa289399c69f
    91f054b3205385a84bf1a15b569df9c7fdf3548b6ab43e402"
}
```

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be **2.0**.

ShopID

Represents a unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

Unique identification of shopping basket or product.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
ShopID
ShoppingCartID

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ShoppingCartID = "78"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEhMYSHOP78

Result signature after hashing using SHA512 algorithm:

b7d6445585850edd8734f758b3547f0954188718402754d30e3890fdfeeb50f99b699cb87924647a8567
349294f166bb0a042efd6d1ee7c4a7dd8885cfb8c623

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.4.2. "Status Check" response

Response example:

```
{
  "WsPayOrderId": "21c1fe57-4784-47a0-a941-0b3e3784efc2",
  "UniqueTransactionNumber": 46370,
  "Signature": "590ealde4c6ca66c2908dae58c083...",
  "STAN": "38967",
  "ApprovalCode": "198620",
  "ShopID": "MYSHOP",
  "ShoppingCartID": "1c731772-e407-45f8-b576-7e20b0e8642d",
  "Amount": 78,
  "CurrencyCode": 191,
  "ActionSuccess": "1",
  "Success": "1",
  "Authorized": "1",
  "Completed": "0",
  "Voided": "0",
  "Refunded": "0",
  "PaymentPlan": "0000",
  "Partner": "Pbz",
  "OnSite": "1",
  "CreditCardName": "AMEX",
  "CreditCardNumber": "377500*****1007",
  "ECI": null,
  "CustomerFirstName": "John",
  "CustomerLastName": "Doe",
  "CustomerAddress": "Street adress10",
  "CustomerCity": "City",
  "CustomerCountry": "HR",
  "CustomerPhone": "0911111111111111",
  "CustomerZIP": "51000",
  "CustomerEmail": "john@doe.com",
  "TransactionDateTime": "20200423102457",
  "IsLessThen30DaysFromTransaction": true,
  "CanBeCompleted": true,
  "CanBeVoided": true,
  "CanBeRefunded": false,
  "Token": "09bf3d95-7a57-43f3-873a-216467a39925",
  "TokenNumber": "1007",
  "ExpirationDate": "2006"
}
```

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay.

UniqueTransactionNumber

UniqueTransactionNumber is a legacy parameter that will soon be deprecated so it should not be used for any identification process.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ActionSuccess
ApprovalCode
SecretKey
ShopID
ApprovalCode
WsPayOrderId

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ActionSuccess = "1"
ApprovalCode = "961792"
WsPayOrderId = "96a5f58f-764c-4640-90ea-591280893bff"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh19617923DfEO2B5Jjm4VC1Q3vEhMYSHOP96179296a5f58f-764c4640-90ea-591280893bff

Result signature after hashing using SHA512 algorithm:

719cbb3ea1edb3cde1bf839c39be2be9fc43f96d317f862007b341862e623870110c1e2b27d556394ae76543d18a10120f6f9ea9753af4086aca036ef75010c1

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

STAN

Alphanumeric field that indicates the sequence of transaction.

ApprovalCode

Authorization number of the purchase.

ShopID

Represents a unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

Unique identification of shopping basket or product.

Amount

Charging amount.

CurrencyCode

Transaction currency represented in ISO 4217 numeric code.

ActionSuccess

ActionSuccess parameter represents status of this action (Status Check). In the event of successful action ActionSuccess value will be 1, and if the action was unsuccessful the parameter will be 0.

Success

Success is a legacy parameter that will be deprecated from this response so it should not be used for any identification process.

This parameter will be deprecated from this response as of 03.09.2021.

Authorized

Authorized parameter can have two possible values: 1 or 0. 1 means that transaction was authorized, 0 means that transaction was not authorized.

Completed

Completed parameter can have two possible values: 1 or 0. 1 means that transaction is completed, 0 means that transaction is incomplete.

Voided

Voided parameter can have two possible values: 1 or 0. 1 means that transaction is voided, 0 means that transaction is not voided.

Refunded

Refunded parameter can have two possible values: 1 or 0. 1 means that transaction is refunded, 0 means that transaction is not refunded.

PaymentPlan

Number of installments and deferred payments used.

Partner

Representing partner which has processed the transaction. Possible values of Partner parameters are available in chapter [Document appendix – Partners](#).

OnSite

OnSite parameter can have two possible values: 1 or 0. 1 means that partner who has processed the transaction is the one that has issued credit card used in this transaction to customer. 0 means that partner who has processed the transaction is not the one that has issued credit card used in this transaction to customer.

CreditCardName

Name of card brand that was be used for this transaction. Possible values of CreditCardName parameter are available in chapter [Document appendix – Credit card brands](#).

CreditCardNumber

Number of credit card used for this transaction.

ECI

Represents result of 3D Secure authentication (Electronic Commerce Indicator).

CustomerFirstName

Customer first name.

CustomerLastName

Customer last name.

CustomerAddress

Customer street address.

CustomerCity

Customer city.

CustomerZIP

Customer postal code.

CustomerCountry

Customer country represented in "ISO 3166-1 alpha-2" two letter country code.

CustomerPhone

Customer phone number.

CustomerEmail

Customer e-mail address.

TransactionDateTime

Date and time of transaction.

IsLessThan30DaysFromTransaction

IsLessThan30DaysFromTransaction parameter can have two possible values: true or false. true means that transaction was created in less than 30 days from today, false means that transaction was created in more than 30 days from today.

CanBeCompleted

CanBeCompleted parameter can have two possible values: true or false. true means that transaction can be completed, false means that transaction cannot be completed.

CanBeVoided

CanBeVoided parameter can have two possible values: true or false. true means that transaction can be voided, false means that transaction cannot be voided.

CanBeRefunded

CanBeRefunded parameter can have two possible values: true or false. true means that transaction can be refunded, false means that transaction cannot be refunded.

Token and **TokenNumber**

Tokenization parameters. More information is available in chapter [WSPayForm tokenization](#).

CanBeRefunded

CanBeRefunded parameter can have two possible values: true or false. true means that transaction can be refunded, false means that transaction cannot be refunded.

ExpirationDate

Expiration date of credit card used for this transaction. (YYMM format).

5.5. Web API “Installment check” method

This service is intended for merchants who need to check whether the payment method allows installment payments.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/installmentCheck> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/installmentCheck> - when the shop is in **PRODUCTION** mode

5.5.1. "Installment Check" request

Request example:

```
{
  "Version": "2.0",
  "ShopID": "MYSHOP",
  "BIN": "543212",
  "CreditCardName": "MASTERCARD",
  "Amount": "1700",
  "Signature": "
cf83e1357eefb8bdf1542850d66d8007d620e4050b5715dc83f4a921d36ce9ce47d0d13c5d85f2b0
ff8318d2877eec2f63b931bd47417a81a538327af927da3e"
}
```

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be **2.0**.

ShopID

Represents a unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

BIN

First 6 digits of the credit card number.

CreditCardName

Name of card brand. Possible values of CreditCardName parameter are available in chapter [Document appendix – Credit card brands](#).

Amount

Charging amount, in text format without decimal separator character where last two digits represent minor units.

Example:

Number: 3.650,35

Final format of Amount parameter: 365035

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID

SecretKey

CreditCardName

SecretKey

Amount

SecretKey

CreditCardName

Example of signature generation if values are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

CreditCardName = "VISA" Amount
= "365035"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEhVISA3DfEO2B5Jjm4VC1Q3vEh3650353DfEO2B5Jjm4VC1Q3vEhVISA

Result signature after hashing using SHA512 algorithm:

6aec09b801741e07b38459cd7c023fc7be8c4fc4b69b4a6b281cf2a50673650bbd81d7475e32b33bb32f9
32532378f9a0d3f24efcab117261cad0fc4d590b53e

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.5.2. "Installment Check" response

Response example:

```
{
  "NumberOfAllowedInstallments": 6,
  "NumberOfAllowedGracePeriod": -1,
  "ActionSuccess": "1",
  "Signature":
"fdb00f825a242c968ac15393414a72ee8106bf04582e47c4bd9c951b44ca37ea4b3be37b5ec4d98d0437ed1
709e5637e8c4536bf71ed355a2f0f923322291588"
}
```

NumberOfAllowedInstallments

Value of NumberOfAllowedInstallments describes maximum number possible installments for the transaction. -1 means that there are no installem

NumberOfAllowedGracePeriod

Value of NumberOfAllowedGracePeriod describes maximum number possible grace period months for the transaction.

ActionSuccess

ActionSuccess parameter represents status of this action (Status Check). In the event of successful action ActionSuccess value will be 1, and if the action was unsuccessful the parameter will be 0.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
Amount
CreditCardName
SecretKey
ActionSuccess

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
CreditCardName = "VISA"
Amount = "365035"
ActionSuccess = "1"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh365035VISA3DfEO2B5Jjm4VC1Q3vEh1

Result signature after hashing using SHA512 algorithm:

67ef58c12d3108ebc2c804d05b064610f115f49d1970cc6181c920e1fe1a0da93e272d9e225c7a17c65da
cdd89f204f70fd5c81500da3fb4dbbb056da171c360

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.6. Web API “Authorization Announce” method

This service is intended for merchants who want to do additional payment configuration before customer arrives on WSPayForm.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/authorizationAnnounce> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/authorizationAnnounce> - when the shop is in **PRODUCTION** mode

5.6.1. "Authorization Announce" request

Request example:

```
{
  "Version": "2.0",
  "ShopID": "MYSHOP",
  "ShoppingCartID": "78",
  "Amount": "1700",
  "Duration": 30,
  "PaymentMethods": {
    "PaymentTypeCodes": ["POVISX"],
    "PaymentTypeGroups": null
  },
  "Signature": "
b7d6445585850edd8734f758b3547f0954188718402754d30e3890fdfeeb50f99b699cb87924647
a8567349294f166bb0a042efd6d1ee7c4a7dd8885cfb8c623"
}
```

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be **2.0**.

ShopID

Represents a unique identification of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

Unique identification of shopping basket or product.

ShoppingCartID should not contain any character different from:

- Letters: ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz
- Numbers: 0123456789 • Special characters: _-.

Amount

Charging amount, in text format without decimal separator character where last two digits represent minor units.

Example:

Number: 3.650,35

Final format of Amount parameter: 365035

Duration

Represents a time in minutes (from now) until customer can enter his card data and pay for service/goods.

PaymentMethods

Represents payment type codes or payment type groups that must be used for this transaction.

PaymentTypeCodes

List of payment type codes that must be used for this transaction. List of possible payment type codes is available in [Document appendix – Payment type codes and groups](#).

PaymentTypeGroups

List of payment type groups that must be used for this transaction. List of possible payment type groups is available in [Document appendix – Payment type codes and groups](#).

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
ShopID
ShoppingCartID

Example of signature generation if values are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh" ShoppingCartID
= "78"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEhMYSHOP78

Result signature after hashing using SHA512 algorithm:

b7d6445585850edd8734f758b3547f0954188718402754d30e3890fdfeceb50f99b699cb87924647a8567
349294f166bb0a042efd6d1ee7c4a7dd8885cfb8c623

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.6.2. "Authorization Announce" response

Response example:

```
{
  "AuthorizationToken": "46f73f09-00a7-4beb-9816-7820b57f8a0f",
  "ValidUntil": "2020-05-19T22:44:45.9138939+02:00", "Signature":
  "f9353e8e36ac25a1743a78c6a06c116f45e51f69297e330797241913464675b885df0ecbb28ab
  7af87186c1d9763801098380c9091ad635333b8b662588591a8"
}
```

AuthorizationToken

Token that contains info on what was requested that needs to be included in mandatory parameters for WSPayForm request.

Example:

```
<form name="pay" action="https://form.wspay.biz/Authorization.aspx" method="POST">
  <input type="hidden" name="ShopID" value="MYSHOP">
  <input type="hidden" name="ShoppingCartID" value="78"> <input
  type="hidden" name="Version" value="2.0">
  <input type="hidden" name="TotalAmount" value="17,00">
  <input type="hidden" name="Signature"
  value="23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d
  79dd73adae117ef108378a2b661faaba5c5ff4c33935fae13fad90a7">
  <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
  <input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
  <input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
  <input type="hidden" name="AuthorizationToken" value="e679626b-afac-4d67-8a26-
  87fc4b7ebc17">
  <input type="submit" value="Pay">
</form>
```

ValidUntil

Represents a timestamp (Round-trip format) until customer can enter his card data and pay for service/goods.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

```
ShopID
SecretKey
AuthorizationToken
SecretKey
ShopID
AuthorizationToken
```


Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

AuthorizationToken = "46f73f09-00a7-4beb-9816-7820b57f8a0f"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh46f73f09-00a7-4beb-9816-7820b57f8a0f3DfEO2B5Jjm4VC1Q3vEh
MYSHOP46f73f09-00a7-4beb-9816-7820b57f8a0f

Result signature after hashing using SHA512 algorithm:

7364de03d79701f951de0cc2ec1e817e6cd83c683e98c0927e1909dc6542a021ccf100c48afa35409a81b
0a552b9a80dbc8f2b47d6babe14a6d0f11fc4fc39ed

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.7. Web API “Create Transaction” method

This service is intended for merchants who need functionality to get URL to WSPay payment form.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://formtest.wspay.biz/api/create-transaction> - when the shop is in **TEST** mode

<https://form.wspay.biz/api/create-transaction> - when the shop is in **PRODUCTION** mode

5.7.1. "Create Transaction" request

These are the same parameters that are sent to WSPayForm as described in [HTML form parameters](#). For request body both form-data and raw JSON format are supported.

JSON request example:

```
{
  "ShopID": "MYSHOP",
  "ShoppingCartID": "78", "Version": "2.0",
  "TotalAmount": "17,00",
  "ReturnURL": "https://myshop.com/success",
  "ReturnErrorURL": "https://myshop.com/error",
  "CancelURL": "https://myshop.com/cancel",
  "Signature": "23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf
0963d79dd73adae117ef108378a2b661faaba5c5ff4c33935fae13fad90a7"
}
```

ShopID

ShopID represents a unique identification of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

ShoppingCartID is unique identification of shopping basket or product.

It must be unique. In case there is already a successful transaction with the same ShoppingCartID, that ID can't be used again for future transactions.

Version

Version parameter represents version of WSPay form to be used. For successful communication version parameter must be **2.0**.

TotalAmount

TotalAmount is amount for which the customer will be charged, expressed in agreed currency (HRK, RSD, BAM, EUR, USD...), TotalAmount parameter must be formatted without dots as thousand separators. Decimal point can only be defined as comma. For example, if Amount is in EUR, after the decimal point, only the first two digits indicating the amount in cents will be taken into account.

Example 1

Number: 3.650,35

Final format of TotalAmount parameter: 3650,35

For signature: 365035

Example 2

Number: 27.488,00

Final format of TotalAmount parameter: 27488,00
For signature: 2748800

ReturnURL

ReturnURL represents https address where the customer will be redirected after successful transaction.

WSPayForm redirects to page defined in ReturnURL parameter and returns parameters based on concrete transaction. HTTP method that will be used for sending these parameters depends on ReturnMethod parameter as described in [Optional parameters](#) chapter.

Parameters that are returned to web shop are described in chapter [Parameters which WSPayForm returns to web shop - ReturnURL](#).

ReturnErrorURL

Represents https address where customer will be redirected in case of communication or transaction error.

WSPayForm redirects to page defined in ReturnErrorURL parameter and returns parameters based on concrete transaction. HTTP method that will be used for sending these parameters depends on ReturnMethod parameter as described in [Optional parameters](#) chapter.

Parameters that are returned to web shop are described in chapter [Parameters which WSPayForm returns to web shop - ReturnErrorURL](#).

CancelURL

Represents https address where customer will be redirected in case the customer cancelled the transaction process or in the case of the form data entrance timeout.

WSPayForm redirects to page defined in CancelURL parameter and returns parameters based on concrete transaction. HTTP method that will be used for sending these parameters depends on ReturnMethod parameter as described in [Optional parameters](#) chapter.

Parameters that are returned to web shop are described in chapter [Parameters which WSPayForm returns to web shop - CancelURL](#).

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
TotalAmount
SecretKey

Note that TotalAmount parameter needs to be converted into string without dots and commas.

Example of TotalAmount 1:

Amount: 7.250,88

Final format of TotalAmount parameter for hashing: 725088

Example of TotalAmount 2:

Amount: 35,00

Final format of TotalAmount parameter for hashing: 3500

Example of signature generation if values for signature are as follows:

ShopID = "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"

ShoppingCartID = "78" Amount
= "1700"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEh17003DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d79dd73adae117e
f108378a2b661faaba5c5ff4c33935fae13fad90a7

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

5.7.2. "Create Transaction" response

If response is successful TransactionId and PaymentFormUrl parameters will not be null.

Successful response example:

```
{
  "TransactionId": "LTiEo4U5HEqPl8IFHHbeCA",
  "PaymentFormUrl": "https://formtest.wspay.biz/authorization?id=LTiEo4U5HEqPl8IFHHbeCA",
  "HasInformation": false,
  "HasWarnings": false,
  "HasErrors": false,
  "HasSuccesses": false,
  "Successes": [],
  "Information": [],
  "Warnings": [],
  "Errors": []
}
```

Unsuccessful response example:

```
{
  "TransactionId": null,
  "PaymentFormUrl": null,
  "HasInformation": false,
  "HasWarnings": false,
  "HasErrors": true,
  "HasSuccesses": false,
  "Successes": [],
  "Information": [],
  "Warnings": [],
  "Errors": [
    {
      "MessageType": "Error",
      "Key": "E00002",
      "Message": "There is no suitable transaction request data extractor..."
    }
  ]
}
```

TransactionId

TransactionId represents a unique identification of payment form. If response is successful, this parameter will not be null.

PaymentFormUrl

PaymentFormUrl represents a URL of requested payment form. If response is successful, this parameter will not be null.

HasInformation

HasInformation represents a boolean which value depends on if there is any data in Information array parameter.

HasWarnings

HasWarnings represents a boolean which value depends on if there is any data in Warnings array parameter.

HasErrors

HasErrors represents a boolean which value depends on if there is any data in Errors array parameter

HasSuccesses

HasSuccesses represents a boolean which value depends on if there is any data in Successes array parameter

Successes

Successes parameter represents a list of successful messages. If response is successful, this list will be empty.

Information

Information parameter represents a list of additional information messages. If response is successful, this list will be empty.

Warnings

Warnings parameter represents a list of warnings. If response is successful, this list will be empty.

Errors

Errors parameter represents a list of errors. If response is successful, this list will be empty.

6. WSPayForm tokenization

6.1. Introduction to WSPayForm tokenization

WSPayForm tokenization is the result of our efforts to make the payment for the end users simpler. Once the credit card is tokenized, it provides to the users and merchants, depending on the accepted terms of use, payment without entering basic credit card data.

It is important to note that from 01.01.2021. there will be update with PSD2 regulations for merchants inside EEA. This update will affect which merchant can use which method for processing token payment.

There are two possible ways to process payment using token after credit card has been tokenized:

- WSPayForm payment using token
- Direct payment using token

Explanation on who and when can use which method is described in [Document appendix – Payment with tokenized card](#).

6.2. Tokenization on WSPayForm

Request for the tokenization is carried out by sending the parameter „IsTokenRequest“ with value “1” along with the other parameters as described in [WSPayForm parameters](#).

It is mandatory to allow user an option to not tokenize his credit card if he does not want to.

Example:

```
<form name="pay" action="https://form.wspay.biz/authorization.aspx" method="POST">
  <input type="hidden" name="ShopID" value="MYSHOP">
  <input type="hidden" name="ShoppingCartID" value="78"> <input
type="hidden" name="Version" value="2.0">
  <input type="hidden" name="TotalAmount" value="17,00">
  <input type="hidden" name="Signature"
value="23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d
79dd73adae117ef108378a2b661faaba5c5ff4c33935fae13fad90a7">
  <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
  <input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
  <input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
  <input type="hidden" name="IsTokenRequest" value="1">
  <input type="submit" value="Pay">
</form>
```

After successful transaction WSPayForm redirects to ReturnURL as described in [Parameters which WSPayForm returns to web shop - ReturnURL](#) with three additional parameters:

Token - unique identifier representing payment type for the single user of the web shop

TokenNumber – number that corresponds to the last 4 digits of the credit card

TokenExp – presenting expiration date of the credit card (YYMM)

6.3. WSPayForm payment using token

WSPayForm payment using token is carried out by using standard WSPayForm integration flow by sending additional parameters “Token” and “TokenNumber” along with the other parameters as described in [WSPayForm parameters](#).

Both “Token” and “TokenNumber” parameters are received from WSPayForm as a result of previous tokenization process.

WSPay must provide an additional ShopID that will be used for WSPayForm payment using token.

Example:

```
<form name="pay" action="https://form.wspay.biz/authorization.aspx" method="POST">
  <input type="hidden" name="ShopID" value="MYSHOPTOK">
  <input type="hidden" name="ShoppingCartID" value="78"> <input
type="hidden" name="Version" value="2.0">
  <input type="hidden" name="TotalAmount" value="17,00">
  <input type="hidden" name="Signature"
value="24608f45fec0dcd73fb661101744ecdd312b1147ddeecd62e9c749a79e461ff285f33f64
6cb48e325d0f944a98c242845024cd1b88df304f300708ac64b40111">
  <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
```

```
<input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
<input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
<input type="hidden" name="Token" value="e32c9607-f77d-44d5-98e8-e58c9f279bfd">
<input type="hidden" name="TokenNumber" value="0189">
<input type="submit" value="Pay">

</form>
```

Submitting this form will redirect customer to WSPayForm where input fields for credit card number and expiration date will be filled and customer will have to enter CVV number.

After that, process is the same as with standard WSPayForm which means that customer will after successful, unsuccessful or cancelled transaction be redirected to URL defined by web shop.

6.4. Direct payment using token

To process direct payment using token, request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/processpayment> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/processpayment> - when the shop is in **PRODUCTION** mode

WSPay must provide an additional ShopID that will be used for direct payment using token.

6.4.1. "Direct payment using token" request

Request example:

```
{
  "Version": "2.0",
  "ShopID": "MYSHOPTOK",
  "ShoppingCartID": "78",
  "Token": "237038b3-761f-4bf7-a107-a18efa84dde0",
  "TokenNumber": "2152",
  "PaymentPlan": "0000",
  "TotalAmount": "1700",
  "DateTime": "20190722115807",
  "CustomerFirstName": "John",
  "CustomerLastName": "Doe",
  "CustomerAddress": "Address 10",
  "CustomerCity": "City",
  "CustomerZIP": "51000",
  "CustomerCountry": "HR",
  "CustomerPhone": "0911111111",
  "CustomerEmail": "john@doe.com",
  "Language": "HR",
  "Signature":
    "4a2b4246db90ed60eff677a60fd139f50e09c3e19d14a1503921c70780b912cf04fd44a7b3b6bd
    3376e4089891a2600aef5aade8979ec546a2ad2bac5d7f8daa"
}
```

Note that Customer information data parameters (CustomerFirstName, CustomerLastName...) and Language parameter are optional. If these parameters are not sent, then shop company data will be used for Customer information.

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be **2.0**.

ShopID

Represents a unique identification of web shop for tokenization. ShopID is received from WSPay. WSPay must provide an additional ShopID that will be used for direct payment using token.

ShoppingCartID

Unique identification of shopping basket or product.

ShoppingCartID should not contain any character different from:

- Letters: ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz
- Numbers: 0123456789 • Special characters: _-.

Token

Unique identifier representing payment type for the single user of the web shop. Token parameter is received from WSPayForm as a result of previous tokenization process.

TokenNumber

Number that corresponds to the last 4 digits of the credit card. TokenNumber parameter is received from WSPayForm as a result previous tokenization process.

PaymentPlan

Value of PaymentPlan is a field that contains two sub-fields. Every sub-field has two digits. First subfield represents number of payments, and second field represents the grace period.

Examples:

„0000“ – no payment plan.

„0600“ – payment through 6 installments and without grace period.

„0602“ – payment through 6 installments, first installment postponed for 2 months.

TotalAmount

The charging amount, in text format without decimal separator character where last two digits represent minor units.

Example:

Number: 3.650,35

Final format of TotalAmount parameter: 365035

DateTime

Date and time of transaction defined by merchant. DateTime parameter is informative timestamp that will be returned as is from WSPay. Format: YYYYMMDDHHmmSS

CustomerFirstName

Customer first name.

CustomerLastName

Customer last name.

CustomerAddress

Customer street address.

CustomerCity

Customer city.

CustomerZIP

Customer postal code.

CustomerCountry

Customer country represented in "ISO 3166-1 alpha-2" two letter country code.

CustomerPhone

Customer phone number.

CustomerEmail

Customer e-mail address.

Language

Language value defines language that will be used when sending payment status confirmation to Customer e-mail address. If Language parameter is not sent, default language value will be English. Possible values are available in [Document appendix - Language](#).

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
TotalAmount
SecretKey

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ShoppingCartID = "78"
TotalAmount = "365035"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEh3650353DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

4553c75526a8f12669a74fd3f11c36043f4a067b75540f0dbef6cf564d2dd244e6f5808007baf1be6093d4
df2391ef386b8733c3dd4ad45136553aa1563425c4

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

6.4.2. "Direct payment using token" response

Response example:

```
{
  "WsPayOrderId": "dd9ec33a-0638-47d0-b17a-5de403ae3a3d",
  "ShoppingCartID": "78",
  "CustomerFirstName": "John",
  "CustomerLastName": "Doe",
  "CustomerAddress": "Cicarijska 10",
  "CustomerCity": "City",
  "CustomerZIP": "51000",
  "CustomerCountry": "HR",
  "CustomerPhone": "123456789",
  "CustomerEmail": "John@Doe.com",
  "ECI": "",
  "XID": null,
  "CAVV": null,
  "UCAF": null,
  "MaskedPan": "377500*****1234",
  "CreditCardName": "MAMEX",
  "PaymentPlan": "0000",
  "ApprovalCode": "610990",
  "ErrorMessage": null,
  "Approved": "1",
  "TotalAmount": "1700",
  "STAN": "38419",
  "ActionSuccess": "1",
  "TransactionDateTime": "20181231233202",
  "Partner": "Pbz",
  "Signature":
    "4be89181861d5c9759a5032bbadfd4c4f07c0a90b4001155ddfbabb74512fdcb3927f9226c14d12
    35a9bcd9a6e4d7723289cb55d3bf2863f9519e32c28c7b3d9"
}
```

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay.

ShoppingCartID

Unique identification of shopping basket or product.

CustomerFirstName

Customer first name.

CustomerLastName

Customer last name.

CustomerAddress

Customer street address.

CustomerCity

Customer city.

CustomerZIP

Customer postal code.

CustomerCountry

Customer country represented in "ISO 3166-1 alpha-2" two letter country code.

CustomerPhone

Customer phone number.

CustomerEmail

Customer e-mail address.

ECI

Represents result of 3D Secure authentication (Electronic Commerce Indicator).

XID

Transaction ID from the 3D Secure provider

CAVV

Card authentication verification value, provided by the 3D Secure Provider

UCAF

Universal cardholder authentication field

CreditCardName

Name of card brand that was be used for this transaction. Possible values of CreditCardName parameter are available in chapter [Document appendix – Credit card brands](#).

MaskedPan

Masked number of credit card used for this transaction.

PaymentPlan

Number of installments and deferred payments used.

ApprovalCode

Authorization number of the purchase.

ErrorMessage

Error description in this field is informative and depends on credit card processor.

Approved

Approved parameter can have two possible values: 1 or 0. 1 means that transaction was approved, 0 means that transaction was declined.

TotalAmount

Charged amount in text format without decimal separator character where last two digits represent minor units.

Example:

Number: 3.650,35

Final format of TotalAmount parameter: 365035

STAN

Alphanumeric field that indicates the sequence of transaction.

ActionSuccess

ActionSuccess parameter represents status of this action (Status Check). In the event of successful action ActionSuccess value will be 1, and if the action was unsuccessful the parameter will be 0.

TransactionDateTime

Date and time of transaction defined by merchant.
Format: YYYYMMDDHHmmSS

Partner

Representing partner which has processed the transaction. Possible values of Partner parameters are available in [Document appendix – Partners](#).

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
Approved
SecretKey
ApprovalCode
SecretKey

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ShoppingCartID = "78"
Approved = "1" ApprovalCode
= "610990"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEh13DfEO2B5Jjm4VC1Q3vEh6109903DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

394779a69fa588623f3a1d526b38436ff081d7c8a0b5ef6049064107ed5ad89a3147fa85588227c57504f6a5ec878b143685fee02191282bcb79737d50f3f8b0

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

7. WSPayForm inside iframe

WSPayForm can be integrated inside HTML iframe element. This will allow web shops to include WSPayForm inside their website without the need of PCI DSS compliance on their website.

Example of calling WSPayForm inside iframe:

```
<form name="pay" action="https://form.wspay.biz/authorization.aspx" method="POST" target="my-iframe">
    <input type="hidden" name="ShopID" value="MYSHOP">
    <input type="hidden" name="ShoppingCartID" value="78"> <input
    type="hidden" name="Version" value="2.0">
    <input type="hidden" name="TotalAmount" value="17,00">
    <input type="hidden" name="Signature"
    value="23455eaf0029bac73613eb00d5242dcf2a5e39fa8d65b26905974dcf61bfbccdaaf0963d
    79dd73adae117ef108378a2b661faaba5c5ff4c33935fae13fad90a7">
    <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
    <input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
    <input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
    <input type="hidden" name="Iframe" value="True">
    <input type="hidden" name="IframeResponseTarget" value="TOP">
    <input type="submit" value="Pay">
</form>
```

```
<iframe name="my-iframe" id="my-iframe" style="width: 100%"></iframe>
```

WSPayForm is compatible with open-source library [iFrame Resizer](#) that enables the automatic resizing of iframe to fit their contained content. In order for web shop to use this functionality they must include `iframeResizer.min.js` Javascript file and call `iFrameResize` function as described in [library GitHub page](#). For WSPayForm to work properly inside iframe, option `checkOrigin` needs to be set to `false`.

```
<script> iFrameResize({ checkOrigin: false }, '#my-
    iframe')
</script>
```


Iframe

Iframe parameter will tell WSPayForm that it is loaded inside HTML iframe element. If web shop is using WSPayForm loaded in iframe then Iframe parameter must have value "1" or "True".


IframeResponseTarget

IframeResponseTarget parameter is optional parameter that can be sent to WSPayForm. It is taken into consideration only if WSPayForm is integrated inside HTML iframe element. IframeResponseTarget parameter will tell WSPayForm how user will be redirected to ReturnURL, ReturnErrorURL and CancelURL. Possible values of IframeResponseTarget parameter are TOP or SELF. If IframeResponseTarget parameter is not sent, WSPayForm will use TOP as default.

If TOP is used, WSPayForm will redirect to ReturnURL, ReturnErrorURL or CancelURL in the full body of the window.

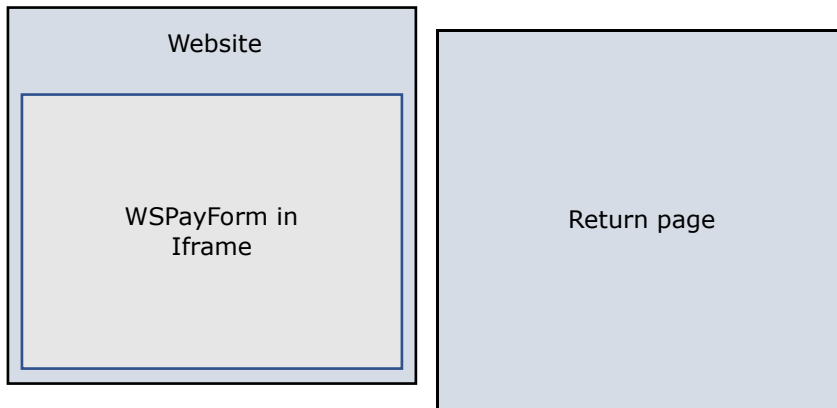

If SELF is used, WSPayForm will redirect to ReturnURL, ReturnErrorURL or CancelURL inside iframe that loaded WSPayForm.

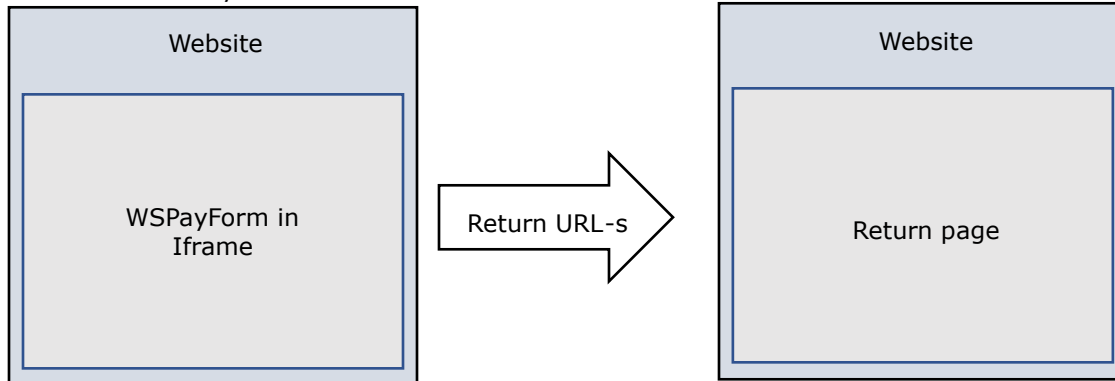

It is important to note that some card processors may not allow FULL 3DS authentication inside iframe. When that is the case WSPayForm will use TOP as a value of IFrameResponseTarget parameter. All card processors should allow FULL 3DS inside iframe by May 2021.

8. Marketplace

Marketplace allows merchant to specify how will charged amount be distributed after a successful purchase.

For merchant to use marketplace functionality, special configuration must be made so it is required to contact our customer support before starting the implementation.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/authorizationAnnounce> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/authorizationAnnounce> - when the shop is in **PRODUCTION** mode

8.1. "Marketplace" request

Marketplace functionality is an extension of Web API "Authorization Announce" method but for the sake of completeness is described in separate chapter. Parameters described in "Authorization Announce" method can be combined with parameters described below.

Request example:

```
{
  "Version": "2.0",
  "ShopID": "MYSHOP",
  "ShoppingCartID": "78",
  "Amount": "1700",
  "Marketplace": {
    "Transactions": [{
      "OrderID": "2015752e-d50d-4a47-b3f7-4829f59605aa",
      "ShopID": "MYSHOP-1",
      "Amount": "1000"
    }, {
      "OrderID": "db4b1999-3063-4920-8012-cc757570ddbb",
      "ShopID": "MYSHOP-2",
      "Amount": "400"
    }, {
      "OrderID": "f29fc253-4656-4d5d-b6a9-2206f5f82ad1",
      "ShopID": "MYSHOP-3",
      "Amount": "300"
    }
  ],
  "Signature":
    "b7d6445585850edd8734f758b3547f0954188718402754d30e3890fdfecb50f99b699cb8792464
    7a8567349294f166bb0a042efd6dlee7c4a7dd8885cfb8c623"
}
```

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be **2.0**.

ShopID

Represents a unique identification of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShoppingCartID

Unique identification of this transaction.

ShoppingCartID should not contain any character different from:

- Letters:
ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz
- Numbers: 0123456789 • Special characters: _-.

Amount

Charging amount, in text format without decimal separator character where last two digits represent minor units.

Example:

Number: 3.650,35

Final format of Amount parameter: 365035

Amount must be equal to sum of distribution amounts as described in Marketplace parameter.

Marketplace

Marketplace object that contains entries about marketplace configuration.

Transactions

List that defines how will charged amount be distributed.

OrderID

Identification of single distribution in implementer system. This is optional parameter for a case when implementer wants to have a reference point on a payment distribution on WSPay.

ShopID

ShopID of single distribution.

Amount

Amount of single distribution, in text format without decimal separator character where last two digits represent minor units.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ShoppingCartID
SecretKey
ShopID
ShoppingCartID

Example of signature generation if values are as follows: ShopID
= "MYSHOP"

SecretKey = "3DfEO2B5Jjm4VC1Q3vEh" ShoppingCartID
= "78"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh783DfEO2B5Jjm4VC1Q3vEhMYSHOP78

Result signature after hashing using SHA512 algorithm:

b7d6445585850edd8734f758b3547f0954188718402754d30e3890fdfecb50f99b699cb87924647a8567
349294f166bb0a042efd6d1ee7c4a7dd8885cfb8c623

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

8.2. "Marketplace" response

Response example:

```
{
  "AuthorizationToken": "46f73f09-00a7-4beb-9816-7820b57f8a0f", "Signature":
  "f9353e8e36ac25a1743a78c6a06c116f45e51f69297e330797241913464675b885df0ecbb28ab
  7af87186c1d9763801098380c9091ad635333b8b662588591a8"
}
```

AuthorizationToken

Token that contains info on what was requested that needs to be included in mandatory parameters for WSPayForm request.

Example:

```
<form name="pay" action="https://form.wspay.biz/Authorization.aspx" method="POST">
  <input type="hidden" name="ShopID" value="MYSHOP">
  <input type="hidden" name="ShoppingCartID" value="78"> <input
  type="hidden" name="Version" value="2.0">
  <input type="hidden" name="TotalAmount" value="17,00">
  <input type="hidden" name="Signature"
  value="7364de03d79701f951de0cc2ec1e817e6cd83c683e98c0927e1909dc6542a021ccf100c4
  8afa35409a81b0a552b9a80dbc8f2b47d6babe14a6d0f11fc4fc39ed">
  <input type="hidden" name="ReturnURL" value="https://myshop.com/success">
  <input type="hidden" name="CancelURL" value="https://myshop.com/cancel">
  <input type="hidden" name="ReturnErrorURL" value="https://myshop.com/error">
  <input type="hidden" name="AuthorizationToken" value="46f73f09-00a7-4beb-9816-
  7820b57f8a0f">
  <input type="submit" value="Pay">
</form>
```

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

```
ShopID
SecretKey
AuthorizationToken
SecretKey
ShopID
AuthorizationToken
```

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

```
ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
```


AuthorizationToken = "46f73f09-00a7-4beb-9816-7820b57f8a0f"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh46f73f09-00a7-4beb-9816-7820b57f8a0f3DfEO2B5Jjm4VC1Q3vEh
MYSHOP46f73f09-00a7-4beb-9816-7820b57f8a0f

Result signature after hashing using SHA512 algorithm:

7364de03d79701f951de0cc2ec1e817e6cd83c683e98c0927e1909dc6542a021ccf100c48afa35409a81b
0a552b9a80dbc8f2b47d6babe14a6d0f11fc4fc39ed

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

8.3. Marketplace settlement

This functionality allows merchants to initiate payment settlement from acquiring bank. This functionality is currently available only for merchants from Montenegro.

The request object in JSON format must be sent using HTTP POST method to one of the following addresses, depending on the current shop status:

<https://test.wspay.biz/api/services/relationSettlement> - when the shop is in **TEST** mode

<https://secure.wspay.biz/api/services/relationSettlement> - when the shop is in **PRODUCTION** mode

8.3.1. "Marketplace settlement" – request

Request example:

```
{
  "Version": "2.0",
  "ShopID": "MYSHOP",
  "WsPayOrderId": "c1c7ad40-6293-417e-9dff-8390822efcb6",
  "SettlementShopIDs": ["MYSHOP-1", "MYSHOP-2", "MYSHOP-3"]
  "Signature":
  "a4ec3c0642ea5de7b3da990151bdb93fd54c59b7950dd791961b619ffd7708c5bf81e9e4b0b
  b8c9be463a6abfd991ddc6d584a7a27d6fc2e15dcda30bcb1e"
}
```

Version

Version parameter represents version of WSPay API to be used. For successful communication version parameter must be 2.0.

ShopID

Unique identification ID of web shop. ShopID is received from WSPay after signing the request for using WSPay service.

ShopID that was used as a parent ShopID in previous marketplace request must be used.

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay. WsPayOrderId is returned from WSPay on previous authorization step.

SettlementShopIDs

List of distribution ShopIDs on which settlement should be applied.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
SecretKey
ApprovalCode
WsPayOrderId
SecretKey

ApprovalCode is returned from WSPay on previous authorization step.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ApprovalCode = "375823"
WsPayOrderId = "c1c7ad40-6293-417e-9dff-8390822efcb6"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh3DfEO2B5Jjm4VC1Q3vEh375823c1c7ad40-6293-417e-9dff-8390822efcb63DfEO2B5Jjm4VC1Q3vEh

Result signature after hashing using SHA512 algorithm:

a4ec3c0642ea5de7b3da990151bdb93fd54c59b7950dd791961b619ffd7708c5bf81e9e4b0bb8c9be463a6abfd991ddc6d584a7a27d6fc2e15dcda30bcb1e

8.3.2. "Marketplace settlement" – response

Response example:

```
{
  "WsPayOrderId": "c1c7ad40-6293-417e-9dff-8390822efcb6",
  "ActionSuccess": "1",
  "Signature":
    "bf042b7e0b40ae6445e9b3f03672aece740ecb84044e06748f4db2f9ef766b52515a1d362f38c1
    e4628bf98862db61289adbcf99083f963203ec9ca8441cd112"
}
```

WsPayOrderId

Alphanumeric field that indicates the sequence of the transaction in the WSPay.

ActionSuccess

ActionSuccess parameter represents status of this action (Marketplace settlement). In the event of successful action ActionSuccess value will be 1, and if the action was unsuccessful the parameter will be 0.

Signature

Represents a signature created from string formatted from following values in a following order using SHA512 algorithm:

ShopID
SecretKey
ActionSuccess
ApprovalCode
SecretKey
WsPayOrderId

Merchant should validate this signature to make sure that the request is originating from WSPay system.

Example of signature generation if values are as follows:

ShopID = "MYSHOP"
SecretKey = "3DfEO2B5Jjm4VC1Q3vEh"
ActionSuccess = "1"
ApprovalCode = "375823"
WsPayOrderId = "c1c7ad40-6293-417e-9dff-8390822efcb6"

String before hashing:

MYSHOP3DfEO2B5Jjm4VC1Q3vEh13758233DfEO2B5Jjm4VC1Q3vEhc1c7ad40-6293-417e-9dff8390822efcb6

Result signature after hashing using SHA512 algorithm:

0e403c7a5b1a7a6fd01ee5bb7660c4ce207a512d59f2f2fa49c9168fc9ff2e64c8ed36a0e3602f5e03089cef606a04c898db82186f1773c96ce8493e2da29ed9

Signature generator, available at <https://signature.wspay.info>, can be used to test signature validity.

8.4. Marketplace completion

To complete preauthorized marketplace transaction standard Web API "Completion" implementation is used but with additional Marketplace object as described below.

```
{
...
  "Marketplace": {
    "Transactions": [{
      "ShopID": "MY-SHOP-1",
      "Amount": "500"
    },
    {
      "ShopID": "MY-SHOP-2",
      "Amount": "300"
    }
  ]
}
...
}
```

Marketplace

Marketplace object that contains entries about marketplace configuration.

Transactions

List that defines how will preauthorized amounts be completed.

ShopID

ShopID of single distribution.

Amount

Amount that will be completed from single distribution.

NOTE:

If Marketplace object is not sent, received amount will be distributed in proportion to the amounts previously received in "Marketplace" request.

8.5. Marketplace refund

To refund completed marketplace transaction standard Web API "Refund" implementation is used but with additional Marketplace object as described below.

```
{
...
  "Marketplace": {
    "Transactions": [{
      "ShopID": "MY-SHOP-1",
      "Amount": "500"
    },
    {
      "ShopID": "MY-SHOP-2",
      "Amount": "300"
    }
  ]
}
...
}
```

Marketplace

Marketplace object that contains entries about marketplace configuration.

Transactions

List that defines how will charged amounts be refunded.

ShopID

ShopID of single distribution.

Amount

Amount that will be refunded from single distribution.

NOTE:

If Marketplace object is not sent, received amount will be distributed in proportion to the amounts previously received in "Marketplace" request.

9. Document Appendix

9.1. Language

Possible values of Lang and Language parameters:

Value	Result
HR	Croatian
SR	Serbian
SL	Slovenian
BS	Bosnian
CG	Montenegro
EN	English
DE	German
IT	Italian
FR	French
NL	Dutch
HU	Hungarian
RU	Russian
SK	Slovakian
CZ	Czech
PL	Polish
PT	Portuguese
ES	Spanish
BG	Bulgarian
RO	Romanian
EL	Greek
MK	North Macedonian
DK	Danish
FI	Finnish
IS	Icelandic
NO	Norwegian
SV	Swedish
TR	Turkish
KAZ	Kazakh

9.2. Credit card brands

Possible values of CreditCardName and PaymentType parameters:

- AMEX
- DINERS
- DINA
- DISCOVER
- MASTERCARD
- MAESTRO
- VISA
- JCB
- DCRCC

Note that when using "Direct payment using token" method, possible values of CreditCardName parameter are:

- MAMEX
- MDINERS
- MDINA
- MDISCOVER
- MMASTERCAR
- MMAESTRO
- MVISA
- MJCB
- MDCRCC

9.3. Payment methods

Possible values of Payment method:

- CreditCard
- PayPal
- IPSNBS
- MONETA
- VALU
- KeksPay
- Aircash
- PayCek
- GooglePay

9.4. Partners

Possible values of Partner parameter:

- Pbz
- Zaba
- ErsteCardClub
- ESB
- PayPal
- Six
- AC
- Bib
- Ibh
- Kbs
- Aik
- Moneta
- NIb
- Ckb
- PbzCard
- IpsIntesa
- Valu
- KeksPay
- Aircash
- PayCek

9.5. Error codes

Possible error codes in ReturnErrorURL:

E00001 - IPG code is not valid (internal error in the application).

E00002 - Application is unable to parse original request data because the data is missing or invalid.

E00003 - Payment form implementation version is missing.

-
- E00004 Transaction creation date and time is not set by the application (internal error in the application).
- E00005 - Transaction previous status is not valid.
- E00006 - Transaction new status is not valid.
- E00007 - Transaction doesn't exist in the system.
- E00008 - Shop ID is mandatory.
- E00009 - Shop ID length is greater than maximum allowed (20 characters).
- E00010 - Shopping cart ID is mandatory.
- E00011 - Shopping cart ID length is greater than maximum allowed (255 characters).
- E00012 - Successfully completed transaction, with the same shopping cart ID, already exists in the system.
- E00013 - Total amount is mandatory.
- E00014 - Total amount must be greater than zero.
- E00015 - Signature is mandatory.
- E00016 - Signature is not valid.
- E00017 - ReturnURL is mandatory.
- E00018 - CancelURL is mandatory.
- E00019 - ReturnErrorURL is mandatory.
- E00020 - Language is not valid.
- E00021 - Payment plan length is not valid.
- E00022 - Payment plan contains non digits.
- E00023 - Payment plan number of installments is not valid.
- E00024 - Payment plan grace period is not valid.
- E00025 - Recurring cycle type is not valid.
- E00026 - Recurring cycle type is undefined, but other recurring values are present.
- E00027 - Recurring cycle type and payment plan are mutually exclusive. You can't specify both at the same time.
- E00028 - Recurring cycle type is not supported for the given credit card.
- E00029 - Recurring interval is mandatory.
- E00030 - Recurring interval must be greater than zero.
- E00031 - Recurring number of payments is mandatory.
- E00032 - Recurring number of payments must be greater than one.
- E00033 - Shop doesn't support recurring payments.
- E00034 - Shop configuration does not exist.

-
- E00035 - Shop configuration is temporarily unavailable.
- E00036 Payment form session timeout is expired.
- E00037 - Shop doesn't support payment with given payment method.
- E00038 - Shop doesn't support payment with given credit card.
- E00039 - Current transaction doesn't support payment with given credit card.
- E00040 - Current transaction doesn't support payment with given payment method.
- E00041 - Shop doesn't support payment with given payment plan/credit card combination.
- E00042 - There are no applicable payment types for the current transaction.
- E00043 - Tokenized credit card information doesn't exist.
- E00044 - Credit card tokenization and payment with tokenized credit card are mutually exclusive.
- E00045 - Payment with predefined credit card type and payment with tokenized credit card are mutually exclusive.
- E00046 - Customer first name is mandatory.
- E00047 - Customer first name length is greater than maximum allowed (50 characters).
- E00048 - Customer last name is mandatory.
- E00049 - Customer last name length is greater than maximum allowed (50 characters).
- E00050 - Customer address is mandatory.
- E00051 - Customer street address length is greater than maximum allowed (100 characters).
- E00052 - Customer city is mandatory.
- E00053 - Customer city length is greater than maximum allowed (50 characters).
- E00054 - Customer zip code is mandatory.
- E00055 - Customer zip code length is greater than maximum allowed (20 characters).
- E00056 - Customer country is mandatory.
- E00057 - Customer country length is greater than maximum allowed (60 characters).
- E00058 - Customer phone is mandatory.
- E00059 - Customer phone length is greater than maximum allowed (20 characters).
- E00060 - Customer email is mandatory.
- E00061 - Customer email address length is greater than maximum allowed (254 characters).
- E00062 - Additional merchant data length is greater than maximum allowed (4000 characters).
- E00063 - Credit card number is not valid.
- E00064 - Credit card expiration date is not valid.
- E00065 - Credit card verification data is not valid.
- E00066 - There were some errors during credit card payment process. Please, try again.

-

E00067 - PayPal transaction setup failed.

E00068 - There were some errors during PayPal payment process. Please, try again.

E00069 - Unsuccessful payment.

E00070 You've already reached maximum number of payment attempts.

E00071 - Successful payment is missing approval code.

E00072 - Successful payment is missing valid communication signature.

E00073 - Pay by link payment item doesn't exist.

E00074 - Pay by link payment item is temporarily unavailable.

E00075 - Pay by link payment item is expired.

E00076 - IPS transaction setup failed.

E00077 - IPS transaction status check is not possible, since it was not previously defined.

E00078 - IPS payment is not supported.

E00079 - Signature length is greater than maximum allowed (128 characters).

E00080 - ReturnURL length is greater than maximum allowed (500 characters).

E00081 - ReturnErrorURL length is greater than maximum allowed (500 characters).

E00082 - CancelURL length is greater than maximum allowed (500 characters).

E00083 - Aircash transaction setup failed.

E00084 - Aircash transaction status check is not possible, since it was not previously defined.

E00085 - Aircash payment is not supported.

E00086 - Iframe response target is not valid.

E00087 - Return success url is not valid.

E00088 - Return error url is not valid.

E00089 - Return cancel url is not valid.

E00090 - VALÚ transaction setup failed.

E00091 - VALÚ transaction status check is not possible, since it was not previously defined.

E00092 - VALÚ payment is not supported.

E00093 - Mobile device operating system is not valid.

E00094 - Mobile device callback interface name is mandatory.

E00095 - Mobile device callback interface name length is greater than maximum allowed (100 characters).

E00096 - KEKS Pay transaction setup failed.

E00097 - KEKS Pay transaction status check is not possible, since it was not previously defined.

E00098 - KEKS Pay payment is not supported.

-
- E00099 - PayCek transaction setup failed.
- E00100 - PayCek transaction status check is not possible, since it was not previously defined.
- E00101 - PayCek payment is not supported.

9.6. Payment with tokenized card

This section explains when merchant will use “WSPayForm payment using token” method and when merchant will use “Direct payment using token” method.

There are two main distinctions regarding payment with tokenized card: Customer Initiated Transactions (CIT) and Merchant Initiated Transactions (MIT).

Customer Initiated Transactions are transactions where customer is the one who initiates transaction with saved card. For example, customer chooses to pay with saved card in checkout process on merchant web shop.

Merchant Initiated Transactions are transaction where merchant submits a transaction with previously saved card without the customer participation. For example, recurring payment, incremental payment or direct payment.

Transaction Type	Merchant in EEA	Merchant outside EEA
CIT	Must use “WSPayForm payment using token”	May use any method
MIT	Will use “Direct payment using token”	Will use “Direct payment using token”

We recommend using “WSPayForm payment using token” for all Customer Initiated Transactions since it provides more convenience for merchants in the means of chargeback.

Note that Maestro card requires 3D Secure authentication for every transaction so it cannot be processed using "Direct payment using token" method.

Payment with tokenized card

[Token and TokenNumber parameters are received from previous tokenization process]

CIT - Customer Initiated Transaction

Standard WSPayForm request
with Token and TokenNumber

ShopID: SHOPID

WSPayForm response

WSPayForm
payment using token

MIT - Merchant Initiated Transaction

Direct payment using token request

ShopID: SHOPIDT

Direct payment using token response

WSPayDirect
payment using token

WEB SECURE
PAYMENT
GATEWAY



9.7. Payment type codes and groups

Most used payment type codes:

Value	Result
POVISX	PBZ Premium Visa
ZABADEVI	ZABA Only Debit Visa
ZABAOVIS	ZABA Only Visa
ZABAOMAS	ZABA Only Mastercard
ECCDNRS	ERSTE Diners
BIOVISX	BIB Only Premium Visa
BIODNA	BIB Only Dina

For a list of additional payment type codes please contact our customer support.

Most used payment type groups:

- VISA
- DINERS
- MASTERCARD
- AMEX
- MAESTRO
- DINA

For a list of additional payment type groups please contact our customer support.