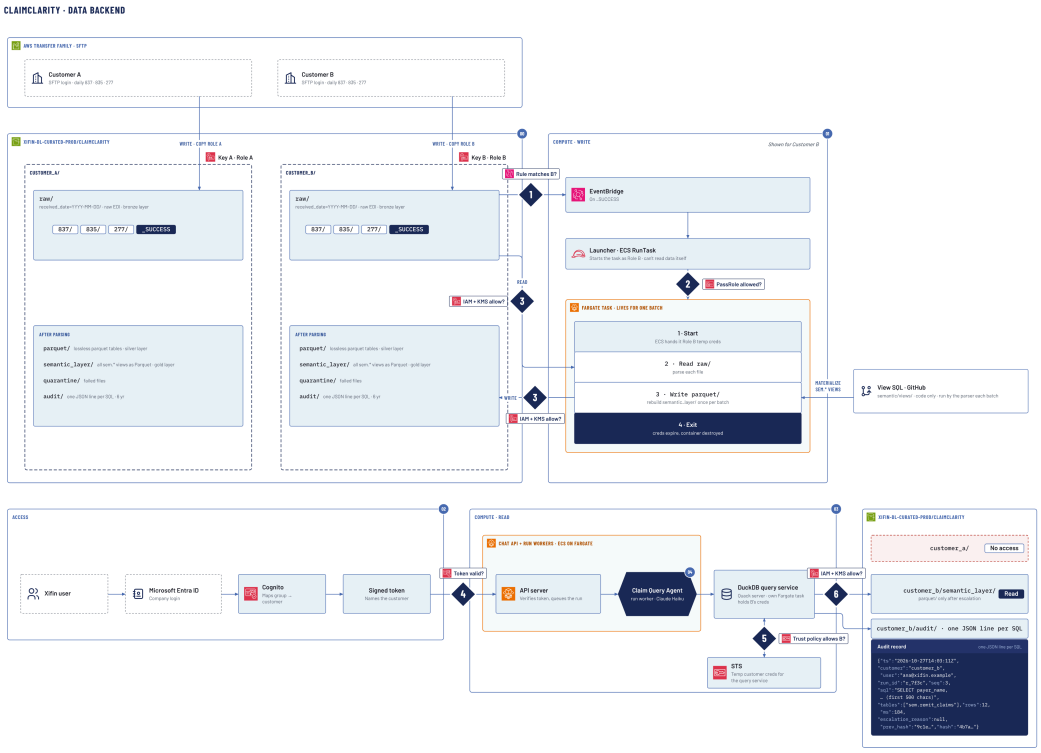
# ClaimClarity architecture

ClaimClarity answers questions about a customer's claims (837P) and remittances (835). Each customer's data sits in its own S3 prefix, under its own KMS key and IAM roles. Six AWS checks, the numbered diamonds, enforce that on every write and read. The main board shows the whole system, and drill-downs 00–04 zoom into each part, and 05 is the access matrix.

The numbered diamonds on every board are the six permission checks. Each number means the same check on every board, and sits on the arrow it guards. Board 05 shows where each one is defined and what every role can do.

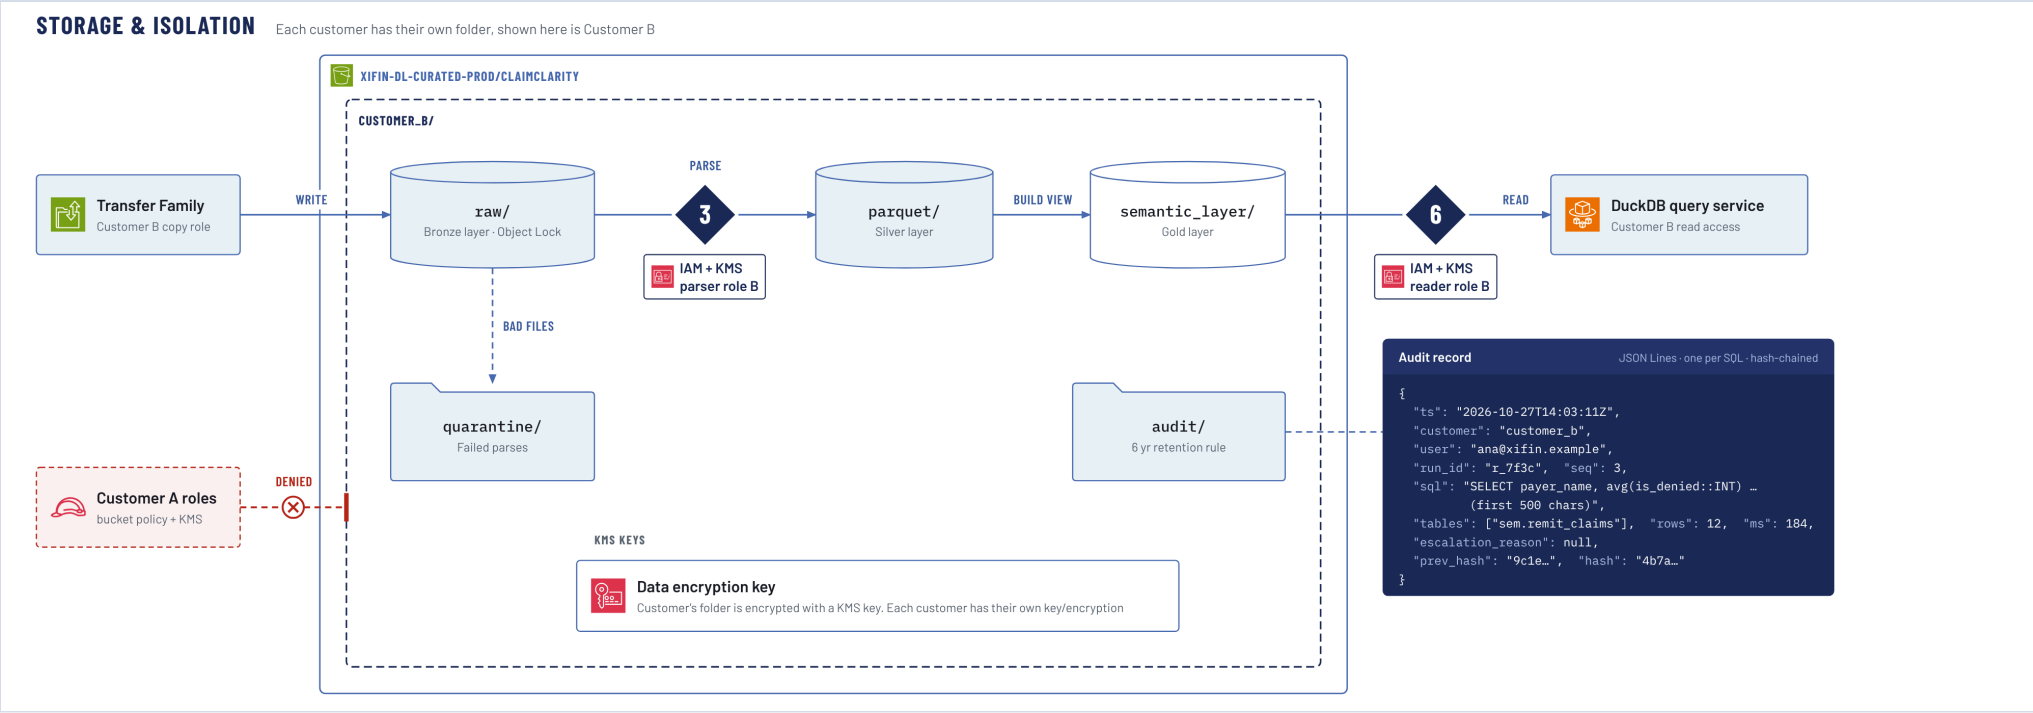
| Gate | What has to be true | Defined in |
|---|---|---|
| 1 | The `_SUCCESS` file is in this customer's `raw/` folder | EventBridge rule, one per customer |
| 2 | The launcher passes only this customer's parser role, only to ECS | Launcher role's IAM policy (`iam:PassRole`) |
| 3 | The parser role and the customer's key allow the read or write | Parser role's IAM policy, bucket policy, customer key's key policy |
| 4 | The token is valid and names the customer | Chat API: checks Cognito's signature on every request |
| 5 | The reader role trusts this token's customer | Reader role's trust policy (STS) |
| 6 | The reader role and the customer's key allow the read | Reader role's IAM policy, bucket policy, customer key's key policy |

# Data backend



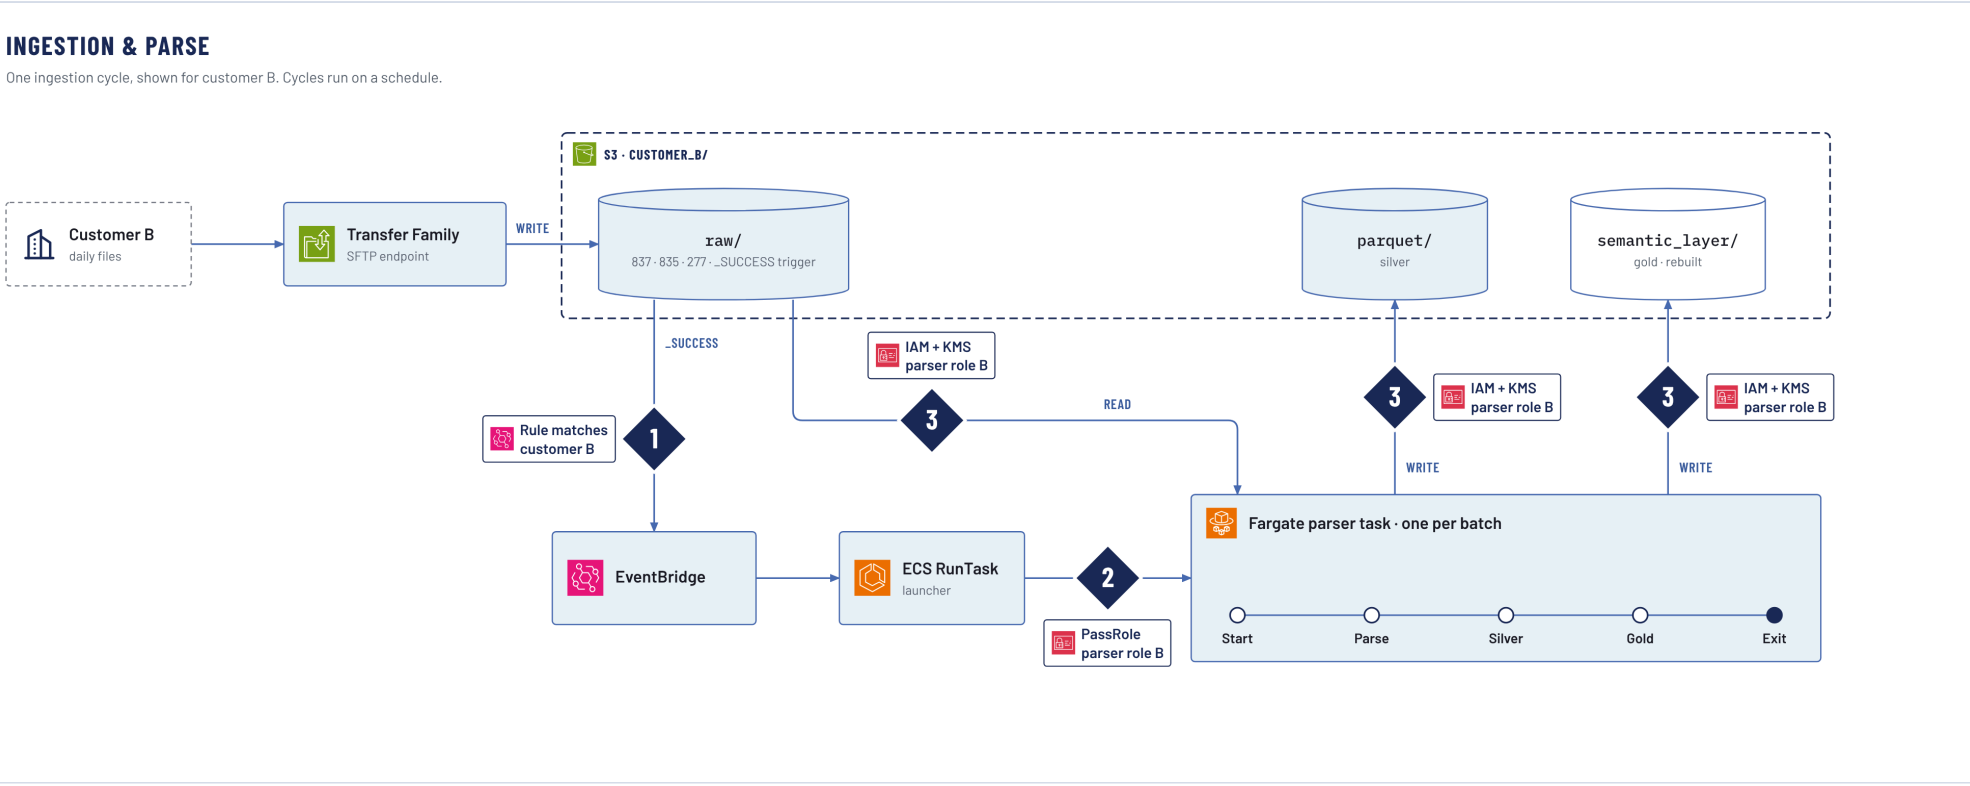

| Part | What it does | Key facts |
|---|---|---|
| SFTP | Each customer sends daily 837 · 835 · 277 files | AWS Transfer Family, customer IP addresses only, straight into `raw/` |
| ClaimClarity data bucket | One prefix per customer: raw → silver → gold, plus quarantine and audit | One bucket for all customer data |
| Compute · write | EventBridge → ECS RunTask → one Fargate parser task per batch | Runs as the customer's parser role. Gates 1–3. |
| Access | Entra ID → Cognito → token naming the customer | The token is the only source of the customer. Gate 4. |
| Compute · read | Chat API → run worker (the Claim Query Agent) → DuckDB query service → STS → gold | 15-minute credentials, this customer's gold only. Gates 5–6. |

# 00 · Storage & isolation



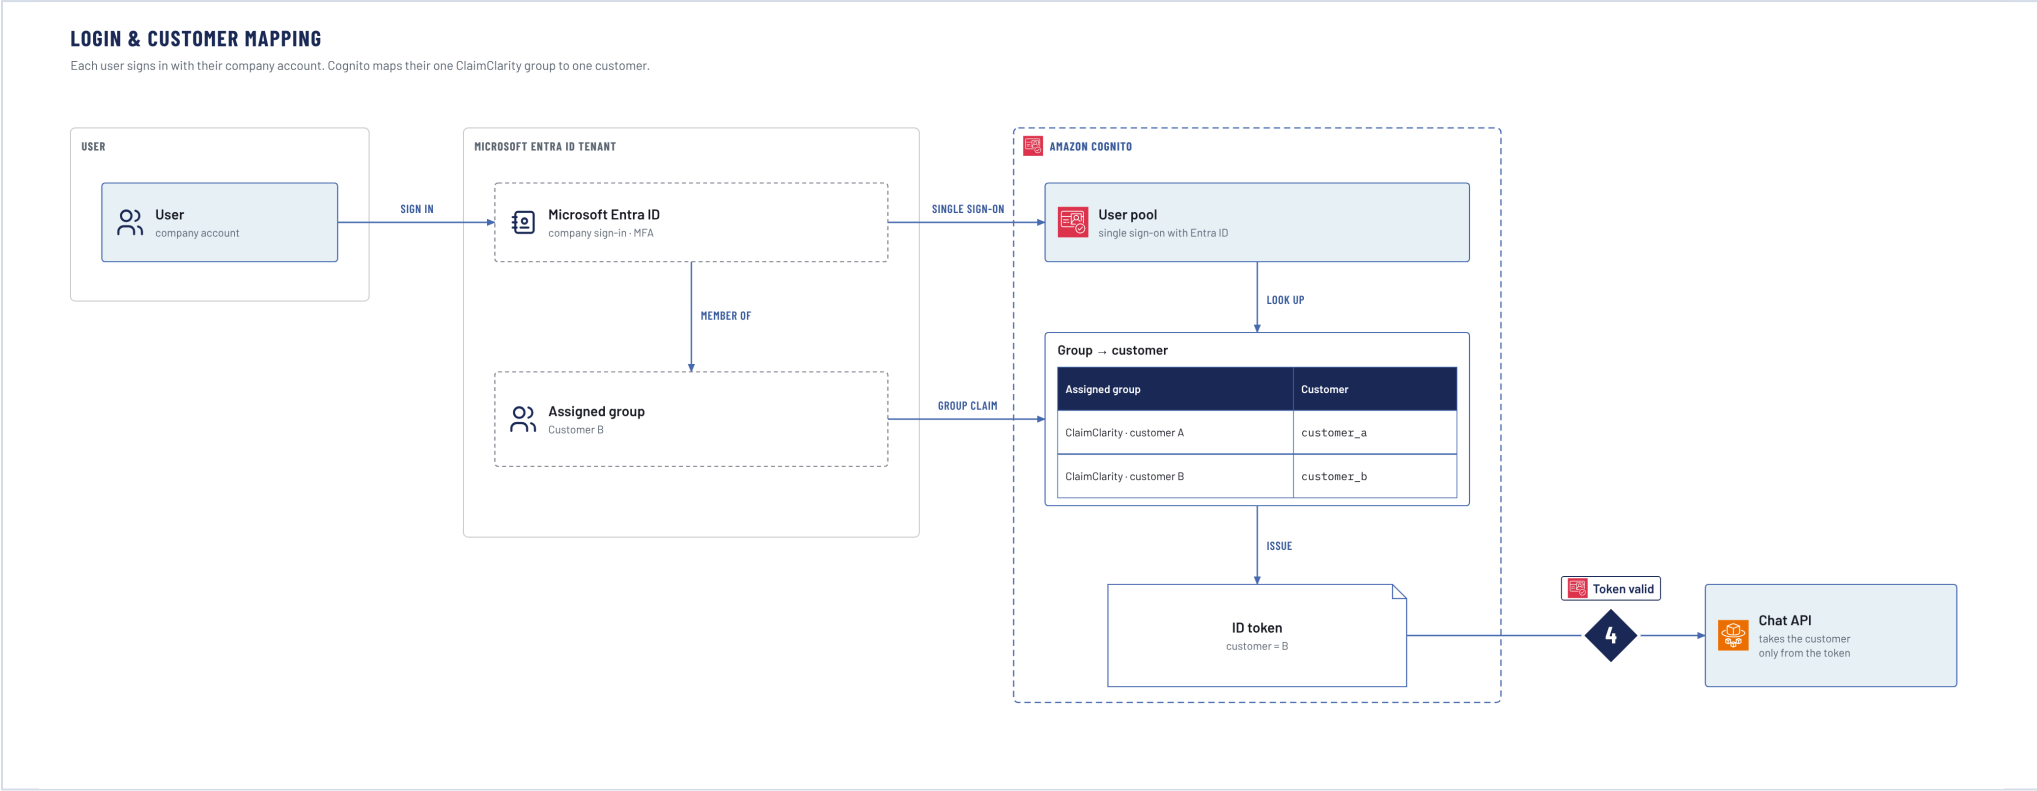

| Part | Key facts |
|---|---|
| Bucket | One bucket for all customer data, one prefix per customer. The web app and the access logs have their own buckets. |
| Prefixes | `raw/` (write-once, Object Lock 7 years, `_SUCCESS` written last), `parquet/` (silver), `semantic_layer/` (gold), `quarantine/` (bad files, kept 1 year), `audit/` |
| IAM roles | Per customer: SFTP copy, parser, reader, audit. IAM prefix policies keep the roles apart. |
| KMS keys | The customer key, one per customer, covers raw, silver, gold and quarantine. The platform audit key covers `audit/`, with one key-policy statement per customer. |
| Bucket policy | Only customer B's roles reach `customer_b/`. Customer A's roles are denied by the bucket policy and the key policy. |
| Query audit | The DuckDB query service writes one JSON Lines record per SQL statement: write-once, kept 6 years, each record chained by hash to the one before |
| Gates | 3 on the parser's reads and writes, 6 on the reader's reads |

# 01 · Ingestion & parse



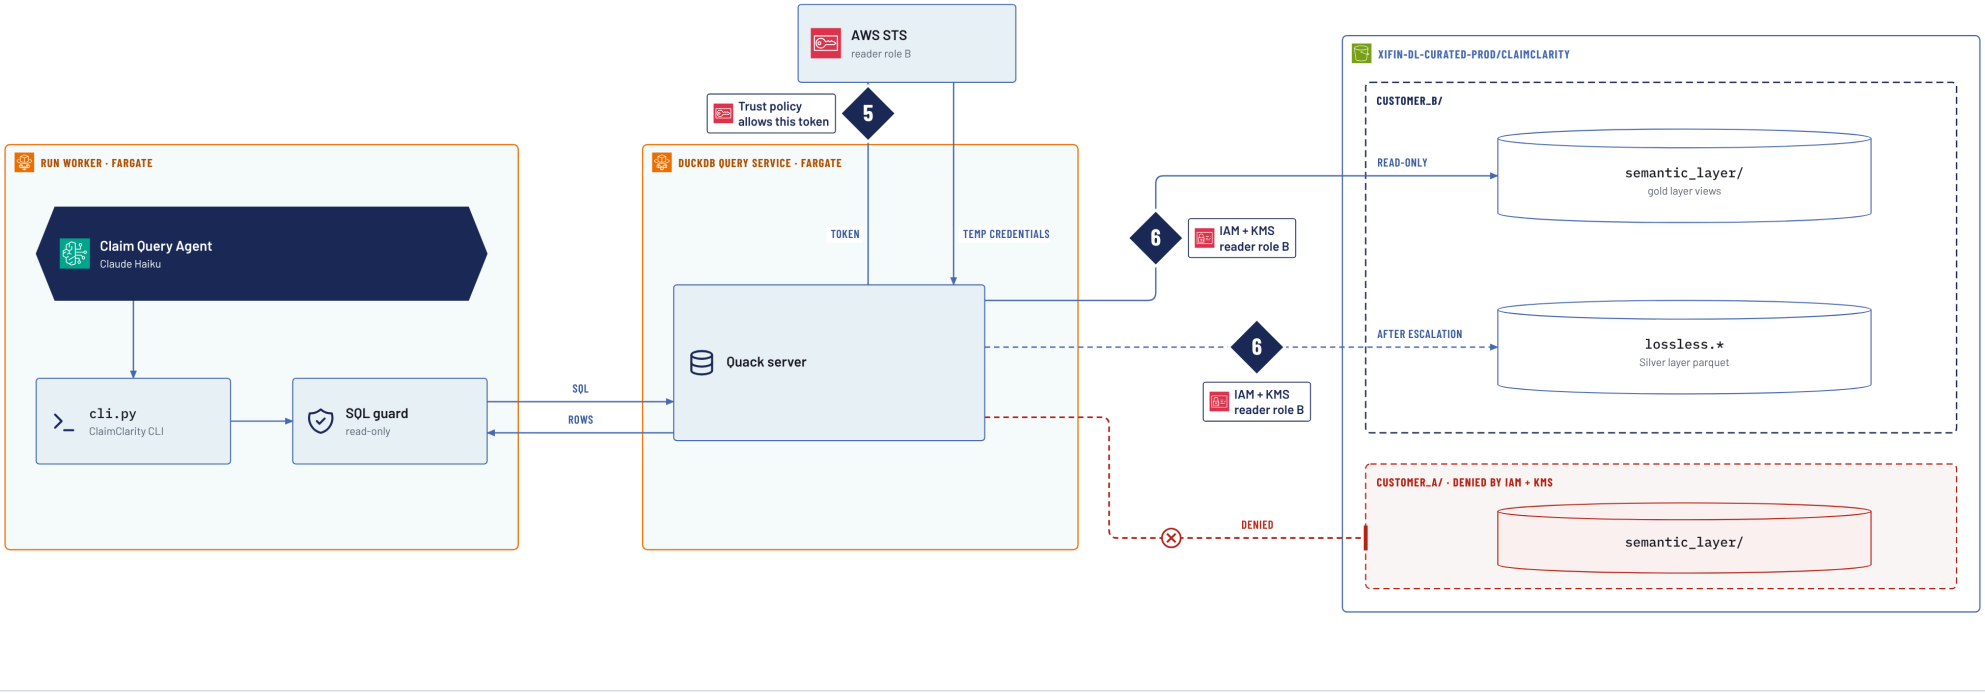

| Step | What happens |
|---|---|
| Intake | The customer uploads over SFTP (port 22, customer IP addresses only). Transfer Family writes straight into `raw/` as the SFTP copy role, `_SUCCESS` last. |
| Gate 1 | The customer's EventBridge rule matches `_SUCCESS` under `customer_b/raw/` only |
| Launch | ECS RunTask starts one parser task. EventBridge retries the launch 3 times. |
| Gate 2 | `iam:PassRole` lets the launcher pass only customer B's parser role, and only to ECS tasks |
| Parser task | Fargate, 4–8 GB of memory, one per batch. It holds the batch lease, a lock object, while it runs. Bad files go to `quarantine/`. |
| Gate 3 | IAM + KMS on every read of `raw/` and every write to silver and gold |
| Publish | Gold is written as a new version, and `CURRENT` moves by compare-and-set. Old versions stay readable for sessions already open. |

# 02 · Login & customer mapping



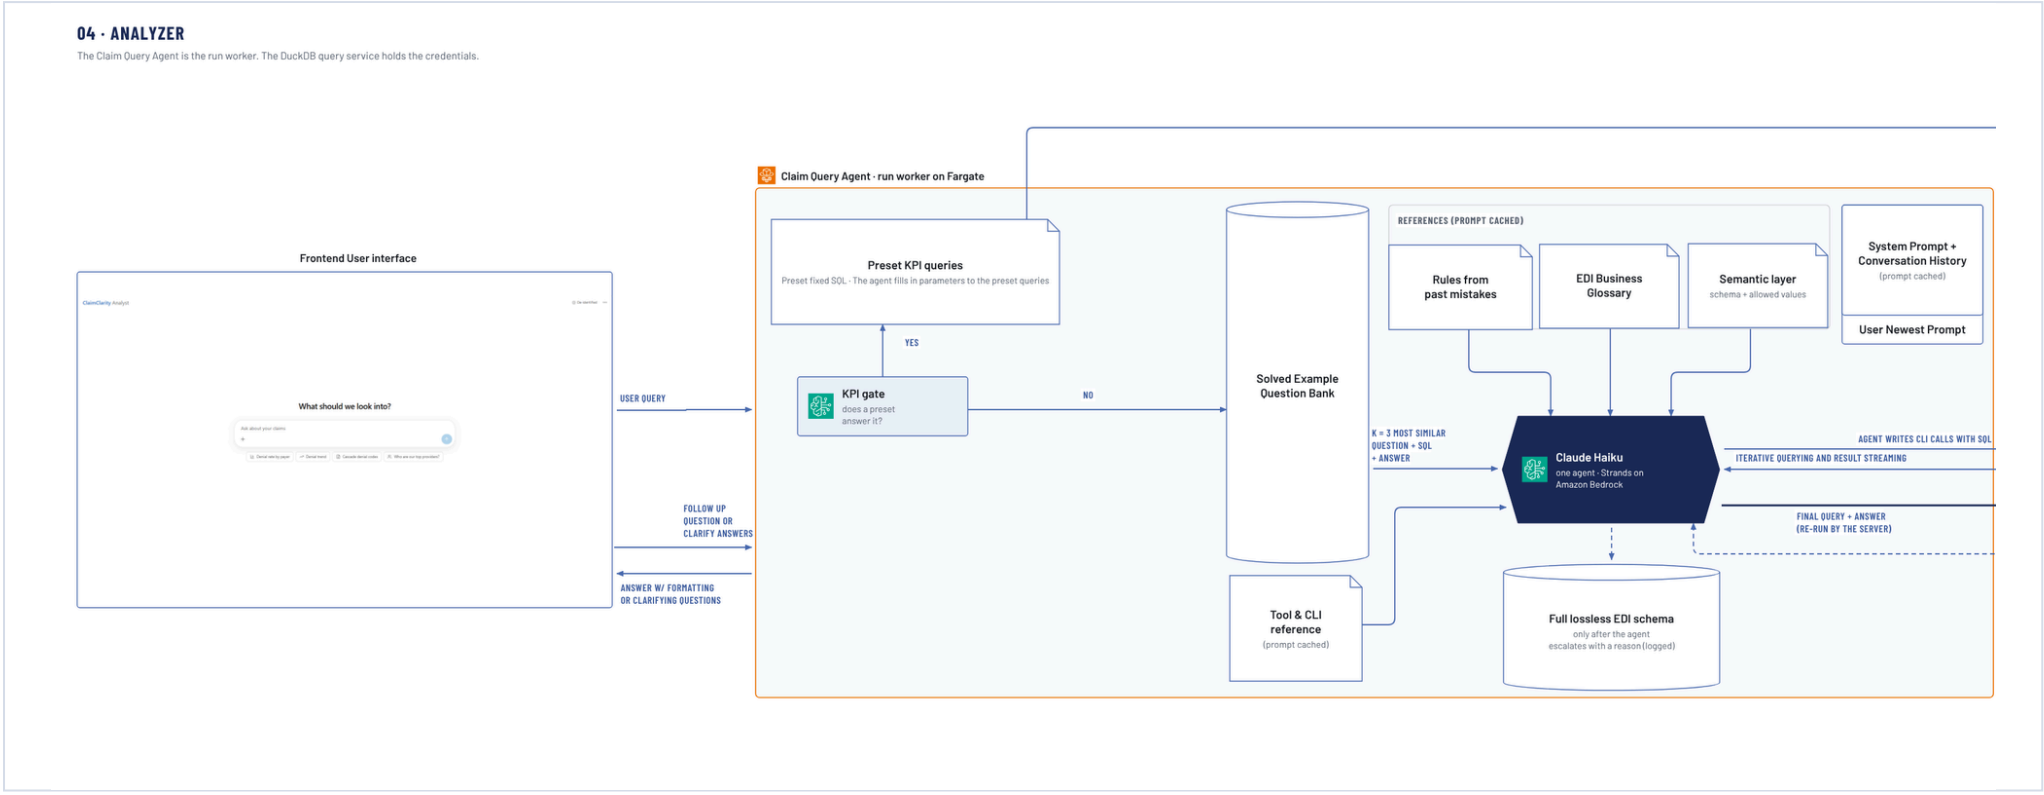

| Part | Key facts |
|---|---|
| Microsoft Entra ID | Company sign-in. The ClaimClarity app is assigned to groups. |
| Assigned group | One group per customer |
| Amazon Cognito | Single sign-on with Entra ID. Maps the user's group to exactly one customer and issues a token naming that customer. A user in no ClaimClarity group, or in more than one, is refused. |
| Gate 4 | The chat API accepts a request only with a valid token, and takes the customer only from it |

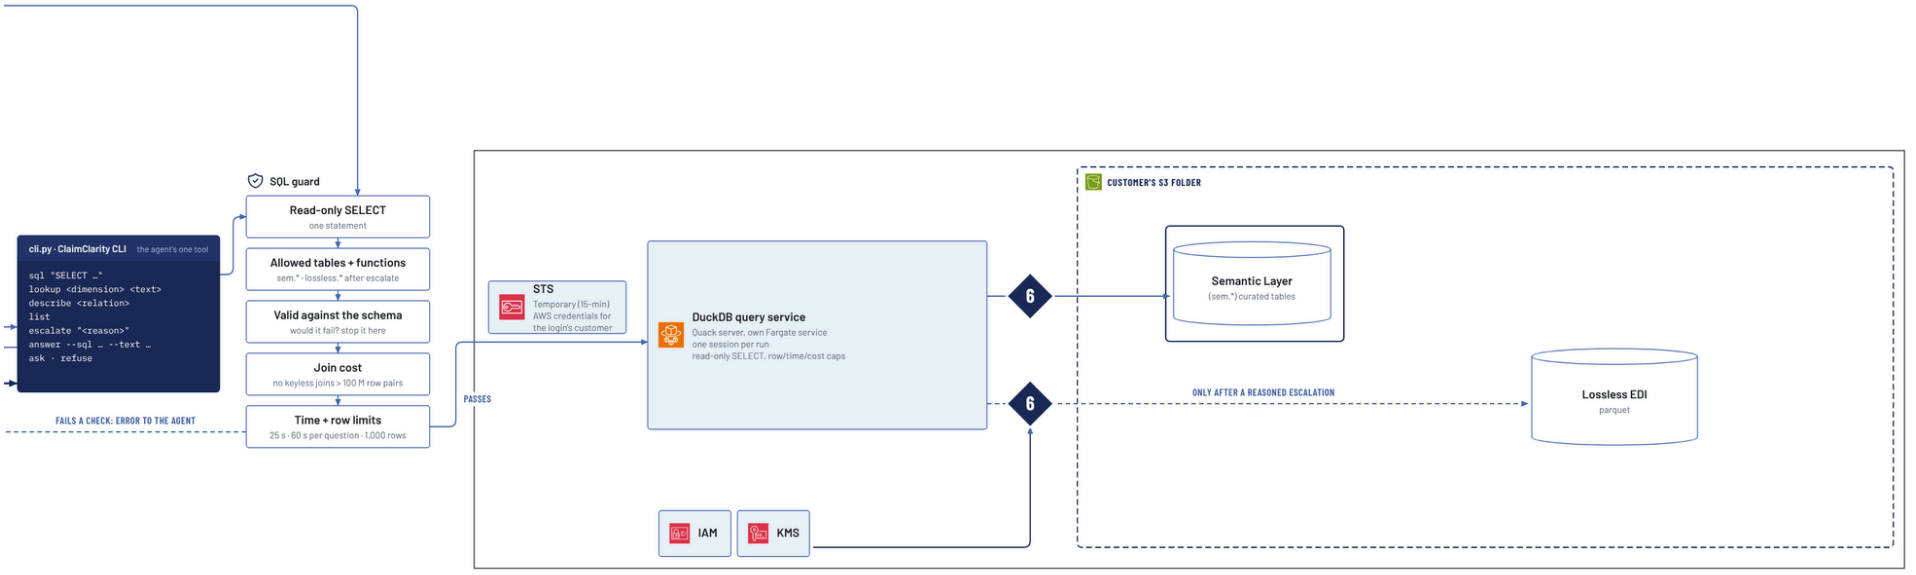
# 03 · Query path




| Part | Key facts |
|---|---|
| Run worker | The Claim Query Agent sends SQL through `cli.py` and the SQL guard. It holds no AWS credentials. |
| SQL guard | Read-only SELECT. Blocks queries that would fail against the schema. 25 s per query, 60 s per question, 1,000 rows. Refuses keyless joins over 100 million row pairs. |
| Quack | SQL goes to the DuckDB query service over Quack with a per-run token, and rows come back the same way |
| Gate 5 | The reader role's trust policy accepts only this token's customer. STS returns read-only credentials for 15 minutes, renewed with the same token when fewer than 3 minutes remain. |
| Gate 6 | IAM + KMS allow reader role B only the current gold version in `customer_b/semantic_layer/`, and `customer_b/parquet/` after an escalation |
| `lossless.*` | PHI-stripped tables published next to gold, read only after the agent escalates with a reason |
| Customer A | Denied twice: the API takes the customer only from the token, and IAM + KMS deny reader role B on `customer_a/` |

# 04 · Analyzer

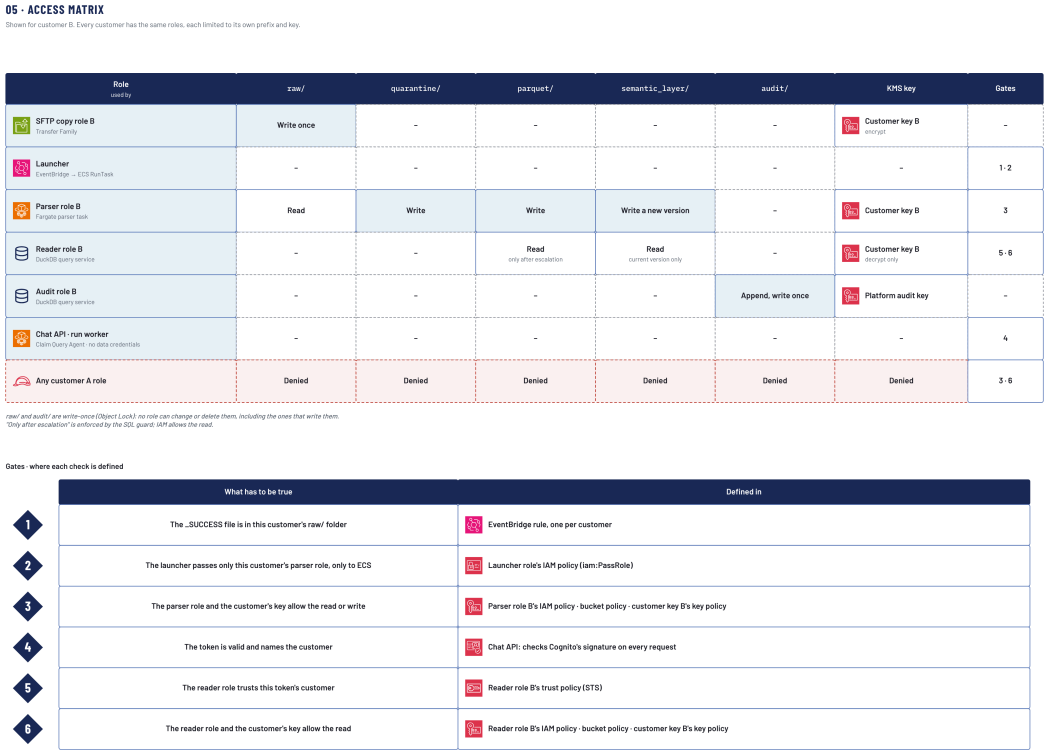

04 · ANALYZER
The Claim Query Agent is the run worker. The DuckDB query service holds the credentials.
Frontend User interface
What should we look into?
USER QUERY
FOLLOW UP QUESTION OR CLARIFY ANSWERS
ANSWER W/ FORMATTING OR CLARIFYING QUESTIONS
Claim Query Agent · run worker on Fargate
Preset KPI queries
Preset fixed SQL · The agent fills in parameters to the preset queries
YES
KPI gate
does a preset answer it?
NO
Solved Example Question Bank
REFERENCES (PROMPT CACHED)
Rules from past mistakes
EDI Business Glossary
Semantic layer
schema + allowed values
System Prompt + Conversation History
(prompt cached)
User Newest Prompt
K = 3 MOST SIMILAR QUESTION + SQL + ANSWER
Claude Haiku
one agent · Strands on Amazon Bedrock
AGENT WRITES CLI CALLS WITH SQL
ITERATIVE QUERYING AND RESULT STREAMING
FINAL QUERY + ANSWER (RE-RUN BY THE SERVER)
Tool & CLI reference
(prompt cached)
Full lossless EDI schema
only after the agent escalates with a reason (logged)




| Part | Key facts |
|---|---|
| KPI gate | One Claude Haiku call with structured output. If a preset fits, it fills the parameters (payer, payer class, month, CPT, CARC), which are checked against the data. Anything else goes to the agent. |
| Preset KPI queries | 16 fixed SQL queries. They pass the SQL guard like any other SQL. |
| Claim Query Agent | The run worker itself (Fargate): Claude Haiku, Strands on Amazon Bedrock |
| Prompt | Cached: rules, EDI glossary, semantic schema with allowed values, tool and CLI reference, system prompt and history. Per question: the 3 most similar solved examples and the newest prompt. |
| First decision | Answer, ask a clarifying question, or escalate to the lossless tables with a reason, which is logged |
| `cli.py` · SQL guard | The agent's one tool: `sql`, `lookup`, `describe`, `list`, `escalate`, then `answer`, `ask` or `refuse`. Every query passes the guard's checks (limits in 03). A failed check goes back to the agent as an error. |
| Answer | Streams back with live steps. The server re-runs the final SQL, so the numbers come from the database. |

Network, operations, log retention and session handling are owned by IT.

# 05 · Access matrix



**05 · ACCESS MATRIX**

Shown for customer B. Every customer has the same roles, each limited to its own prefix and key.

| Role (used by) | raw/ | quarantine/ | parquet/ | semantic_layer/ | audit/ | KMS key | Gates |
|---|---|---|---|---|---|---|---|
| SFTP copy role B — Transfer Family | Write once | – | – | – | – | Customer key B — encrypt | – |
| Launcher — EventBridge → ECS RunTask | – | – | – | – | – | – | 1 · 2 |
| Parser role B — Fargate parser task | Read | Write | Write | Write a new version | – | Customer key B | 3 |
| Reader role B — DuckDB query service | – | – | Read — only after escalation | Read — current version only | – | Customer key B — decrypt only | 5 · 6 |
| Audit role B — DuckDB query service | – | – | – | – | Append, write once | Platform audit key | – |
| Chat API · run worker — Claim Query Agent · no data credentials | – | – | – | – | – | – | 4 |
| Any customer A role | Denied | Denied | Denied | Denied | Denied | Denied | 3 · 6 |

*raw/ and audit/ are write-once (Object Lock): no role can change or delete them, including the ones that write them.*
*"Only after escalation" is enforced by the SQL guard; IAM allows the read.*

Gates · where each check is defined

| | What has to be true | Defined in |
|---|---|---|
| 1 | The _SUCCESS file is in this customer's raw/ folder | EventBridge rule, one per customer |
| 2 | The launcher passes only this customer's parser role, only to ECS | Launcher role's IAM policy (iam:PassRole) |
| 3 | The parser role and the customer's key allow the read or write | Parser role B's IAM policy · bucket policy · customer key B's key policy |
| 4 | The token is valid and names the customer | Chat API: checks Cognito's signature on every request |
| 5 | The reader role trusts this token's customer | Reader role B's trust policy (STS) |
| 6 | The reader role and the customer's key allow the read | Reader role B's IAM policy · bucket policy · customer key B's key policy |

| Part | Key facts |
|---|---|
| Roles | Four per customer (SFTP copy, parser, reader, audit), plus the launcher. Each is limited to its own prefix `customer_b/` and its own key. |
| Write-once | `raw/` and `audit/` (Object Lock): no role can change or delete them, including the roles that write them |
| Escalation | The reader may read `parquet/` only after an escalation. The SQL guard enforces this; IAM allows the read. |
| No data credentials | The chat API and the run worker (the Claim Query Agent) hold no AWS data credentials |
| Customer A | Every customer A role is denied everywhere under `customer_b/`, by the bucket policy and customer key B's key policy |

## Open decisions

| Question | Default shown |
|---|---|
| SFTP: AWS Transfer Family or an EC2 host? | Transfer Family, writing straight into `raw/` |
| Does the audit record keep the SQL text? | Yes, the first 500 characters |
| Queue and run workers | SQS + Fargate run workers |
| Per-customer limits | Concurrency and token budgets still need values |