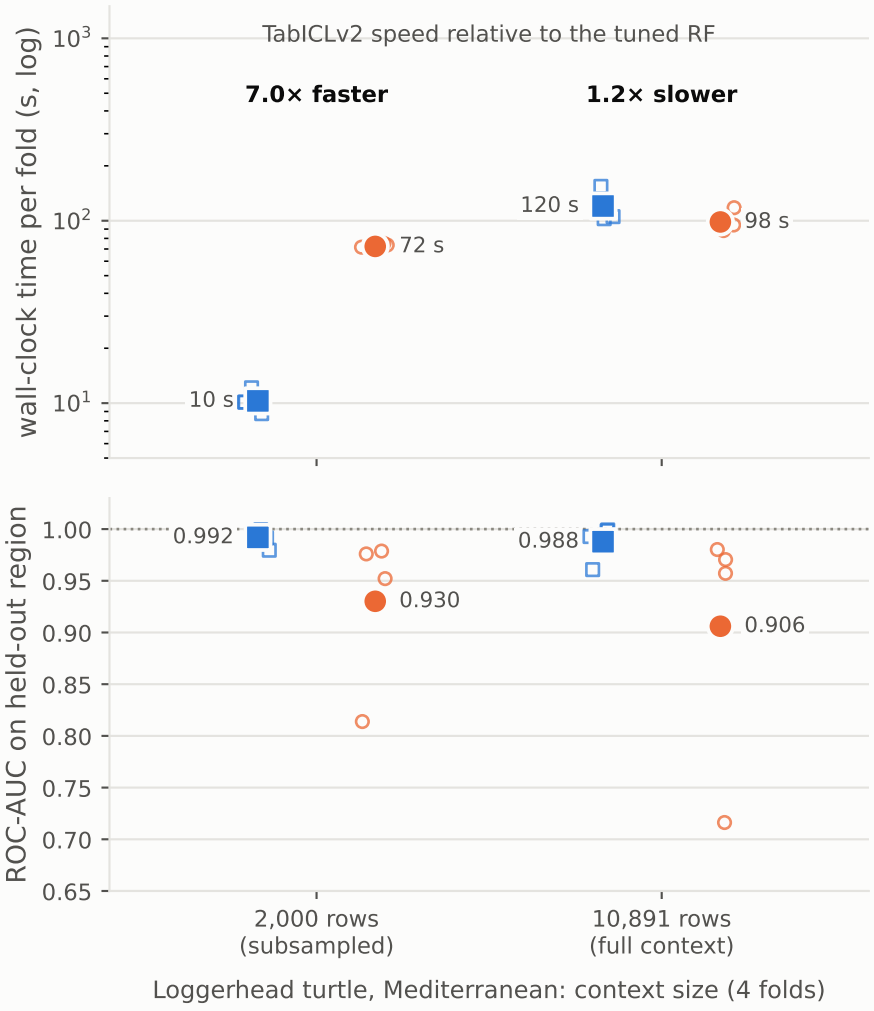
TabICLv2 speed relative to the tuned RF
7.0× faster
1.2× slower
wall-clock time per fold (s, log)
10^3
10^2
10^1
120 s
98 s
72 s
10 s
ROC-AUC on held-out region
1.00
0.95
0.90
0.85
0.80
0.75
0.70
0.65
0.992
0.988
0.930
0.906
2,000 rows
(subsampled)
10,891 rows
(full context)
Loggerhead turtle, Mediterranean: context size (4 folds)
TabICLv2 (mean)
Tuned RF, nested-CV search + fit (mean)
individual folds