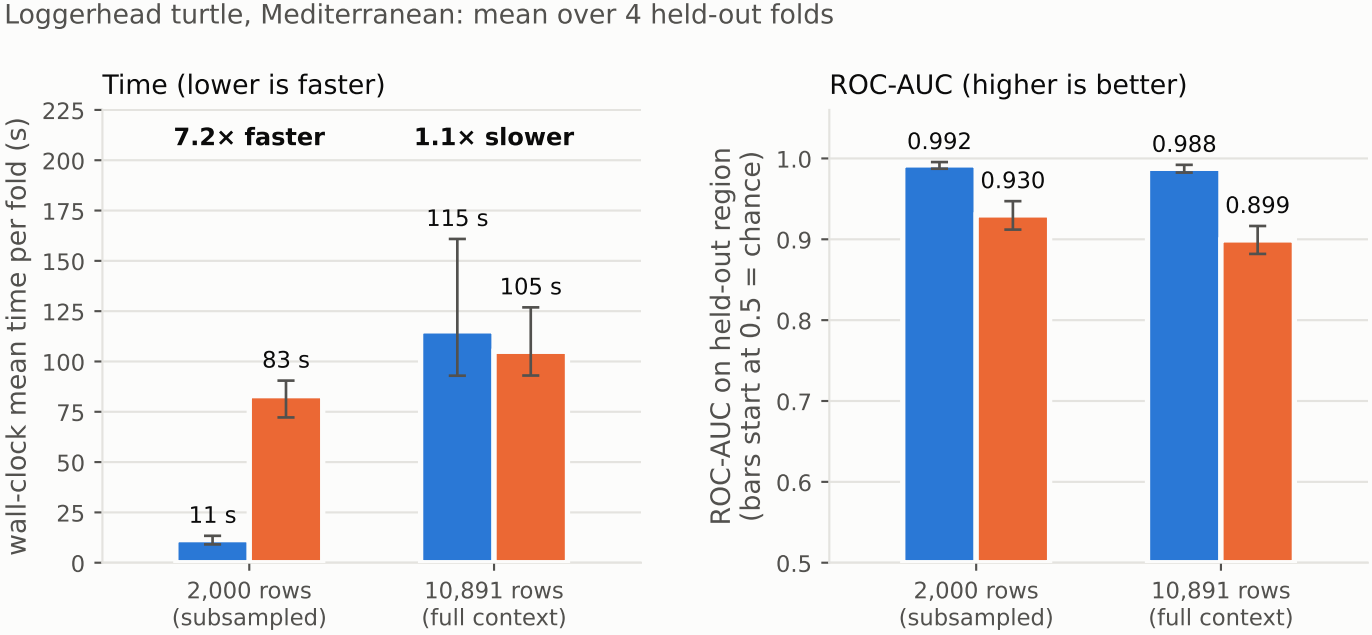
Loggerhead turtle, Mediterranean: mean over 4 held-out folds
Time (lower is faster)
7.2× faster
1.1× slower
wall-clock mean time per fold (s)
225
200
175
150
125
100
75
50
25
0
11 s
83 s
115 s
105 s
2,000 rows
(subsampled)
10,891 rows
(full context)
ROC-AUC (higher is better)
ROC-AUC on held-out region
(bars start at 0.5 = chance)
1.0
0.9
0.8
0.7
0.6
0.5
0.992
0.930
0.988
0.899
2,000 rows
(subsampled)
10,891 rows
(full context)
TabICLv2
Tuned RF, nested-CV search + fit
whiskers: time, fastest–slowest fold; AUC, bootstrap 95% CI