

Azure Platform Case Study

Development / Testing / Production

A private application platform with Terraform and federated CI/CD

Three environments. Two subscriptions. Separate workload identities and private networks. Production approval, PIM and runtime verification.

Peter Hudcovic Evidence and build records reviewed October 6, 2026

Overview and subscriptions

Configuration and observed results

I built a private Azure application platform in Sweden Central with separate development, testing and production environments. Dev and Test share the non-production subscription. Production has its own subscription, identities, network and Terraform state. The shared package store lives in the Dev foundation resource group.

Home > Subscriptions

Subscriptions

Default Directory (peterhudcovic@gmail.onmicrosoft.com)

+ Add

Manage Policies

View Requests

View eligible subscriptions

Export to CSV

Analyze

Global administrators can manage all subscriptions in this list by updating their policy setting [here](#).

Showing subscriptions in Default Directory directory. Don't see a subscription? [Switch directories](#)

Search for any field...

Subscriptions : Filtered (2 of 2)

My role == all

Status == all

Add filter

☐ Subscription name ↑↓	Subscription ID ↑↓	My role ↑↓	Current cost	Secure Score ↑↓	Parent management group ↑↓	Status ↑↓
☐ sub-app-nonprod	8b38e1d5-139f-4006-8f2b-ffb32a6ac114	Owner	€2.39	-	Tenant Root Group	Active
☐ sub-app-prod	61845030-2daa-4797-a97a-59a7fd8d478f	Owner	0.00	-	Tenant Root Group	Active

Environment comparison

Actual scope and role capabilities

	Development	Testing	Production
Subscription	sub-app-nonprod	sub-app-nonprod	sub-app-prod
VNet CIDR	10.10.0.0/16	10.20.0.0/16	10.30.0.0/16
Gateway private IP	10.10.4.10	10.20.4.10	10.30.4.10
App Service plan	B1	P0v3	P0v3
Monitoring	Dev workspace	Shared Dev workspace	Own workspace
Bastion SKU	Developer	Developer	Basic
Application delivery	main completion trigger	main completion trigger	Manual approval
Privileged access	Lab bootstrap admin	Lab bootstrap admin	Reader + VM login, PIM roles

Subscriptions and shared delivery

Architecture derived from the source snapshot



No VNet peering. Private DNS links remain environment-specific.

Users and access

Configuration and observed results

Application sign-in and infrastructure administration use separate grants. Lab Admin bootstraps the lab and belongs to the app-user groups. Prod Admin has permanent Reader and Virtual Machine User Login, with privileged resource and secret roles available through PIM. PIM activation requires justification and MFA and lasts at most two hours. Conditional Access policies evaluate non-production NAT locations and device-code sign-in in report-only mode.

Home > sub-app-prod

sub-app-prod | Access control (IAM) ☆ ...

Search

Overview Activity log Access control (IAM) Tags Diagnose and solve problems Security Resource Visualizer Events Resource groups Cost Management Billing Settings Monitoring Help

Check access Role assignments Roles Deny assignments

Number of role assignments for this subscription 40 5000 Privileged 3

View assignments

prod admin x Type: All Role: All Scope: All scopes State: All End time: All Group by: Role

All (2) Job function roles (1) Privileged administrator roles (1)

☐	Name ↑↓	Type ↑↓	Role ↑↓	Scope ↑↓	State ↑↓	End time ↑↓	Condition ↑↓
☐	Contributor (1)						
☐	Prod Admin 0ba401df-650b-4548-9360-bf5...	User	Contributor	This resource	Eligible Permanent	Permanent	None
☐	Reader (1)						
☐	Prod Admin 0ba401df-650b-4548-9360-bf5...	User	Reader	This resource	Active Permanent	Permanent	None

Showing 1 - 2 of 2 results.

Source: [infra/environments/production/layer-0-foundation/access.tf](https://github.com/peterhudcovic/azure-platform-lab/blob/main/production/layer-0-foundation/access.tf)

Access and permissions matrix

Actual scope and role capabilities

Account / identity	Scope and capability	Boundary
Lab Admin	Bootstrap across all environments; app-group member	Broad administrator, no declared Entra VM login grant
Prod Admin	Reader + VM User Login permanently; PIM Contributor and secret roles	Prod scope; privileged roles need activation
App-user groups	Sign-in to assigned environment application	No Azure management role; /health excluded
Application MI	Secrets User on own application-vault RG	Secret read; no secret write grant
Gateway MI	Secrets User on certificate vault	Vault scope, not a single certificate
Build MI	Blob Data Contributor on shared packages	Read/write/delete blobs, not upload only
Deploy MI	Website Contributor on own app RG; package Blob Reader	Website management exceeds package deploy
Infra L1 / L2	Contributor on own layer RGs; state and dependency grants	No role assignment; resource changes can use runtime MIs
Destroy MI	Contributor on network/app/vault RGs and state access	Create/update/delete, not delete only
Prod lock roles	Infra L2 creates locks; destroy removes locks	Explicit custom lock grants on app/vault RGs
DevOpsInfrastructure	Reader + Network Contributor on network RG	Pool placement, not application data access

Managed identities and role boundaries

Configuration and observed results

Each environment has six user-assigned identities for the application, gateway, deploy, destroy and two infrastructure layers. Dev foundation also hosts the shared build identity. Runtime identities read secrets at their assigned scopes. Pipeline identities use workload identity federation. Contributor and Website Contributor are broader than a single operation, so I document the actual role scopes instead of treating them as strict deploy-only or delete-only permissions.


Managed Identities						
Default Directory (peterhudcovic@gmail.onmicrosoft.com)						
+ Create Manage view Refresh Export to CSV Open query Assign tags Delete Add to service group						
Filter for any field... Subscription equals all Resource Group equals all Location equals all Add filter						
☐	Name	Type	Resource Group	Location	Subscription ID ↑	
☐	 id-sits-prod-agw-swc	...	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-app-swc	...	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-deploy-swc	...	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-destroy-swc	...	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-infra-l1-swc	...	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-infra-l2-swc	...	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-build-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-agw-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-app-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-deploy-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-destroy-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-infra-l1-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-infra-l2-swc	...	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-agw-swc	...	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-app-swc	...	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-deploy-swc	...	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-destroy-swc	...	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-infra-l1-swc	...	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-infra-l2-swc	...	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114

Source: docs/build-log/13-access-matrix.md

Shared CI/CD

Configuration and observed results

Azure DevOps builds one Python package, runs unit tests, records the source commit and SHA-256, and uploads the package to shared storage. Deploy jobs retrieve and verify the same package through environment-specific identities and private application agent pools. YAML enables Dev and Test completion triggers for main builds. Captured lab runs were manual on the working branch. Production deployment requires approval on prod-app, with self-approval enabled in this lab.

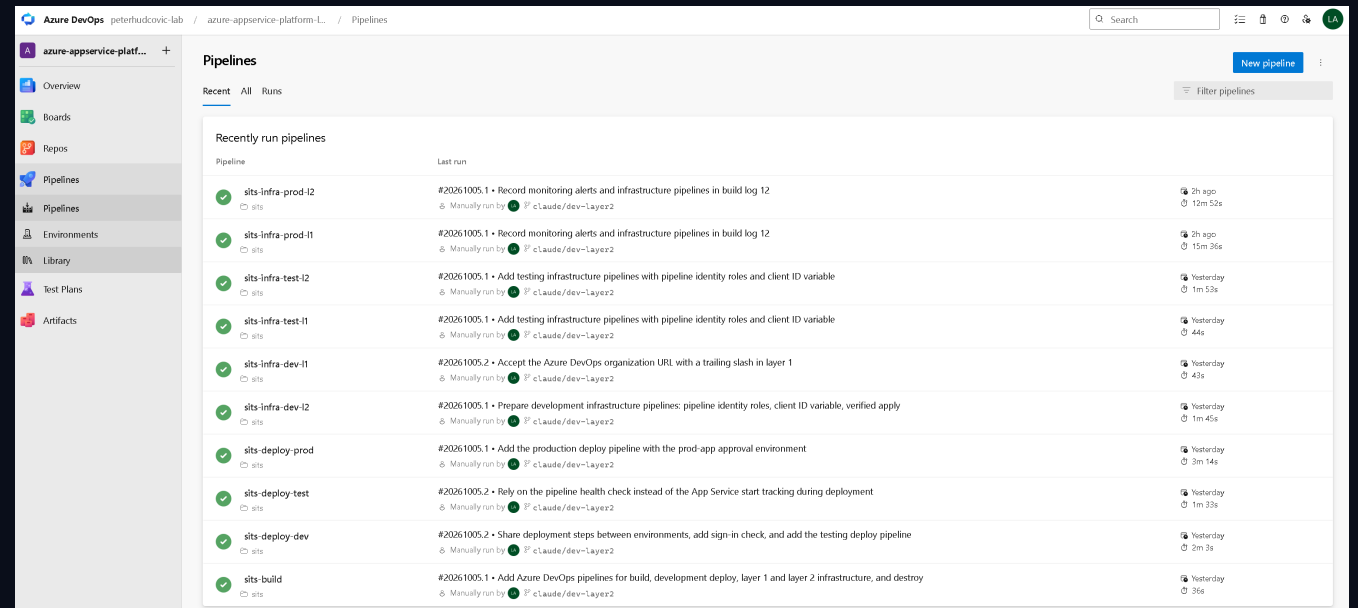

The screenshot shows the Azure DevOps web interface for a project named 'peterhudcovic-lab'. The left sidebar contains navigation links for Overview, Boards, Repos, Pipelines, Environments, Library, Test Plans, and Artifacts. The main area is titled 'Pipelines' and shows a list of 'Recently run pipelines'. Each entry includes a pipeline name, a status icon (green checkmark for success), a description of the build steps, the user who triggered the run, and the time taken to complete.

Pipeline	Last run
sts-infra-prod-12 sits	#20261005.1 • Record monitoring alerts and infrastructure pipelines in build log 12 Manually run by c.Laude/dev-Layer2 2h ago 12m 52s
sts-infra-prod-11 sits	#20261005.1 • Record monitoring alerts and infrastructure pipelines in build log 12 Manually run by c.Laude/dev-Layer2 2h ago 15m 36s
sts-infra-test-12 sits	#20261005.1 • Add testing infrastructure pipelines with pipeline identity roles and client ID variable Manually run by c.Laude/dev-Layer2 Yesterday 1m 53s
sts-infra-test-11 sits	#20261005.1 • Add testing infrastructure pipelines with pipeline identity roles and client ID variable Manually run by c.Laude/dev-Layer2 Yesterday 44s
sts-infra-dev-11 sits	#20261005.2 • Accept the Azure DevOps organization URL with a trailing slash in layer 1 Manually run by c.Laude/dev-Layer2 Yesterday 43s
sts-infra-dev-12 sits	#20261005.1 • Prepare development infrastructure pipelines: pipeline identity roles, client ID variable, verified apply Manually run by c.Laude/dev-Layer2 Yesterday 1m 45s
sts-deploy-prod sits	#20261005.1 • Add the production deploy pipeline with the prod-app approval environment Manually run by c.Laude/dev-Layer2 Yesterday 3m 14s
sts-deploy-test sits	#20261005.2 • Rely on the pipeline health check instead of the App Service start tracking during deployment Manually run by c.Laude/dev-Layer2 Yesterday 1m 33s
sts-deploy-dev sits	#20261005.2 • Share deployment steps between environments, add sign-in check, and add the testing deploy pipeline Manually run by c.Laude/dev-Layer2 Yesterday 2m 3s
sts-build sits	#20261005.1 • Add Azure DevOps pipelines for build, development deploy, layer 1 and layer 2 infrastructure, and destroy Manually run by c.Laude/dev-Layer2 Yesterday 36s

Source: [pipelines/templates/deploy-steps.yml](#)

Terraform layers and infrastructure delivery

Configuration and observed results

Layer 0 retains foundation resources and identities. Layer 1 creates networking and operations. Layer 2 creates the application platform. Every environment and layer has a separate state container with Entra authentication. Layer 1 pipelines use hosted agents because they create the private pools. Layer 2 uses the environment infrastructure pool. Production has a plan stage and an approval on prod-infra, followed by a new plan, conditional apply and verification. Build log 12 records No changes runs in all environments.

peterhudcovic-lab / azure-appservice-platform-l... / Settings / Agent pools

Project Settings

azure-appservice-platform-lab

General

- Overview
- Teams
- Permissions
- Notifications
- Service hooks
- Dashboards

Boards

- Project configuration
- Team configuration
- GitHub connections

Pipelines

- Agent pools**
- Parallel jobs
- Settings
- Test management
- Service connections


Agent pools

Name
 Azure Pipelines Azure Pipelines
 Default Azure Pipelines
 GitHub-hosted Agents Azure Pipelines
 mdp-sits-dev-app-swc Lab Admin
 mdp-sits-dev-infra-swc Lab Admin
 mdp-sits-prod-app-swc Lab Admin
 mdp-sits-prod-infra-swc Lab Admin
 mdp-sits-test-app-swc Lab Admin
 mdp-sits-test-infra-swc Lab Admin

Networking and private access

Configuration and observed results

The VNets use 10.10.0.0/16, 10.20.0.0/16 and 10.30.0.0/16 with no peering. Subnets separate operations, gateway, application integration, private endpoints and pipeline agents. Private DNS zones link to their own VNet. App Service inbound private endpoints and outbound VNet integration serve different directions of traffic. NSGs use explicit permitted flows followed by deny-all inbound at priority 4000. NAT attaches to operations, application and agent subnets.

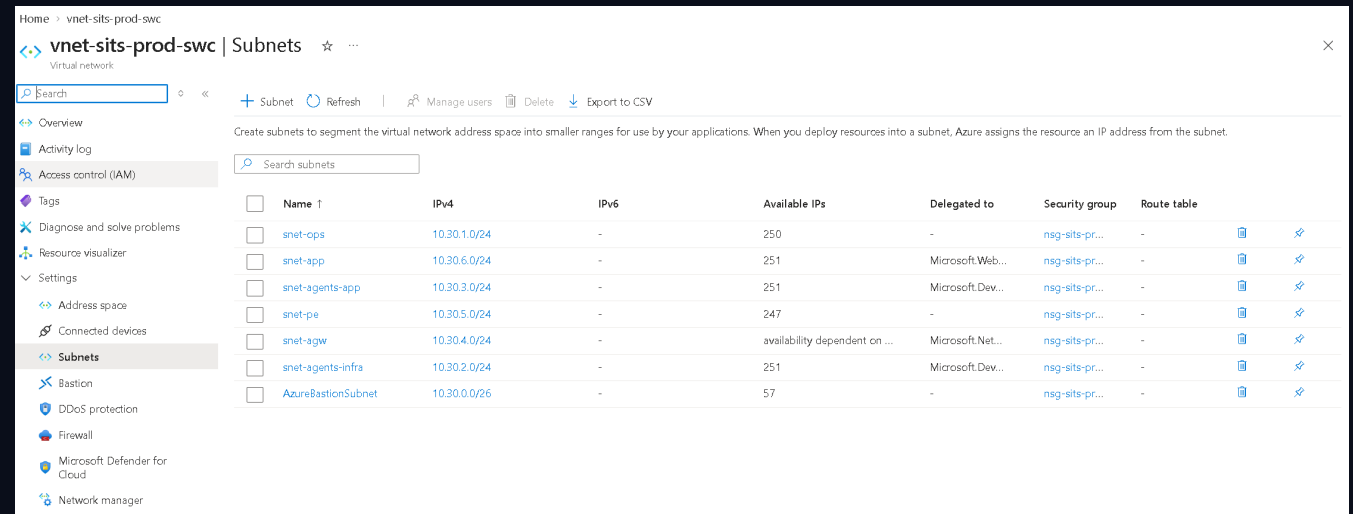

The screenshot shows the Azure portal interface for the virtual network 'vnet-sits-prod-swc'. The 'Subnets' tab is selected, displaying a table of subnets. The table includes columns for Name, IPv4, IPv6, Available IPs, Delegated to, Security group, and Route table. The subnets listed are: snet-ops, snet-app, snet-agents-app, snet-pe, snet-agw, snet-agents-infra, and AzureBastionSubnet. Each subnet has a checkbox for selection and a link to view details.

☐	Name ↑	IPv4	IPv6	Available IPs	Delegated to	Security group	Route table		
☐	snet-ops	10.30.1.0/24	-	250	-	nsg-sits-pr...	-		
☐	snet-app	10.30.6.0/24	-	251	Microsoft.Web...	nsg-sits-pr...	-		
☐	snet-agents-app	10.30.3.0/24	-	251	Microsoft.Dev...	nsg-sits-pr...	-		
☐	snet-pe	10.30.5.0/24	-	247	-	nsg-sits-pr...	-		
☐	snet-agw	10.30.4.0/24	-	availability dependent on ...	Microsoft.Net...	nsg-sits-pr...	-		
☐	snet-agents-infra	10.30.2.0/24	-	251	Microsoft.Dev...	nsg-sits-pr...	-		
☐	AzureBastionSubnet	10.30.0.0/26	-	57	-	nsg-sits-pr...	-		

Source: [docs/build-log/14-acceptance-checks-and-certificate-trust.md](#)

Production traffic paths


DNS resolves addresses separately from application HTTPS traffic

Flow	Origin	Destination and purpose
Operations session	Azure portal / Bastion	Ops VM; Prod Entra user login or local emergency account
Application HTTPS	Ops VM 10.30.1.4	Gateway private listener 10.30.4.10:443
Backend HTTPS	Application Gateway	App private endpoint 10.30.5.7:443, then App Service
Deployment	Private application pool	App SCM private endpoint; package fingerprint verified
Application secrets	App outbound VNet integration	Application Key Vault private endpoint 10.30.5.6:443
Listener certificate	Gateway managed identity	Certificate vault secret, separately authorized
DNS resolution	VNet clients	Internal and privatelink zones; DNS is not an HTTPS hop
Diagnostics	Gateway and application vault	Environment Log Analytics and e-mail action groups

Development

Configuration and observed results

Development uses sub-app-nonprod and vnet-sits-dev-swc with address space 10.10.0.0/16. The private gateway is 10.10.4.10 and the application hostname is app.dev.sits.internal. App Service uses B1. Development hosts the shared package store and the monitoring workspace used by both non-production environments. Separate application and infrastructure pools run jobs within the Dev network.

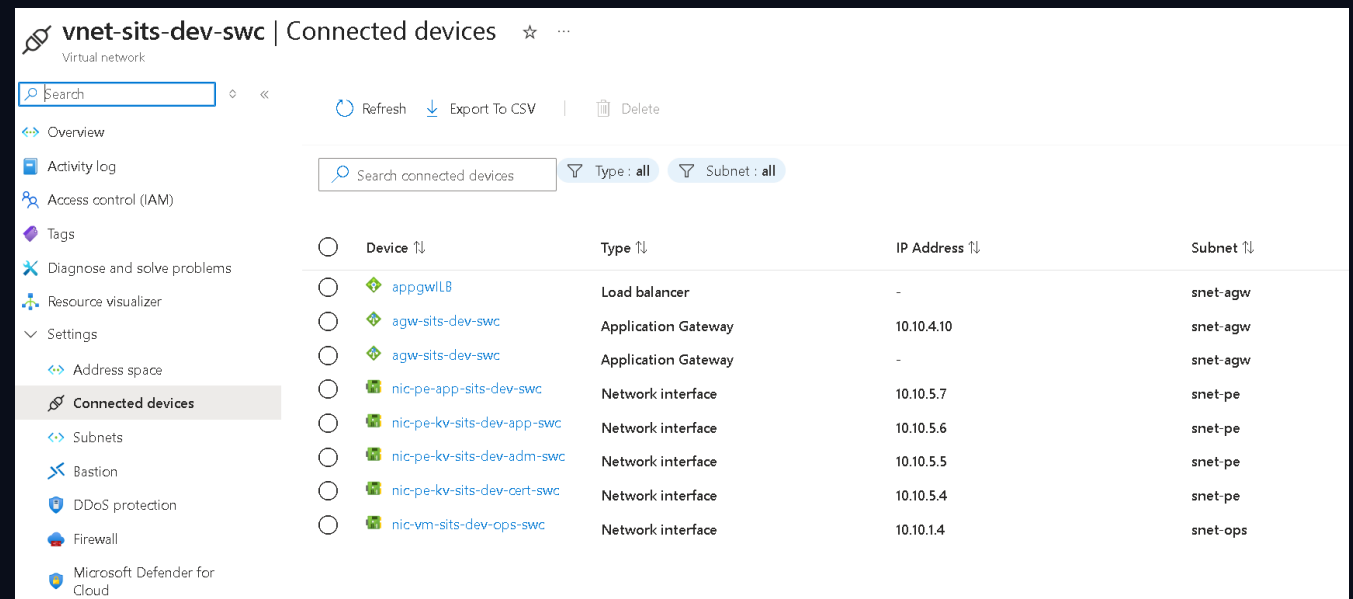


Device	Type	IP Address	Subnet
apgw-lb	Load balancer	-	snet-agw
agw-sits-dev-swc	Application Gateway	10.10.4.10	snet-agw
agw-sits-dev-swc	Application Gateway	-	snet-agw
nic-pe-app-sits-dev-swc	Network interface	10.10.5.7	snet-pe
nic-pe-kv-sits-dev-app-swc	Network interface	10.10.5.6	snet-pe
nic-pe-kv-sits-dev-adm-swc	Network interface	10.10.5.5	snet-pe
nic-pe-kv-sits-dev-cert-swc	Network interface	10.10.5.4	snet-pe
nic-vm-sits-dev-ops-swc	Network interface	10.10.1.4	snet-ops

Source: docs/build-log/07-development-network-operations.md

Testing

Configuration and observed results

Testing uses the same non-production subscription but its own resource groups, VNet, identities and state. The VNet is 10.20.0.0/16, the gateway is 10.20.4.10 and the hostname is app.test.sits.internal. App Service uses P0v3. Testing reads the shared package and reuses the Dev Log Analytics and Application Insights resources. This is an explicit monitoring dependency rather than complete resource independence.

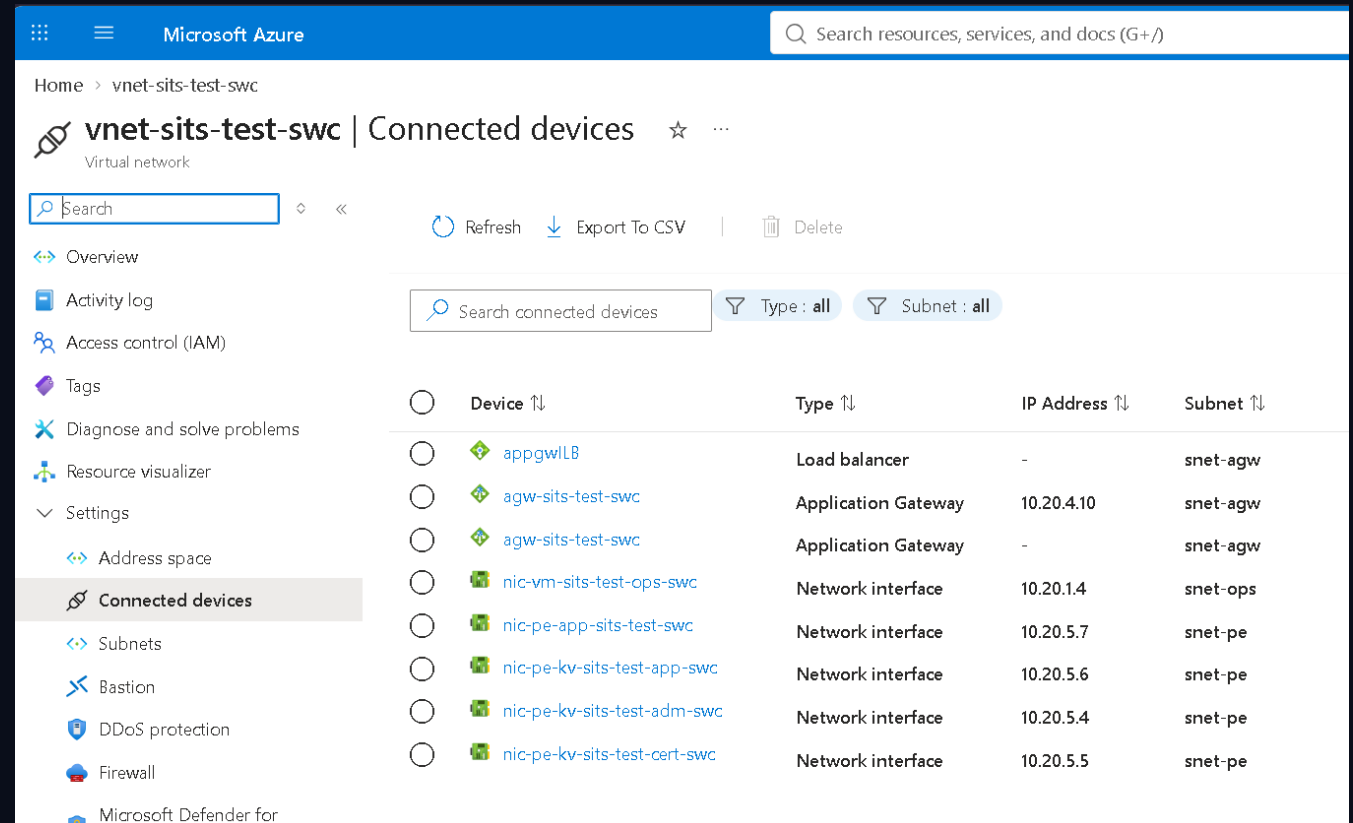


Device	Type	IP Address	Subnet
appgwLB	Load balancer	-	snet-agw
agw-sits-test-swc	Application Gateway	10.20.4.10	snet-agw
agw-sits-test-swc	Application Gateway	-	snet-agw
nic-vm-sits-test-ops-swc	Network interface	10.20.1.4	snet-ops
nic-pe-app-sits-test-swc	Network interface	10.20.5.7	snet-pe
nic-pe-kv-sits-test-app-swc	Network interface	10.20.5.6	snet-pe
nic-pe-kv-sits-test-adm-swc	Network interface	10.20.5.4	snet-pe
nic-pe-kv-sits-test-cert-swc	Network interface	10.20.5.5	snet-pe

Source: [docs/build-log/10-testing-environment.md](#)

Production

Configuration and observed results

Production uses sub-app-prod and 10.30.0.0/16. App Service uses P0v3 and the private gateway listens at 10.30.4.10 for app.prod.sits.internal. Production has its own monitoring, Bastion Basic, delete locks, PIM and separate approval environments. Public access is disabled on the Web App and application Key Vault. Certificate and admin foundation vaults retain public access, even though private endpoints also exist.

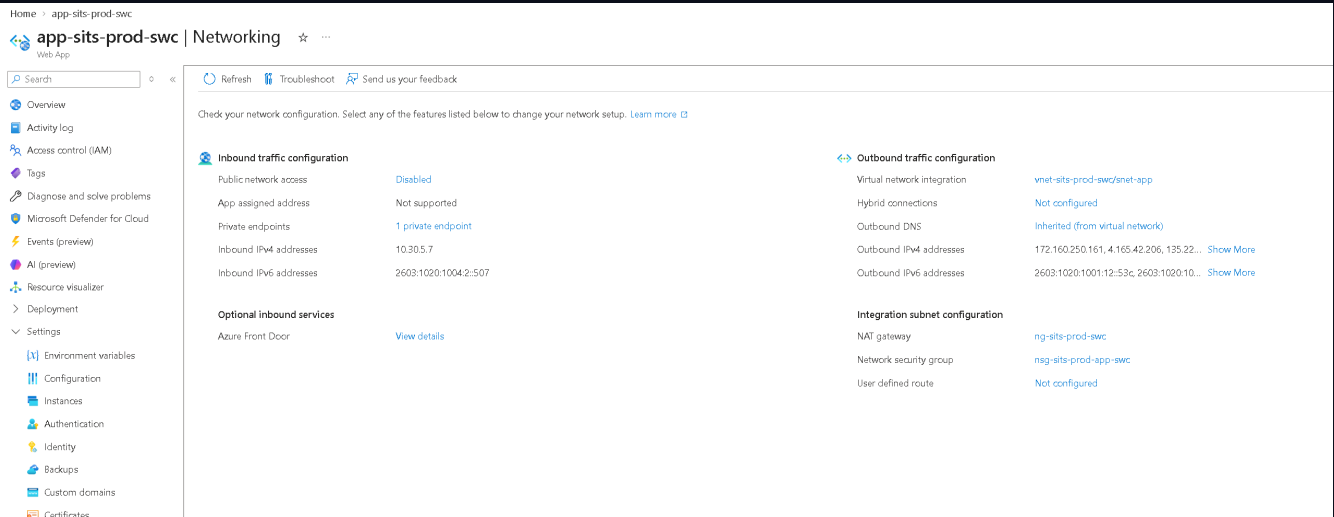


Source: docs/build-log/11-production-environment.md

Gateway, WAF and TLS

Configuration and observed results

The WAF_v2 gateway exposes a private HTTPS listener and forwards to the App Service hostname using HTTPS on port 443. A custom /health probe returned HTTP 200 and the backend was Healthy at capture time. Microsoft Default Rule Set 2.1 runs in Detection mode. A managed identity retrieves the listener certificate from the certificate vault. The self-signed certificate is trusted locally on each Ops VM as recorded in build log 14, and must be imported again after renewal or VM rebuild.

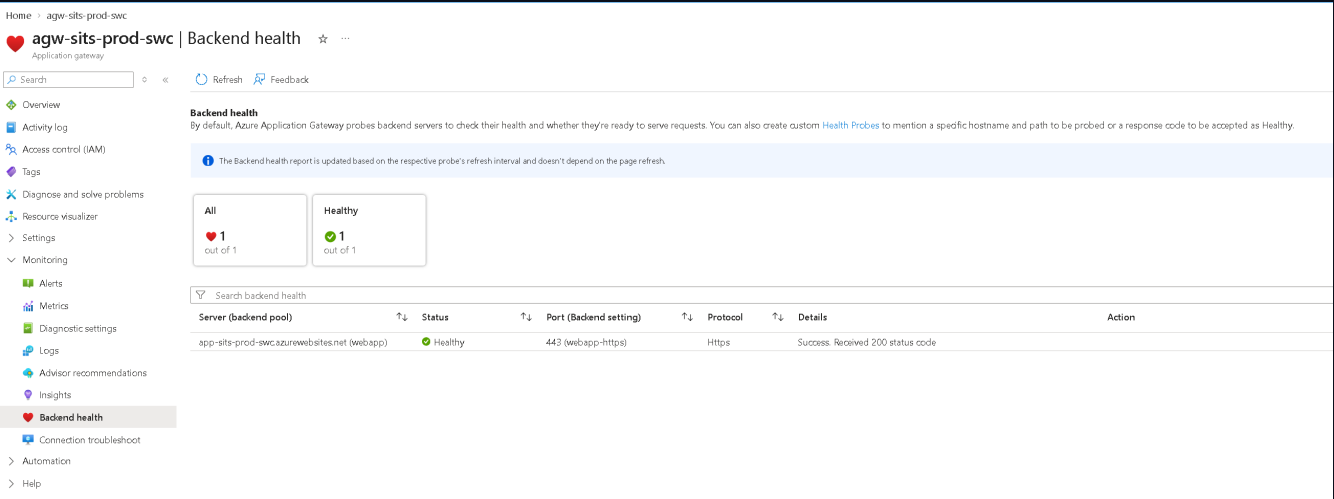


Source: docs/build-log/14-acceptance-checks-and-certificate-trust.md

Operations access through Bastion

Configuration and observed results

Bastion provides the operations entry point without a public IP on the VM NIC. Production supports Microsoft Entra ID sign-in through AADLoginForWindows and the permanent VM User Login grant. My captured session returned azuread\prodadmin. The local opsadmin account remains a separate emergency administrator path. The Entra user session does not need the local VM password or an activated Contributor role.

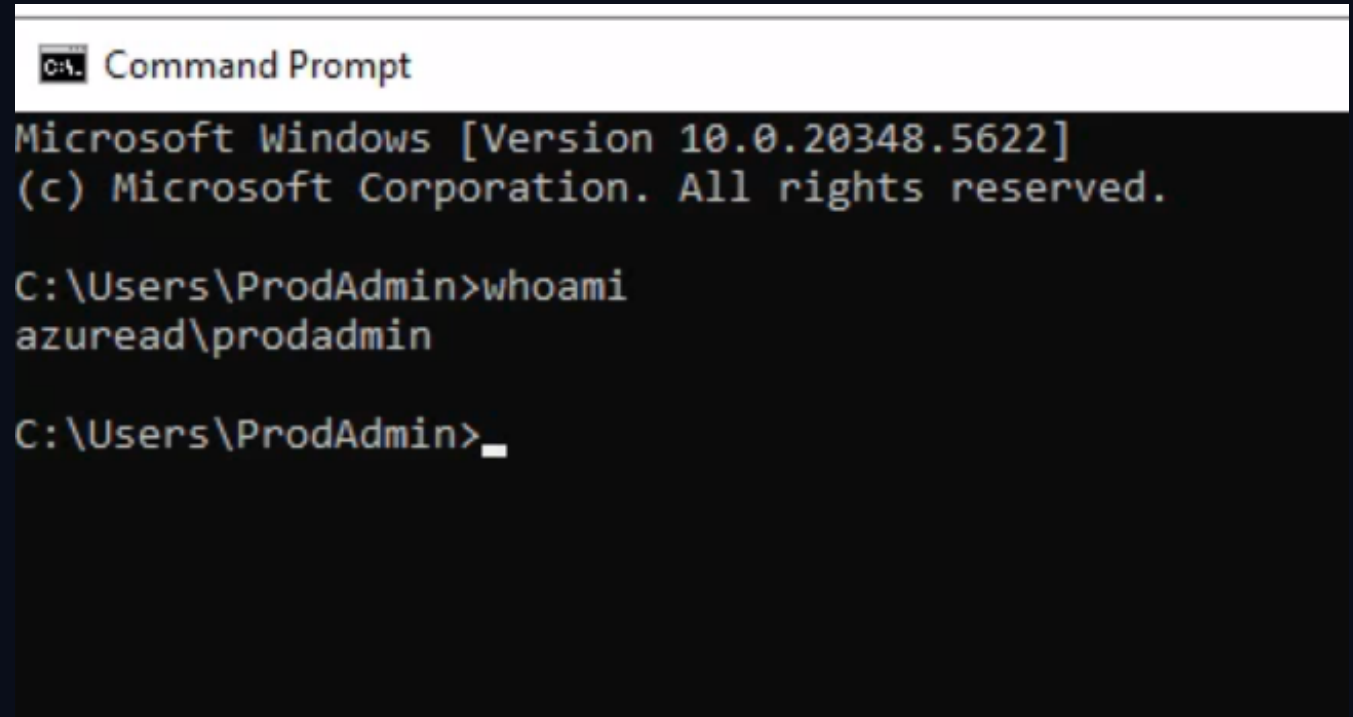

```
Command Prompt
Microsoft Windows [Version 10.0.20348.5622]
(c) Microsoft Corporation. All rights reserved.

C:\Users\ProdAdmin>whoami
azuread\prodadmin

C:\Users\ProdAdmin>
```

Runtime validation from the production VM

Configuration and observed results

From source 10.30.1.4, app.prod.sits.internal resolved to the gateway at 10.30.4.10 and TCP port 443 was reachable. App Service resolved through privatelink.azurewebsites.net to 10.30.5.7. The application vault resolved through privatelink.vaultcore.azure.net to 10.30.5.6. These terminal outputs prove private DNS resolution and gateway TCP reachability. Build log 14 separately records trusted HTTPS /health responses and cross-environment DNS isolation tests.

```
Name                                     Type      TTL      Section    IPAddress
app.prod.sits.internal                   A         300      Answer     10.30.4.10

ComputerName                            : app.prod.sits.internal
RemoteAddress                           : 10.30.4.10
ResolvedAddresses                        : {10.30.4.10}
PingSucceeded                           : False
PingReplyDetails                         :
TcpClientSocket                         :
PingTestSucceeded                       : True
RemotePort                              : 443
TraceRoute                              :
Detailed                                : False
InterfaceAlias                          : Ethernet
InterfaceIndex                          : 6
InterfaceDescription                    : Microsoft Hyper-U Network Adapter
NetAdapter                              : MSFT_NetAdapter <CreationClassName = "MSFT_NetAdapter", DeviceID = "{CDCC59CD-8A52-4E59-A8A9-EDB73BC7F81A}", SystemCreationClassName = "CIM_NetworkPort", SystemName =
"ms-prod">
NetRoute                                : MSFT_NetRoute <InstanceID = "{8:8:9:55055;87:8;8;55;}">
SourceAddress                           : 10.30.1.4
NameResolutionSucceeded                  : True
BasicNameResolution                      : {Microsoft.DnsClient.Commands.DnsRecord_A}
LLMNRethiosRecords                      : {}
DNSOnlyRecords                          : {Microsoft.DnsClient.Commands.DnsRecord_A}
AllNameResolutionResults                 : Microsoft.DnsClient.Commands.DnsRecord_A
IsAdmin                                  : False
NetworkIsolationContext                  : Internet
MatchingIPsecRules                       :

Name                                     : app-sits-prod-svc.azurewebsites.net
QueryType                                : CNAME
TTL                                       : 60
Section                                  : Answer
NameHost                                 : app-sits-prod-svc.privatelink.azurewebsites.net
app-sits-prod-svc.privatelink.azurewebsites.net
t                                         10      Answer     10.30.5.7


Name                                     : kv-sits-prod-app-svc.vault.azure.net
QueryType                                : CNAME
TTL                                       : 34
Section                                  : Answer
NameHost                                 : kv-sits-prod-app-svc.privatelink.vaultcore.azure.net
kv-sits-prod-app-svc.privatelink.vaultcore.azure.net
re.net                                   10      Answer     10.30.5.6

PS C:\Users\ProdAdmin> A_
```

Application and identity

Configuration and observed results

The Python demo runs on Linux App Service with Entra Easy Auth. An assigned application group controls protected routes. The application managed identity reads the application vault, while a federation credential supports the sign-in configuration without an app-registration client secret. The /health route deliberately allows anonymous probing from network-authorized clients. Application access and Key Vault RBAC remain separate checks.

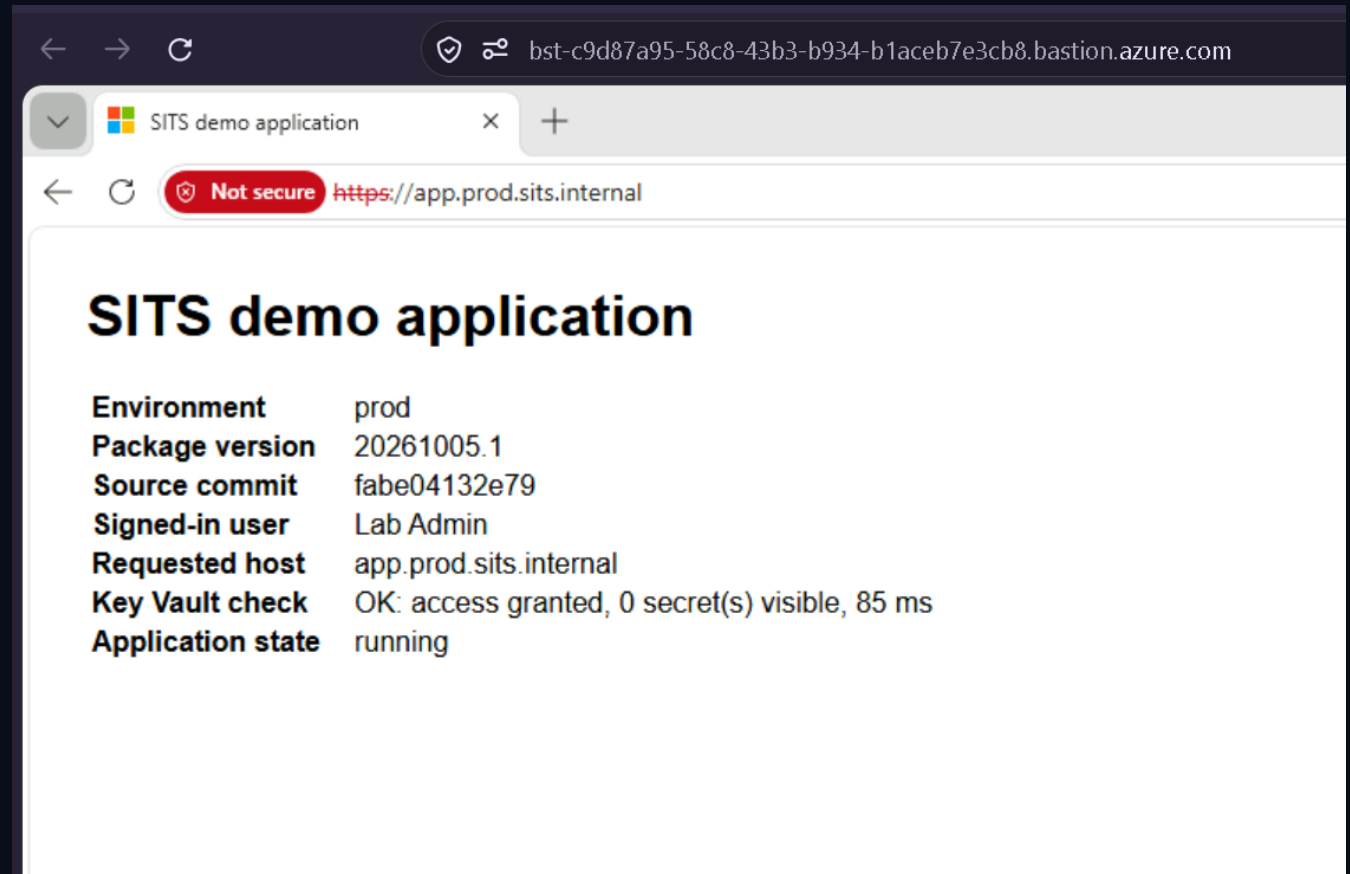

Source: [infra/environments/production/layer-2-application/appservice.tf](#)

Monitoring and diagnostics

Configuration and observed results

Gateway allLogs and AllMetrics stream to the production Log Analytics workspace using AzureDiagnostics tables. Dev and Test share the non-production workspace. Four custom alert rules per environment cover application health, unhealthy gateway backends, denied application-vault access and WAF matches. Production also has a Failure Anomalies smart detector. The Application Insights overview had no request telemetry in its selected one-hour window, so it does not prove active application instrumentation.

Home > agw-sits-prod-swc | Diagnostic settings

Diagnostic setting

Save Discard Delete Feedback

A diagnostic setting specifies a list of categories of platform logs and/or metrics that you want to collect from a resource, and one or more destinations that you would stream them to. Normal usage charges for the destination will occur. [Learn more about the different log categories and contents of those logs](#)

Diagnostic setting name: diag-log-sits-prod-swc

Logs

Category groups ⓘ

☒ allLogs

Categories

☒ Application Gateway Access Log

☒ Application Gateway Performance Log

☒ Application Gateway Firewall Log

Destination details

☒ Send to Log Analytics workspace

Subscription

sub-app-prod

Log Analytics workspace

log-sits-prod-swc (swedencentral)

Destination table ⓘ

Azure diagnostics Resource specific

☐ Archive to a storage account

☐ Stream to an event hub

☐ Send to partner solution

Metrics

☒ AllMetrics

Observed alerts

Configuration and observed results

The captured Azure Monitor view lists 16 fired instances across the selected subscriptions: 13 warnings and three informational alerts. These include repeated Key Vault access-denied results and WAF matches. WAF is in Detection, so a matched request does not establish prevention-mode blocking. The alert inventory and fired instances show configuration and observed events separately.

Home > Monitor

Monitor | Alerts

Microsoft

Summarize alerts fired in last 24 hours

Help me setup a new alert rule

Catch me up on alerts fired this week

Search

View as timeline (preview)

Create

Alert rules

Action groups

Alert processing rules

Prometheus rule groups

Change user response

Actions

Refresh

Overview

Activity log

Alerts

Metrics

Observability agents (preview)

Issues

Logs

Health models

Change Analysis

Service health

Workbooks

Dashboards with Grafana

Insights

Managed Services

Settings

Support + Troubleshooting

Create an autonomous observability agent: Automatically create and investigate issues from alerts, and correlate related alerts to reduce noise. [Learn more](#)

Create a new agent

Search

Subscription: 2 selected

Time range: Past 24 hours

Alert condition: Fired

Severity: all

Add filter

Total alerts

Critical

Error

Warning

Informational

Verbose

No grouping

Name ↑↓	Severity ↑↓	Affected resource ↑↓	Alert condition ↑↓	User response ↑↓	Fire time ↑↓
☐ alert-sits-prod-waf-request-matched	3 - Informational	log-sits-prod-swc	Fired	New	10/6/2026, 1:12 AM
☐ alert-sits-dev-waf-request-matched	3 - Informational	log-sits-dev-swc	Fired	New	10/6/2026, 1:09 AM
☐ alert-sits-test-waf-request-matched	3 - Informational	log-sits-dev-swc	Fired	New	10/6/2026, 1:08 AM
☐ alert-sits-prod-keyvault-access-denied	2 - Warning	log-sits-prod-swc	Fired	New	10/6/2026, 12:59 AM
☐ alert-sits-prod-keyvault-access-denied	2 - Warning	log-sits-prod-swc	Fired	New	10/6/2026, 12:49 AM
☐ alert-sits-prod-keyvault-access-denied	2 - Warning	log-sits-prod-swc	Fired	New	10/5/2026, 11:34 PM
☐ alert-sits-test-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 11:27 PM
☐ alert-sits-test-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 11:22 PM
☐ alert-sits-test-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 11:22 PM
☐ alert-sits-dev-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 11:21 PM
☐ alert-sits-dev-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 11:06 PM
☐ alert-sits-dev-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 10:46 PM
☐ alert-sits-prod-keyvault-access-denied	2 - Warning	log-sits-prod-swc	Fired	New	10/5/2026, 10:44 PM
☐ alert-sits-test-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 10:42 PM
☐ alert-sits-dev-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 10:31 PM
☐ alert-sits-dev-keyvault-access-denied	2 - Warning	log-sits-dev-swc	Fired	New	10/5/2026, 10:26 PM

Source: docs/build-log/12-monitoring-alerts-and-infrastructure-pipelines.md

Limitations and next steps

Configuration and observed results

The current lab is deployed and demonstrated. Next work includes Terraform modules, a destroy-and-rebuild exercise, removal of temporary administrator state grants after approval, WAF Prevention after tuning, Conditional Access enforcement after report review, and a certificate from a trusted CA. Developer and tester infrastructure groups and app-user/app-denied demonstration accounts are not implemented. Foundation vault public exposure, shared monitoring dependencies and broad built-in roles remain visible design limits.

Sources and evidence

Repository snapshot 8def94695003

The main presentation follows the requested order: subscriptions, users and permissions, shared delivery, networking, Dev, Test, Prod, monitoring and next steps. The appendix preserves the collected screenshots and their English explanations.


Build records 12 and 14 record completed infrastructure pipeline checks, acceptance checks and certificate trust. The access matrix in build record 13 reflects an earlier snapshot; newer pipeline dependency grants are documented in build record 12 and the captured role assignments.

Application Insights overview is excluded because it displays a connection string. The original remains in local evidence. Identifiers, resource names and IP addresses are retained. Masked password fields contain no visible password value.

Project source: github.com/PeterHudcovic/azure-appservice-platform-lab

Prod demo application

Overview

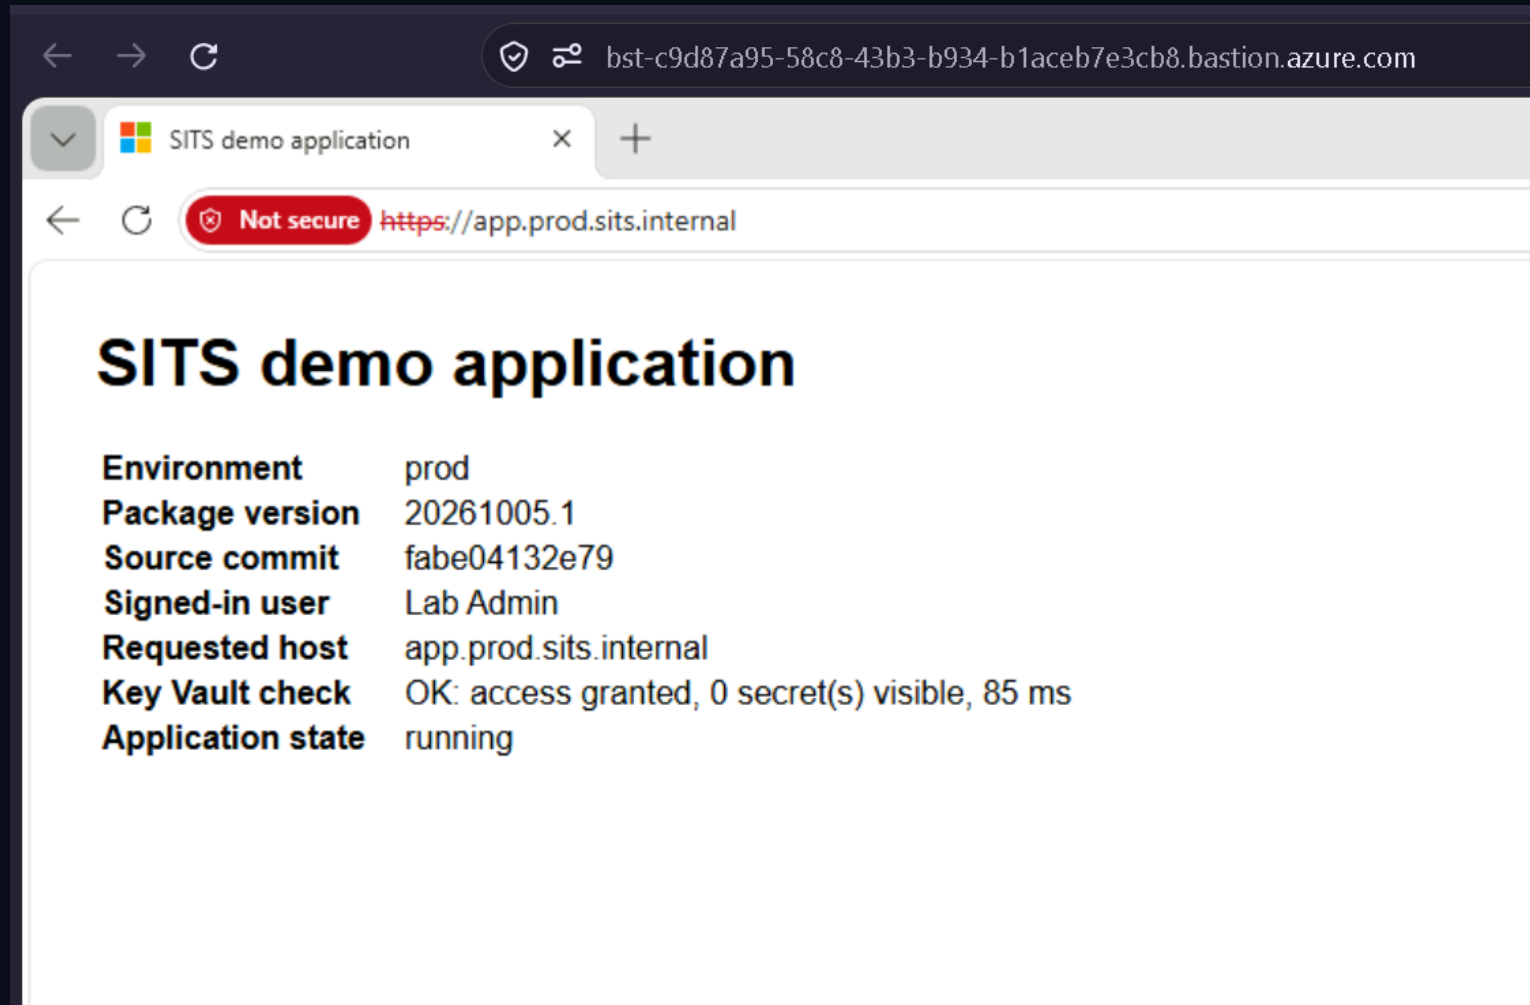

The production demo application provides a browser view of the deployed application and its identity and Key Vault checks. This is application evidence, separate from infrastructure configuration.

Subscriptions

Overview

Home > Subscriptions

Subscriptions

Default Directory (peterhudcovicgmail.onmicrosoft.com)

[Compare the different Azure subscription types](#) [Forecast my cost for next billing period](#)

[+ Add](#) [Manage Policies](#) [View Requests](#) [View eligible subscriptions](#) [Export to CSV](#) [Analyze](#)

Global administrators can manage all subscriptions in this list by updating their policy setting [here](#).

Showing subscriptions in Default Directory directory. Don't see a subscription? [Switch directories](#)

Subscriptions : **Filtered (2 of 2)** My role == all Status == all [Add filter](#)

☐ Subscription name ↑↓	Subscription ID ↑↓	My role ↑↓	Current cost	Secure Score ↑↓	Parent management group ↑↓	Status ↑↓
☐ sub-app-nonprod	8b38e1d5-139f-4006-8f2b-ffb32a6ac114	Owner	€2.39	-	Tenant Root Group	✓ Active
☐ sub-app-prod	61845030-2daa-4797-a97a-59a7fd8d478f	Owner	0.00	-	Tenant Root Group	✓ Active

Development and testing share sub-app-nonprod. Production uses sub-app-prod, creating a separate subscription boundary for management access, policy and cost tracking.

Entra app user groups

Users and access

Home > Default Directory | Groups > Groups

Groups | All groups

Default Directory

New group Download groups Refresh Manage view Delete Got feedback?

Overview

All groups

Insights (Preview)

Deleted groups

Diagnose and solve problems

Settings

Activity

Help

Microsoft Entra has a simpler, integrated experience for managing all your Identity and Access Management needs. Try the new Microsoft Entra admin center!

Search

Add filter

Search mode Contains

3 groups found

☐	Name ↑	Object Id	Group type	Membership type	Email
☐	 grp-sits-dev-app-users	8deaa12c-efa7-406e-a36a-b7f61636e3b0	Security	Assigned	
☐	 grp-sits-prod-app-users	c9c1dbf5-0300-4e99-b9aa-5ceb46ec3a69	Security	Assigned	
☐	 grp-sits-test-app-users	71ef8af0-6d89-4b2c-b4bd-186bf6b10bf8	Security	Assigned	

Each environment has its own application user group. These groups control application sign-in and do not grant Azure resource administration.

Entra dev app users members

Users and access

Home > Default Directory | Groups > Groups | All groups > grp-sits-dev-app-users

grp-sits-dev-app-users | Members

Group

◊ << + Add members Bulk operations Refresh Manage view Remove Got feedback?

- Overview
- Diagnose and solve problems
- Manage
 - Properties
 - Members**
 - Owners
 - Roles and administrators
 - Administrative units
 - Group memberships
 - Applications
 - Licenses
 - Azure role assignments
- Activity
- Help

Direct members All members

Search Add filter

1 group member found

☐	Name ↑	Type	Email
☐	LA Lab Admin	User	

The development app-user group lists its captured membership. Lab Admin belongs to the group for the application demonstration.

Entra dev assignment required

Users and access

app-sits-dev | Properties

Enterprise Application

Overview

Deployment Plan

Diagnose and solve problems

Manage

Properties

Owners

Roles and administrators

Users and groups

Single sign-on

Provisioning

Application proxy

Self-service

Custom security attributes

Security

Conditional Access

Permissions

Token encryption

Activity

Sign-in logs

Usage & insights

Audit logs

Provisioning logs

Access reviews

Help

Support + Troubleshooting

« Got feedback?

View and manage application settings for your organization. Editing properties like display information, user sign-in settings, and user visibility settings requires Global Administrator, Cloud Application Administrator, Application Administrator roles. [Learn more.](#)

If this application resides in your tenant, you can manage additional properties on the [application registration](#).

Activation status

Activated

Enabled for users to sign-in?

Yes No

Name *

app-sits-dev

Homepage URL

Logo

A

Select a file

Application ID

f4169317-e014-44b4-8565-6aa0f818c3d8

Object ID

b08a6f9f-f9bf-4dab-bf93-b40d38f46356

Assignment required?

Yes No

Visible to users?

Yes No

Notes

The development enterprise application requires explicit user or group assignment for sign-in. The same assignment requirement is configured across Dev, Test and Prod, keeping protected application access limited to assigned users.

Entra dev enterprise app assignments

Users and access

... > Enterprise applications | All applications > app-sits-prod | Properties > Enterprise applications | All applications > app-sits-dev

app-sits-dev | Users and groups

Enterprise Application

« + Add user/group ✎ Edit assignment 🗑 Remove assignment 🔍 Update credential 🔄 Refresh ...

[The application will appear for assigned users within My Apps. Set 'visible to users?' to no in properties to prevent this.](#)

Assign users and groups to app-roles for your application here. To create new app-roles for this application, use the [application registration](#)

First 200 shown, search all users & groups

	Display name	Object type
☐	 Lab Admin	User
☐	 grp-sits-dev-app-users	Group

The development enterprise application has its dedicated app-user group assigned, alongside a direct assignment for Lab Admin. Explicit application assignments keep development sign-in access separate from other environments and from Azure infrastructure permissions.

Entra nonprod nat named location

Users and access

Home > Conditional Access

Conditional Access | Named locations

Microsoft Entra ID

Overview
Policies
Deleted Policies
Phased rollout
Insights and reporting
Diagnose and solve problems

Manage

- Named locations
- Custom controls (Preview)
- Terms of use
- VPN connectivity
- Authentication contexts
- Authentication strengths
- Classic policies

Monitoring

- Sign-in logs
- Audit logs

Troubleshooting + Support

- New support request

Named locations are used by Microsoft Entra ID to identify locations that are marked Trusted or Untrusted. Named Locations that are marked Trusted or Untrusted are used by Conditional Access policies to evaluate sign-ins.

All Named Locations Deleted Named Locations

Search by name

1 named location found

Name	Location type
SITS development and testing NAT addresses	IP ranges

Update location (IP ranges)

Upload Download Delete

Configure named location IPv4 and IPv6 ranges. [Learn more](#)

Name *

SITS development and testing NAT addresses

☐ Mark as trusted location

2 IP ranges found

20.240.216.144/32	
9.223.113.24/32	

The named location contains the development and testing NAT egress addresses as individual /32 ranges and is not marked as trusted. The production administrator Conditional Access policy uses this location to evaluate sign-ins originating from non-production networks; enforcement remains Report-only.

Entra prod app users members

Users and access

The screenshot shows the Microsoft Entra Admin Center interface for the 'grp-sits-prod-app-users' group. The 'Members' tab is selected in the left navigation pane. The main content area shows a search bar and a table of group members. One member is listed: 'Lab Admin' (User).

	Name ↑	Type	Email
☐	LA Lab Admin	User	

The production app-user group lists its captured membership. Protected application routes require the environment application assignment.

Entra prod application and managed identity

Users and access

Home > app-sits-prod | Branding & properties > Enterprise applications

Enterprise applications | All applications

Default Directory

« + New application Refresh Download (Export) Preview info Columns Preview features Got feedback?

Overview

Overview

Diagnose and solve problems

Manage

All applications

Private Network connectors

User settings

App launchers

Custom authentication extensions

Security

Conditional Access

Consent and permissions

View, filter, and search applications in your organization that are set up to use your Microsoft Entra tenant as their Identity Provider.

The list of applications that are maintained by your organization are in [application registrations](#).

app-sits-prod

2 applications found

Name	Object ID	Application ID	Homepage URL	Created on	Activation status
 app-sits-prod	e6fd07e0-fe18-4d53-a81e-a41a...	518644e9-8ed9-453c-8c20-15b5cd...		10/5/2026	Activated
 id-sits-prod-app-swc	d81bcf1e-6b04-4799-b471-62e...	05ee7ee8-83b1-404a-9e36-ed3024...		10/5/2026	Activated

Production uses two distinct identities: app-sits-prod is the enterprise application for user sign-in, while id-sits-prod-app-swc is the managed identity used by the running application to access Azure services. This separates user authentication from application resource access.

Entra prod assignment required

Users and access

The screenshot displays the Microsoft Entra admin center interface. The left sidebar contains a navigation menu with categories like Tenant governance, Domain services, Conditional Access, Multifactor authentication, Identity Secure Score, Authentication methods, Account recovery, Password reset, Custom security attributes, Certificate authorities, External Identities, Cross-tenant synchronization, Entra Connect, Backup and recovery, Domain names, Custom branding, Mobility, Monitoring & health, ID Protection, ID Governance, Verified ID, Global Secure Access, What's new, Billing, Security Store, Diagnose & solve problems, and New support request. The main content area shows the 'app-sits-prod' application properties. The 'Properties' tab is selected, showing details such as Activation status (Activated), Enabled for users to sign-in? (Yes), Name (app-sits-prod), Homepage URL, Logo, Application ID, Object ID, Assignment required? (Yes), Visible to users? (Yes), and Notes. The 'Assignment required?' setting is highlighted with a blue button labeled 'Yes'.

Microsoft Entra admin center

Search resources, services, and docs (G+/)

admin@peterhudcovicg...
DEFAULT DIRECTORY (PETERHUD...

Home > app-sits-prod | Branding & properties > Enterprise applications | All applications > app-sits-prod

app-sits-prod | Properties

Enterprise Application

Overview
Deployment Plan
Diagnose and solve problems

Manage

- Properties
- Owners
- Roles and administrators
- Users and groups
- Single sign-on
- Provisioning
- Application proxy
- Self-service
- Custom security attributes

Security

- Conditional Access
- Permissions
- Token encryption

Activity

- Sign-in logs
- Usage & insights
- Audit logs
- Provisioning logs
- Access reviews

Help

- Support + Troubleshooting

Activation status **Activated**

Enabled for users to sign-in? **Yes** No

Name * app-sits-prod

Homepage URL

Logo

Application ID 518644e9-8ed9-453c-8c20-15b5cd45d43a

Object ID e6fd07e0-fe18-4d53-a81e-a41a0b919fee

Assignment required? **Yes** No

Visible to users? **Yes** No

Notes

Save Discard Delete

The production enterprise application requires explicit user or group assignment for sign-in. This prevents unassigned users from accessing protected application routes; Lab Admin and the production app-user group are assigned separately.

Entra prod conditional access policies

Users and access

Home > Enterprise applications | All applications > app-sits-dev | Properties > Conditional Access

Conditional Access | Policies

Microsoft Entra ID

Overview Policies Deleted Policies Phased rollout Insights and reporting Diagnose and solve problems

Manage

- Named locations
- Custom controls (Preview)
- Terms of use
- VPN connectivity
- Authentication contexts
- Authentication strengths
- Classic policies

Monitoring

- Sign-in logs
- Audit logs

Troubleshooting + Support

- New support request

+ New policy + New policy from template Upload policy file What if Refresh Preview features Got feedback?

Microsoft Entra Conditional Access policies are used to apply access controls to keep your organization secure. [Learn more](#)

Microsoft-managed policies

Policies created ⓘ

0

User created policies

Policies created ⓘ

2

Search policies Add filter

2 out of 2 policies found

Policy name	Created by	State	Alert	Creation date	Modified date
SITS production: block device code sign-in for the production	USER	Report-only		10/5/2026, 8:15:20...	
SITS production: block the production admin from developme	USER	Report-only		10/5/2026, 8:37:45...	

The replacement screenshot shows both production administrator Conditional Access policies in Report-only mode, together with their creation dates. The controls are evaluated without enforcing blocks, allowing their sign-in impact to be reviewed before enforcement.

Entra prod device code policy details

Users and access

Home > Enterprise applications | All apps

Conditional Access

Microsoft Entra ID

Overview

Policies

Deleted Policies

Phased rollout

Insights and reporting

Diagnose and solve problems

Manage

Named locations

Custom controls (Preview)

Terms of use

VPN connectivity

Authentication contexts

Authentication strengths

Classic policies

Monitoring

Sign-in logs

Audit logs

Troubleshooting + Support

New support request

Policy details

SITS production: block device code sign-in for the production admin

View or Edit

Duplicate

Download JSON

Delete

Policy details

Policy impact

State

Report-only (policy is evaluated but not enforced)

Created by

User

Users, agents or workload identities

1 user

Excluded identities

1 user, 0 groups, 0 roles

Included resources

All resources

Network

Not configured

Requirements for access

Block access

Client apps

1 included

Included authentication flows

deviceCodeFlow

Created date

10/5/26, 8:15:20 PM

The production administrator device-code policy targets deviceCodeFlow across all resources with a Block access control. It remains Report-only: sign-ins are evaluated without enforcing the block, allowing impact to be reviewed before activation. The detail also shows one included user, one excluded user and the creation timestamp; individual identities are defined in Terraform and are not named in this view.

Entra prod enterprise app assignments

Users and access

Home > app-sits-prod | Branding & properties > Enterprise applications | All applications > app-sits-prod

app-sits-prod | Users and groups

Enterprise Application

« + Add user/group ✎ Edit assignment 🗑 Remove assignment 🔍 Update credential 🔄 Refresh ⋮

Overview

Deployment Plan

Diagnose and solve problems

Manage

Properties

Owners

Roles and administrators

Users and groups

Single sign-on

Provisioning

Application proxy

Self-service

Custom security attributes

Information

The application will appear for assigned users within My Apps. Set 'visible to users?' to no in properties to prevent this.

Assign users and groups to app-roles for your application here. To create new app-roles for this application, use the [application registration](#)

First 200 shown, search all users & groups

	Display name	Object type
☐	 Lab Admin	User
☐	 grp-sits-prod-app-users	Group

The production enterprise application has the production app-user group assigned, alongside a direct assignment for Lab Admin. These application assignments are separate from Azure infrastructure roles. The direct user assignment is visible portal evidence in addition to the group assignment declared in Terraform.

Entra prod enterprise app properties

Users and access

Home > app-sits-prod | Branding & properties > Enterprise applications | All applications > app-sits-prod

app-sits-prod | Properties

Enterprise Application

<<  Got feedback?

- Overview
- Deployment Plan
- Diagnose and solve problems

Manage

- Properties**
- Owners
- Roles and administrators
- Users and groups
- Single sign-on
- Provisioning
- Application proxy
- Self-service
- Custom security attributes

View and manage application settings for your organization. Editing properties like display information, user sign-in settings, and user visibility settings requires Global Administrator, Cloud Application Administrator, Application Administrator roles. [Learn more.](#)

If this application resides in your tenant, you can manage additional properties on the [application registration](#).


Activation status ⓘ ✔ Activated

Enabled for users to sign-in? ⓘ Yes No

Name * ⓘ ✔

Homepage URL ⓘ

Logo ⓘ



Select a file 

The production enterprise application is activated and enabled for user sign-in. It provides the Entra ID sign-in entry for the production application; access assignments are shown separately. The Assignment required setting is not visible in this screenshot.

Entra prod nonprod location policy details

Users and access

Home > Conditional Access

Conditional Access

Microsoft Entra ID

Overview

Policies

Deleted Policies

Phased rollout

Insights and reporting

Diagnose and solve problems

Manage

Named locations

Custom controls (Preview)

Terms of use

VPN connectivity

Authentication contexts

Authentication strengths

Classic policies

Monitoring

Sign-in logs

Audit logs

Troubleshooting + Support

New support request

Policy details

SITS production: block the production admin from development and testing NAT addresses

View or Edit

Duplicate

Download JSON

Delete

Policy details

Policy impact

State

Report-only (policy is evaluated but not enforced)

Users, agents or workload identities

1 user

Included resources

All resources

Requirements for access

Block access

Client apps

1 included

Created by

User

Excluded identities

1 user, 0 groups, 0 roles

Network

Not configured

Locations

1 included

Created date

10/5/26, 8:37:45 PM

The production administrator location policy includes one location and a Block access control across all resources. It remains Report-only, evaluating sign-ins without enforcing a block. The policy is designed to restrict production administration from development and testing NAT addresses; the addresses themselves are shown separately in the named location evidence.

Entra test app users members

Users and access

grp-sits-test-app-users | Members ...

Group

« + Add members Bulk operations Refresh Manage view Remove Got feedback?

Overview

Diagnose and solve problems

Manage

Properties

Members

Owners

Roles and administrators

Administrative units

Group memberships

Applications

Licenses

Azure role assignments

> Activity

> Help

Direct members All members

Search Add filter

1 group member found

	Name ↑	Type	Email
☐	LA Lab Admin	User	

The testing app-user group lists its captured membership. Application membership is separate from management-plane roles.

Entra test assignment required

Users and access

Home > Enterprise applications | All applications > app-sits-test

app-sits-test | Properties

Enterprise Application

«

Got feedback?

Overview

Deployment Plan

Diagnose and solve problems

Manage

Properties

Owners

Roles and administrators

Users and groups

Single sign-on

Provisioning

Application proxy

Self-service

Custom security attributes

Security

Conditional Access

Permissions

Token encryption

Activity

Sign-in logs

Usage & insights

Audit logs

Provisioning logs

Access reviews

Help

Support + Troubleshooting

View and manage application settings for your organization. Editing properties like display information, user sign-in settings, and user visibility settings requires Global Administrator, Cloud Application Administrator, Application Administrator roles. [Learn more.](#)

If this application resides in your tenant, you can manage additional properties on the [application registration](#).

Activation status ⓘ

Activated

Enabled for users to sign-in? ⓘ

Yes No

Name * ⓘ

app-sits-test

Homepage URL ⓘ

Logo ⓘ

A

Select a file

Application ID ⓘ

5862e35e-c595-4118-80a4-15008d3b2d40

Object ID ⓘ

a82cd7f5-acef-40a9-8136-e39bb98213a1

Assignment required? ⓘ

Yes No

Visible to users? ⓘ

Yes No

Notes ⓘ

The testing enterprise application requires explicit user or group assignment for sign-in. Combined with its dedicated app-user group, this restricts protected application access to assigned users rather than all tenant users.

Peter Hudcovic / Azure platform lab / October 2026

39

Entra test enterprise app assignments

Users and access


The screenshot shows the Microsoft Entra admin center interface. The breadcrumb path is 'Home > Enterprise applications | All applications > app-sits-test'. The page title is 'app-sits-test | Users and groups' with a sub-label 'Enterprise Application'. The left navigation pane includes 'Overview', 'Deployment Plan', 'Diagnose and solve problems', and a 'Manage' section with 'Properties', 'Owners', 'Roles and administrators', 'Users and groups' (selected), 'Single sign-on', 'Provisioning', 'Application proxy', and 'Self-service'. The main content area has a toolbar with 'Add user/group', 'Edit assignment', 'Remove assignment', 'Update credential', 'Refresh', and a menu icon. A blue information banner states: 'The application will appear for assigned users within My Apps. Set 'visible to users?' to no in properties to prevent this.' Below this, a text block says: 'Assign users and groups to app-roles for your application here. To create new app-roles for this application, use the [application registration](#)'. A search box contains the text 'First 200 shown, search all users & groups'. A table lists the assigned users and groups:

	Display name	Object type
☐	 grp-sits-test-app-users	Group

The testing enterprise application is assigned to its dedicated app-user group. Lab Admin is a member of that group, so testing access is granted through group membership rather than a separate direct user assignment shown here. This keeps application access managed at the environment group level.

Prod admin keyvault networking

Users and access

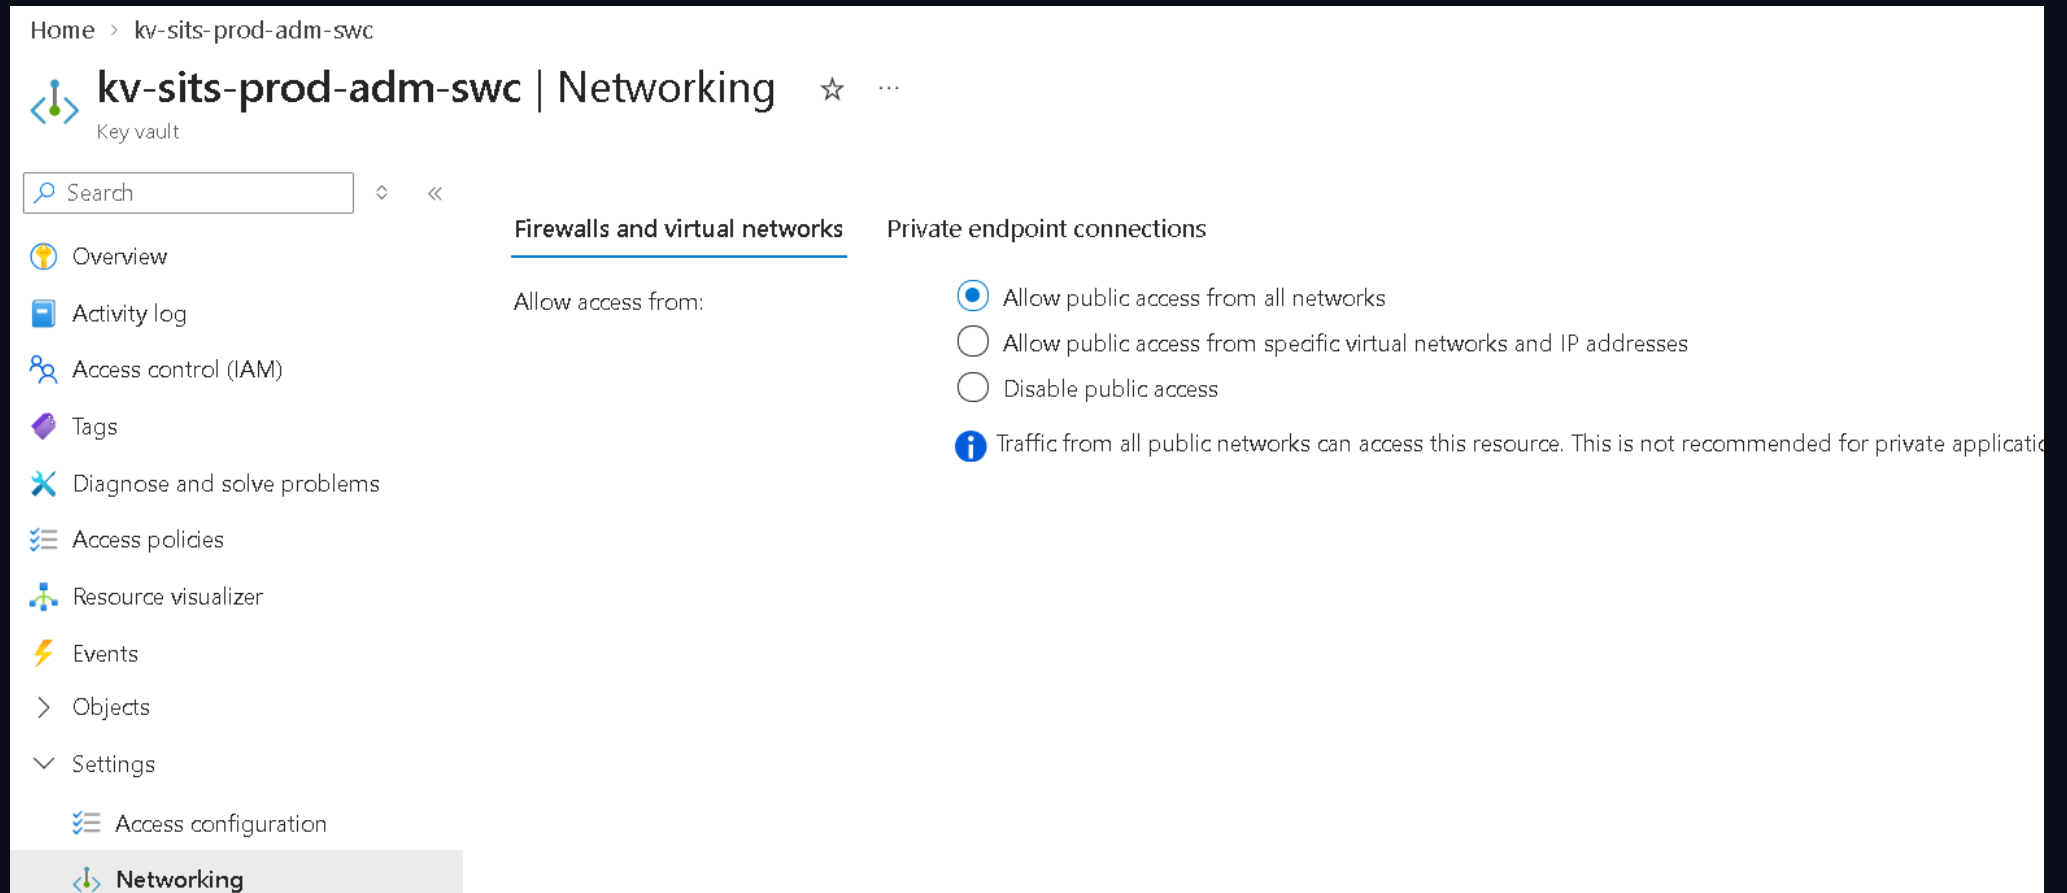

The screenshot displays the Azure portal interface for the Key Vault resource 'kv-sits-prod-adm-swc'. The left-hand navigation pane lists various management options: Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Access policies, Resource visualizer, Events, Objects, and Settings. The 'Networking' option is currently selected and highlighted. The main content area is titled 'kv-sits-prod-adm-swc | Networking' and includes a search bar and a back arrow. It is divided into two sections: 'Firewalls and virtual networks' and 'Private endpoint connections'. Under 'Firewalls and virtual networks', the 'Allow access from:' section is visible. The 'Private endpoint connections' section contains three radio button options: 'Allow public access from all networks' (which is selected), 'Allow public access from specific virtual networks and IP addresses', and 'Disable public access'. Below these options, an informational message states: 'Traffic from all public networks can access this resource. This is not recommended for private applications.'

The production administration vault kv-sits-prod-adm-swc allows public access from all networks. Like the certificate vault, it is not configured for private-only network access. This records the current lab configuration and a network-hardening opportunity; authentication and authorization are separate from network reachability.

Prod admin keyvault private endpoint connection

Users and access

The screenshot shows the Azure portal interface for the resource 'kv-sits-prod-adm-swc' under the 'Networking' section. The left sidebar contains navigation links: Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Access policies, Resource visualizer, Events, Objects, Settings, Access configuration, and Networking (selected). The main content area is titled 'Private endpoint connections' and includes a warning message: 'Firewall settings allow access from all networks. The security provided by private endpoints will not be satisfied.' Below this, there is a table of private endpoint connections. The table has columns for 'Private endpoint', 'Connection name', 'Sub-resource', 'Subnet', and 'Connection state'. One connection is listed: 'pe-kv-sits-prod-adm-swc' with connection name 'psc-kv-sits-prod-adm-swc', sub-resource 'vault', subnet 'vnet-sits-prod-swc/snet-pe', and state 'Approved'.

Private endpoint	Connection name	Sub-resource	Subnet	Connection state
☐ pe-kv-sits-prod-adm-swc	psc-kv-sits-prod-adm-swc	vault	vnet-sits-prod-swc/snet-pe	Approved

The administration vault lists private endpoint pe-kv-sits-prod-adm-swc with connection psc-kv-sits-prod-adm-swc targeting the vault subresource in vnet-sits-prod-swc/snet-pe. Its state is Approved. The portal warns that firewall settings allow access from all networks, so the approved private endpoint coexists with public network access.

Prod admin network vm user login

Users and access

The screenshot displays the Azure Resource Manager 'Access control (IAM)' interface for the resource group 'rg-sits-prod-network-swc'. The left sidebar shows the 'Resource groups' list, with 'rg-sits-prod-network-swc' selected. The main pane shows the 'Access control (IAM)' tab, which includes a search bar, filters, and a table of role assignments.

Search and Filters:

- Search: Prod Admin
- Type: All
- Role: All
- Scope: All scopes
- State: All
- End time: All
- Group by: Role

Summary:

- Number of role assignments for this subscription: 40
- Privileged: 5

Role Assignments Table:

Name	Type	Role	Scope	State	End time	Condition
Contributor (1)						
Prod Admin (0ba401cf-650b...)	User	Contributor	Subscription (Inh...)	Eligible Permanent	Permanent	None
Reader (1)						
Prod Admin (0ba401cf-650b...)	User	Reader	Subscription (Inh...)	Active Permanent	Permanent	None
Virtual Machine User Login (1)						
Prod Admin (0ba401cf-650b...)	User	Virtual Machine User Login	This resource	Active Permanent	Permanent	None

Showing 1 - 3 of 3 results.

Prod Admin has permanently active Virtual Machine User Login at the production network resource group scope, with Reader access and eligible Contributor inherited from the subscription. VM sign-in authorization is separated from the Contributor privileges that require PIM activation.

Prod admin subscription reader and eligible contributor

Users and access

Home > sub-app-prod

sub-app-prod | Access control (IAM) ☆ ...

Subscription

Search

+ Add ▾ Download role assignments Edit columns Refresh Delete Feedback

Overview Activity log Access control (IAM) Tags Diagnose and solve problems Security Resource visualizer Events Resource groups Resources Cost Management Billing Settings Monitoring Help

Check access **Role assignments** Roles Deny assignments

Number of role assignments for this subscription ⓘ Privileged ⓘ

40 5000 3

View assignments

prod admin × Type: All Role: All Scope: All scopes State: All End time: All Group by: Role

All (2) Job function roles (1) Privileged administrator roles (1)

☐	Name ↑↓	Type ↑↓	Role ↑↓	Scope ↑↓	State ↑↓	End time ↑↓	Condition ↑↓
✓	Contributor (1)						
☐	Prod Admin 0ba401cf-650b-4548-9360-bf5...	User	Contributor	This resource	Eligible Permanent	Permanent	None
✓	Reader (1)						
☐	Prod Admin 0ba401cf-650b-4548-9360-bf5...	User	Reader	This resource	Active Permanent	Permanent	None

Showing 1 - 2 of 2 results.

At the production subscription scope, Prod Admin has permanently active Reader access and permanent eligibility for Contributor. This provides ongoing visibility into production while requiring PIM activation for Contributor privileges.

Prod pim admin vault eligible secrets user

Users and access

The screenshot shows the Azure PIM Assignments page for the resource 'kv-sits-prod-adm-swc'. The page is titled 'kv-sits-prod-adm-swc | Assignments' and includes a navigation pane on the left with sections: Overview, Tasks (My roles, Pending requests, Approve requests), Manage (Roles, Assignments, Settings), and Activity (Resource audit, Activity log, My audit). The main content area shows tabs for 'Eligible assignments', 'Active assignments', and 'Expired assignments'. The 'Eligible assignments' tab is selected, displaying a table of assignments. The table has columns: Name, Principal name, Type, Membership, Condition, Start time, End time, and Action. There are two rows of assignments: one for 'Contributor' and one for 'Key Vault Secrets User'. Both rows show 'Prod Admin' as the member, with 'admin-prod@peterhudcc' as the principal name. The 'Contributor' row has an 'Inherited' membership and a start time of '10/5/2026, 8:42:00 PM'. The 'Key Vault Secrets User' row has a 'Direct' membership and a start time of '10/5/2026, 8:41:52 PM'. Both assignments are 'Permanent' and have 'Remove' and 'Update' actions available.

Home > Browse > kv-sits-prod-adm-swc

kv-sits-prod-adm-swc | Assignments

Privileged Identity Management | Azure resources

« + Add assignments Review Settings Refresh Export Got feedback?

Overview

Tasks

- My roles
- Pending requests
- Approve requests

Manage

- Roles
- Assignments
- Settings

Activity

- Resource audit
- Activity log
- My audit

Eligible assignments Active assignments Expired assignments

Search by member name

Name	Principal name	Type	Membership	Condition	Start time	End time	Action
Contributor							
Prod Admin	admin-prod@peterhudcc	User	Inherited	None	10/5/2026, 8:42:00 PM	Permanent	Remove Update
Key Vault Secrets User							
Prod Admin	admin-prod@peterhudcc	User	Direct	None	10/5/2026, 8:41:52 PM	Permanent	Remove Update

Prod Admin has a direct eligible Key Vault Secrets User assignment on kv-sits-prod-adm-swc, alongside inherited eligible Contributor access. Permanent eligibility permits activation when needed; it does not represent permanently active secret-read access.

Prod pim app vaults eligible secrets officer

Users and access

Home > Browse > rg-sits-prod-kv-swc

rg-sits-prod-kv-swc | Assignments

Privileged Identity Management | Azure resources

« + Add assignments Review Settings Refresh Export Got feedback?

Overview

Tasks

- My roles
- Pending requests
- Approve requests

Manage

- Roles
- Assignments
- Settings

Activity

- Resource audit
- Activity log
- My audit

Eligible assignments Active assignments Expired assignments

Search by member name

Name	Principal name	Type	Membership	Condition	Start time	End time	Action
Contributor							
Prod Admin	admin-prod@peterhudcovicgmail.onmic	User	Inherited	None	10/5/2026, 8:42:00 PM	Permanent	Remove Update
Key Vault Secrets Officer							
Prod Admin	admin-prod@peterhudcovicgmail.onmic	User	Direct	None	10/5/2026, 8:42:13 PM	Permanent	Remove Update

Prod Admin has a direct eligible Key Vault Secrets Officer assignment at the production application-vault resource group scope, alongside inherited eligible Contributor access. This separates secret-management eligibility from permanently active access and applies to vaults within this resource group.

Prod pim contributor activation settings

Users and access

Home > Privileged Identity Management | Azure resources > sub-app-prod | Roles > Contributor

Role setting details - Contributor

Privileged Identity Management | Azure resources

Edit

Activation			
Setting	State		
Activation maximum duration (hours)	2 hour(s)		
On activation, require	Azure MFA		
Require justification on activation	Yes		
Require ticket information on activation	No		
Require approval to activate	No		
Approvers	None		
Require pre-approval custom extension to activate (Preview)	No		
Require post-approval custom extension to activate (Preview)	No		
Assignment			
Setting	State		
Allow permanent eligible assignment	Yes		
Expire eligible assignments after	-		
Allow permanent active assignment	No		
Expire active assignments after	6 month(s)		
Require Azure Multi-Factor Authentication on active assignment	No		
Require justification on active assignment	Yes		
Send notifications when members are assigned as eligible to this role:			
Type	Default recipients	Additional recipients	Critical emails only
Role assignment alert	Admin	None	False
Notification to the assigned user (assignee)	Assignee	None	False
Request to approve a role assignment renewal/extension	Approver	None	False
Send notifications when members are assigned as active to this role:			
Type	Default recipients	Additional recipients	Critical emails only
Role assignment alert	Admin	None	False
Notification to the assigned user (assignee)	Assignee	None	False
Request to approve a role assignment renewal/extension	Approver	None	False
Send notifications when eligible members activate this role:			
Type	Default recipients	Additional recipients	Critical emails only
Role activation alert	Admin	None	False

Production Contributor activation is limited to two hours and requires Azure MFA and a justification. Activation does not require an approver or ticket information. Permanent eligibility is allowed, while permanent active assignments are disabled in these role settings, separating eligibility from time-limited privileged access.

Prod pim eligible contributor

Users and access

Home > Privileged Identity Management | Azure resources > sub-app-prod

sub-app-prod | Assignments

Privileged Identity Management | Azure resources

« + Add assignments Review Settings Refresh Export | Got feedback?

Overview

Tasks

- My roles
- Pending requests
- Approve requests
- Review access

Manage

- Roles
- Assignments
- Alerts
- Access reviews

Eligible assignments Active assignments Expired assignments

Search by member name

Name	Principal name	Type	Membership	Condition	Start time	End time
Contributor						
Prod Admin	admin-prod@peterhudcovicgmail.onmicrosoft.com	User	Direct	None	10/5/2026, 8:42:00 PM	Permanent

Prod Admin has a direct PIM-eligible Contributor assignment at production subscription scope. Permanent refers to the eligibility period, not permanently active Contributor privileges; activation is required before using the role. Activation duration and requirements are shown separately.

Prod pim foundation inherited contributor

Users and access

Home > Browse > rg-sits-prod-foundation-swc

rg-sits-prod-foundation-swc | Assignments ...

Privileged Identity Management | Azure resources

« + Add assignments Review Settings Refresh Export Got feedback?

Overview

Tasks

- My roles
- Pending requests
- Approve requests

Manage

- Roles
- Assignments

Eligible assignments Active assignments Expired assignments

Search by member name

Name	Principal name	Type	Membership	Condition	Start time	End time	Action
Contributor							
Prod Admin	admin-prod@peterhudcc	User	Inherited	None	10/5/2026, 8:42:00 PM	Permanent	Remove Update

The production foundation resource group shows Prod Admin's inherited eligible Contributor assignment. This reflects eligibility inherited from the subscription scope, rather than a direct Key Vault data-access assignment.

Managed identities subscription overview

Managed identities

Managed Identities					
Default Directory (peterhudcovicgmail.onmicrosoft.com)					
Identify non-compliant Managed Identities using ARG. How many Managed Identities do I have in total? Filter Managed Identities by resource group and location.					
+ Create Manage view Refresh Export to CSV Open query Assign tags Delete Add to service group					
Filter for any field... Subscription equals all Resource Group equals all Location equals all Add filter					
☐	Name	Type	Resource Group	Location	Subscription ID ↑
☐	 id-sits-prod-agw-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-app-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-deploy-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-destroy-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-infra-l1-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-prod-infra-l2-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f
☐	 id-sits-build-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-agw-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-app-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-deploy-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-destroy-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-infra-l1-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-dev-infra-l2-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-agw-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-app-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-deploy-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-destroy-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-infra-l1-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114
☐	 id-sits-test-infra-l2-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114

Production identities reside in a separate subscription, while Dev and Test share the non-production subscription. Each environment has six dedicated identities for Application Gateway, application runtime, deployment, teardown and two infrastructure layers. The development foundation also hosts the shared build identity, bringing its total to seven. A shared build publishes packages that each environment's deployment identity can retrieve.

Build identity federated credential details

Managed identities

Home > Managed Identities > id-sits-build-swc | Federated credentials

Edit Federated Credential ...

Configure an identity from an external OpenID Connect Provider to get tokens as this managed identity to access Microsoft Entra ID protected services. [Learn more](#)

Federated credential scenario * ⓘ ▼

ⓘ To ensure secure FIC access, make sure your issuer uses immutable subject identifiers. If you use GitLab, review the recommended configuration. [Learn more](#)

Connect your account

Enter the details of the account that you want to connect with Microsoft Entra ID. These values will be used by Microsoft Entra ID to validate the connection.

Issuer URL * ⓘ

Subject identifier * ⓘ

Credential details

Enter and review the details for this credential. The credential name cannot be edited after creation.

Name * ⓘ

Audience * ⓘ

[Edit \(optional\)](#)

The azure-devops-build federated credential specifies the tenant's Microsoft Entra v2.0 issuer, a workload subject identifier and the api://AzureADTokenExchange audience. These trust parameters constrain which external workload token can be exchanged for access as the build managed identity, without a stored client secret. The subject identifier is truncated in the screenshot.

Build identity federated credential

Managed identities

The screenshot shows the Azure portal interface for a managed identity named 'id-sits-build-swc'. The left sidebar contains navigation links: Overview, Activity log, Access control (IAM), Tags, Azure role assignments, Associated resources (preview), Resource visualizer, Settings, Federated credentials (selected), Properties, Locks, Monitoring, Automation, and Help. The main content area is titled 'Federated credentials' and includes a search bar, a description of federated credentials, an 'Add Credential' button, and a table of configured credentials.

Home > Managed Identities > id-sits-build-swc

Managed Identity

id-sits-build-swc | Federated credentials

Search

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

Federated credentials

Properties

Locks

Monitoring

Automation

Help

Allow other identities to impersonate this managed identity by establishing a trust with an external OpenID Connect (OIDC) identity provider. This federation allows you to get tokens to access Microsoft Entra ID protected resources that this managed identity has access to. [Learn more](#)

+ Add Credential


1 of 20 configured

Name	Issuer	Subject Identifier	Delete
azure-devops-build	https://login.microsoftonline.com/3bdeb384-5dba-4624-a330-01211232fa30/v2.0	/eid1/c/pub/t/hLPeO7pdJEajMAEhEjl...	

The shared build managed identity has a federated credential named azure-devops-build. This trust enables the configured Azure DevOps workload to obtain tokens as the managed identity without storing a client secret. The list shows the issuer and a truncated subject identifier; credential details are required to document the complete trust configuration.

Build identity package container role

Managed identities

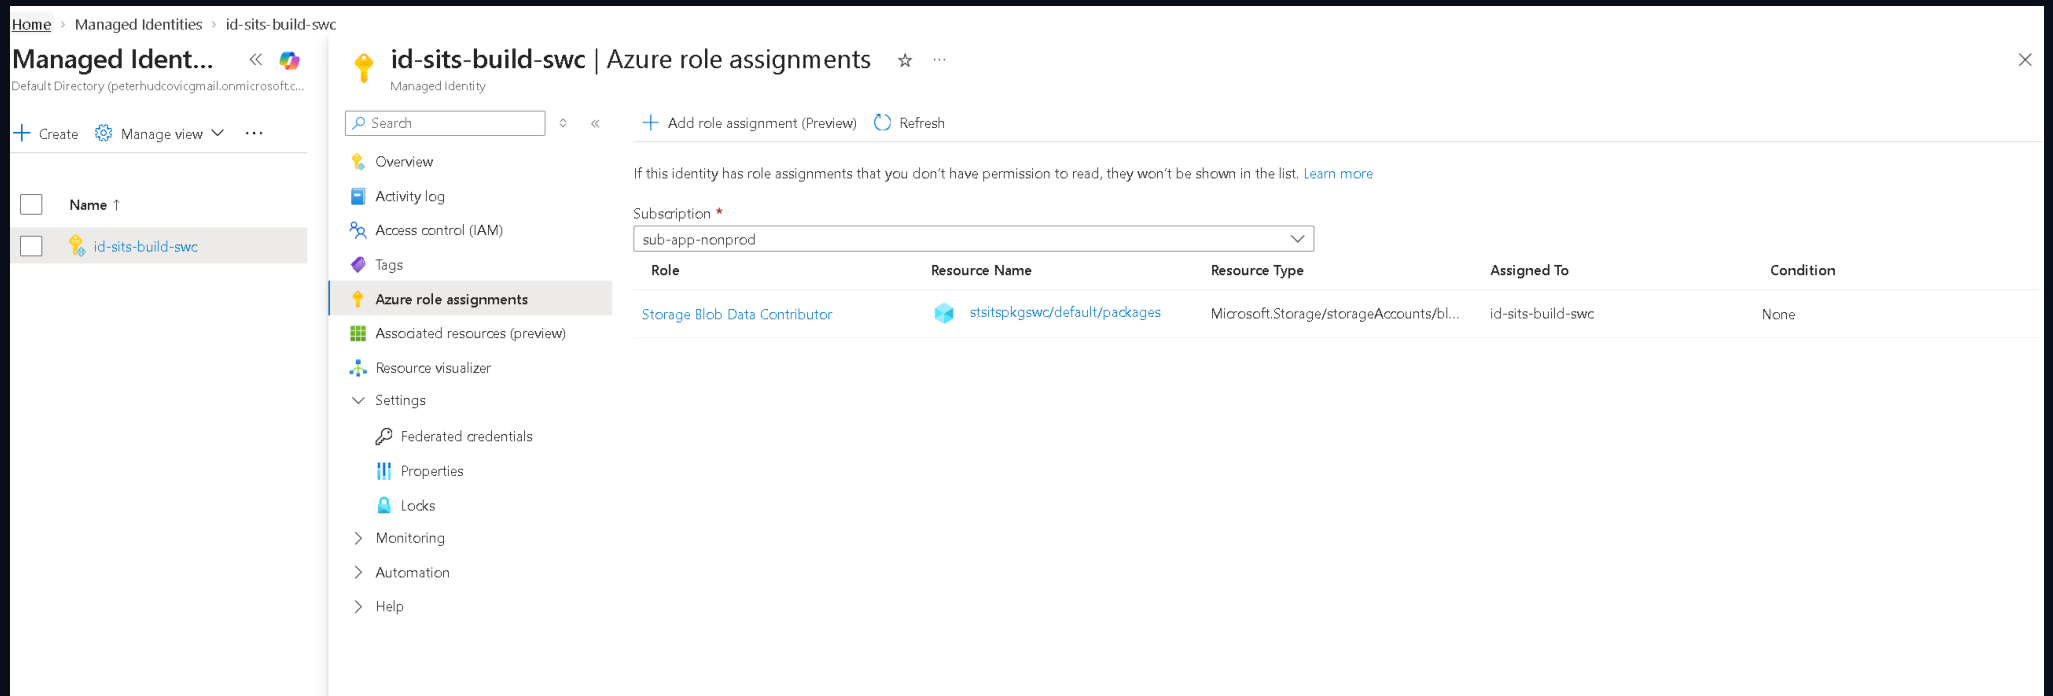

The screenshot displays the Azure portal interface for the Managed Identity 'id-sits-build-swc'. The left-hand navigation pane includes options like 'Create', 'Manage view', and a list of identities with 'id-sits-build-swc' selected. The main content area is titled 'id-sits-build-swc | Azure role assignments'. It features a search bar, a '+ Add role assignment (Preview)' button, and a 'Refresh' button. A message states: 'If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)'. Below this, a 'Subscription' dropdown menu is set to 'sub-app-nonprod'. A table lists the role assignments:

Role	Resource Name	Resource Type	Assigned To	Condition
Storage Blob Data Contributor	stsitspkgswc/default/packages	Microsoft.Storage/storageAccounts/bl...	id-sits-build-swc	None

The shared build identity has Storage Blob Data Contributor on the packages container in stsitspkgswc (resource name shown in the portal: stsitspkgswc/default/packages), within the non-production subscription. Container-scoped blob access supports publishing build artifacts for deployment; this role also permits reading and deleting blobs, rather than upload-only access.

Dev app identity keyvault secrets user

Managed identities

id-sits-dev-app-swc | Azure role assignments ☆ ...

Managed Identity

Search ◇ « + Add role assignment (Preview) Refresh

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

Federated credentials

Properties

Locks

Monitoring

Automation

Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *

sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Key Vault Secrets User	rg-sits-dev-kv-swc	Resource Group	id-sits-dev-app-swc

The Dev application managed identity has Key Vault Secrets User at the rg-sits-dev-kv-swc resource group scope. This supports identity-based access to application secrets without stored Azure credentials. The assignment covers vaults within this resource group and permits reading secret values, rather than metadata-only access.

Dev deploy identity role assignments

Managed identities

id-sits-dev-deploy-swc | Azure role assignments ☆ ...

Managed Identity

Search ◇ << + Add role assignment (Preview) Refresh

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

Federated credentials

Properties

Locks

> Monitoring

> Automation

> Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *
sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To	Condition
Storage Blob Data Reader	stsitspkgswc/default/packages	Microsoft.Storage/storageAccounts/bl...	id-sits-dev-deploy-swc	None
Website Contributor	rg-sits-dev-app-swc	Resource Group	id-sits-dev-deploy-swc	None

The Dev deployment identity has Website Contributor on rg-sits-dev-app-swc and Storage Blob Data Reader on the shared packages container. This scopes application management to Dev and allows retrieval of build artifacts without granting the deployment identity permission to modify or delete package blobs.

Dev destroy identity role assignments

Managed identities

 **id-sits-dev-destroy-swc** | Azure role assignments

Managed Identity

⌵ ⏪ [+ Add role assignment \(Preview\)](#) [Refresh](#)

 Overview

 Activity log

 Access control (IAM)

 Tags

 **Azure role assignments**

 Associated resources (preview)

 Resource visualizer

Settings

 Federated credentials

 Properties

 Locks

Monitoring

Automation

Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *

sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Storage Blob Data Contributor	 stsitstfdevswc/default/tfstate-layer2	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-dev-destroy-swc
Storage Blob Data Contributor	 stsitstfdevswc/default/tfstate-layer1	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-dev-destroy-swc
Contributor	 rg-sits-dev-app-swc	Resource Group	id-sits-dev-destroy-swc
Contributor	 rg-sits-dev-kv-swc	Resource Group	id-sits-dev-destroy-swc
Contributor	 rg-sits-dev-network-swc	Resource Group	id-sits-dev-destroy-swc
Network Contributor	 NetworkWatcherRG	Resource Group	id-sits-dev-destroy-swc
Reader	 rg-sits-dev-foundation-swc	Resource Group	id-sits-dev-destroy-swc

The Dev teardown identity has Storage Blob Data Contributor on the Layer 1 and Layer 2 Terraform state containers, Contributor on the application, application-vault and network resource groups, Network Contributor on NetworkWatcherRG and Reader on the foundation resource group. These scoped assignments support teardown and dependency discovery through a separate identity. Contributor also permits creating and updating resources, not deletion alone.

Dev gateway identity certificate vault role

Managed identities

id-sits-dev-agw-swc | Azure role assignments ☆ ...

Managed Identity

Search ◇ << + Add role assignment (Preview) ↻ Refresh

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *
sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Key Vault Secrets User	kv-sits-dev-cert-swc	Key vault	id-sits-dev-agw-swc

The Dev Application Gateway identity has Key Vault Secrets User on kv-sits-dev-cert-swc, supporting identity-based retrieval of the secret backing its TLS certificate. Access is scoped to the certificate vault, rather than a single certificate secret.

Managed identities all environments

Managed identities

Home

Managed Identities

☆ ...

List Managed Identities modified in the last 30 days using ARG.

How many Managed Identities do I have in total?

Filter Managed Identities by resource group and location.

Default Directory (peterhudcovic@gmail.onmicrosoft.com)

+ Create

Manage view

Refresh

Export to CSV

Open query

Assign tags

Delete

Add to service group

Group by none

id-sit

Subscription equals all

Resource Group equals all

Location equals all

Add filter

☐	Name ↑	Type	Resource Group	Location	Subscription ID
☐	 id-sits-build-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-dev-agw-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-dev-app-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-dev-deploy-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-dev-destroy-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-dev-infra-l1-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-dev-infra-l2-swc	Managed Identity	rg-sits-dev-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-prod-agw-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59...
☐	 id-sits-prod-app-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59...
☐	 id-sits-prod-deploy-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59...
☐	 id-sits-prod-destroy-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59...
☐	 id-sits-prod-infra-l1-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59...
☐	 id-sits-prod-infra-l2-swc	Managed Identity	rg-sits-prod-foundation-swc	Sweden Central	/subscriptions/61845030-2daa-4797-a97a-59...
☐	 id-sits-test-agw-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-test-app-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-test-deploy-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-test-destroy-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-test-infra-l1-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...
☐	 id-sits-test-infra-l2-swc	Managed Identity	rg-sits-test-foundation-swc	Sweden Central	/subscriptions/8b38e1d5-139f-4006-8f2b-ffb...

Separate managed identities are provisioned for application runtime, Application Gateway, infrastructure layers, deployment and teardown in each environment. A shared build identity resides in the development foundation resource group. This separation enables role assignments to be scoped by workload and environment; the inventory itself does not show the granted permissions.

Prod app identity keyvault secrets user

Managed identities

Home > Managed Identities > id-sits-prod-app-swc

Managed Identity id-sits-prod-app-swc | Azure role assignments

Search Add role assignment (Preview) Refresh

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *
sub-app-prod

Role	Resource Name	Resource Type	Assigned To	Condition
Key Vault Secrets User	rg-sits-prod-kv-swc	Resource Group	id-sits-prod-app-swc	None

The production application managed identity has Key Vault Secrets User at the rg-sits-prod-kv-swc resource group scope. This supports identity-based access to application secrets without stored Azure credentials. The assignment covers vaults in this resource group and permits reading secret values, rather than metadata-only access.

Prod deploy identity federated credential

Managed identities

Home > Managed Identities > id-sits-prod-deploy-swc

Managed Identity id-sits-prod-deploy-swc | Federated credentials

Search

Federated credentials

Allow other identities to impersonate this managed identity by establishing a trust with an external OpenID Connect (OIDC) identity provider. This federation allows you to get tokens to access Microsoft Entra ID protected resources that this managed identity has access to. [Learn more](#)

[+ Add Credential](#)

1 of 20 configured

Name	Issuer	Subject Identifier	Delete
azure-devops-prod-deploy	https://login.microsoftonline.com/3bdeb384-5dba-4624-a330-01211232fa30/v2.0	/eid1/c/pub/t/hLPeO7pdJEajMAEhEJL...	

Federated credentials

- Properties
- Locks
- Monitoring
- Automation
- Help

The production deployment managed identity has a federated credential named `azure-devops-prod-deploy`. This trust supports workload identity federation for production deployment without a stored client secret, using an identity separate from build and infrastructure tasks. The subject identifier is truncated in this list view.

Prod deploy identity package reader

Managed identities

Home > Managed Identities > id-sits-prod-deploy-swc

Managed Identity id-sits-prod-deploy-swc | Azure role assignments

Search Add role assignment (Preview) Refresh

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *
sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To	Condition
Storage Blob Data Reader	stsitspkgswc/default/packages	Microsoft.Storage/storageAccounts/bl...	id-sits-prod-deploy-swc	None

The production deployment identity has Storage Blob Data Reader on stsitspkgswc/default/packages in the non-production subscription. This container-scoped, read-only data access allows production deployment to retrieve shared build artifacts without granting permission to modify or delete those blobs.

Managed identities

The production deployment identity has Website Contributor scoped to rg-sits-prod-app-swc. This enables application deployment and website management within the production application resource group while separating deployment from broader infrastructure identities. The role permits more than package deployment alone.

Prod destroy identity role assignments

Managed identities

Home > Managed Identities > id-sits-prod-destroy-swc

Managed Identity id-sits-prod-destroy-swc | Azure role assignments

Search + Add role assignment (Preview) Refresh

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)


Subscription * sub-app-prod

Role	Resource Name	Resource Type	Assigned To	Condition
Contributor	rg-sits-prod-network-swc	Resource Group	id-sits-prod-destroy-swc	None
Contributor	rg-sits-prod-app-swc	Resource Group	id-sits-prod-destroy-swc	None
Contributor	rg-sits-prod-kv-swc	Resource Group	id-sits-prod-destroy-swc	None
SITS Lock Remover	rg-sits-prod-kv-swc	Resource Group	id-sits-prod-destroy-swc	None
SITS Lock Remover	rg-sits-prod-app-swc	Resource Group	id-sits-prod-destroy-swc	None
Storage Blob Data Contributor	stststfprodswc/default/tfstate-lay...	Microsoft.Storage/storageAccounts/bl...	id-sits-prod-destroy-swc	None
Storage Blob Data Contributor	stststfprodswc/default/tfstate-lay...	Microsoft.Storage/storageAccounts/bl...	id-sits-prod-destroy-swc	None
Reader	rg-sits-prod-foundation-swc	Resource Group	id-sits-prod-destroy-swc	None
Network Contributor	NetworkWatcherRG	Resource Group	id-sits-prod-destroy-swc	None

The production teardown identity has Contributor on the network, application and application-vault resource groups, SITS Lock Remover on the application and vault groups, and blob data access to two Terraform state containers. Foundation Reader and Network Contributor on NetworkWatcherRG support dependency discovery and network cleanup. This separates teardown identity from provisioning identities, but Contributor also permits creation and updates, not deletion alone. State container names are truncated in the screenshot.

Prod gateway identity certificate vault role

Managed identities

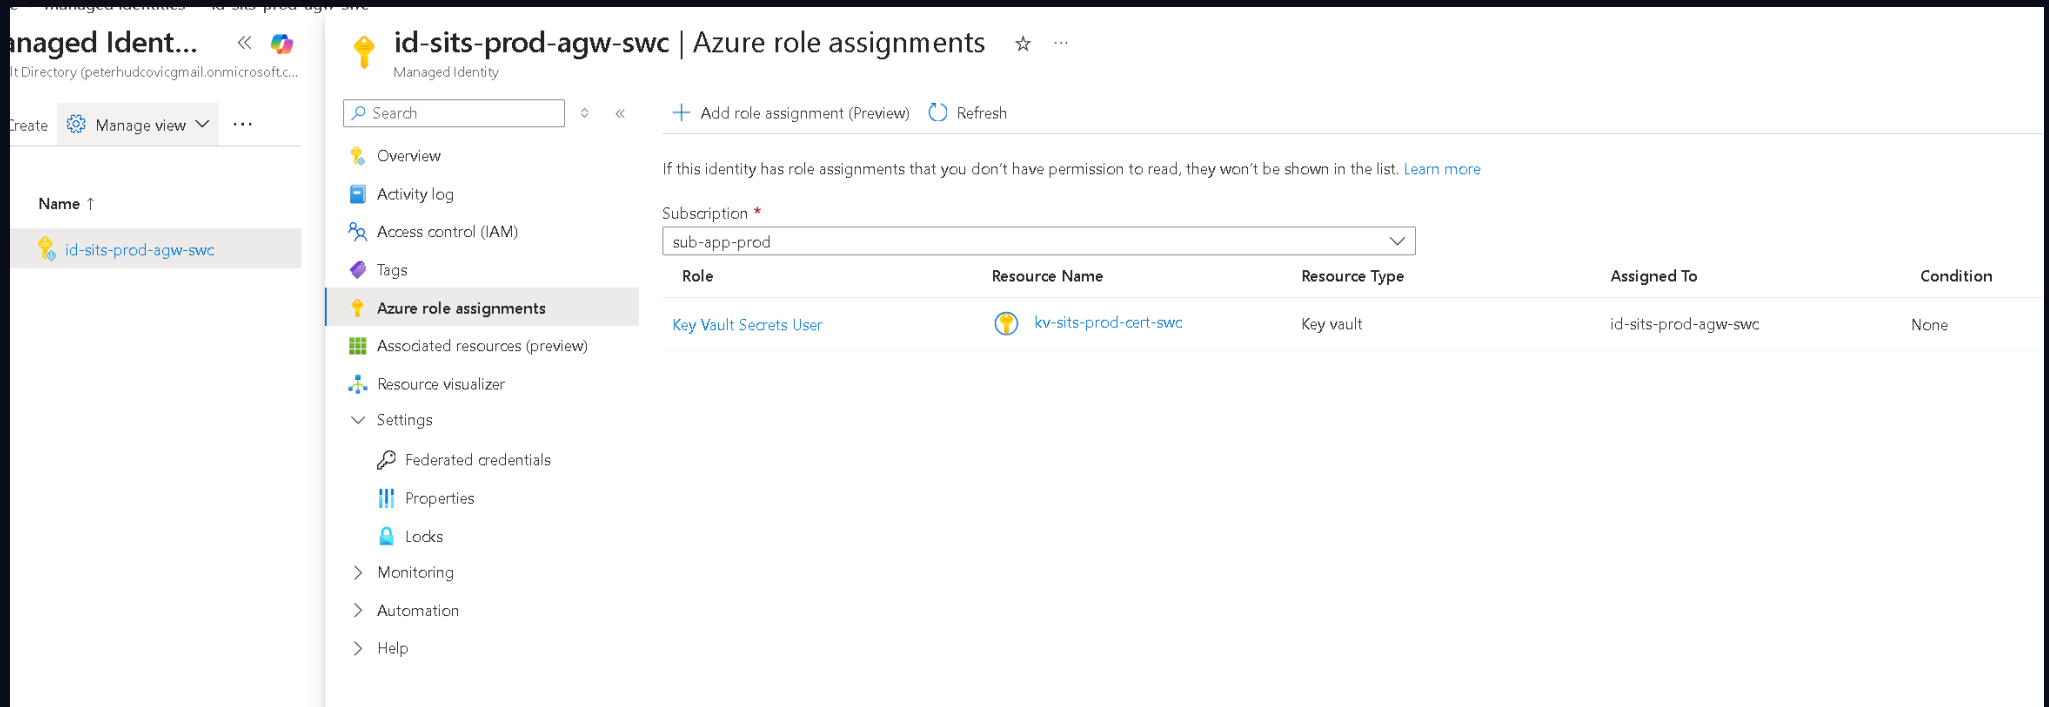

The screenshot displays the Azure portal interface for the managed identity 'id-sits-prod-agw-swc'. The main section is titled 'Azure role assignments' and shows a table of role assignments. The table has five columns: Role, Resource Name, Resource Type, Assigned To, and Condition. One role assignment is listed: 'Key Vault Secrets User' assigned to 'kv-sits-prod-cert-swc' (Key vault) under the 'sub-app-prod' subscription. The left sidebar shows the navigation menu with 'Azure role assignments' selected.

Role	Resource Name	Resource Type	Assigned To	Condition
Key Vault Secrets User	kv-sits-prod-cert-swc	Key vault	id-sits-prod-agw-swc	None

The production Application Gateway managed identity has Key Vault Secrets User scoped to kv-sits-prod-cert-swc. This enables identity-based retrieval of the secret backing its TLS certificate. The permission is assigned at vault scope, rather than restricted to one certificate secret.

Prod operations vm system assigned identity


Managed identities

The screenshot shows the Azure portal interface for a virtual machine named 'vm-sits-prod-ops-swc'. The left-hand navigation pane lists various settings categories, with 'Identity' highlighted under the 'Security' section. The main content area is titled 'vm-sits-prod-ops-swc | Identity' and features two tabs: 'System assigned' (selected) and 'User assigned'. Under the 'System assigned' tab, a descriptive text explains that a system-assigned managed identity is restricted to one per resource and tied to its lifecycle. Below this text are action buttons: 'Save', 'Discard', 'Refresh', and 'Got feedback?'. The 'Status' section shows a toggle switch set to 'On'. The 'Object (principal) ID' is displayed as 'b90aff87-da69-4ebf-95b2-d54c05912fcf'. The 'Permissions' section contains a button labeled 'Azure role assignments'. A blue information banner at the bottom states: 'This resource is registered with Microsoft Entra ID. The managed identity can be configured to allow access to other resources.'

The production operations VM has its system-assigned managed identity set to On, with a principal ID displayed. This documents the identity configuration; it does not establish any Azure role grants or a successful user sign-in.

Test app identity keyvault secrets user

Managed identities

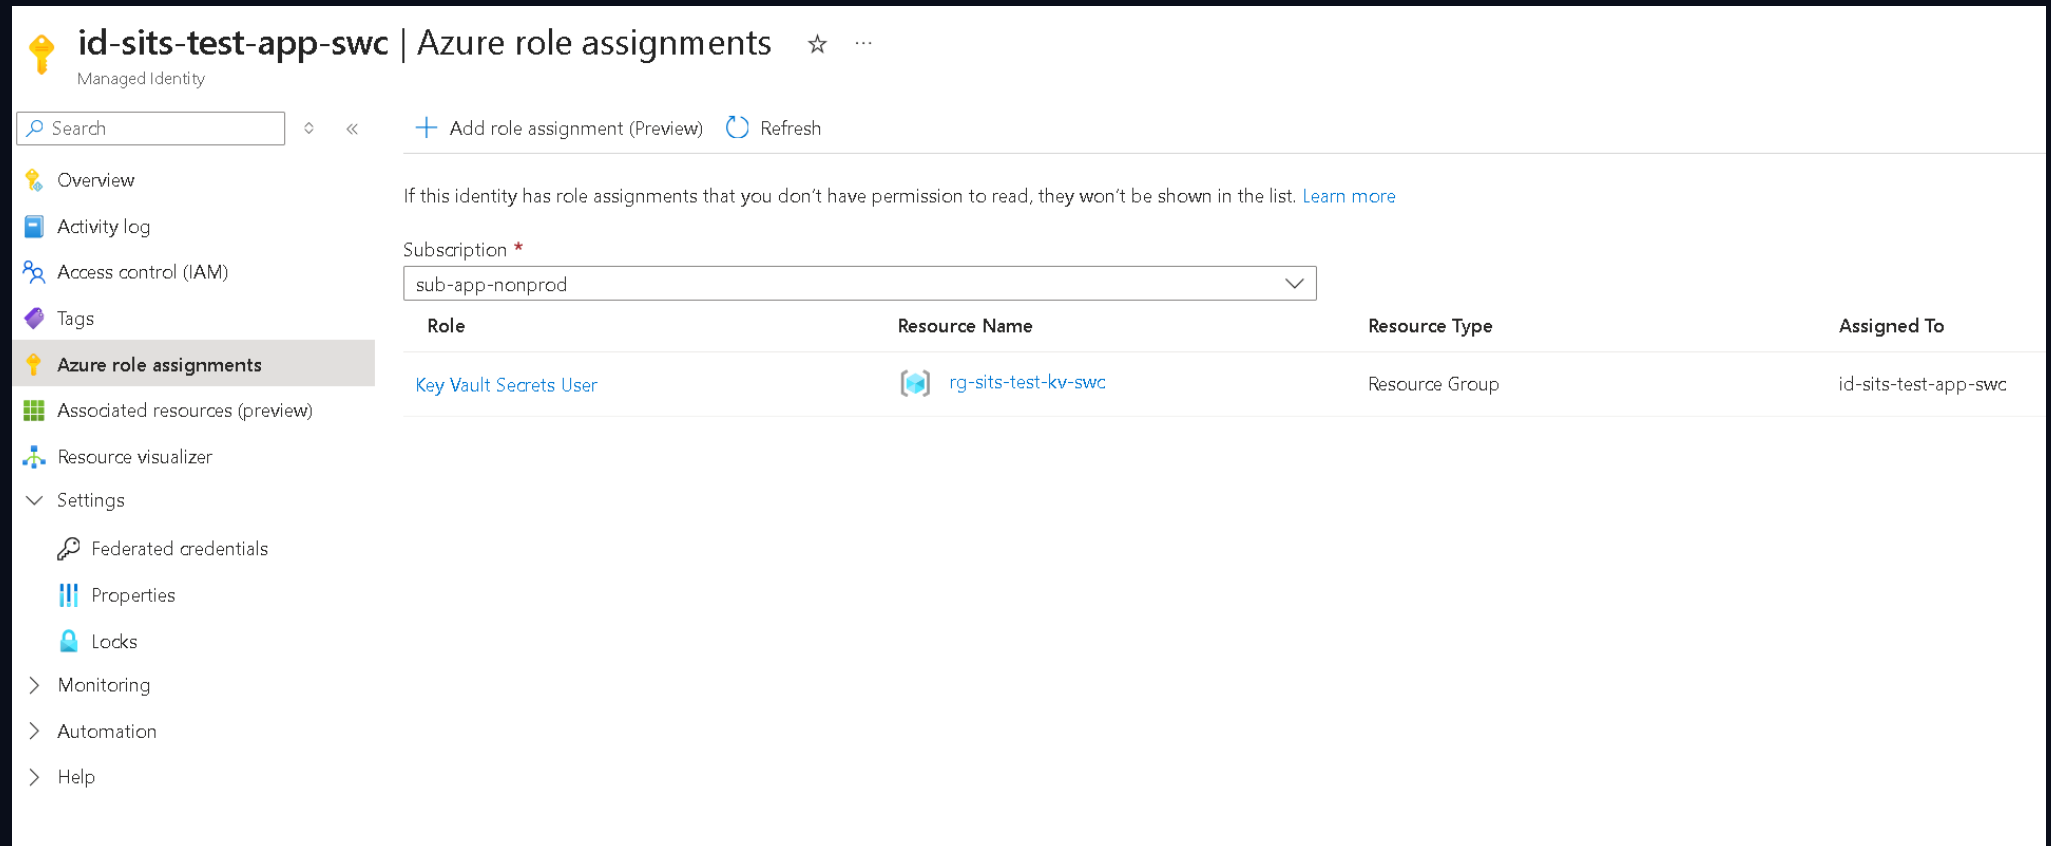


The screenshot shows the Azure portal interface for the managed identity 'id-sits-test-app-swc'. The left sidebar contains a navigation menu with options like Overview, Activity log, Access control (IAM), Tags, Azure role assignments (selected), Associated resources (preview), Resource visualizer, Settings, Federated credentials, Properties, Locks, Monitoring, Automation, and Help. The main content area is titled 'Azure role assignments' and includes a search bar, a '+ Add role assignment (Preview)' button, and a 'Refresh' button. A message states: 'If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)'. Below this, a 'Subscription' dropdown menu is set to 'sub-app-nonprod'. A table lists the role assignments:

Role	Resource Name	Resource Type	Assigned To
Key Vault Secrets User	 rg-sits-test-kv-swc	Resource Group	id-sits-test-app-swc

The Test application identity has Key Vault Secrets User at rg-sits-test-kv-swc resource group scope, enabling identity-based secret access without stored Azure credentials. The role covers vaults in this group and permits reading secret values.

Test deploy identity role assignments

Managed identities

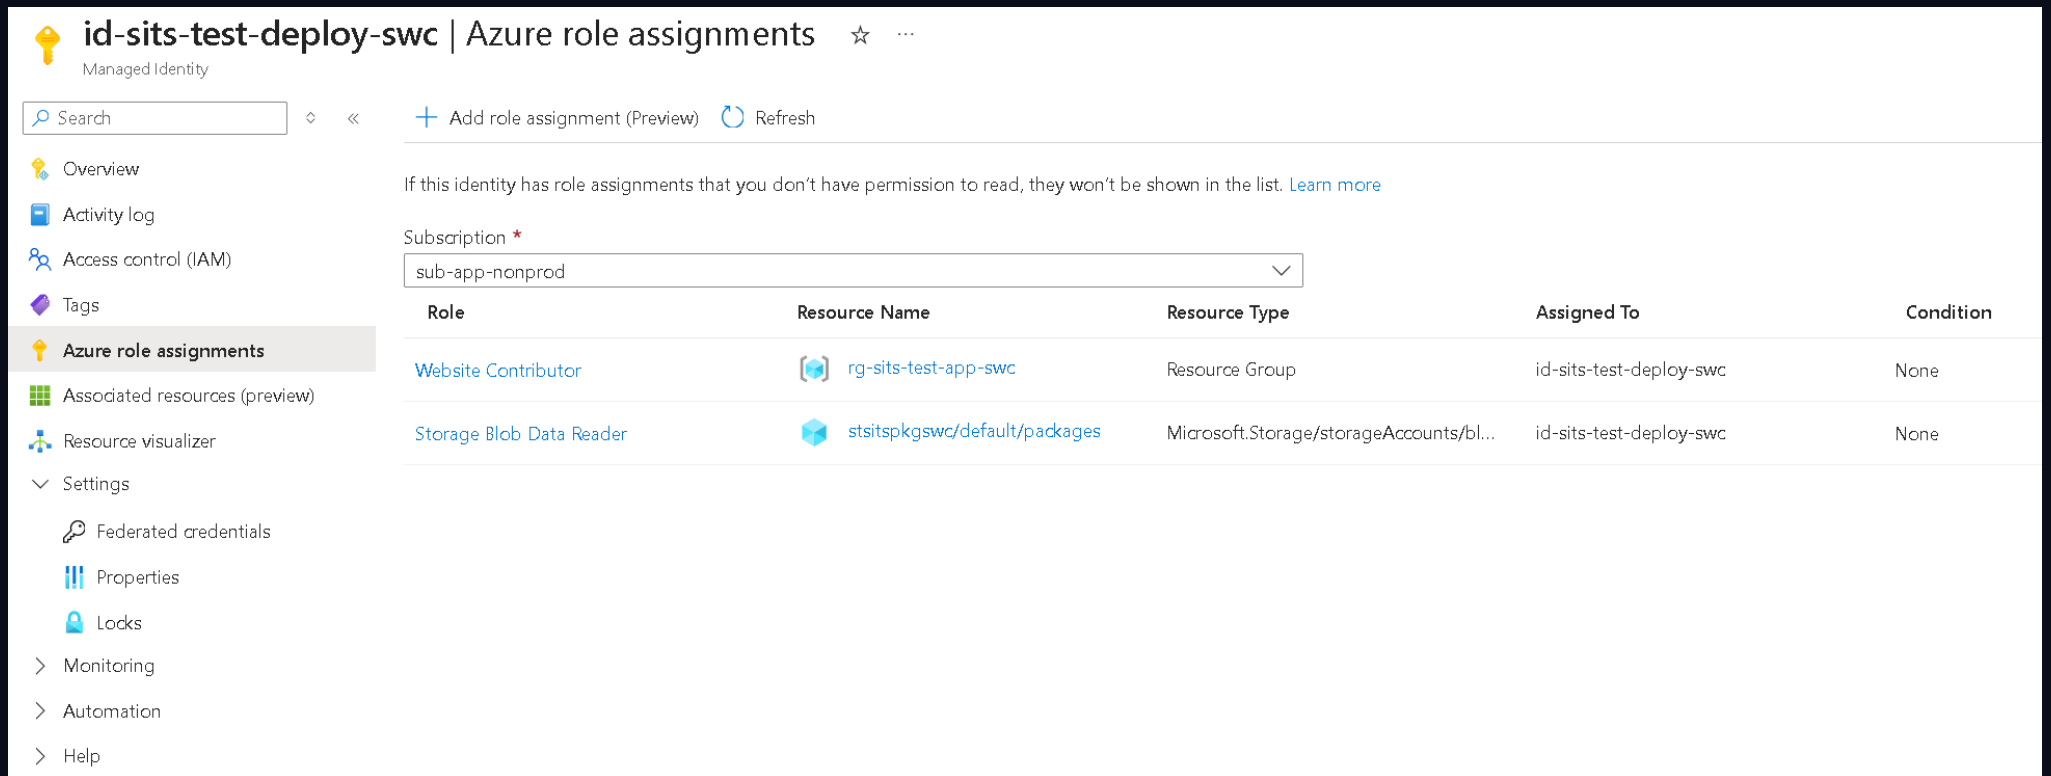

The screenshot displays the 'Azure role assignments' page for the Managed Identity 'id-sits-test-deploy-swc'. The left-hand navigation pane includes links to Overview, Activity log, Access control (IAM), Tags, Azure role assignments (selected), Associated resources (preview), Resource visualizer, Settings, Federated credentials, Properties, Locks, Monitoring, Automation, and Help. The main content area features a search bar, '+ Add role assignment (Preview)' button, and a 'Refresh' button. A message states: 'If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)'. Below this is a 'Subscription' dropdown menu set to 'sub-app-nonprod'. A table lists the role assignments:

Role	Resource Name	Resource Type	Assigned To	Condition
Website Contributor	 rg-sits-test-app-swc	Resource Group	id-sits-test-deploy-swc	None
Storage Blob Data Reader	 stsitspkgswc/default/packages	Microsoft.Storage/storageAccounts/bl...	id-sits-test-deploy-swc	None

The Test deployment identity has Website Contributor on rg-sits-test-app-swc and Storage Blob Data Reader on the shared packages container. This separates Test application management from artifact publication, allowing deployments to retrieve build packages without modifying them.

Test destroy identity role assignments

Managed identities

 id-sits-test-destroy-swc | Azure role assignments ☆ ...

Managed Identity

⌵ ⏪

 Overview

 Activity log

 Access control (IAM)

 Tags

 **Azure role assignments**

 Associated resources (preview)

 Resource visualizer

Settings

-  Federated credentials
-  Properties
-  Locks

Monitoring

Automation

Help

 Add role assignment (Preview)

 Refresh

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *

sub-app-nonprod ⌵

Role	Resource Name	Resource Type	Assigned To
Contributor	 rg-sits-test-network-swc	Resource Group	id-sits-test-destroy-swc
Contributor	 rg-sits-test-kv-swc	Resource Group	id-sits-test-destroy-swc
Contributor	 rg-sits-test-app-swc	Resource Group	id-sits-test-destroy-swc
Storage Blob Data Contributor	 stsitsfttestswc/default/tfstate-layer2	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-test-destroy-swc
Storage Blob Data Contributor	 stsitsfttestswc/default/tfstate-layer1	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-test-destroy-swc
Network Contributor	 NetworkWatcherRG	Resource Group	id-sits-test-destroy-swc
Reader	 rg-sits-test-foundation-swc	Resource Group	id-sits-test-destroy-swc
Reader	 appi-sits-dev-swc	Application Insights	id-sits-test-destroy-swc
Reader	 log-sits-dev-swc	Log Analytics workspace	id-sits-test-destroy-swc

The Test teardown identity has Contributor on Test network, application and vault resource groups and blob data access to both Terraform state containers. NetworkWatcherRG permissions and Reader on Test foundation and shared Dev monitoring support cleanup and dependency discovery. Contributor permits creating and updating resources as well as deleting them.

Test gateway identity certificate vault role

Managed identities

id-sits-test-agw-swc | Azure role assignments

Managed Identity

Search

+ Add role assignment (Preview) Refresh

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *

sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Key Vault Secrets User	kv-sits-test-cert-swc	Key vault	id-sits-test-agw-swc

The Test Application Gateway identity has Key Vault Secrets User on kv-sits-test-cert-swc, supporting identity-based retrieval of the secret backing its TLS certificate. Permission is assigned at certificate-vault scope.

Azure devops agent pools all environments

Shared CI/CD

peterhudcovic-lab / azure-appservice-platform-l... / Settings / Agent pools

Project Settings

azure-appservice-platform-lab

General

Overview

Teams

Permissions

Notifications

Service hooks

Dashboards

Boards

Project configuration

Team configuration

GitHub connections

Pipelines

Agent pools

Parallel jobs

Settings

Test management

Service connections

Agent pools

Name

Azure Pipelines

Azure Pipelines

Default

Azure Pipelines

GitHub-hosted Agents

Azure Pipelines

mdp-sits-dev-app-swc

Lab Admin

mdp-sits-dev-infra-swc

Lab Admin

mdp-sits-prod-app-swc

Lab Admin

mdp-sits-prod-infra-swc

Lab Admin

mdp-sits-test-app-swc

Lab Admin

mdp-sits-test-infra-swc

Lab Admin

Azure DevOps lists separate application and infrastructure agent pools for Dev, Test and Prod, alongside the standard pools. This separation allows pipeline execution to be routed by environment and task. The inventory shows pool availability in the project; it does not demonstrate agent health, private network connectivity or pipeline authorization.

Peter Hudcovic / Azure platform lab / October 2026

70

Azure devops service connections federation


Shared CI/CD

Service connections			Secur
Filter by keywords			Created by Type
Name	Type	Authentication method	
 build	Azure Resource Manager	Workload Identity federation (Manual)	
 dev-deploy	Azure Resource Manager	Workload Identity federation (Manual)	
 dev-destroy	Azure Resource Manager	Workload Identity federation (Manual)	
 dev-infra-l1	Azure Resource Manager	Workload Identity federation (Manual)	
 dev-infra-l2	Azure Resource Manager	Workload Identity federation (Manual)	
 github-peterhudcovic	GitHub	Grant authorization	
 prod-deploy	Azure Resource Manager	Workload Identity federation (Manual)	
 prod-destroy	Azure Resource Manager	Workload Identity federation (Manual)	
 prod-infra-l1	Azure Resource Manager	Workload Identity federation (Manual)	
 prod-infra-l2	Azure Resource Manager	Workload Identity federation (Manual)	
 test-deploy	Azure Resource Manager	Workload Identity federation (Manual)	
 test-destroy	Azure Resource Manager	Workload Identity federation (Manual)	
 test-infra-l1	Azure Resource Manager	Workload Identity federation (Manual)	
 test-infra-l2	Azure Resource Manager	Workload Identity federation (Manual)	

Thirteen Azure Resource Manager service connections use manually configured workload identity federation: one shared build connection and separate deploy, teardown and two infrastructure-layer connections for each environment. This separates pipeline authentication by task and environment without stored Azure client secrets. A separate GitHub connection provides repository integration. Manual describes the federation configuration method, not the pipeline trigger.

Azure devops successful pipeline overview

Shared CI/CD

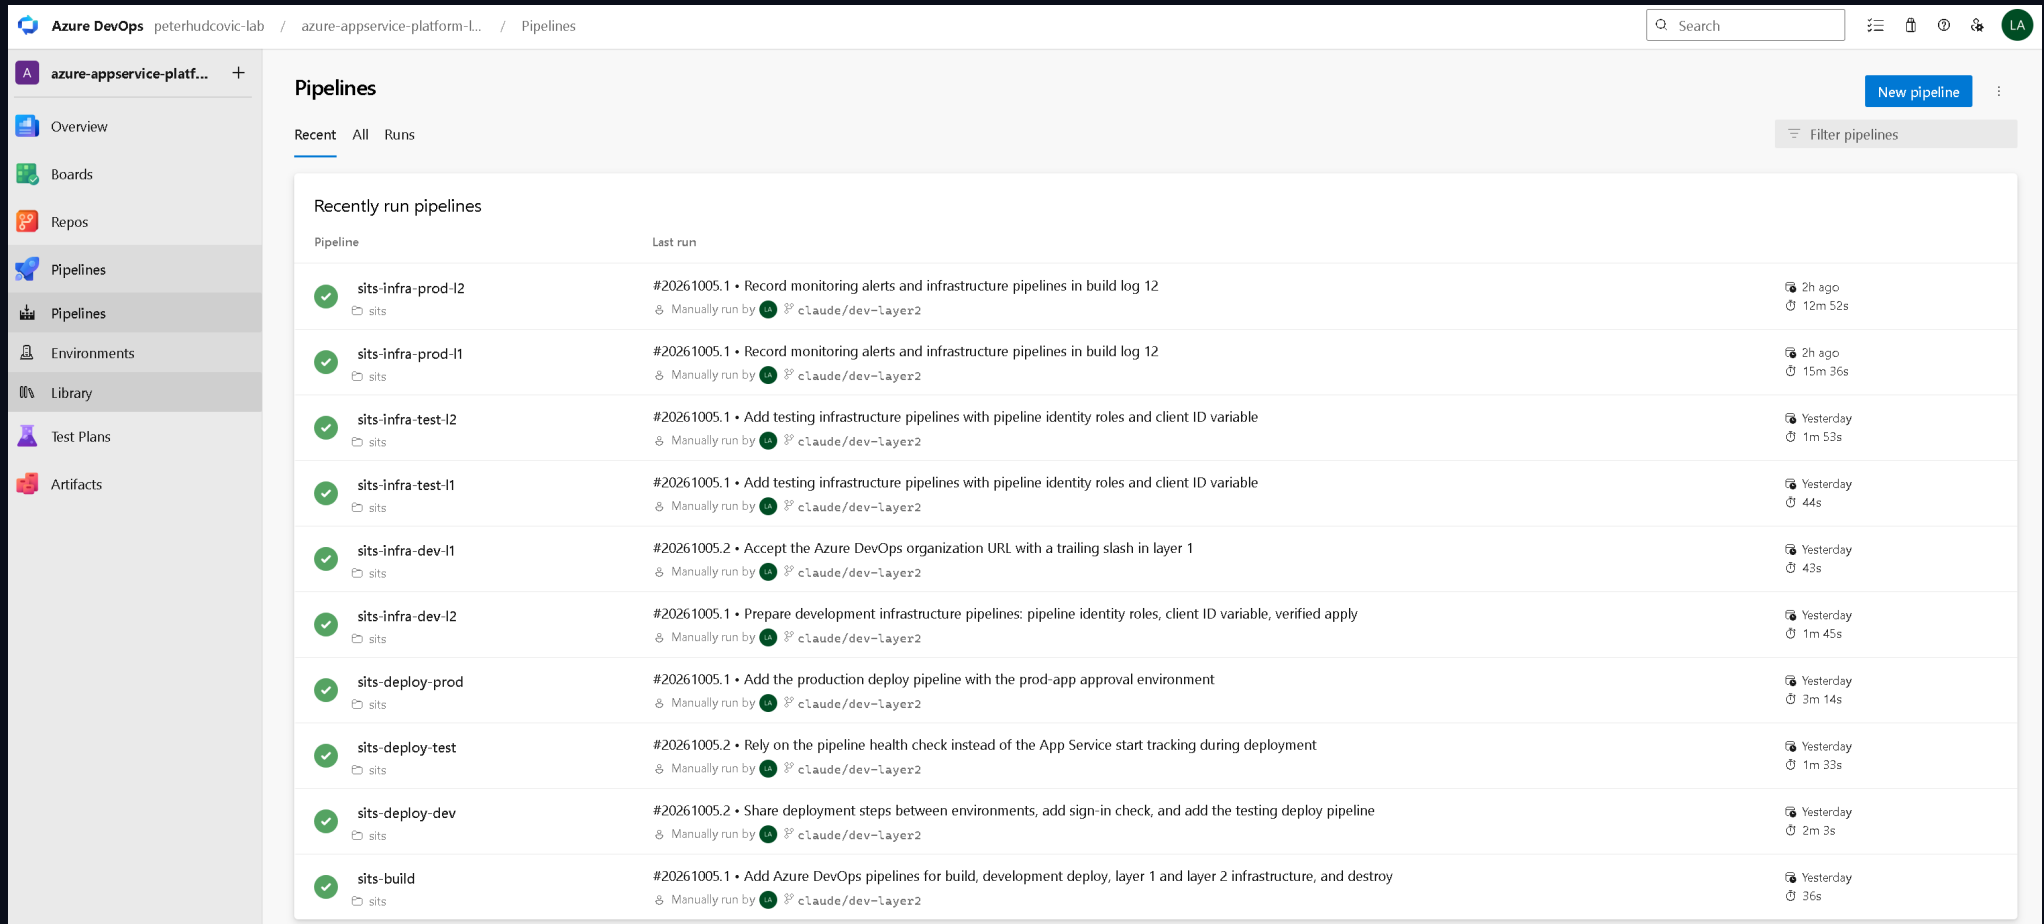

The screenshot displays the Azure DevOps interface for the 'azure-appservice-platf...' workspace. The left sidebar shows navigation options: Overview, Boards, Repos, Pipelines (selected), Environments, Library, Test Plans, and Artifacts. The main area is titled 'Pipelines' and shows a list of 'Recently run pipelines'.

Pipeline	Last run
 sits-infra-prod-l2 sits	#20261005.1 • Record monitoring alerts and infrastructure pipelines in build log 12 Manually run by  cclaude/dev-layer2 2h ago 12m 52s
 sits-infra-prod-l1 sits	#20261005.1 • Record monitoring alerts and infrastructure pipelines in build log 12 Manually run by  cclaude/dev-layer2 2h ago 15m 36s
 sits-infra-test-l2 sits	#20261005.1 • Add testing infrastructure pipelines with pipeline identity roles and client ID variable Manually run by  cclaude/dev-layer2 Yesterday 1m 53s
 sits-infra-test-l1 sits	#20261005.1 • Add testing infrastructure pipelines with pipeline identity roles and client ID variable Manually run by  cclaude/dev-layer2 Yesterday 44s
 sits-infra-dev-l1 sits	#20261005.2 • Accept the Azure DevOps organization URL with a trailing slash in layer 1 Manually run by  cclaude/dev-layer2 Yesterday 43s
 sits-infra-dev-l2 sits	#20261005.1 • Prepare development infrastructure pipelines: pipeline identity roles, client ID variable, verified apply Manually run by  cclaude/dev-layer2 Yesterday 1m 45s
 sits-deploy-prod sits	#20261005.1 • Add the production deploy pipeline with the prod-app approval environment Manually run by  cclaude/dev-layer2 Yesterday 3m 14s
 sits-deploy-test sits	#20261005.2 • Rely on the pipeline health check instead of the App Service start tracking during deployment Manually run by  cclaude/dev-layer2 Yesterday 1m 33s
 sits-deploy-dev sits	#20261005.2 • Share deployment steps between environments, add sign-in check, and add the testing deploy pipeline Manually run by  cclaude/dev-layer2 Yesterday 2m 3s
 sits-build sits	#20261005.1 • Add Azure DevOps pipelines for build, development deploy, layer 1 and layer 2 infrastructure, and destroy Manually run by  cclaude/dev-layer2 Yesterday 36s

Azure DevOps shows successful recent runs for the shared build pipeline, application deployment to Dev, Test and Prod, and both infrastructure layers in each environment. The displayed runs were manually initiated from claude/dev-layer2. This provides execution evidence for the pipelines, without demonstrating automatic promotion or approval checks in this overview.

Dev app managed pool details

Shared CI/CD

Project Settings
azure-appservice-platform-lab

General

- Overview
- Teams
- Permissions
- Notifications
- Service hooks
- Dashboards

Boards

- Project configuration
- Team configuration
- GitHub connections

Pipelines

- Agent pools
- Parallel jobs
- Settings
- Test management
- Service connections
- XAML build services

Repos

- Repositories
- Migration to GitHub

Artifacts

- Storage

Test

mdp-sits-dev-app-swc

Jobs Details Security Approvals and checks Analytics

Owner Undo Save

Lab Admin

Description Edit Undo Save

Managed DevOps Pool: mdp-sits-dev-app-swc

This Pool is managed via the azure resource: /subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114/resourceGroups/rg-sits-dev-network-swc/providers/Microsoft.DevOpsInfrastructure/pools/mdp-sits-dev-app-swc. Please do not modify or delete this pool directly in Azure DevOps.

Read more about Managed DevOps Pools in our [documentation](#)

If you have any questions or need to request changes to this pool, please contact the admins in the Security section or one of the following contacts:

- No contacts provided

Pool Details

- Region: swedencentral
- SKU: Standard_D2ads_v5
- Parallelism: 1
- Stateful: False
- Predictive Provisioning Mode: None
- Vnet State: Subnet Delegated
- Public IPs: 0

The Dev application Managed DevOps Pool is backed by an Azure resource in the Dev network resource group in Sweden Central. Its displayed configuration uses Standard_D2ads_v5, parallelism 1, stateless agents, a delegated subnet and zero public IPs. This supports pipeline execution within the environment network without public agent IPs; the screenshot does not itself verify endpoint connectivity.

Dev infra managed pool details

Shared CI/CD

 **mdp-sits-dev-infra-swc**

[Jobs](#) [Details](#) [Security](#) [Approvals and checks](#) [Analytics](#)

Owner

Undo Save

 Lab Admin ×

Description

Edit Undo Save

Managed Devops Pool: mdp-sits-dev-infra-swc

This Pool is managed via the azure resource: /subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114/resourceGroups/rg-sits-dev-network-swc/providers/Microsoft.DevOpsInfrastructure/pools/mdp-sits-dev-infra-swc. Please do not modify or delete this pool directly in Azure DevOps.

Read more about Managed Devops Pools in our [documentation](#)

If you have any questions or need to request changes to this pool, please contact the admins in the Security section or one of the following contacts:

- No contacts provided

Pool Details

- Region: swedencentral
- SKU: Standard_D2ads_v5
- Parallelism: 1
- Stateful: False
- Predictive Provisioning Mode: None
- Vnet State: Subnet Delegated
- Public IPs: 0

The Dev infrastructure Managed DevOps Pool is backed by an Azure resource in rg-sits-dev-network-swc within the non-production subscription. Its displayed configuration uses Standard_D2ads_v5 in Sweden Central, parallelism 1, stateless agents, a delegated subnet and zero public IPs. A separate infrastructure pool allows infrastructure jobs to be routed independently of application deployment jobs; this view does not verify pipeline authorization or endpoint connectivity.

Prod app approval settings details

Shared CI/CD

Check execution order
Checks will run by order, which is pre-determined by check types. Checks within the same order will run in parallel.

Order	Display name	Type
1	All approvers must approve	Approvals

Approvals

Approvers

Lab Admin X +

Instructions to approvers (optional)

Production deployment: check the build run, version, and SHA-256 fingerprint shown in the run, and the testing results, before approving.

Advanced

☒ Allow approvers to approve their own runs

Control options

Timeout

30 Days

Lab Admin is the configured approver for the production application environment, with a 30-day approval timeout. Instructions ask the approver to review the build run, version, SHA-256 fingerprint and testing results before approving. Approval of the approver's own runs is enabled, so this lab demonstrates a manual approval gate rather than enforced separation between requester and approver.

Prod app environment approval check

Shared CI/CD

← **prod-app** Add resource

Production application deployment. Mandatory approval; shows the exact build run whose SHA-256 fingerprint is verified again before deployment.

Deployments Approvals and checks

Check execution order + Add new

Checks will run by order, which is pre-determined by check types. Checks within the same order will run in parallel. [Learn more](#)

Order	Display name	Type	Timeout	Details
1	All approvers must approve	Approvals	30d	LA

The prod-app Azure DevOps environment has an Approvals check requiring all configured approvers to approve, with a 30-day timeout. This establishes an approval gate for deployment stages that reference this environment. The environment description mentions build fingerprint verification; this screenshot demonstrates the configured approval check, not execution of SHA-256 verification or self-approval restrictions.

Prod app managed pool details

Shared CI/CD

 **mdp-sits-prod-app-swc**

[Jobs](#) [Details](#) [Security](#) [Approvals and checks](#) [Analytics](#)

Owner

Undo Save

 Lab Admin ×

Description

Edit Undo Save

Managed DevOps Pool: mdp-sits-prod-app-swc

This Pool is managed via the azure resource: /subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f/resourceGroups/rg-sits-prod-network-swc/providers/Microsoft.DevOpsInfrastructure/pools/mdp-sits-prod-app-swc. Please do not modify or delete this pool directly in Azure DevOps.

Read more about Managed DevOps Pools in our [documentation](#)

If you have any questions or need to request changes to this pool, please contact the admins in the Security section or one of the following contacts:

- No contacts provided

Pool Details

- Region: swedencentral
- SKU: Standard_D2ads_v5
- Parallelism: 1
- Stateful: False
- Predictive Provisioning Mode: None
- Vnet State: Subnet Delegated
- Public IPs: 0

The production application Managed DevOps Pool is backed by an Azure resource in the production network resource group and subscription in Sweden Central. It uses Standard_D2ads_v5, parallelism 1, stateless agents, a delegated subnet and zero public IPs. This provides a separate execution pool for production application jobs within the production network; endpoint connectivity is verified separately.

Prod deploy service connection overview

Shared CI/CD

← prod-deploy

ID: a7e4916a-13e9-4679-b9a4-e282229c8988

Overview

Usage history

Approvals and checks

Details

Service connection type

 **Azure Resource Manager**
using workload identity federation with openid connect
[Manage service connection roles](#)
[Manage Managed Identity](#)

Creator
 Lab Admin

Description

Production application deployment after approval, identity id-sits-prod-deploy-swc

Workload Identity federation details

Issuer:
<https://login.microsoftonline.com/3bdeb384-5dba-4624-a330-01211232fa30/v2.0>

Subject identifier:
</eid1/c/pub/t/hLPeO7pdJEajMAEhEjL6MA/a/rISbSSEtf0KqFyZ8ppdXmA/sc/4d0805b4-ef76-4476-9faa-183c38a42d17/a7e4916a-13e9-4679-b9a4-e282229c8988>

The prod-deploy Azure Resource Manager service connection uses OpenID Connect workload identity federation with the production deployment managed identity. Its issuer and subject identifier define the federated trust; they are configuration identifiers, not credentials or bearer tokens. The description references deployment after approval, but approval enforcement must be evidenced separately.

Prod infra managed pool details

Shared CI/CD

 **mdp-sits-prod-infra-swc**

Jobs Details Security Approvals and checks Analytics

Owner

Undo Save

 Lab Admin ×

Description

Edit Undo Save

Managed DevOps Pool: mdp-sits-prod-infra-swc

This Pool is managed via the azure resource: /subscriptions/61845030-2daa-4797-a97a-59a7fd8d478f/resourceGroups/rg-sits-prod-network-swc/providers/Microsoft.DevOpsInfrastructure/pools/mdp-sits-prod-infra-swc. Please do not modify or delete this pool directly in Azure DevOps.

Read more about Managed DevOps Pools in our [documentation](#)

If you have any questions or need to request changes to this pool, please contact the admins in the Security section or one of the following contacts:

- No contacts provided

Pool Details

- Region: swedencentral
- SKU: Standard_D2ads_v5
- Parallelism: 1
- Stateful: False
- Predictive Provisioning Mode: None
- Vnet State: Subnet Delegated
- Public IPs: 0

The production infrastructure Managed DevOps Pool is backed by an Azure resource in rg-sits-prod-network-swc within the separate production subscription. It uses Standard_D2ads_v5 in Sweden Central, parallelism 1, stateless agents, a delegated subnet and zero public IPs. This separates production infrastructure execution from application deployment jobs and non-production pools.

Test app managed pool details

Shared CI/CD

 **mdp-sits-test-app-swc**

[Jobs](#) [Details](#) [Security](#) [Approvals and checks](#) [Analytics](#)

Owner

 Lab Admin

Undo Save

Description

Edit Undo Save

Managed Devops Pool: mdp-sits-test-app-swc

This Pool is managed via the azure resource: /subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114/resourceGroups/rg-sits-test-network-swc/providers/Microsoft.DevOpsInfrastructure/pools/mdp-sits-test-app-swc. Please do not modify or delete this pool directly in Azure DevOps.

Read more about Managed Devops Pools in our [documentation](#)

If you have any questions or need to request changes to this pool, please contact the admins in the Security section or one of the following contacts:

- No contacts provided

Pool Details

- Region: swedencentral
- SKU: Standard_D2as_v5
- Parallelism: 1
- Stateful: False
- Predictive Provisioning Mode: None
- Vnet State: Subnet Delegated
- Public IPs: 0

The Test application Managed DevOps Pool is backed by an Azure resource in the Test network resource group within the non-production subscription. Its displayed configuration uses Standard_D2as_v5 in Sweden Central, parallelism 1, stateless agents, a delegated subnet and zero public IPs. This provides separate execution for Test application jobs within the Test network; endpoint connectivity is verified separately.

Test infra managed pool details

Shared CI/CD

 **mdp-sits-test-infra-swc**

Jobs Details Security Approvals and checks Analytics

Owner

Undo Save

 Lab Admin ×

Description

Edit Undo Save

Managed DevOps Pool: mdp-sits-test-infra-swc

This Pool is managed via the azure resource: /subscriptions/8b38e1d5-139f-4006-8f2b-ffb32a6ac114/resourceGroups/rg-sits-test-network-swc/providers/Microsoft.DevOpsInfrastructure/pools/mdp-sits-test-infra-swc. Please do not modify or delete this pool directly in Azure DevOps.

Read more about Managed DevOps Pools in our [documentation](#)

If you have any questions or need to request changes to this pool, please contact the admins in the Security section or one of the following contacts:

- No contacts provided

Pool Details

- Region: swedencentral
- SKU: Standard_D2as_v5
- Parallelism: 1
- Stateful: False
- Predictive Provisioning Mode: None
- Vnet State: Subnet Delegated
- Public IPs: 0

The Test infrastructure Managed DevOps Pool is backed by an Azure resource in rg-sits-test-network-swc within the non-production subscription. It uses Standard_D2as_v5 in Sweden Central, parallelism 1, stateless agents, a delegated subnet and zero public IPs. The separate infrastructure pool supports routing Test infrastructure jobs independently of application deployment jobs.

Bastions all environments

Production networking and operations

Home

Bastions

☆ ...

Identify connectivity issues in bastion resources

Analyze performance of bastion resources

Track metrics for bastion hosts

Default Directory (peterhudcovicgmail.onmicrosoft.com)

+ Create

⚙️ Manage view

🔄 Refresh

⬇️ Export to CSV

🔗 Open query

|

🏷️ Assign tags

+ Add to service group

🔍 Filter for any field...

Subscription equals all

Resource Group equals all

×

Location equals all

×

+ Add filter

☐	Name ↑	Type	Resource Group	Location	Subscription
☐	✕ bas-sits-dev-swc	... Bastion	rg-sits-dev-network-swc	Sweden Central	sub-app-nonprod
☐	✕ bas-sits-prod-swc	... Bastion	rg-sits-prod-network-swc	Sweden Central	sub-app-prod
☐	✕ bas-sits-test-swc	... Bastion	rg-sits-test-network-swc	Sweden Central	sub-app-nonprod

The Azure Bastions inventory lists bas-sits-dev-swc, bas-sits-test-swc, and bas-sits-prod-swc in Sweden Central, each in its environment-specific network resource group. Development and testing use sub-app-nonprod, while production uses sub-app-prod. This documents a separate Bastion resource for each environment; connection success is separate evidence.

Prod admin session runtime dns and gateway connectivity

Production networking and operations

```
Name                                     Type      TTL      Section  IPAddress
-----
app.prod.sits.internal                  A         300      Answer   10.30.4.10

ComputerName                           : app.prod.sits.internal
RemoteAddress                          : 10.30.4.10
ResolvedAddresses                      : {10.30.4.10}
PingSucceeded                          : False
PingReplyDetails                      :
TcpClientSocket                       :
TcpTestSucceeded                      : True
RemotePort                            : 443
TraceRoute                            :
Detailed                              : False
InterfaceAlias                        : Ethernet
InterfaceIndex                        : 6
InterfaceDescription                  : Microsoft Hyper-V Network Adapter
NetAdapter                            : MSFT_NetAdapter <CreationClassName = "MSFT_NetAdapter", DeviceID = "<CDCC59CD-8A52-4E59-A8A9-EDB73BC7F81A>", SystemCreationClassName = "CIM_NetworkPort", SystemName =
                                     "ops-prod">
NetRoute                              : MSFT_NetRoute <InstanceID = ":8:8:8:9:55255;:8?:8:8;55;">
SourceAddress                         : 10.30.1.4
NameResolutionSucceeded                : True
BasicNameResolution                   : <Microsoft.DnsClient.Commands.DnsRecord_A>
LLMNRNetbiosRecords                  : <>
DNSOnlyRecords                       : <Microsoft.DnsClient.Commands.DnsRecord_A>
AllNameResolutionResults               : Microsoft.DnsClient.Commands.DnsRecord_A
IsAdmin                               : False
NetworkIsolationContext                : Internet
MatchingIPsecRules                    :

Name      : app-sits-prod-svc.azurewebsites.net
QueryType : CNAME
TTL       : 60
Section   : Answer
NameHost  : app-sits-prod-svc.privatelink.azurewebsites.net

app-sits-prod-svc.privatelink.azurewebsites.net A      10      Answer   10.30.5.7

Name      : kv-sits-prod-app-svc.vault.azure.net
QueryType : CNAME
TTL       : 34
Section   : Answer
NameHost  : kv-sits-prod-app-svc.privatelink.vaultcore.azure.net

kv-sits-prod-app-svc.privatelink.vaultcore.azure.net A      10      Answer   10.30.5.6

PS C:\Users\ProdAdmin> A_
```

The PowerShell session at C:\Users\ProdAdmin shows app.prod.sits.internal resolving to 10.30.4.10 and a successful TCP connection to port 443 from source 10.30.1.4. App Service resolves through its privatelink.azurewebsites.net alias to 10.30.5.7, and the application Key Vault resolves through its privatelink.vaultcore.azure.net alias to 10.30.5.6. TcpTestSucceeded and NameResolutionSucceeded are True; PingSucceeded is False. Together with the separate whoami screenshot, this records runtime checks in the user-reported Entra-authenticated Prod Admin session. The checks establish DNS resolution and gateway TCP reachability, not TLS trust, HTTP responses, or backend authorization.

Prod app keyvault networking

Production networking and operations

Home > kv-sits-prod-app-swc

kv-sits-prod-app-swc | Networking ☆ ...

Key vault

Search

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Access policies
Resource visualizer
Events
Objects
Settings
Access configuration
Networking
Microsoft Defender for Cloud ☆
Properties
Locks
Monitoring
Automation
Help

Firewalls and virtual networks Private endpoint connections

Allow access from:

☐ Allow public access from all networks
☐ Allow public access from specific virtual networks and IP addresses
☒ Disable public access

Exception

Enabling access to resources requires you allow trusted Microsoft services to bypass firewall.

☐ Allow trusted Microsoft services to bypass this firewall


Information This setting is related to firewall only. In order to access this key vault, the trusted service must also be given explicit permissions the Access Policies section. [configuration](#)

[Learn more about key vault network security configuration](#)

The production application Key Vault kv-sits-prod-app-swc has Disable public access selected. The trusted Microsoft services firewall bypass option is unchecked. This documents the vault's public network access configuration; private endpoint connection approval and DNS integration are documented separately.

Prod app keyvault private endpoint connection

Production networking and operations

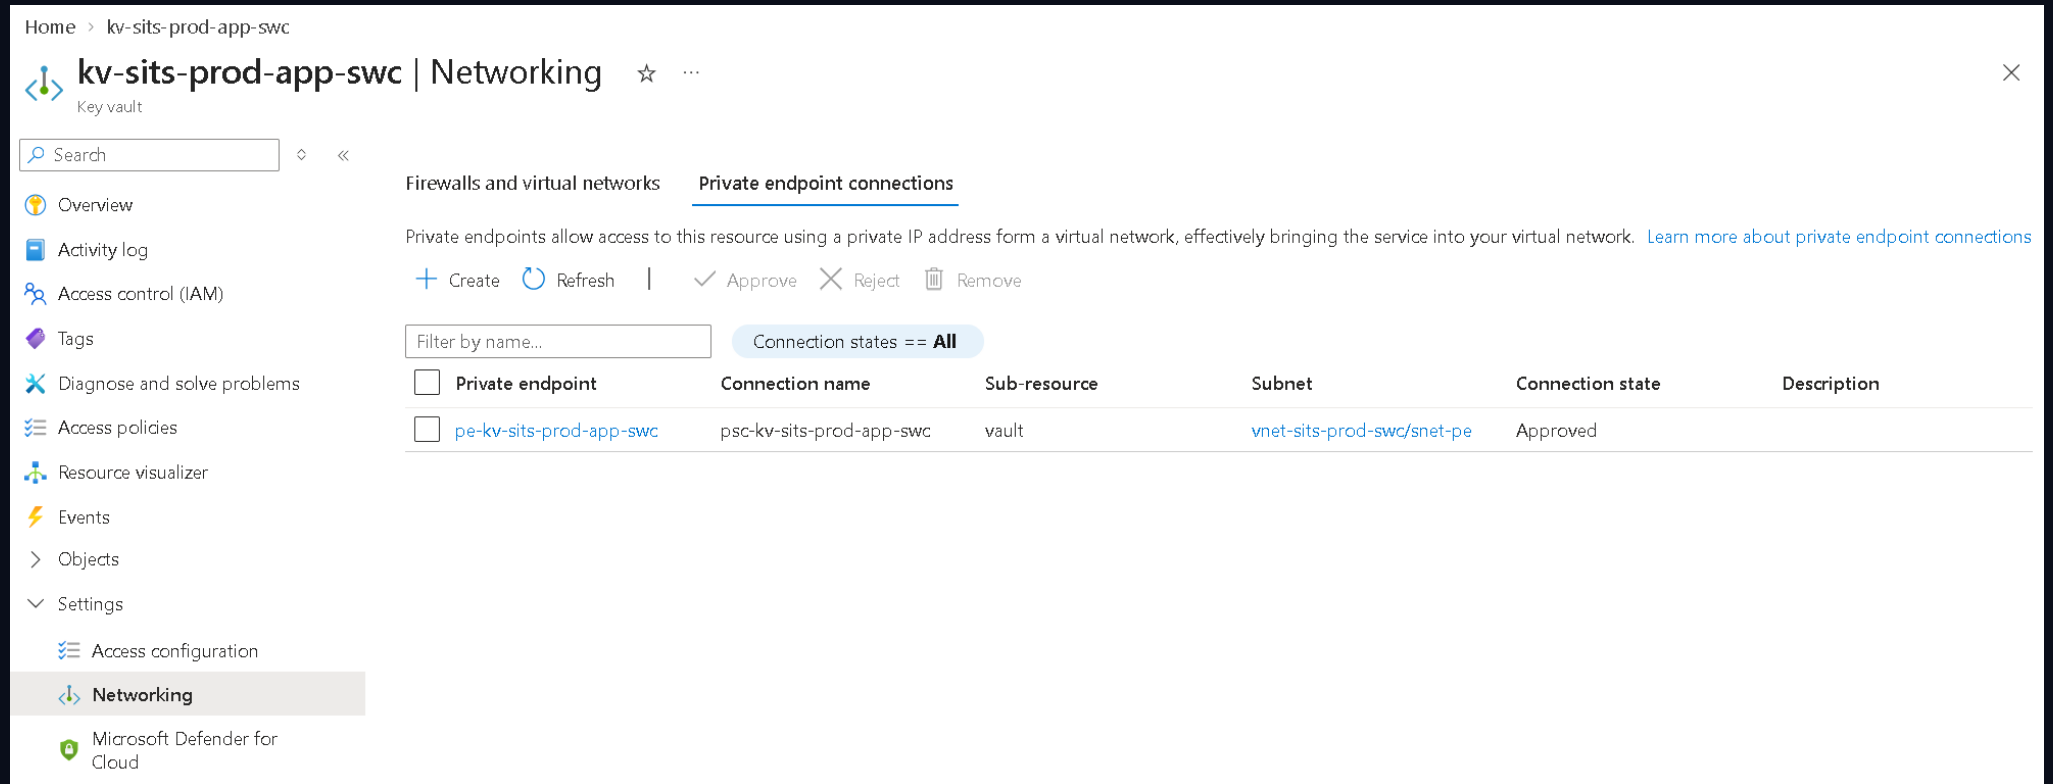

Home > kv-sits-prod-app-swc

kv-sits-prod-app-swc | Networking ☆ ...

Key vault

Search

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Access policies
Resource visualizer
Events
Objects
Settings
Access configuration
Networking
Microsoft Defender for Cloud

Firewalls and virtual networks Private endpoint connections

Private endpoints allow access to this resource using a private IP address from a virtual network, effectively bringing the service into your virtual network. [Learn more about private endpoint connections](#)

+ Create Refresh | ✓ Approve ✗ Reject 🗑 Remove

Filter by name... Connection states == All

☐ Private endpoint	Connection name	Sub-resource	Subnet	Connection state	Description
☐	pe-kv-sits-prod-app-swc	psc-kv-sits-prod-app-swc	vault	vnet-sits-prod-swc/snet-pe	Approved

The application Key Vault lists private endpoint pe-kv-sits-prod-app-swc with connection psc-kv-sits-prod-app-swc targeting the vault subresource. The connection state is Approved and the endpoint is attached to vnet-sits-prod-swc/snet-pe. Together with the networking screenshot, this documents an approved private connection while public access is disabled. DNS resolution and authorized secret access are separate checks.

Prod app keyvault private endpoint dns

Production networking and operations

Home > pe-kv-sits-prod-app-swc

pe-kv-sits-prod-app-swc | DNS configuration ☆ ⋮

Private endpoint

Search ⌕ ⌵ ⌵ + Add configuration ↻ Refresh

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Resource visualizer
Settings
Application security groups
DNS configuration
Properties
Locks
Monitoring
Automation
Help

Private DNS integration

To connect privately with your private endpoint, you need a DNS record. We recommend that you integrate your private endpoint using a private DNS zone. You can also utilize your own DNS servers. [Learn more](#)

Customer Visible FQDNs

DNS records visible to the customer

Network Interface	IP addresses	FQDN
nic-pe-kv-sits-prod-app-swc	10.30.5.6	kv-sits-prod-app-swc.vault.azure.net

Configuration name	FQDN	IP address	Subscription	Private DNS zone	DNS zone group
privatelink.vaultcore.azure...			sub-app-prod	privatelink.vaultcore.azure.net	default
	kv-sits-prod-app-swc.privatelink.vaultcore.azure.net	10.30.5.6		-	-

The application Key Vault private endpoint DNS configuration lists nic-pe-kv-sits-prod-app-swc at 10.30.5.6 and customer-visible hostname kv-sits-prod-app-swc.vault.azure.net. Its default DNS zone group is associated with privatelink.vaultcore.azure.net, with the configured private DNS entry pointing to 10.30.5.6. The full private FQDN is kv-sits-prod-app-swc.privatelink.vaultcore.azure.net. This documents DNS integration configuration; runtime resolution is a separate check.

Prod app private dns vnet link

Production networking and operations

Home > pe-app-sits-prod-swc | DNS configuration > privatelink.azurewebsites.net

privatelink.azurewebsites.net | Virtual Network Links

Private DNS zone

Search

+ Add Refresh Delete Give feedback

Search virtual network links

Fetchd 1 virtual Network link(s).
0 Virtual Network links selected

Link Name	Link Status	Virtual Network	Auto-Registration	Fallback to Internet
link-webapp-vnet-sits-prod-swc	Completed	vnet-sits-prod-swc	Disabled	Disabled

- Overview
- Activity log
- Access control (IAM)
- Tags
- Diagnose and solve problems
- Resource visualizer
- > Settings
- ▼ DNS Management
 - Recordsets
 - Virtual Network Links**
- > Monitoring
- > Automation
- > Help

The privatelink.azurewebsites.net private DNS zone lists one virtual network link, link-webapp-vnet-sits-prod-swc, to vnet-sits-prod-swc. Link status is Completed. Auto-registration and Fallback to Internet are Disabled. This documents the zone-to-VNet association; runtime DNS resolution is separate evidence.

Prod app private endpoint dns

Production networking and operations

Home > pe-app-sits-prod-swc

pe-app-sits-prod-swc | DNS configuration Private endpoint

Search Add configuration Refresh

Overview Activity log Access control (IAM) Tags Diagnose and solve problems Resource visualizer Settings

Application security groups DNS configuration Properties Locks Monitoring Automation Help

Private DNS integration

To connect privately with your private endpoint, you need a DNS record. We recommend that you integrate your private endpoint using a private DNS zone. You can also utilize your own DNS servers. [Learn more](#)

Customer Visible FQDNs

DNS records visible to the customer

Network Interface	IP addresses	FQDN
nic-pe-app-sits-prod-swc	10.30.5.7	app-sits-prod-swc.azurewebsites.net
		app-sits-prod-swc.scm.azurewebsites.net

Configuration name	FQDN	IP address	Subscription	Private DNS zone	DNS zone group
privatelink.azurewebsites.net			sub-app-prod	privatelink.azurewebsites.net	default
	app-sits-prod-swc.privatelink.azurewebsites.net	10.30.5.7		-	-
	app-sits-prod-swc.scm.privatelink.azurewebsites.net	10.30.5.7		-	-

The private endpoint DNS configuration associates the default DNS zone group with `privatelink.azurewebsites.net`. Both `app-sits-prod-swc.privatelink.azurewebsites.net` and `app-sits-prod-swc.scm.privatelink.azurewebsites.net` have the private endpoint address `10.30.5.7`. The customer-visible application and SCM hostnames are also listed. This documents configured DNS integration for application and deployment endpoints; runtime name resolution is verified separately.

Prod app private endpoint overview

Production networking and operations

The screenshot displays the Azure portal interface for the private endpoint resource 'pe-app-sits-prod-swc'. The page is titled 'Home' and includes a search bar and a 'Is my private endpoint resilient?' button. The left sidebar shows the navigation menu with 'Overview' selected. The main content area is divided into two sections: 'Essentials' and 'Properties'.

Essentials

Resource group (move)	: rg-sits-prod-app-swc
Location (move)	: Sweden Central
Subscription (move)	: sub-app-prod
Subscription ID	: 61845030-2daa-4797-a97a-59a7fd8d478f
Provisioning state	: Succeeded
Tags (edit)	: <code>costCenter : sits-lab</code> <code>environment : prod</code> Show more (1)

Properties

Virtual network/subnet	: vnet-sits-prod-swc/snet-pe
Network interface	: nic-pe-app-sits-prod-swc
Private link resource	: app-sits-prod-swc
Target sub-resource	: sites
Connection status	: Approved
Request/Response	:

[JSON View](#)

The production App Service private endpoint `pe-app-sits-prod-swc` has provisioning state `Succeeded` and connection status `Approved`. It connects to the `sites` subresource of `app-sits-prod-swc` through `nic-pe-app-sits-prod-swc` in `vnet-sits-prod-swc/snet-pe`. This confirms an approved Private Link association; DNS resolution, application reachability and public access settings are verified separately.

Prod app service networking

Production networking and operations

Home > app-sits-prod-swc

app-sits-prod-swc | Networking ☆ ...

Web App

Search

Refresh Troubleshoot Send us your feedback

Check your network configuration. Select any of the features listed below to change your network setup. [Learn more](#)

Inbound traffic configuration

Public network access	Disabled
App assigned address	Not supported
Private endpoints	1 private endpoint
Inbound IPv4 addresses	10.30.5.7
Inbound IPv6 addresses	2603:1020:1004:2::507

Optional inbound services

Azure Front Door	View details
------------------	------------------------------

Outbound traffic configuration

Virtual network integration	vnet-sits-prod-swc/snet-app
Hybrid connections	Not configured
Outbound DNS	Inherited (from virtual network)
Outbound IPv4 addresses	172.160.250.161, 4.165.42.206, 135.22... Show More
Outbound IPv6 addresses	2603:1020:1001:12::53c, 2603:1020:10... Show More

Integration subnet configuration

NAT gateway	ng-sits-prod-swc
Network security group	nsg-sits-prod-app-swc
User defined route	Not configured

Production App Service public network access is Disabled, with one private endpoint and inbound private IPv4 address 10.30.5.7. Outbound VNet integration uses vnet-sits-prod-swc/snet-app and inherits DNS from the virtual network. The integration subnet has NAT gateway ng-sits-prod-swc and network security group nsg-sits-prod-app-swc; no user-defined route or hybrid connection is configured. Private endpoints provide inbound access while VNet integration provides outbound network connectivity. This overview does not establish routing of every outbound traffic category.

Prod app service overview

Production networking and operations

Home

app-sits-prod-swc Web App

Search

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Microsoft Defender for Cloud

Events (preview)

AI (preview)

Resource visualizer

Deployment

Settings

Performance

App Service plan

Development Tools

API

Monitoring

Automation

Support + troubleshooting

Essentials

Resource group (move) : rg-sits-prod-app-swc

Status : Running

Location (move) : Sweden Central

Subscription (move) : sub-app-prod

Subscription ID : 61845030-2daa-4797-a97a-59a7fd8d478f

Tags (edit) : costCenter : sits-lab environment : prod Show more (1)

Default domain : app-sits-prod-swc.azurewebsites.net

App Service Plan : asp-sits-prod-swc (P0v3: 1)

Operating System : Linux

Health Check : 100.00% (Healthy 1 / Degraded 0)

Properties Monitoring Logs Capabilities Notifications (0) Recommendations

Web app

Name : app-sits-prod-swc

Publishing model : Code

Runtime Stack : Python - 3.12

Runtime status : Healthy

Domains

Default domain : app-sits-prod-swc.azurewebsites.net

Custom domain : Add custom domain

Hosting

Plan Type : App Service plan

Name : asp-sits-prod-swc

Operating System : Linux

Instance Count : 1

SKU and size : PremiumV3 (P0v3) Scale up

Deployment Center

Deployment logs : View logs

Last deployment : Loading deployments...

Deployment provider : None

Application Insights

Name : appi-sits-prod-swc

Region : Sweden Central

Networking

Inbound IP addresses : 51.12.74.1, 2603:1020:1004:2::507

Private endpoint connections : 1 private endpoint

Virtual network integration : vnet-sits-prod-swc/snet-app

The production App Service is Running on Linux with Python 3.12 and a single PremiumV3 P0v3 instance. The overview reports a healthy runtime and a 100% health check result with one healthy instance. It lists production Application Insights, one private endpoint connection and outbound VNet integration with vnet-sits-prod-swc/snet-app. The displayed inbound IP addresses do not establish whether public network access is enabled; that setting is documented separately.

Prod application gateway backend health

Production networking and operations

The screenshot shows the 'Backend health' page in the Azure portal for the application gateway 'agw-sits-prod-swc'. The left sidebar contains navigation links: Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, Settings, Monitoring, Alerts, Metrics, Diagnostic settings, Logs, Advisor recommendations, Insights, Backend health (selected), Connection troubleshoot, Automation, and Help. The main content area has a search bar, 'Refresh' and 'Feedback' buttons, and a 'Backend health' section. This section includes a description, a note about the report's update frequency, and two summary boxes: 'All' (1 out of 1) and 'Healthy' (1 out of 1). Below these is a table with columns: Server (backend pool), Status, Port (Backend setting), Protocol, Details, and Action. The table contains one row for 'app-sits-prod-swc.azurewebsites.net (webapp)' with a 'Healthy' status, port '443 (webapp-https)', and protocol 'Https'. The details show 'Success. Received 200 status code'.

Home > agw-sits-prod-swc

agw-sits-prod-swc | Backend health ☆ ...

Application gateway

Search ◊ << Refresh Feedback

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Monitoring

Alerts

Metrics

Diagnostic settings

Logs

Advisor recommendations

Insights

Backend health

Connection troubleshoot

Automation

Help

Backend health

By default, Azure Application Gateway probes backend servers to check their health and whether they're ready to serve requests. You can also create custom [Health Probes](#) to mention a specific hostname and path to be probed or a response code to be accepted as Healthy.

The Backend health report is updated based on the respective probe's refresh interval and doesn't depend on the page refresh.

All
❤️ 1
out of 1

Healthy
✅ 1
out of 1

Search backend health

Server (backend pool)	↑↓ Status	↑↓ Port (Backend setting)	↑↓ Protocol	↑↓ Details	Action
app-sits-prod-swc.azurewebsites.net (webapp)	✅ Healthy	443 (webapp-https)	Https	Success. Received 200 status code	

Application Gateway reports its single production backend `app-sits-prod-swc.azurewebsites.net` in the webapp pool as Healthy. The webapp-https backend setting uses HTTPS on port 443, and the health probe received HTTP 200. This demonstrates successful gateway-to-backend health probing at capture time; it does not by itself verify user authentication or every application route.

Prod application gateway listeners

Production networking and operations

The screenshot displays the 'Listeners' page in the Azure portal for an Application Gateway. The left sidebar contains navigation options: Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, Settings (Configuration, Web application firewall, Backend pools, Backend settings, Frontend IP configurations, Private link, JWT validation configurations (Preview), SSL settings), **Listeners**, Rules, Rewrites, Health probes, and Properties. The main content area shows the 'Listeners' tab selected, with a search bar and a table of listeners. A single listener, 'https-prod', is listed with port 443, HTTPS protocol, Private IPv4 frontend IP, and associated rule 'app-prod'. Below the table, the 'SSL Policy' section is expanded, showing the selected policy 'AppGwSslPolicy20220101' with a minimum protocol version of 'TLSv1_2' and a list of cipher suites.

Home > agw-sits-prod-swc

agw-sits-prod-swc | Listeners ☆ ...

Search

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

- Configuration
- Web application firewall
- Backend pools
- Backend settings
- Frontend IP configurations
- Private link
- JWT validation configurations (Preview)
- SSL settings
- Listeners**
- Rules
- Rewrites
- Health probes
- Properties

Listeners Listener TLS certificates

+ Add listener Refresh Feedback Troubleshoot

Application Gateway provides native support for WebSocket across all gateway sizes. There is no additional configuration required to enable or disable WebSocket support. If a WebSocket traffic is received on the Application Gateway, it is automatically directed to the WebSocket enabled backend server using the appropriate backend pool as specified in application gateway rules. [Learn more about listeners and WebSocket support.](#)

Search listeners

Name	Port	Protocol	Frontend IP	Associated rule	Host name
https-prod	443	HTTPS	Private IPv4	app-prod	> app.prod.sits.internal

SSL Policy

The SSL policy defines the SSL protocol version and available ciphers. Choose from one of the predefined policies or create a custom security policy to match your organizational security requirements. These policies apply to all HTTPS listeners unless they are overridden by listener specific SSL Policy under SSL settings. [Learn more about SSL policy.](#)

Selected SSL Policy: Predefined (change)

Policy name
AppGwSslPolicy20220101


Min protocol version
TLSv1_2

Cipher suites
TLS_AES_256_GCM_SHA384
TLS_AES_128_GCM_SHA256
TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256
TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256
TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384
TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384

The https-prod listener accepts HTTPS on port 443 using the private IPv4 frontend and hostname app.prod.sits.internal. It is associated with routing rule app-prod. The gateway uses predefined SSL policy AppGwSslPolicy20220101 with minimum protocol version TLS 1.2. Certificate source and backend routing details are documented separately.

Prod application gateway overview

Production networking and operations

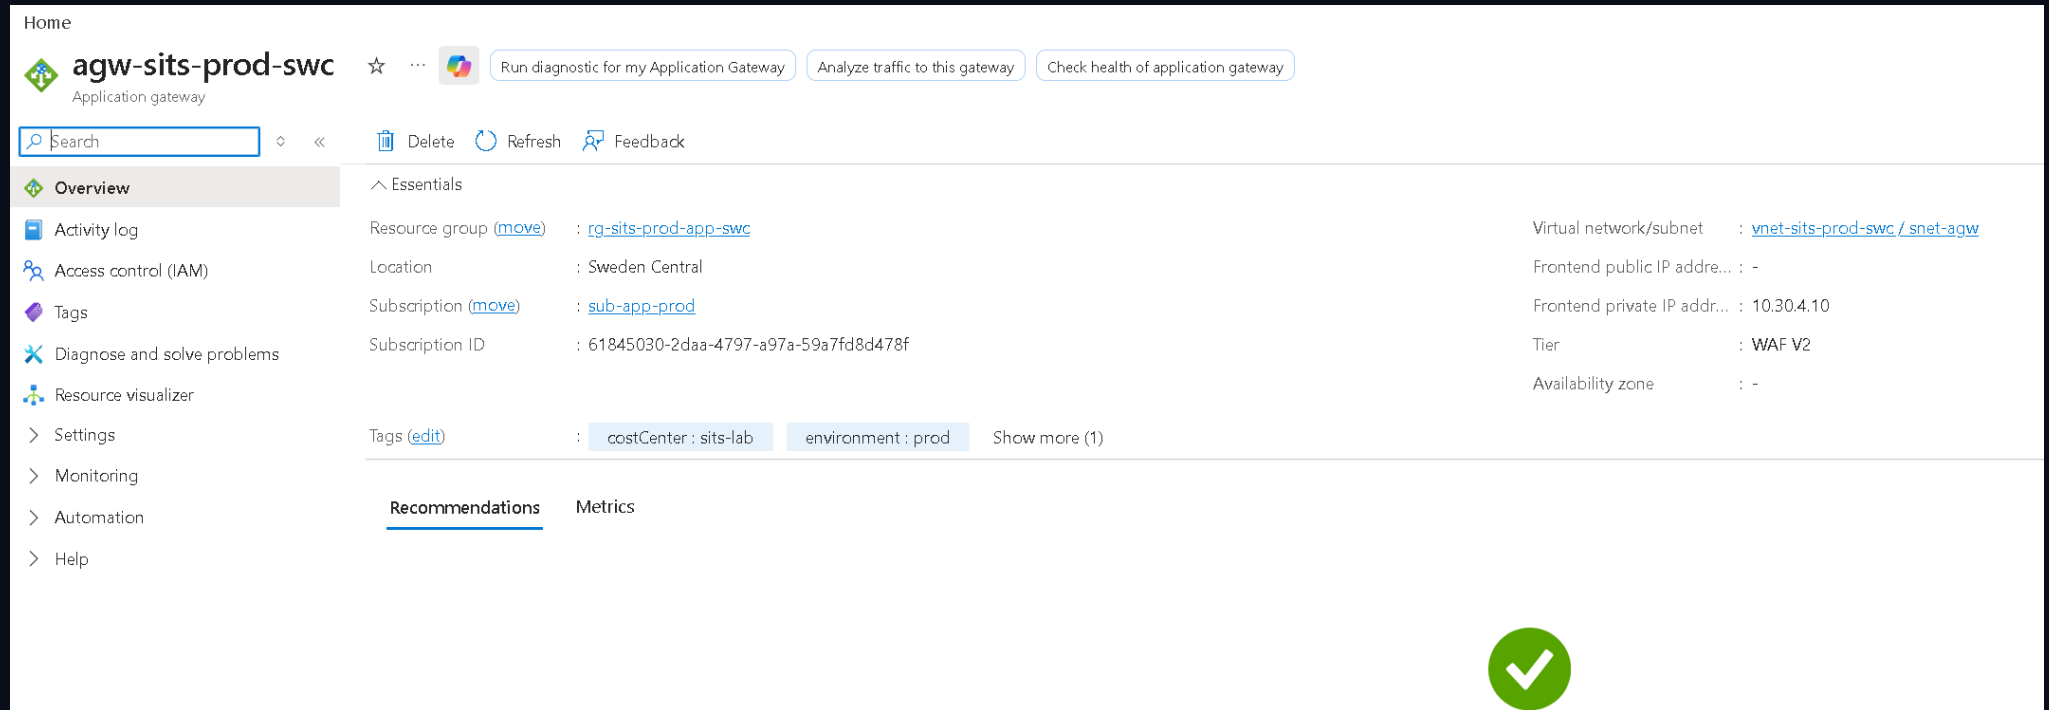

The screenshot displays the Azure portal interface for the Application Gateway resource 'agw-sits-prod-swc'. The page is titled 'Home' and includes a search bar and navigation links. The left sidebar shows the 'Overview' tab selected, with options for Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, Settings, Monitoring, Automation, and Help. The main content area shows the 'Essentials' section with details about the resource group, location, subscription, and tags. The 'Recommendations' and 'Metrics' sections are also visible. A green checkmark icon is present in the bottom right corner of the screenshot.

Home

agw-sits-prod-swc
Application gateway

Run diagnostic for my Application Gateway Analyze traffic to this gateway Check health of application gateway

Search

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Monitoring

Automation

Help

Essentials

Resource group (move) : rg-sits-prod-app-swc

Location : Sweden Central

Subscription (move) : sub-app-prod

Subscription ID : 61845030-2daa-4797-a97a-59a7fd8d478f

Tags (edit) : costCenter : sits-lab environment : prod Show more (1)

Virtual network/subnet : vnet-sits-prod-swc / snet-agw

Frontend public IP address : -

Frontend private IP address : 10.30.4.10

Tier : WAF V2

Availability zone : -

Recommendations Metrics

The production Application Gateway agw-sits-prod-swc uses the WAF V2 tier in Sweden Central and attaches to vnet-sits-prod-swc/snet-agw. Its frontend private IP address is 10.30.4.10, with no frontend public IP address listed. This documents the private frontend configuration; the WAF operating mode, listener configuration and backend health are documented separately.

Prod application gateway tls certificate details

Production networking and operations

The screenshot displays the Azure portal interface for managing application gateway TLS certificates. On the left, the 'Listeners' section is active, showing a table of 'Listener TLS certificates'. The table has columns for Certificate name, Type, Key vault ID, Status (Expiry), and Common Name. One certificate, 'cert-app-prod', is listed with a status of 'Active (Oct 5, 2027)'. On the right, a detailed view for 'cert-app-prod' is shown. It includes fields for Listener certificate name, Type (Key Vault), Key vault ID, Managed identity, Status (Active), Expiry (Oct 5, 2027), SHA-1 Thumbprint, Subject Common Name, Issuer Common Name, and Subject Alternative Name. The Associated listener is 'agw-sits-prod-swc/https-prod'.

Certificate name	Type	Key vault ID	Status (Expiry)	Common Name
cert-app-prod	Key Vault	https://kv-sits-prod-cert-swc.vault.azure.net/secrets/cert-app-prod	Active (Oct 5, 2027)	app.prod.sits.internal

agw-sits-prod-swc/cert-app-prod

agw-sits-prod-swc

Edit Delete Refresh

Certificate Information

Listener certificate name: cert-app-prod

Type: Key Vault Copy to clipboard

Key vault ID: https://kv-sits-prod-cert-swc.vault.azure.net/secrets/cert-app-prod Copy to clipboard

Managed identity: /subscriptions/61845030-2daa-4797-a97a-... Copy to clipboard

Status: Active

Expiry: Oct 5, 2027

SHA-1 Thumbprint: 0D854E3D562A5CD4B075204CCCCDA2C1... Copy to clipboard

Subject Common Name: app.prod.sits.internal Copy to clipboard

Issuer Common Name: app.prod.sits.internal Copy to clipboard

Subject Alternative Name: app.prod.sits.internal Copy to clipboard


Associated listener

agw-sits-prod-swc/https-prod

The certificate detail panel shows cert-app-prod as an Active Key Vault certificate expiring October 5, 2027, associated with listener https-prod. Subject common name, issuer common name and subject alternative name are app.prod.sits.internal. A managed identity reference and SHA-1 certificate thumbprint are displayed but truncated. The panel records certificate metadata and its listener association, without exposing secret values or private key material.

Prod application gateway tls certificate

Production networking and operations

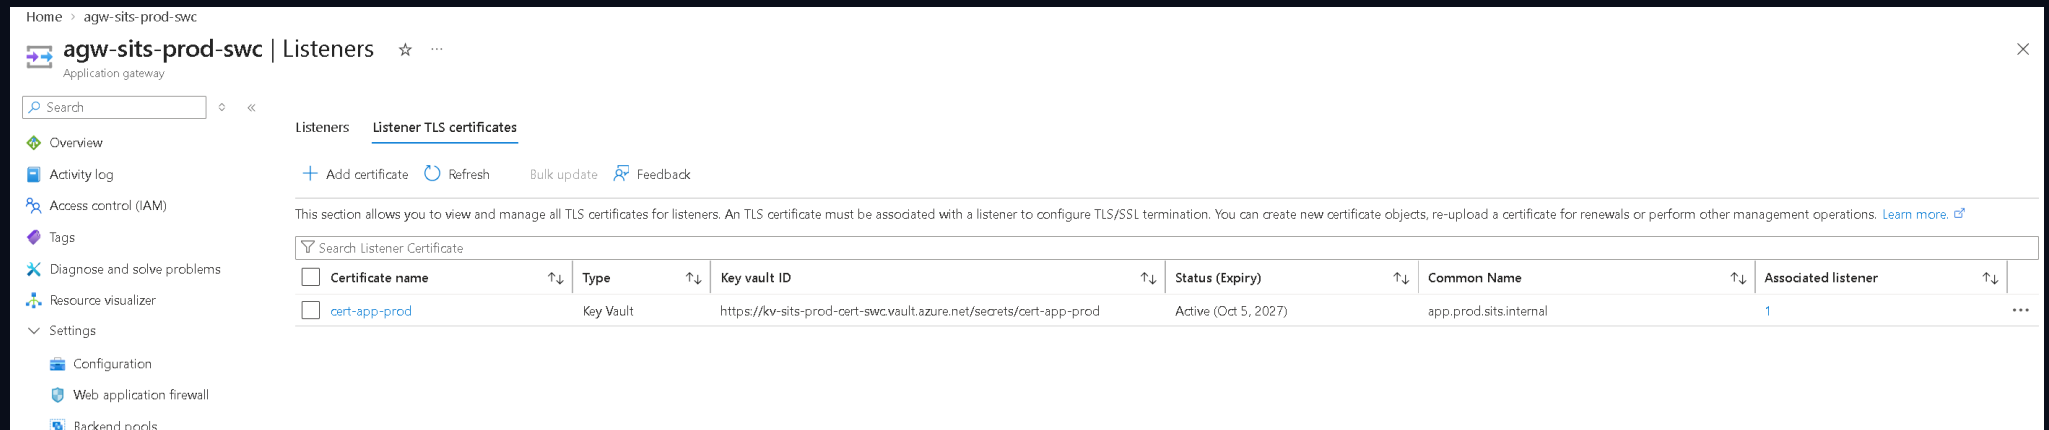

Home > agw-sits-prod-swc

agw-sits-prod-swc | Listeners ☆ ...

Application gateway

Search

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Configuration

Web application firewall

Backend pools

Listeners

Listener TLS certificates

+ Add certificate Refresh Bulk update Feedback

This section allows you to view and manage all TLS certificates for listeners. An TLS certificate must be associated with a listener to configure TLS/SSL termination. You can create new certificate objects, re-upload a certificate for renewals or perform other management operations. [Learn more.](#)

Search Listener Certificate

Certificate name	Type	Key vault ID	Status (Expiry)	Common Name	Associated listener
cert-app-prod	Key Vault	https://kv-sits-prod-cert-swc.vault.azure.net/secrets/cert-app-prod	Active (Oct 5, 2027)	app.prod.sits.internal	1

Listener certificate cert-app-prod is sourced from the versionless Key Vault secret URI `https://kv-sits-prod-cert-swc.vault.azure.net/secrets/cert-app-prod`. The portal reports it as Active, expiring October 5, 2027, with common name `app.prod.sits.internal` and one associated listener. This view documents the certificate reference and status, without exposing certificate private key material or secret values. It does not establish trust by a public certificate authority.

Prod bastion overview

Production networking and operations

The screenshot displays the Azure portal interface for the bastion resource 'bas-sits-prod-swc'. The left sidebar contains navigation links: Overview (selected), Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, Settings, Monitoring, Automation, and Help. The main content area is divided into two sections: Essentials and Tutorials.

Essentials

- Resource group (move): [rg-sits-prod-network-swc](#)
- Location: Sweden Central
- Subscription (move): [sub-app-prod](#)
- Subscription ID: 61845030-2daa-4797-a97a-59a7fd8d478f
- Virtual network/subnet: [vnet-sits-prod-swc/AzureBastionSubnet](#)
- Public DNS name: bst-c9d87a95-58c8-43b3-b934-b1aceb7e3cb8.bastion.azure.com
- Public IPv4 address: -
- Public IPv6 address: -
- Tier: Basic
- Provisioning state: Succeeded
- Availability zone: None

Tags (edit)

- costCenter : sits-lab
- environment : prod
- owner : peter

Tutorials Sessions

Free training from Microsoft

- Connect to virtual machines through the Azure portal by using Azure Bastion**
8 units • 40 min
Deploy Azure Bastion to securely connect to Azure virtual machines directly within the Azure portal.
[Start "Connect to virtual machines" training.](#)
- Configure and manage virtual networks for Azure administrators**
15 units • 13 hr 39 min
Learn how to configure and manage a range of Azure network capabilities including connectivity services and network monitoring services.
[Start "Configure and manage virtual networks" training.](#)

Production Bastion bas-sits-prod-swc uses the Basic tier in Sweden Central and attaches to vnet-sits-prod-swc/AzureBastionSubnet. Provisioning state is Succeeded and availability zone is None. A public DNS name is listed, while the public IPv4 and IPv6 fields display dashes. Those fields alone do not establish a private-only Bastion deployment. The operations NSG separately documents RDP access from the Bastion subnet.

Prod cert keyvault networking

Production networking and operations

The screenshot shows the Azure portal interface for the Key Vault resource 'kv-sits-prod-cert-swc'. The breadcrumb navigation at the top indicates 'Home > kv-sits-prod-cert-swc'. The page title is 'kv-sits-prod-cert-swc | Networking', with a star icon and a menu icon to its right. Below the title is a search bar and a left-hand navigation pane. The navigation pane includes links for Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Access policies, Resource visualizer, Events, Objects, Settings, and Access configuration. The 'Firewalls and virtual networks' tab is selected and highlighted. Under this tab, the 'Allow access from:' section shows three radio button options: 'Allow public access from all networks' (which is selected), 'Allow public access from specific virtual networks and IP addresses', and 'Disable public access'. Below these options is an information icon with a warning message: 'Traffic from all public networks can access this resource. This is not recommended for private applications or environments.'

The production certificate vault kv-sits-prod-cert-swc allows public access from all networks. This is broader network exposure than the application vault, whose public access is disabled. Authentication and authorization remain required; a private endpoint does not disable the public endpoint. This screenshot records the current lab configuration and a network-hardening opportunity.

Prod cert keyvault private endpoint connection

Production networking and operations

Home > kv-sits-prod-cert-swc

kv-sits-prod-cert-swc | Networking ☆ ...

Key vault

Search

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Access policies

Resource visualizer

Events

Objects

Settings

Access configuration

Networking

Microsoft Defender for Cloud

Firewalls and virtual networks **Private endpoint connections**

Private endpoints allow access to this resource using a private IP address from a virtual network, effectively bringing the service into your virtual network. [Learn more about private endpoint connections](#)

+ Create Refresh | ✓ Approve ✗ Reject 🗑 Remove

⚠ Firewall settings allow access from all networks. The security provided by private endpoints will not be satisfied.

Filter by name... Connection states == All

☐ Private endpoint	Connection name	Sub-resource	Subnet	Connection state	Description
☐ pe-kv-sits-prod-cert-swc	psc-kv-sits-prod-cert-swc	vault	vnet-sits-prod-swc/snet-pe	Approved	

The certificate vault lists private endpoint pe-kv-sits-prod-cert-swc with connection psc-kv-sits-prod-cert-swc targeting the vault subresource in vnet-sits-prod-swc/snet-pe. Its connection state is Approved. The portal also warns that firewall settings allow access from all networks. The approved private connection therefore coexists with public network access; it does not establish private-only access.

Prod gateway backend https settings

Production networking and operations

The screenshot displays the Microsoft Azure portal interface. On the left, the navigation pane shows the 'Backend settings' section for the 'agw-sits-prod-swc' application gateway. The main area shows a table of backend settings with one entry: 'webapp-https' on port 443 using HTTPS protocol and disabled cookie-based affinity.

The right-hand pane shows the 'Add Backend setting' configuration form for 'webapp-https'. The settings are as follows:

- Backend settings name:** webapp-https
- Backend protocol:** ☒ HTTP ☒ HTTPS
- Backend port:** 443
- Backend HTTPS validation settings:**
 - Control the HTTPS validations for TLS connections with the backend servers.
 - Backend certificate validation type:** ☒ Complete validation ☐ Configurable
 - Backend server certificate issuer:** ☒ Public CA ☐ Private CA
 - Ensure backend server has complete certificate chain installed. [Learn more.](#)
- Additional backend settings:**
 - Cookie-based affinity:** ☐ Enable ☒ Disable
 - Connection draining:** ☐ Enable ☒ Disable
 - Dedicated backend connection:** ☐ Enable ☒ Disable
 - Request time-out (seconds):** 30
 - Override backend path:** (empty)
- Override hostname:**
 - By default, the Application Gateway sends the same HTTP host header to the backend as it receives from the client. If your backend application/service requires a specific host value, you can override it using this setting.
 - Override with new host name:** ☒ Yes ☐ No
 - Host name override:** ☐ Pick host name from backend target ☒ Override with specific domain name
 - Host name:** app-sits-prod-swc.azurewebsites.net

At the bottom of the form are 'Save' and 'Cancel' buttons.

The webapp-https backend setting shows HTTPS on port 443 with Complete validation and Public CA selected for backend server certificate validation. The request timeout is 30 seconds. Cookie-based affinity, connection draining and dedicated backend connection are disabled. Hostname override is enabled with the specific domain app-sits-prod-swc.azurewebsites.net. These are backend TLS settings, separate from the frontend listener certificate. The lower custom probe configuration is outside the visible panel area.

Prod gateway health probe

Production networking and operations

The screenshot displays the Azure portal interface for configuring a health probe. The left sidebar shows the navigation menu with 'Health probes' selected. The main content area is titled 'webapp-health' and shows the following configuration details:

- Name:** webapp-health
- Protocol:** ☒ HTTP ☐ HTTPS ☐ TCP ☐ TLS
- Pick host name from backend settings:** ☐ Yes ☒ No
- Host:** app-sits-prod-swc.azurewebsites.net
- Pick port from backend settings:** ☒ Yes ☐ No
- Path:** /health
- Interval (seconds):** 30
- Timeout (seconds):** 30
- Unhealthy threshold:** 3
- Use probe matching conditions:** ☒ Yes ☐ No
- HTTP response status code match:** 200-399
- HTTP response body match:** (empty)
- Backend settings:** webapp-https

Custom probe webapp-health uses HTTPS with explicit host app-sits-prod-swc.azurewebsites.net and path /health. It inherits the port from backend setting webapp-https. The interval and timeout are both 30 seconds, with an unhealthy threshold of three. Matching accepts HTTP status codes 200-399 with no response body condition. The separate backend health screenshot reports an actual HTTP 200 response at capture time.

Prod gateway routing rules

Production networking and operations

Home > agw-sits-prod-swc

agw-sits-prod-swc | Rules ☆ ...
Application gateway

Search

+ Routing rule ❤ Backend health 🗨 Feedback

Search rules

Name	↑↓	Type	↑↓	Listener	↑↓	Priority	↑↓
app-prod		Basic		https-prod		100	...

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

- Configuration
- Web application firewall
- Backend pools
- Backend settings
- Frontend IP configurations
- Private link
- JWT validation configurations (Preview)
- SSL settings
- Listeners
- Rules**

The production gateway rules overview lists one Basic routing rule, app-prod, associated with listener https-prod and priority 100. Backend routing targets are not shown in this overview.

Prod gateway rule backend routing

Production networking and operations

Home > agw-sits-prod-swc | Rules

app-prod ...

1 Listener

2 Routing

3 Review

A routing rule defines how requests are matched, routed, and load-balanced across backend resources. [Learn more](#)

Rule type *

☒ Basic

Routes traffic without evaluating request attributes or matching conditions.

☐ Advanced (Preview)

Route traffic based on Header conditions. More condition types coming soon.

☐ Path-based

Route traffic based on Path conditions.

✓ Backend targets

Select the backend target that must serve the traffic.

BASIC RULE

Route traffic to **backend pool**

Target	Backend setting
webapp	webapp-https ...

The Routing panel for the existing app-prod rule shows Basic routing to backend pool webapp using backend setting webapp-https. Together with the listener detail and backend health evidence, this documents the configured route from https-prod to the production application backend. No path-based or advanced rule type is selected.

Prod gateway rule listener

Production networking and operations

[Home](#) > [agw-sits-prod-swc](#) | Rules

app-prod

 ...

1 Listener

2 Routing

3 Review

Configure a routing rule to send traffic from a listener to one or more backend targets.

Rule name *

app-prod

Rule Priority * ⓘ

100

Listener

A listener accepts traffic on a specified IP address, port, and protocol. Matching requests are routed according to the associated rule.

Listener *

https-prod

▼

[Create new](#)

The app-prod routing rule has priority 100 and uses listener https-prod. This panel documents the listener side of the rule; the backend target and backend settings are shown separately in the Routing step.

Prod infra layer1 role assignments

Production networking and operations

The screenshot displays the 'Azure role assignments' page for the Managed Identity 'id-sits-prod-infra-l1-swc'. The left sidebar shows the navigation menu with 'Azure role assignments' selected. The main content area shows a table of role assignments for the subscription 'sub-app-prod'.

Role	Resource Name	Resource Type	Assigned To	Condition
Contributor	rg-sits-prod-network-swc	Resource Group	id-sits-prod-infra-l1-swc	None
Storage Blob Data Contributor	stststfprodswc/default/tfstate-lay...	Microsoft.Storage/storageAccounts/bl...	id-sits-prod-infra-l1-swc	None
Key Vault Contributor	kv-sits-prod-cert-swc	Key vault	id-sits-prod-infra-l1-swc	None
Reader	rg-sits-prod-foundation-swc	Resource Group	id-sits-prod-infra-l1-swc	None
Storage Account Contributor	stststflowprodswc	Storage account	id-sits-prod-infra-l1-swc	None
Log Analytics Contributor	log-sits-prod-swc	Log Analytics workspace	id-sits-prod-infra-l1-swc	None
Network Contributor	NetworkWatcherRG	Resource Group	id-sits-prod-infra-l1-swc	None
Key Vault Contributor	kv-sits-prod-adm-swc	Key vault	id-sits-prod-infra-l1-swc	None

The production Layer 1 infrastructure identity has Contributor on the network resource group and Storage Blob Data Contributor on a Terraform state container. Additional scoped assignments provide foundation resource visibility and management of the certificate and admin vaults, flow-log storage, Log Analytics workspace and NetworkWatcherRG. These permissions support network provisioning and its cross-layer dependencies. Key Vault Contributor is a management-plane role, not secret-value read access; the state container name is truncated in this screenshot.

Prod infra layer2 role assignments

Production networking and operations

The screenshot displays the 'Azure role assignments' page for the Managed Identity 'id-sits-prod-infra-l2-swc'. The left sidebar shows the navigation menu with 'Azure role assignments' selected. The main content area shows a table of role assignments. The table has five columns: Role, Resource Name, Resource Type, Assigned To, and Condition. The table lists ten assignments, including SITS Lock Creator, Contributor, Storage Blob Data Contributor, Reader, Network Contributor, Log Analytics Contributor, and Managed Identity Operator. The 'Assigned To' column shows that all roles are assigned to the 'id-sits-prod-infra-l2-swc' Managed Identity. The 'Condition' column shows 'None' for all assignments.

Role	Resource Name	Resource Type	Assigned To	Condition
SITS Lock Creator	rg-sits-prod-app-swc	Resource Group	id-sits-prod-infra-l2-swc	None
Contributor	rg-sits-prod-kv-swc	Resource Group	id-sits-prod-infra-l2-swc	None
Contributor	rg-sits-prod-app-swc	Resource Group	id-sits-prod-infra-l2-swc	None
SITS Lock Creator	rg-sits-prod-kv-swc	Resource Group	id-sits-prod-infra-l2-swc	None
Storage Blob Data Contributor	stsitsprodswg/default/tfstate-lay...	Microsoft.Storage/storageAccounts/bl...	id-sits-prod-infra-l2-swc	None
Reader	rg-sits-prod-foundation-swc	Resource Group	id-sits-prod-infra-l2-swc	None
Network Contributor	rg-sits-prod-network-swc	Resource Group	id-sits-prod-infra-l2-swc	None
Log Analytics Contributor	log-sits-prod-swc	Log Analytics workspace	id-sits-prod-infra-l2-swc	None
Managed Identity Operator	id-sits-prod-agw-swc	Managed Identity	id-sits-prod-infra-l2-swc	None
Managed Identity Operator	id-sits-prod-app-swc	Managed Identity	id-sits-prod-infra-l2-swc	None

The production Layer 2 identity has Contributor and SITS Lock Creator on the application and application-vault resource groups, plus blob data access to a Terraform state container. Scoped foundation Reader, Network Contributor, Log Analytics Contributor and Managed Identity Operator assignments support application provisioning and its network, monitoring and identity dependencies. Managed Identity Operator permits assigning the specified runtime identities to resources. The state container name is truncated in this view.

Prod internal dns app record

Production networking and operations

Home > prod.sits.internal

prod.sits.internal | Recordsets ☆ ...
Private DNS zone

Search

+ Add Refresh Delete Give feedback

A record set is a collection of records in a zone that have the same name and are the same type. Record Sets will be automatically fetched in batches of 100 as you scroll through the existing record sets. [Learn more](#)

Search

Fetched 2 record set(s).
0 record sets selected

Name	Type	TTL	Value	Auto registered
@	SOA	3600	Email: azureprivatedns-host.microsoft.com Host: azureprivatedns.net Refresh: 3600 Retry: 300 Expire: 2419200 Minimum TTL: 10 Serial number: 1	False
app	A	300	10.30.4.10	False

The prod.sits.internal private DNS zone contains an app A record pointing to 10.30.4.10, the production Application Gateway private frontend address. The record has a TTL of 300 seconds and Auto registered is False. This documents the configured mapping for app.prod.sits.internal; runtime DNS resolution is separate evidence.

Prod keyvault private dns vnet link

Production networking and operations

Home > pe-kv-sits-prod-app-swc | DNS configuration > privatelink.vaultcore.azure.net

privatelink.vaultcore.azure.net | Virtual Network Links ☆ ...

Private DNS zone

Search

+ Add Refresh Delete Give feedback

Search virtual network links

Fetched 1 virtual Network link(s).
0 Virtual Network links selected

Link Name	Link Status	Virtual Network	Auto-Registration	Fallback to Internet
link-keyvault-vnet-sits-prod-swc	Completed	vnet-sits-prod-swc	Disabled	Disabled

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Resource visualizer
Settings
DNS Management
Recordsets
Virtual Network Links
Monitoring
Automation
Help

The `privatelink.vaultcore.azure.net` private DNS zone lists one virtual network link, `link-keyvault-vnet-sits-prod-swc`, to `vnet-sits-prod-swc`. Link status is `Completed`, with `Auto-registration` and `Fallback to Internet` Disabled. This documents the production zone-to-VNet association; runtime DNS resolution is separate evidence.

Prod nat gateway outbound ip

Production networking and operations

Home > ng-sits-prod-swc

ng-sits-prod-swc | Outbound IP ☆ ...

NAT gateway

Search ⌵ ⏪ ✎ Edit 🔄 Refresh

- Overview
- Activity log
- Access control (IAM)
- Tags
- Diagnose and solve problems
- Resource visualizer
- Settings
- Outbound IP**
- Networking
- Configuration
- Properties
- Locks
- > Monitoring
- > Automation
- > Help

View and configure which public IP addresses and public IP prefixes will be used for outbound connectivity. At least one is required for outbound connectivity.

Public IP addresses

Name ↑↓	IP address ↑↓	IP version ↑↓	Remove
pip-sits-prod-nat-swc	172.160.250.161	IPv4	✕

Public IP prefixes

Name ↑↓	IP prefix ↑↓	IP version ↑↓	Remove
No items found			

Production NAT gateway ng-sits-prod-swc is associated with public IPv4 resource pip-sits-prod-nat-swc at 172.160.250.161. No public IP prefixes are configured. This documents the configured outbound address; subnet associations and runtime egress behavior are separate evidence.

Prod nat gateway overview

Production networking and operations

The screenshot displays the Azure portal interface for the NAT gateway resource 'ng-sits-prod-swc'. The left-hand navigation pane includes links to Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, and Settings. The main content area is divided into two sections: 'Essentials' and a configuration section. The 'Essentials' section provides key details about the gateway, including its resource group, location, subscription, and associated virtual network and subnets. The configuration section offers quick links to 'Configure outbound IP addresses' and 'Configure networking'.

Home

ng-sits-prod-swc
NAT gateway

Run health check for my NAT Gateway How to improve resiliency of my nat gateway Inspect connectivity for my NAT Gateway

Search Delete Refresh

Overview

- Activity log
- Access control (IAM)
- Tags
- Diagnose and solve problems
- Resource visualizer
- Settings
 - Outbound IP
 - Networking
 - Configuration
 - Properties
 - Locks
- Monitoring
- Automation
- Help

Essentials

Resource group ([move](#)) : [rg-sits-prod-network-swc](#) Virtual network : [vnet-sits-prod-swc](#)

Location : Sweden Central (Zone 1) Subnets : [4](#)

Subscription ([move](#)) : [sub-app-prod](#) SKU : Standard

Subscription ID : 61845030-2daa-4797-a97a-59a7fd8d478f Public IP addresses : [1](#)

Tags ([edit](#)) : costCenter : sits-lab environment : prod owner : peter Public IP prefixes : 0


Configure outbound IP addresses
Configure which public IP addresses and public IP prefixes to use for outbound connectivity.

Configure networking
Configure which subnets of a virtual network should use this NAT gateway.

Production NAT gateway ng-sits-prod-swc uses the Standard SKU in Sweden Central, Zone 1. The overview lists vnet-sits-prod-swc, four associated subnets, one public IP address and no public IP prefixes. Subnet names and the outbound address are documented separately. This records the NAT gateway configuration, not a runtime test of outbound traffic.

Prod nat gateway subnet associations

Production networking and operations

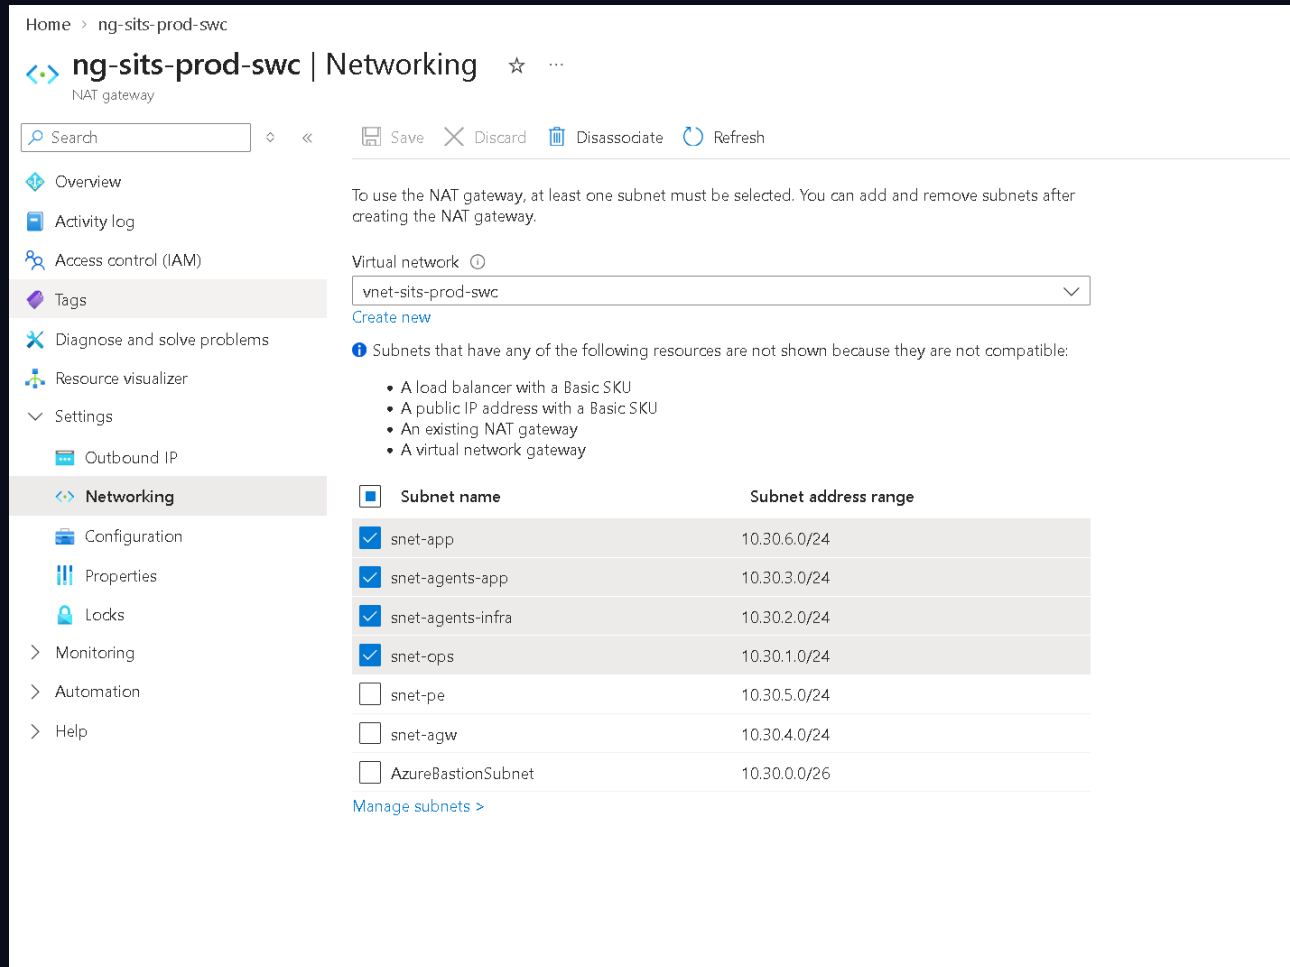

Home > ng-sits-prod-swc

ng-sits-prod-swc | Networking ☆ ...

NAT gateway

Search Save Discard Disassociate Refresh

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Resource visualizer
Settings
Outbound IP
Networking
Configuration
Properties
Locks
Monitoring
Automation
Help

To use the NAT gateway, at least one subnet must be selected. You can add and remove subnets after creating the NAT gateway.

Virtual network ⓘ
vnet-sits-prod-swc
[Create new](#)

Subnets that have any of the following resources are not shown because they are not compatible:

- A load balancer with a Basic SKU
- A public IP address with a Basic SKU
- An existing NAT gateway
- A virtual network gateway

☒ Subnet name	Subnet address range
☒ snet-app	10.30.6.0/24
☒ snet-agents-app	10.30.3.0/24
☒ snet-agents-infra	10.30.2.0/24
☒ snet-ops	10.30.1.0/24
☐ snet-pe	10.30.5.0/24
☐ snet-agw	10.30.4.0/24
☐ AzureBastionSubnet	10.30.0.0/26

[Manage subnets >](#)

Production NAT gateway ng-sits-prod-swc is associated with snet-app (10.30.6.0/24), snet-agents-app (10.30.3.0/24), snet-agents-infra (10.30.2.0/24) and snet-ops (10.30.1.0/24) in vnet-sits-prod-swc. The private endpoint, Application Gateway and Bastion subnets are not selected. Together with the outbound IP evidence, this documents the configured NAT associations; it does not prove that every application traffic category routes through the integration subnet.

Prod nat public ip overview

Production networking and operations

The screenshot displays the Azure portal interface for the Public IP resource 'pip-sits-prod-nat-swc'. The breadcrumb navigation shows 'Home > ng-sits-prod-swc | Outbound IP'. The resource name is 'pip-sits-prod-nat-swc' with the subtitle 'Public IP address'. There are two helpful links: 'Can you check if my public Ip is highly available' and 'How to ensure public Ip fault tolerance'. Below the navigation bar, there is a search bar and a set of action buttons: Associate, Dissociate, Delete, Move, Refresh, Open in mobile, and Give feedback. The left sidebar contains a menu with 'Overview' selected, and other options like Activity log, Access control (IAM), Tags, Resource visualizer, Settings, Monitoring, Automation, and Help. The main content area is divided into two sections. The 'Essentials' section lists key properties: Resource group (rg-sits-prod-network-swc), Location (Sweden Central (Zone 1)), Subscription (sub-app-prod), and Subscription ID (61845030-2daa-4797-a97a-59a7fd8d478f). The 'Tags' section shows three tags: costCenter : sits-lab, environment : prod, and owner : peter. The second section lists additional properties: SKU (Standard), Tier (Regional), IP address (172.160.250.161), DNS name (-), Associated to (ng-sits-prod-swc), and Virtual machine (-). At the bottom, there are tabs for 'Get Started', 'Properties', and 'Tutorials', with 'Get Started' being the active tab.

Home > ng-sits-prod-swc | Outbound IP

pip-sits-prod-nat-swc Public IP address

Can you check if my public Ip is highly available How to ensure public Ip fault tolerance

Search

Associate Dissociate Delete Move Refresh Open in mobile Give feedback

Overview

- Activity log
- Access control (IAM)
- Tags
- Resource visualizer
- Settings
- Monitoring
- Automation
- Help

Essentials

Resource group (move)	: rg-sits-prod-network-swc	SKU	: Standard
Location (move)	: Sweden Central (Zone 1)	Tier	: Regional
Subscription (move)	: sub-app-prod	IP address	: 172.160.250.161
Subscription ID	: 61845030-2daa-4797-a97a-59a7fd8d478f	DNS name	: -
		Associated to	: ng-sits-prod-swc
		Virtual machine	: -

Tags (edit) : costCenter : sits-lab environment : prod owner : peter

See more

Get Started Properties Tutorials

Public IP resource pip-sits-prod-nat-swc has address 172.160.250.161, Standard SKU and Regional tier in Sweden Central, Zone 1. It is associated with NAT gateway ng-sits-prod-swc. No DNS name or virtual machine association is listed. This documents the public IP resource used by the NAT gateway.

Prod network resource group filtered overview

Production networking and operations

The screenshot displays the Azure Resource Manager interface for the resource group **rg-sits-prod-network-swc**. The left-hand navigation pane shows the 'Resource groups' section, with the selected resource group highlighted. The main content area shows the 'Overview' tab, which includes essential information about the resource group, such as its subscription (sub-app-prod), subscription ID (61845030-2daa-4797-a97a-59a7fd8d478f), and location (Sweden Central). Below this, the 'Resources' section displays a filtered list of resources. The search filter 'prod admin' is applied, resulting in one resource: 'asg-sits-prod-pe-kv-admin-swc' (Application security group) located in Sweden Central.

Name	Type	Location
asg-sits-prod-pe-kv-admin-swc	Application security group	Sweden Central

The production network resource group is hosted in the separate production subscription in Sweden Central. This filtered resource view shows the application security group for the admin Key Vault private endpoint, used to identify that endpoint in network security rules. The resource search is filtered by 'prod admin', so this screenshot does not show the full network inventory or user role assignments.

Prod operations nsg rules

Production networking and operations

Home

nsg-sits-prod-ops-swc
Network security group

Search

Move Delete Refresh Give feedback

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Monitoring

Automation

Help

Essentials

Resource group (move): rg-sits-prod-network-swc

Location: Sweden Central

Subscription (move): sub-app-prod

Subscription ID: 61845030-2daa-4797-a97a-59a7fd8d478f

Tags (edit): costCenter: sits-lab, environment: prod, owner: peter

Custom security rules: 2 inbound, 1 outbound

Associated with: 1 subnets, 0 network interfaces

JSON View

Filter by name


Port == all Protocol == all Source == all Destination == all Action == all

Priority	Name	Port	Protocol	Source	Destination	Action
Inbound Security Rules						
100	allow-rdp-from-bastion	3389	Tcp	10.30.0.0/26	asg-sits-prod-ops-vm-s...	Allow
4000	deny-all-inbound	Any	Any	Any	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBo...	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny
Outbound Security Rules						
100	deny-ops-vm-to-azure-r...	Any	Any	asg-sits-prod-ops-vm-s...	AzureResourceManager	Deny
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

The operations NSG allows inbound TCP 3389 from the Bastion subnet 10.30.0.0/26 to the operations VM application security group at priority 100. A custom deny-all inbound rule at priority 4000 precedes default inbound rules. A custom outbound rule at priority 100 denies traffic from the operations VM ASG to the AzureResourceManager service tag. Default VNet and Internet outbound allow rules remain; this is not a blanket outbound deny. Some rule and ASG names are truncated. The screenshot documents configured rules rather than a runtime connectivity test.

Prod operations vm bastion authentication options


Production networking and operations

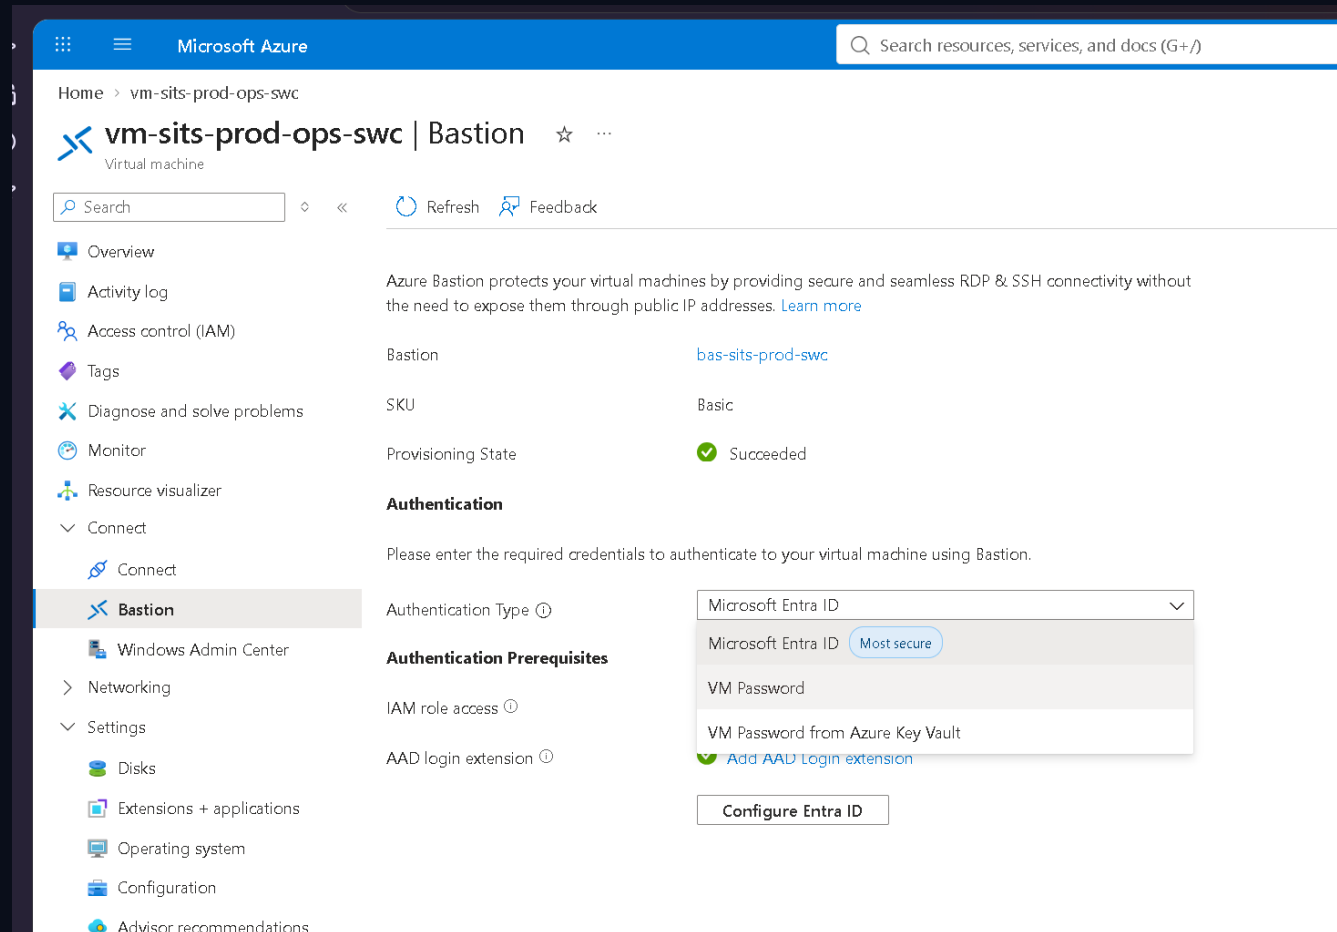

The Bastion connection page for vm-sits-prod-ops-swc identifies bas-sits-prod-swc with Basic SKU and provisioning state Succeeded. The Authentication Type menu shows Microsoft Entra ID, VM Password, and VM Password from Azure Key Vault, with Microsoft Entra ID selected. The page requires authentication for the VM connection and lists IAM role access and the AAD login extension as prerequisites. This documents the connection workflow and available authentication choices, rather than a completed login.

Prod operations vm bastion connect

Production networking and operations

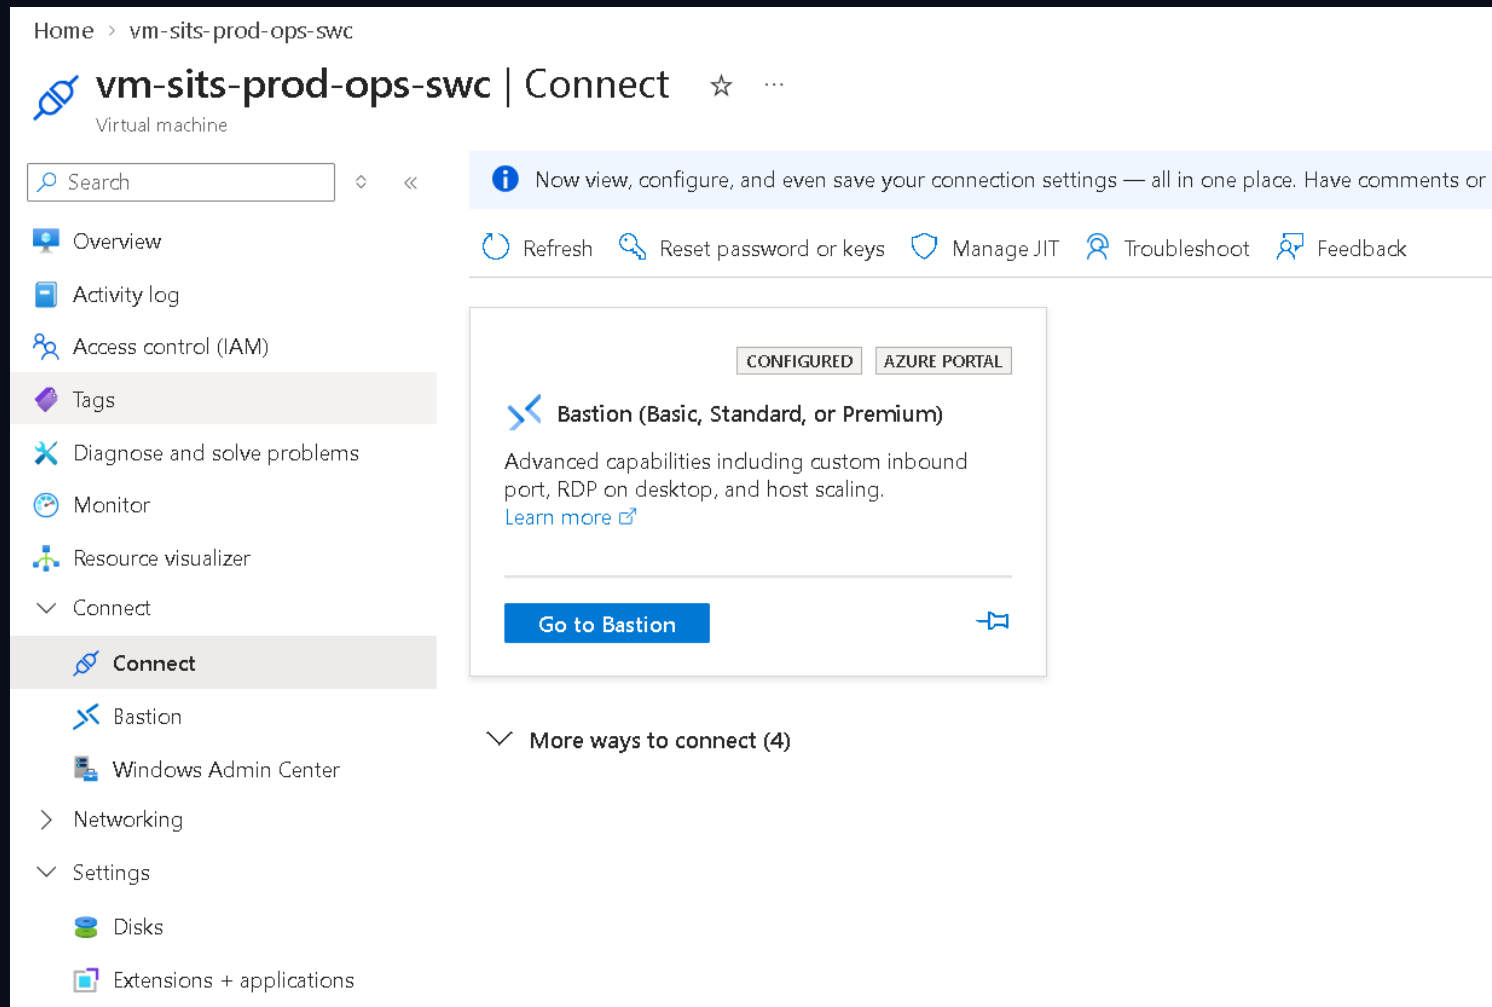

The Connect page for vm-sits-prod-ops-swc shows Bastion as Configured and offers the Go to Bastion entry point for an Azure portal connection. This documents the available connection method; a successful session is separate evidence.

Prod operations vm bastion password login

Production networking and operations

Home > vm-sits-prod-ops-swc

vm-sits-prod-ops-swc | Bastion ☆ ...
Virtual machine

Search ◇ << Refresh Feedback

- Overview
- Activity log
- Access control (IAM)
- Tags
- Diagnose and solve problems
- Monitor
- Resource visualizer
- Connect
 - Connect
 - Bastion**
 - Windows Admin Center
- Networking
- Settings
 - Disks
 - Extensions + applications

Azure Bastion protects your virtual machines by providing secure and seamless RDP & SSH connectivity without the need to expose them through public IP addresses. [Learn more](#)

Bastion [bas-sits-prod-swc](#)

SKU Basic

Provisioning State ✓ Succeeded

Authentication

Please enter the required credentials to authenticate to your virtual machine using Bastion.

Authentication Type ⓘ VM Password ▼

Username * ⓘ opsadmin

VM Password * ⓘ ●●●●●●●●●●●●●●●●●●●● ⓘ

> **Connection Settings**

The Bastion page for vm-sits-prod-ops-swc shows VM Password authentication selected, username opsadmin, and a masked password field. The associated Bastion is bas-sits-prod-swc, Basic SKU, with provisioning state Succeeded. This captures the local VM credential authentication workflow; it does not demonstrate Microsoft Entra ID login or a successful connection.

Prod operations vm entra login extension

Production networking and operations

Home > vm-sits-prod-ops-swc

vm-sits-prod-ops-swc | Extensions + applications

Virtual machine

Search

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Monitor
Resource visualizer
Connect
Connect
Bastion
Windows Admin Center
Networking
Settings
Disks
Extensions + applications

Extensions VM Applications

+ Add Refresh Update Enable automatic upgrade Disable automatic upgrade Feedback

Search to filter items...


Showing all 1 items

Name	Type	Version	Latest Version	Status	Automatic upgrade status
AADLoginForWindows	Microsoft.Azure.ActiveDirectory.AADLoginForWindows	2.2.0.0	2.2.0.0	Provisioning succeeded	Disabled

The production operations VM lists AADLoginForWindows, type Microsoft.Azure.ActiveDirectory.AADLoginForWindows, version 2.2.0.0, with status Provisioning succeeded. The portal lists the same version as Latest Version and automatic upgrade status Disabled. This documents installation of the Entra login extension; a successful user sign-in is separate evidence.

Prod operations vm entra login whoami

Production networking and operations

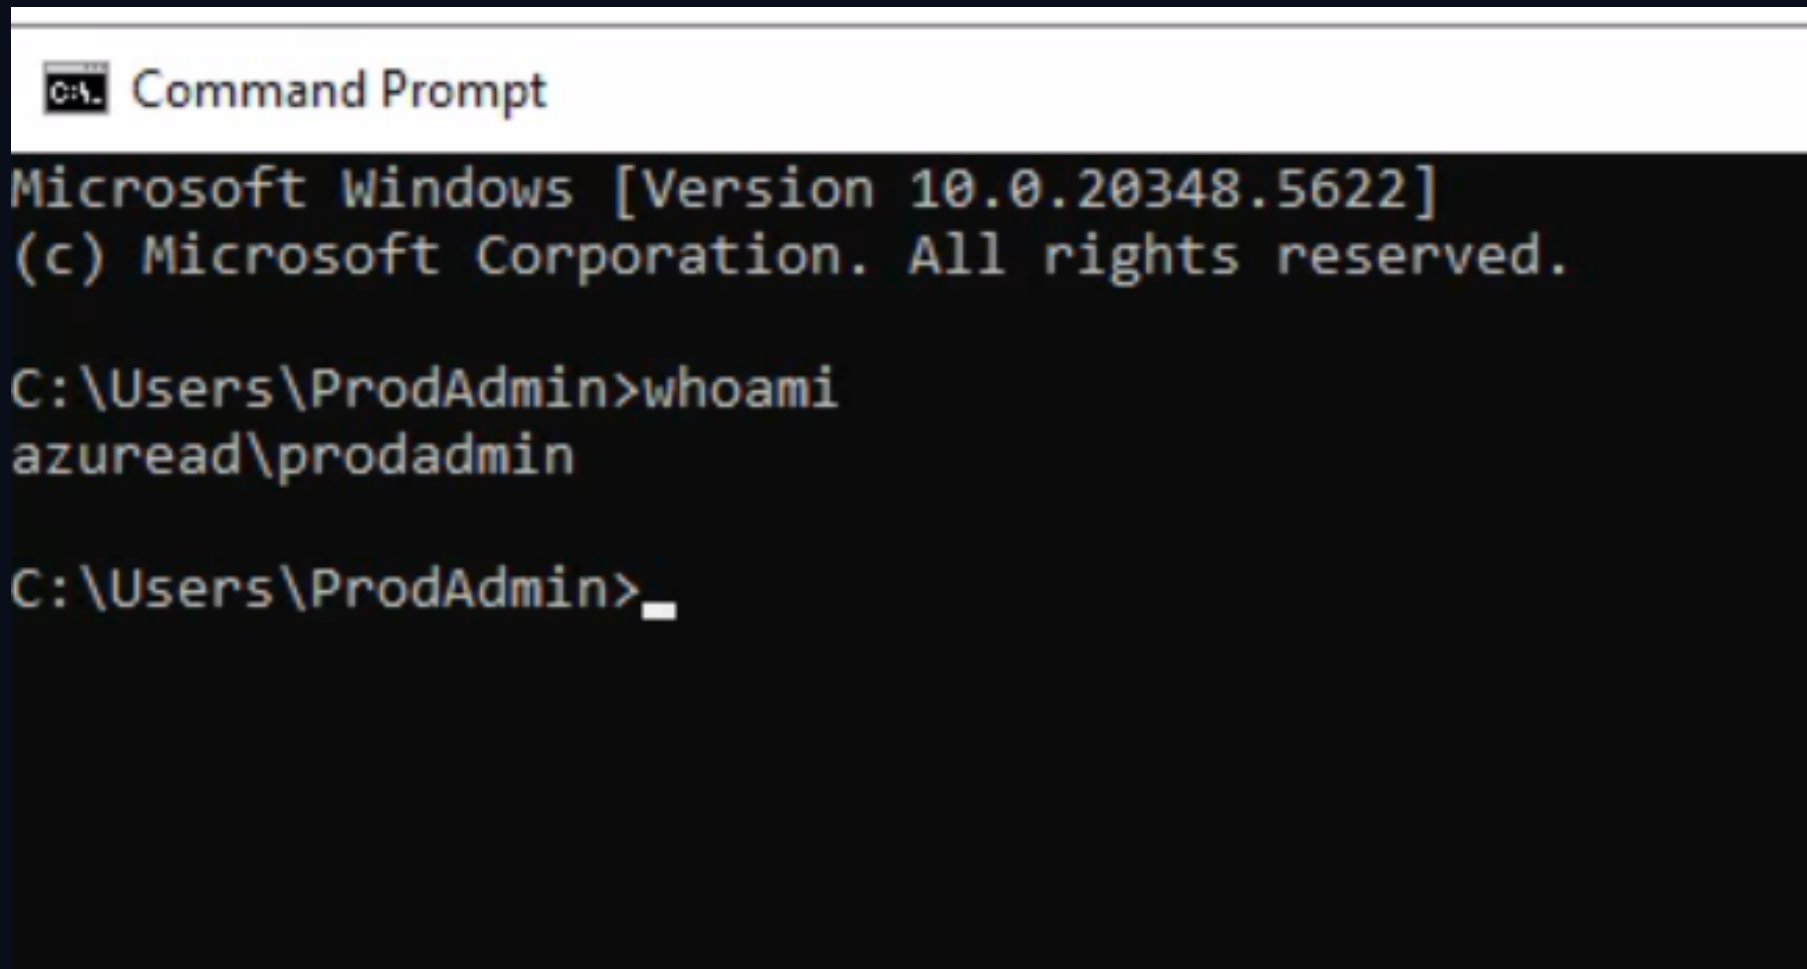

```
C:\> Command Prompt

Microsoft Windows [Version 10.0.20348.5622]
(c) Microsoft Corporation. All rights reserved.

C:\Users\ProdAdmin>whoami
azuread\prodadmin

C:\Users\ProdAdmin>
```

Inside the Windows VM session, `whoami` returns `azuread\prodadmin`. Together with the user-reported Bastion connection using Microsoft Entra ID, this documents a session under the Prod Admin Entra account without entering the local VM account password. The screenshot identifies the session account; it does not establish the specific Entra authentication factors or MFA enforcement.

Prod operations vm overview

Production networking and operations

The screenshot displays the Azure portal interface for a virtual machine named 'vm-sits-prod-ops-swc'. The left sidebar shows the navigation menu with 'Overview' selected. The main content area is divided into several sections:

- Essentials:** Shows the resource group 'rg-sits-prod-network-swc', status 'Running', location 'Sweden Central (Zone 1)', subscription 'sub-ops-prod', and availability zone '1'.
- Properties:** A table listing various VM properties such as computer name, operating system, VM generation, architecture, agent status, version, hibernation, host group, host, proximity placement group, colocation status, capacity reservation group, disk controller type, Azure Spot, availability zone, extended zone, availability set, scale set, security type, and various security features like secure boot, vTPM, integrity monitoring, metadata security protocol, and WinServer.
- Networking:** Displays the public IP address '172.160.250.161' (NAT gateway ng-sits-prod-swc), private IP address '10.30.1.4', and the virtual network/subnet 'vnet-sits-prod-swc/snet-ops'.
- Size:** Shows the VM size 'Standard D2s v6' with 2 vCPUs and 8 GiB RAM.
- Source image details:** Lists the source image publisher 'MicrosoftWindowsServer', offer 'WindowsServer', and plan '2022-datacenter-azure-edition'.
- Disk:** Shows the OS disk 'osdisk-vm-sits-prod-ops-swc' with encryption at host disabled and Azure disk encryption not enabled.
- Auto-shutdown:** Shows the auto-shutdown feature is not enabled.

The production operations VM `vm-sits-prod-ops-swc` is Running in Sweden Central, availability zone 1, using Windows Server 2022 Datacenter Azure Edition and Standard D2s v6 with two vCPUs and 8 GiB memory. It has private IP 10.30.1.4 in `vnet-sits-prod-swc/snet-ops`. The primary NIC public IP field is empty; the listed public address 172.160.250.161 is explicitly associated with NAT gateway `ng-sits-prod-swc`. Trusted launch, Secure Boot and vTPM are enabled, and the VM agent is Ready. This captures configuration and status at the time of the screenshot.

Prod operations vm runtime dns and gateway connectivity

Production networking and operations

```
PS C:\Users\opsadmin> Resolve-DnsName app.prod.sits.internal -Type A

Name
----
app.prod.sits.internal
Type      TTL  Section  IPAddress
-----
A         300  Answer   10.30.4.10

PS C:\Users\opsadmin> Test-NetConnection app.prod.sits.internal -Port 443

ComputerName      : app.prod.sits.internal
RemoteAddress     : 10.30.4.10
RemotePort        : 443
InterfaceAlias    : Ethernet
SourceAddress     : 10.30.1.4
TcpTestSucceeded  : True

PS C:\Users\opsadmin> Resolve-DnsName app-sits-prod-swc.azurewebsites.net -Type A

Name                                Type  TTL  Section  NameHost
----
app-sits-prod-swc.azurewebsite CNAME 60   Answer   app-sits-prod-swc.privatelink.azurewebsites.net
s.net

Name      : app-sits-prod-swc.privatelink.azurewebsites.net
QueryType : A
TTL       : 10
Section   : Answer
IP4Address : 10.30.5.7

PS C:\Users\opsadmin> Resolve-DnsName kv-sits-prod-app-swc.vault.azure.net -Type A


Name                                Type  TTL  Section  NameHost
----
kv-sits-prod-app-swc.vault.azu CNAME 60   Answer   kv-sits-prod-app-swc.privatelink.vaultcore.azure.net
re.net

Name      : kv-sits-prod-app-swc.privatelink.vaultcore.azure.net
QueryType : A
TTL       : 10
Section   : Answer
IP4Address : 10.30.5.6
```

PowerShell resolves `app.prod.sits.internal` to `10.30.4.10` with TTL 300. `Test-NetConnection` confirms TCP port 443 is reachable at that address from source `10.30.1.4`, with `TcpTestSucceeded True`. The App Service hostname resolves through `app-sits-prod-swc.privatelink.azurewebsites.net` to `10.30.5.7`, and the application Key Vault hostname resolves through `kv-sits-prod-app-swc.privatelink.vaultcore.azure.net` to `10.30.5.6`. These outputs demonstrate runtime private DNS resolution from the operations VM and TCP connectivity to the gateway; they do not verify TLS certificate trust, HTTP responses, or authorization to App Service or Key Vault.

Prod private endpoint nsg rules

Production networking and operations

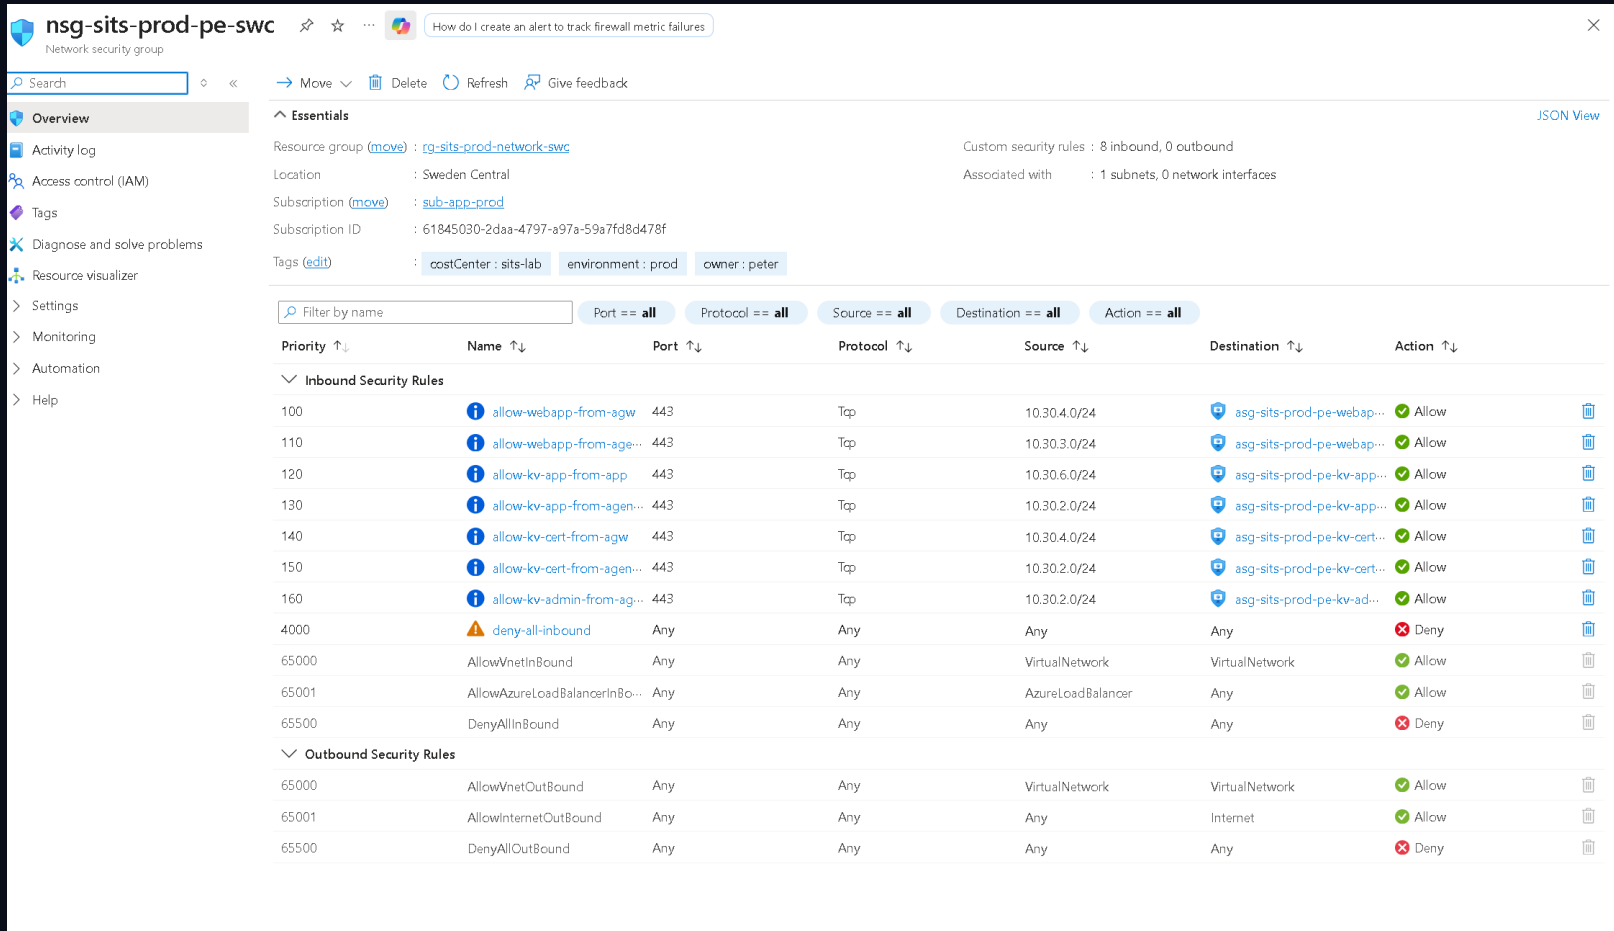

nsg-sits-prod-pe-sw
Network security group

Search Move Delete Refresh Give feedback

Overview

- Activity log
- Access control (IAM)
- Tags
- Diagnose and solve problems
- Resource visualizer
- Settings
- Monitoring
- Automation
- Help

Essentials

Resource group (move) : [rg-sits-prod-network-sw](#)

Location : Sweden Central

Subscription (move) : [sub-app-prod](#)

Subscription ID : 61845030-2daa-4797-a97a-59a7fd8d478f

Tags (edit) : costCenter : sits-lab environment : prod owner : peter

Custom security rules : 8 inbound, 0 outbound

Associated with : 1 subnets, 0 network interfaces

JSON View

Filter by name Port == all Protocol == all Source == all Destination == all Action == all

Priority	Name	Port	Protocol	Source	Destination	Action
Inbound Security Rules						
100	allow-webapp-from-agw	443	Tcp	10.30.4.0/24	asg-sits-prod-pe-webap...	Allow
110	allow-webapp-from-age...	443	Tcp	10.30.3.0/24	asg-sits-prod-pe-webap...	Allow
120	allow-kv-app-from-app	443	Tcp	10.30.6.0/24	asg-sits-prod-pe-kv-app...	Allow
130	allow-kv-app-from-agen...	443	Tcp	10.30.2.0/24	asg-sits-prod-pe-kv-app...	Allow
140	allow-kv-cert-from-agw	443	Tcp	10.30.4.0/24	asg-sits-prod-pe-kv-cert...	Allow
150	allow-kv-cert-from-agen...	443	Tcp	10.30.2.0/24	asg-sits-prod-pe-kv-cert...	Allow
160	allow-kv-admin-from-ag...	443	Tcp	10.30.2.0/24	asg-sits-prod-pe-kv-ad...	Allow
4000	deny-all-inbound	Any	Any	Any	Any	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInBo...	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny
Outbound Security Rules						
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

The private endpoint NSG has seven custom TCP 443 allow rules at priorities 100-160 targeting application security groups: gateway and application agents to the web app; App Service integration and infrastructure agents to the application vault; gateway and infrastructure agents to the certificate vault; infrastructure agents to the administration vault. A custom deny-all inbound rule at priority 4000 precedes the default inbound rules. No custom outbound rules are listed; default outbound rules remain. Some rule and ASG names are truncated. This documents configured rules; enforcement on private endpoint interfaces also depends on subnet private endpoint network policies.

Prod private endpoint subnet network policies

Production networking and operations

The screenshot displays the Azure portal interface for a virtual network named 'vnet-sits-prod-swc'. The left sidebar shows various navigation options, with 'Subnets' selected. The main area shows a list of subnets, with 'snet-pe' highlighted. The right pane shows the 'Edit subnet' configuration for 'snet-pe'.

Subnets List:

Name	IPv4	IPv6	Available IP addresses
snet-ops	10.30.1.0/24	-	250
snet-app	10.30.6.0/24	-	251
snet-agents-app	10.30.3.0/24	-	251
snet-pe	10.30.5.0/24	-	247
snet-agw	10.30.4.0/24	-	available
snet-agents-infra	10.30.2.0/24	-	251
AzureBastionSubnet	10.30.0.0/26	-	57


Edit subnet configuration for 'snet-pe':

- Include an IPv4 address space:** ☒ Address prefix '10.30.5.0/24' cannot be updated because the subnet is in use.
- IPv4 address space:** 10.30.0.0/16
- Starting address:** 10.30.5.0
- Size:** /24
- Subnet address range:** 10.30.5.0 - 10.30.5.255
- IPv6:** ☐ This virtual network has no IPv6 address ranges.
- Private subnet:** ☒ Enable private subnet (no default outbound access). After March 31, 2026, private subnet will be the default selection for new virtual networks.
- Security:** ☐ Simplify internet access for virtual machines by using a network address translation gateway. Filter subnet traffic using a network security group.
- NAT gateway:** None
- Network security group:** nsg-sits-prod-pe-swc
- Route table:** None
- Service Endpoints:** ☐ Create service endpoint policies to allow traffic to specific Azure resources from your virtual network over service endpoints.
- Network identifier subscription:** sub-app-prod
- Network identifier:** None
- Services:**
- Subnet Delegation:** ☐ Delegate subnet to a service.
- Network Policy for Private Endpoints:** ☐ The network policy affects the types of network policies that control traffic going to the private endpoints in this subnet.
- Private endpoint network policy:** Route tables, Network security groups

The snet-pe detail panel shows address range 10.30.5.0/24 and private endpoint network policy set to Route tables, Network security groups. The associated NSG is nsg-sits-prod-pe-swc; NAT gateway, route table and subnet delegation are None. Enable private subnet (no default outbound access) is checked. This documents the displayed subnet policy configuration supporting NSG evaluation for private endpoints; it is separate from runtime traffic tests.

Prod vnet connected devices

Production networking and operations

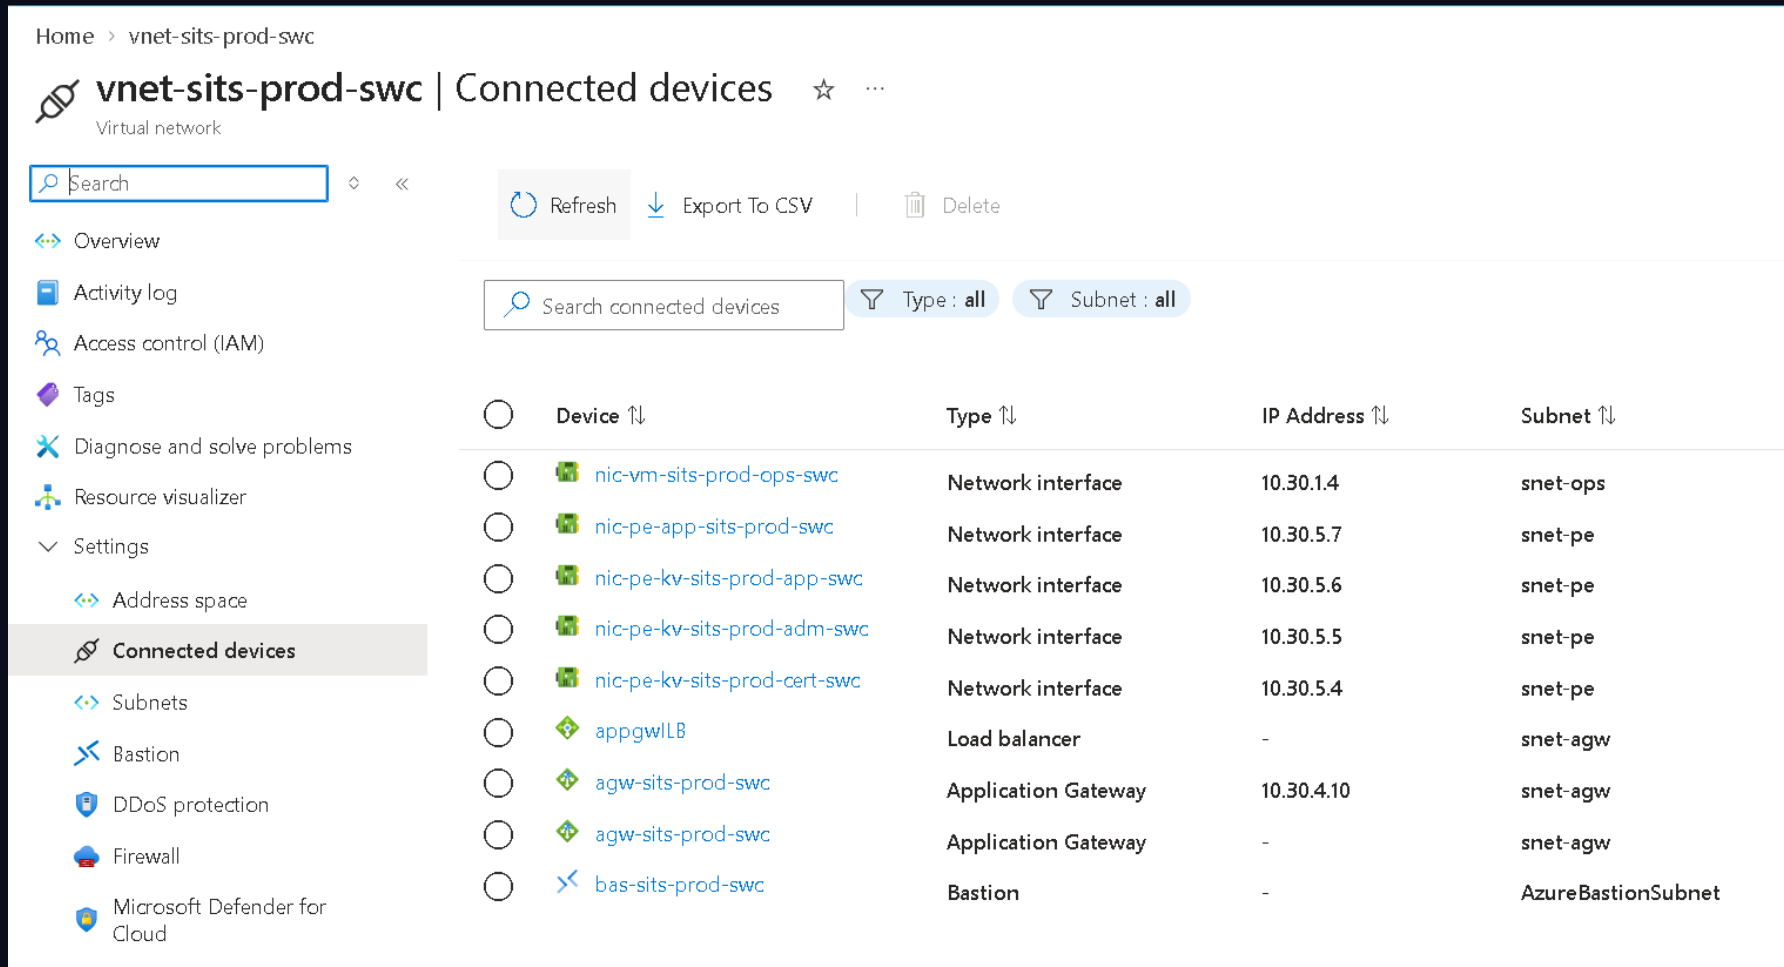


Device	Type	IP Address	Subnet
nic-vm-sits-prod-ops-swc	Network interface	10.30.1.4	snet-ops
nic-pe-app-sits-prod-swc	Network interface	10.30.5.7	snet-pe
nic-pe-kv-sits-prod-app-swc	Network interface	10.30.5.6	snet-pe
nic-pe-kv-sits-prod-adm-swc	Network interface	10.30.5.5	snet-pe
nic-pe-kv-sits-prod-cert-swc	Network interface	10.30.5.4	snet-pe
apgwLB	Load balancer	-	snet-agw
agw-sits-prod-swc	Application Gateway	10.30.4.10	snet-agw
agw-sits-prod-swc	Application Gateway	-	snet-agw
bas-sits-prod-swc	Bastion	-	AzureBastionSubnet

The production VNet view shows the operations VM interface at 10.30.1.4, Application Gateway at 10.30.4.10, and private endpoint interfaces for the certificate vault (10.30.5.4), administration vault (10.30.5.5), application vault (10.30.5.6) and App Service (10.30.5.7). Bastion appears in AzureBastionSubnet. These interfaces show where resources attach to the network; this inventory alone does not prove connectivity or access rules.

Prod vnet subnets

Production networking and operations

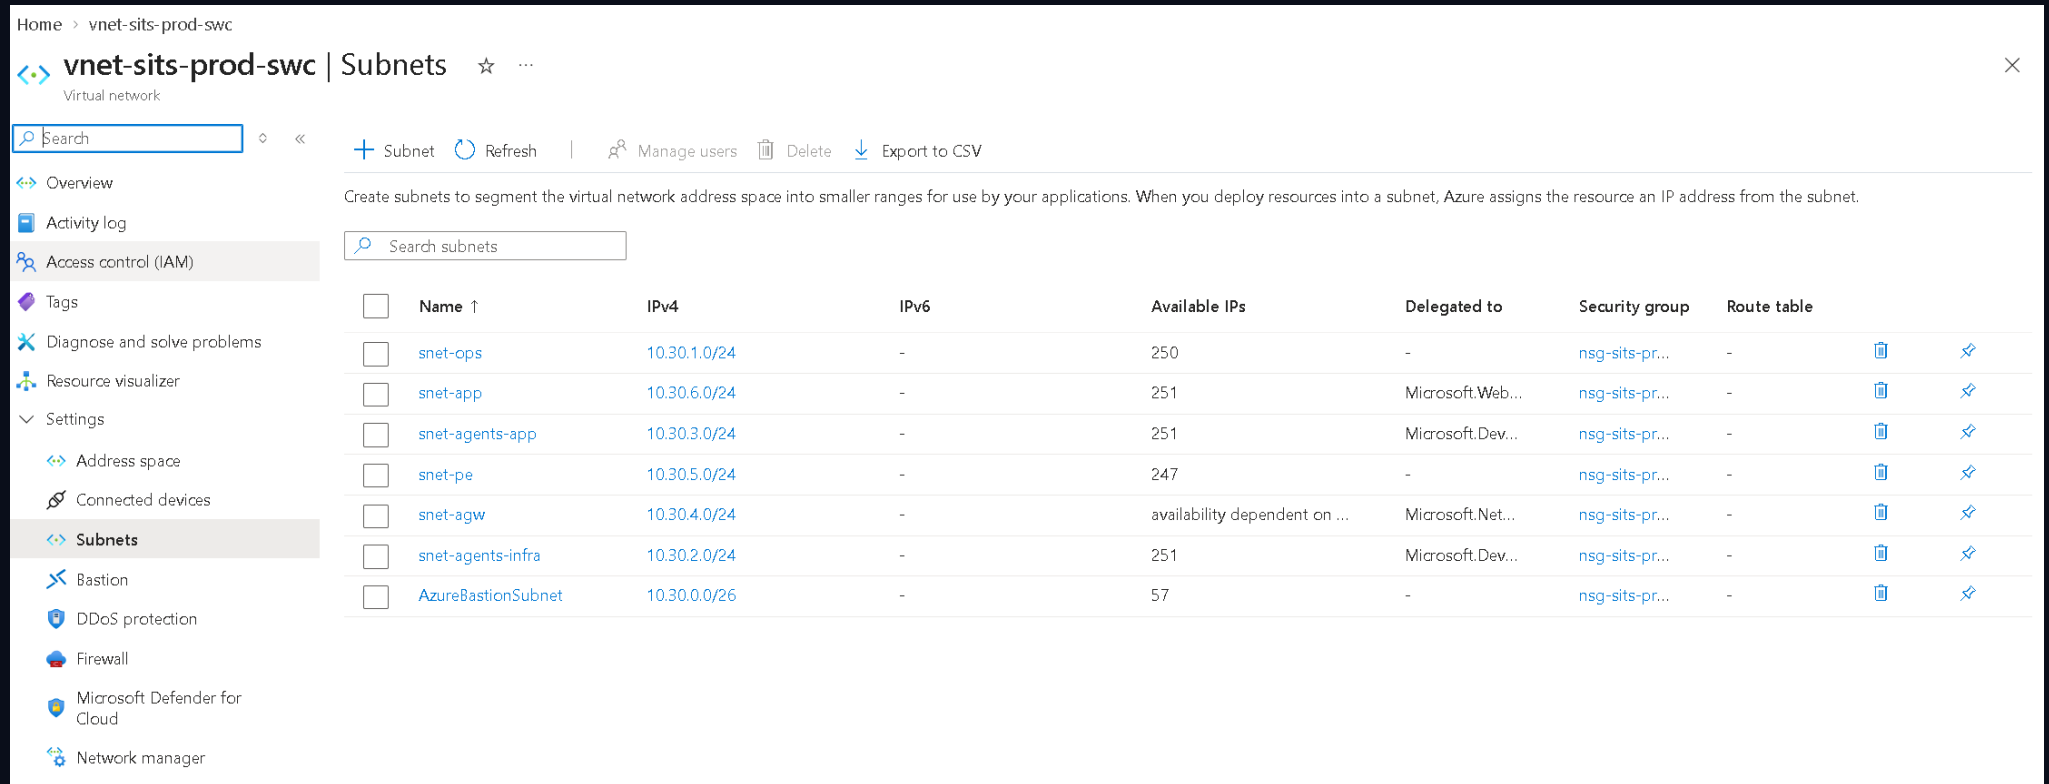

Home > vnet-sits-prod-swc

vnet-sits-prod-swc | Subnets ☆ ...

Virtual network

Search

+ Subnet Refresh | Manage users Delete Export to CSV

Create subnets to segment the virtual network address space into smaller ranges for use by your applications. When you deploy resources into a subnet, Azure assigns the resource an IP address from the subnet.

Search subnets

☐	Name ↑	IPv4	IPv6	Available IPs	Delegated to	Security group	Route table		
☐	snet-ops	10.30.1.0/24	-	250	-	nsg-sits-pr...	-		
☐	snet-app	10.30.6.0/24	-	251	Microsoft.Web...	nsg-sits-pr...	-		
☐	snet-agents-app	10.30.3.0/24	-	251	Microsoft.Dev...	nsg-sits-pr...	-		
☐	snet-pe	10.30.5.0/24	-	247	-	nsg-sits-pr...	-		
☐	snet-agw	10.30.4.0/24	-	availability dependent on ...	Microsoft.Net...	nsg-sits-pr...	-		
☐	snet-agents-infra	10.30.2.0/24	-	251	Microsoft.Dev...	nsg-sits-pr...	-		
☐	AzureBastionSubnet	10.30.0.0/26	-	57	-	nsg-sits-pr...	-		

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Address space

Connected devices

Subnets

Bastion

DDoS protection

Firewall

Microsoft Defender for Cloud

Network manager

The production VNet separates Bastion (10.30.0.0/26), operations (10.30.1.0/24), infrastructure agents (10.30.2.0/24), application agents (10.30.3.0/24), Application Gateway (10.30.4.0/24), private endpoints (10.30.5.0/24) and App Service VNet integration (10.30.6.0/24). The view shows subnet delegations and associated security groups. This segmentation enables workload-specific network controls; actual allowed traffic is defined by the security rules, not subnet separation alone.

Prod waf managed rules

Production networking and operations

The screenshot shows the 'waf-sits-prod-swc | Managed rules' page in the Azure portal. The left sidebar contains navigation links: Overview, Activity log, Access control (IAM), Tags, Resource visualizer, Settings, Policy settings, and Managed rules (selected). The main content area has tabs for Managed Rulesets, Exclusions, and Exceptions. A banner indicates the policy mode is set to Detection. Below the banner are controls for Assign, Add exclusions, Add exceptions, Refresh, Export to CSV, Enable, Disable, and Change action. A filter bar shows 'Rule group : (All)', 'Status : (All)', 'Action : (All)', and 'Group by Rule set'. The table below lists rules from the Microsoft_DefaultRuleSet_2.1.

☐	>	Rule id	Description	Action	Status	Exclusions	Rule group	Rule set
▼ Microsoft_DefaultRuleSet_2.1 (190)								
☐		930100	Path Traversal Attack (/../)	Anomaly score	✓ Enabled		LFI	Microsoft_DefaultRuleSet_2.1
☐		930110	Path Traversal Attack (/../)	Anomaly score	✓ Enabled		LFI	Microsoft_DefaultRuleSet_2.1
☐		930120	OS File Access Attempt	Anomaly score	✓ Enabled		LFI	Microsoft_DefaultRuleSet_2.1
☐		930130	Restricted File Access Attempt	Anomaly score	✓ Enabled		LFI	Microsoft_DefaultRuleSet_2.1
☐		931100	Possible Remote File Inclusion (RFI) Attack: URL Parameter using IP Ad...	Anomaly score	✓ Enabled		RFI	Microsoft_DefaultRuleSet_2.1
☐		931110	Possible Remote File Inclusion (RFI) Attack: Common RFI Vulnerable P...	Anomaly score	✓ Enabled		RFI	Microsoft_DefaultRuleSet_2.1
☐		931120	Possible Remote File Inclusion (RFI) Attack: URL Payload Used w/Traili...	Anomaly score	✓ Enabled		RFI	Microsoft_DefaultRuleSet_2.1
☐		931130	Possible Remote File Inclusion (RFI) Attack: Off-Domain Reference/Link	Anomaly score	✓ Enabled		RFI	Microsoft_DefaultRuleSet_2.1
☐		932100	Remote Command Execution: Unix Command Injection	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932105	Remote Command Execution: Unix Command Injection	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932110	Remote Command Execution: Windows Command Injection	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932115	Remote Command Execution: Windows Command Injection	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932120	Remote Command Execution: Windows PowerShell Command Found	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932130	Remote Command Execution: Unix Shell Expression or Confluence Vul...	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932140	Remote Command Execution: Windows FOR/IF Command Found	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1
☐		932150	Remote Command Execution: Direct Unix Command Execution	Anomaly score	✓ Enabled		RCE	Microsoft_DefaultRuleSet_2.1

The production WAF managed rules view lists Microsoft_DefaultRuleSet_2.1 with 190 rules. Visible examples for local file inclusion, remote file inclusion and remote command execution are Enabled with Anomaly score actions. The banner confirms Detection mode. This screenshot documents the ruleset version and representative rule settings, not the status of every rule or observed attack detections.

Prod waf policy association

Production networking and operations

waf-sits-prod-swc | Associations ☆ ...

Application Gateway WAF policy

Search

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Settings

Policy settings

Managed rules

Custom rules

Associations

Associate this WAF policy with a specific application gateway, listener, route path, or application gateway for containers. A WAF policy can be associated with multiple application gateways. You can add, remove, and replace existing WAF policy associations with the selected application gateway. [Learn more about associations](#)

ⓘ Deselect application gateway(s). To disassociate the selected application gateway, associate the gateway to a different WAF policy.

+ Add association ▼ Remove association Refresh

Filter for any field

Association type : all Application Gateway : all Resource Group : all

Association type	Application Gateway	Resource Group
Application Gateway	agw-sits-prod-swc	rg-sits-prod-app-swc

The WAF policy waf-sits-prod-swc is associated at Application Gateway scope with agw-sits-prod-swc in rg-sits-prod-app-swc. This confirms that the documented production WAF policy is attached to the production gateway. Its Enabled state and Detection mode are shown in the separate policy overview.

Prod waf policy overview

Production networking and operations

Home > agw-sits-prod-swc | Web application firewall

waf-sits-prod-swc
Application Gateway WAF policy

How do I troubleshoot issues with this Application Gateway WAF policy? Summarize the configurations of this Application Gateway WAF policy. List the associated Application Gateways for this policy.

Search

Overview

- Activity log
- Access control (IAM)
- Tags
- Resource visualizer
- Settings
- Monitoring
- Automation
- Help

Essentials

Resource group (move) : [rg-sits-prod-app-swc](#)

Location : Sweden Central

Subscription (move) : [sub-app-prod](#)

Subscription ID : 61845030-2daa-4797-a97a-59a7fd8d478f

Tags (edit) : [costCenter : sits-lab](#) [environment : prod](#) [owner : peter](#)

Policy state : Enabled

Policy mode : Detection

Associations : 1

Policy settings
Configure multiple settings that apply to all rules within the policy.

Managed rules
Configure Azure managed rule sets that protect your web application from common threats.

Associations
Associate this WAF policy to one or more application gateways for protection.

Custom rules
Author custom rules to protect your web application from specifically identified threats.

Log scrubbing rules
Add log scrubbing rules to scrub sensitive data in the logs within this policy.

The production Application Gateway WAF policy waf-sits-prod-swc is Enabled in Detection mode and shows one association. Detection mode supports observing rule matches without claiming prevention-mode blocking. The overview does not identify the associated resource or show the configured managed rule set; those details are documented separately.

Dev infra layer1 role assignments

Development

 id-sits-dev-infra-l1-swc | Azure role assignments

Managed Identity

[+ Add role assignment \(Preview\)](#) [Refresh](#)

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

Federated credentials

Properties

Locks

Monitoring

Automation

Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *

sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Storage Blob Data Contributor	 stststfdevswc/default/tfstate-layer1	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-dev-infra-l1-swc
Contributor	 rg-sits-dev-network-swc	Resource Group	id-sits-dev-infra-l1-swc
Key Vault Contributor	 kv-sits-dev-adm-swc	Key vault	id-sits-dev-infra-l1-swc
Key Vault Contributor	 kv-sits-dev-cert-swc	Key vault	id-sits-dev-infra-l1-swc
Log Analytics Contributor	 log-sits-dev-swc	Log Analytics workspace	id-sits-dev-infra-l1-swc
Reader	 rg-sits-dev-foundation-swc	Resource Group	id-sits-dev-infra-l1-swc
Network Contributor	 NetworkWatcherRG	Resource Group	id-sits-dev-infra-l1-swc
Storage Account Contributor	 stststflowdevswc	Storage account	id-sits-dev-infra-l1-swc

The Dev Layer 1 infrastructure identity has Contributor on the development network resource group and Storage Blob Data Contributor on the tfstate-layer1 container. Scoped assignments also provide foundation visibility and management of the admin and certificate vaults, Log Analytics workspace, NetworkWatcherRG and flow-log storage. These permissions support network provisioning and its foundation dependencies; Key Vault Contributor manages vault resources rather than granting secret-value read access.

Dev infra layer2 role assignments

Development

 id-sits-dev-infra-l2-swc | Azure role assignments

Managed Identity

+ Add role assignment (Preview)

Refresh

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

- Federated credentials
- Properties
- Locks

Monitoring

Automation

Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *


sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Storage Blob Data Contributor	 stsitsfdevswc/default/tfstate-layer2	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-dev-infra-l2-swc
Contributor	 rg-sits-dev-kv-swc	Resource Group	id-sits-dev-infra-l2-swc
Contributor	 rg-sits-dev-app-swc	Resource Group	id-sits-dev-infra-l2-swc
Managed Identity Operator	 id-sits-dev-app-swc	Managed Identity	id-sits-dev-infra-l2-swc
Reader	 rg-sits-dev-foundation-swc	Resource Group	id-sits-dev-infra-l2-swc
Network Contributor	 rg-sits-dev-network-swc	Resource Group	id-sits-dev-infra-l2-swc
Log Analytics Contributor	 log-sits-dev-swc	Log Analytics workspace	id-sits-dev-infra-l2-swc
Managed Identity Operator	 id-sits-dev-agw-swc	Managed Identity	id-sits-dev-infra-l2-swc

The Dev Layer 2 identity has Contributor on the application and application-vault resource groups and Storage Blob Data Contributor on the tfstate-layer2 container. Foundation Reader, Network Contributor and Log Analytics Contributor support provisioning dependencies, while Managed Identity Operator on the application and gateway identities permits assigning those identities to resources.

Dev vnet connected devices

Development

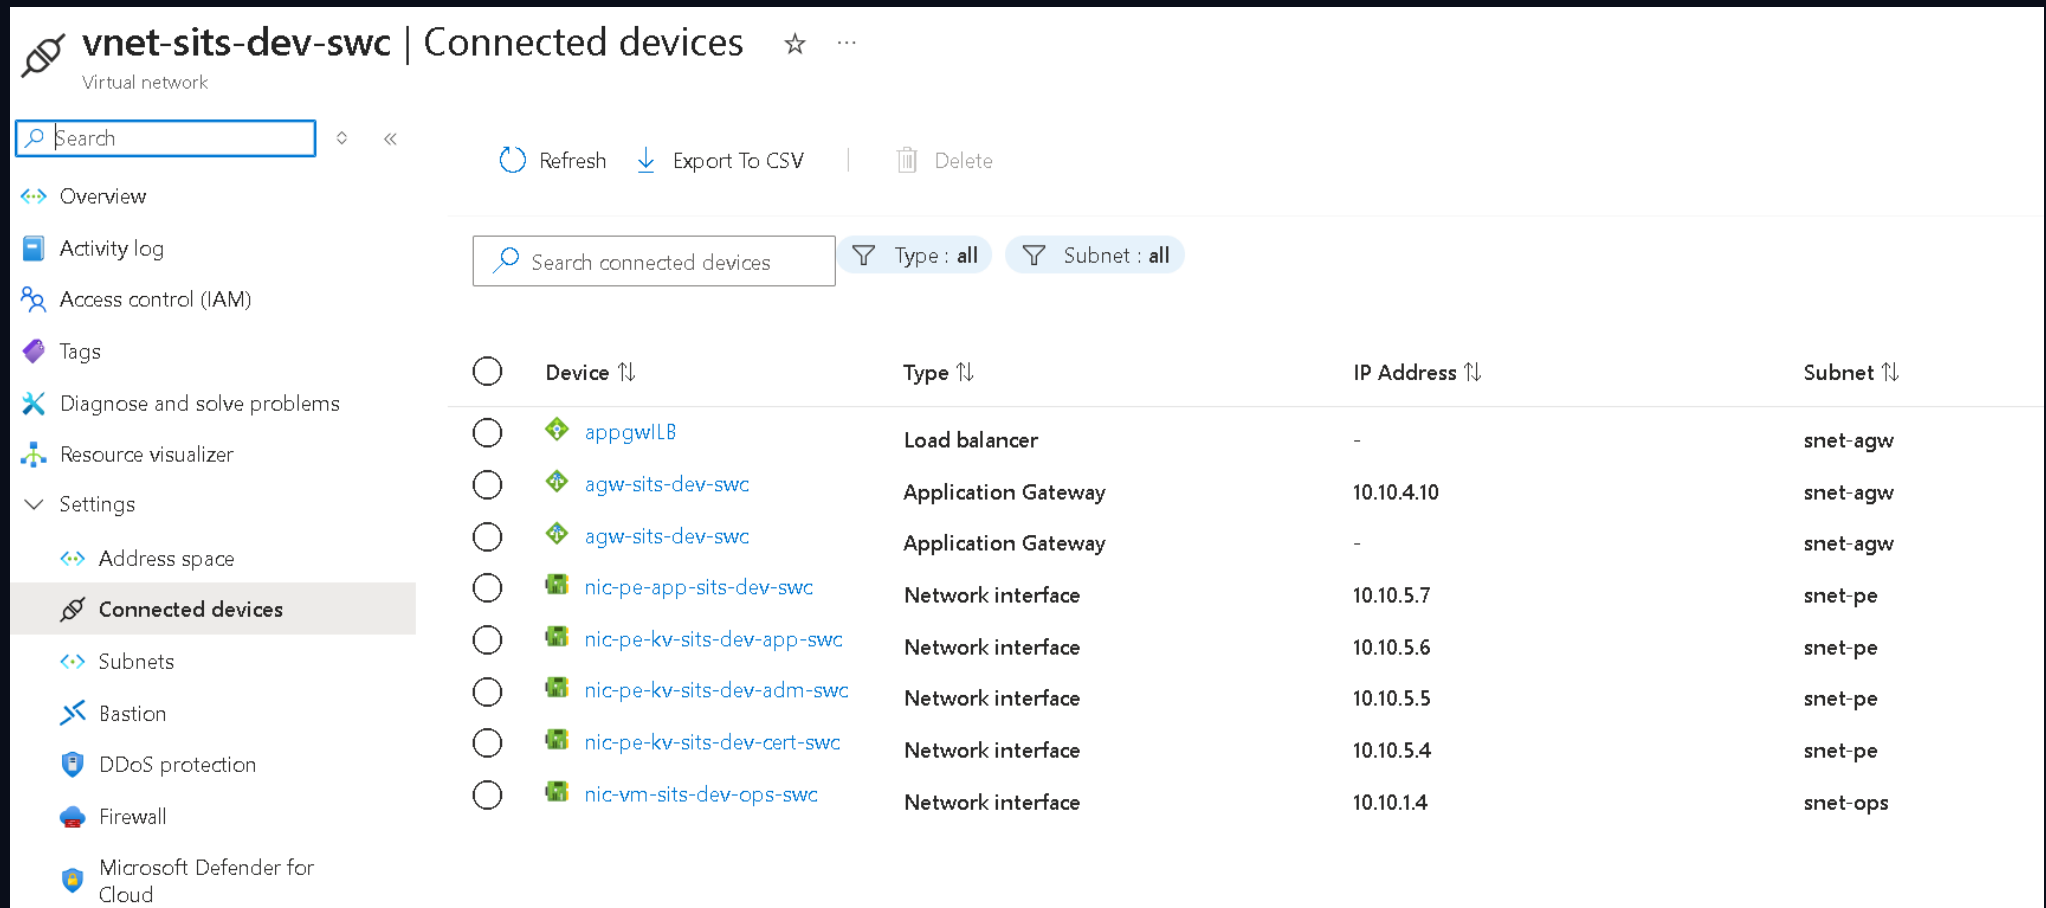

vnet-sits-dev-swc | Connected devices ☆ ...

Virtual network

Search

Refresh Export To CSV Delete

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Address space

Connected devices

Subnets

Bastion

DDoS protection

Firewall

Microsoft Defender for Cloud


Search connected devices Type : all Subnet : all

Device ↕	Type ↕	IP Address ↕	Subnet ↕
appgwLB	Load balancer	-	snet-agw
agw-sits-dev-swc	Application Gateway	10.10.4.10	snet-agw
agw-sits-dev-swc	Application Gateway	-	snet-agw
nic-pe-app-sits-dev-swc	Network interface	10.10.5.7	snet-pe
nic-pe-kv-sits-dev-app-swc	Network interface	10.10.5.6	snet-pe
nic-pe-kv-sits-dev-adm-swc	Network interface	10.10.5.5	snet-pe
nic-pe-kv-sits-dev-cert-swc	Network interface	10.10.5.4	snet-pe
nic-vm-sits-dev-ops-swc	Network interface	10.10.1.4	snet-ops

The development VNet inventory shows the operations VM interface at 10.10.1.4 and Application Gateway at 10.10.4.10. The private endpoint subnet contains interfaces for the certificate vault (10.10.5.4), administration vault (10.10.5.5), application vault (10.10.5.6) and App Service (10.10.5.7). This view documents network attachment and private addressing; connectivity and access controls require separate evidence.

Dev vnet subnets

Development

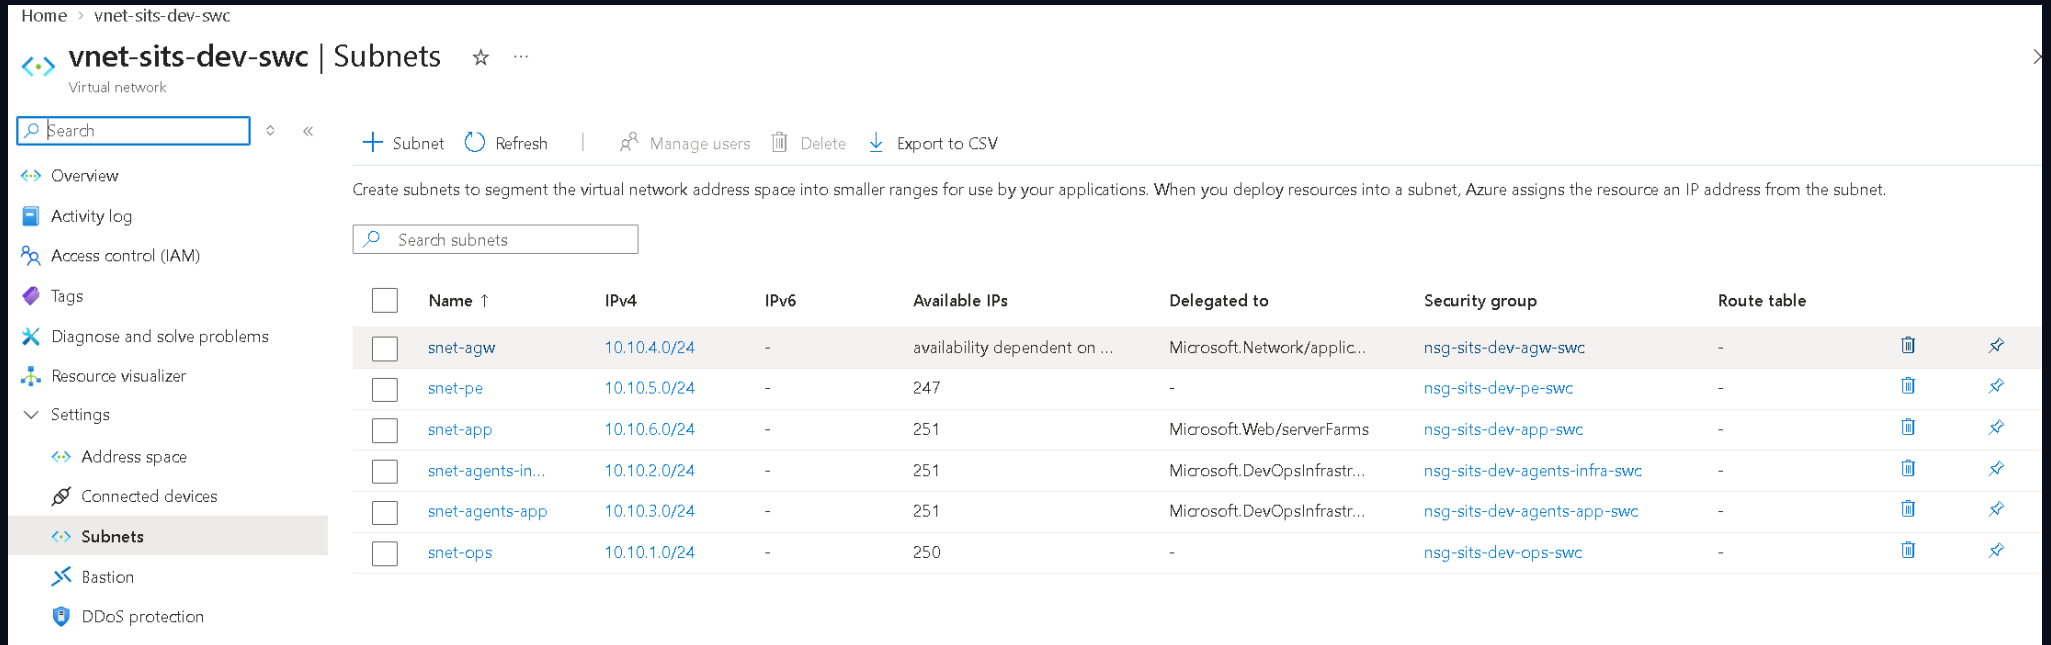

Home > vnet-sits-dev-swc

vnet-sits-dev-swc | Subnets ☆ ...
Virtual network

Search

+ Subnet Refresh | Manage users Delete Export to CSV

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Resource visualizer
Settings
Address space
Connected devices
Subnets
Bastion
DDoS protection

Create subnets to segment the virtual network address space into smaller ranges for use by your applications. When you deploy resources into a subnet, Azure assigns the resource an IP address from the subnet.

Search subnets

☐	Name ↑	IPv4	IPv6	Available IPs	Delegated to	Security group	Route table		
☐	snet-agw	10.10.4.0/24	-	availability dependent on ...	Microsoft.Network/applic...	nsg-sits-dev-agw-swc	-		
☐	snet-pe	10.10.5.0/24	-	247	-	nsg-sits-dev-pe-swc	-		
☐	snet-app	10.10.6.0/24	-	251	Microsoft.Web/serverFarms	nsg-sits-dev-app-swc	-		
☐	snet-agents-in...	10.10.2.0/24	-	251	Microsoft.DevOpsInfrastr...	nsg-sits-dev-agents-infra-swc	-		
☐	snet-agents-app	10.10.3.0/24	-	251	Microsoft.DevOpsInfrastr...	nsg-sits-dev-agents-app-swc	-		
☐	snet-ops	10.10.1.0/24	-	250	-	nsg-sits-dev-ops-swc	-		

The development VNet separates operations (10.10.1.0/24), infrastructure agents (10.10.2.0/24), application agents (10.10.3.0/24), Application Gateway (10.10.4.0/24), private endpoints (10.10.5.0/24) and App Service VNet integration (10.10.6.0/24). The overview shows subnet delegations and a dedicated network security group association for each subnet, with no route table associations shown. Actual allowed traffic depends on the security rules.

Test infra layer1 role assignments

Testing

 **id-sits-test-infra-l1-swc** | Azure role assignments

Managed Identity

[+ Add role assignment \(Preview\)](#) [Refresh](#)

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

Federated credentials

Properties

Locks

Monitoring

Automation

Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *

sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Contributor	 rg-sits-test-network-swc	Resource Group	id-sits-test-infra-l1-swc
Storage Blob Data Contributor	 stststftestswc/default/tfstate-layer1	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-test-infra-l1-swc
Log Analytics Contributor	 log-sits-dev-swc	Log Analytics workspace	id-sits-test-infra-l1-swc
Key Vault Contributor	 kv-sits-test-cert-swc	Key vault	id-sits-test-infra-l1-swc
Key Vault Contributor	 kv-sits-test-adm-swc	Key vault	id-sits-test-infra-l1-swc
Reader	 rg-sits-test-foundation-swc	Resource Group	id-sits-test-infra-l1-swc
Network Contributor	 NetworkWatcherRG	Resource Group	id-sits-test-infra-l1-swc
Storage Account Contributor	 stststflowtestswc	Storage account	id-sits-test-infra-l1-swc

The Test Layer 1 identity has Contributor on the Test network resource group and blob data access to tfstate-layer1. Scoped vault management, foundation Reader, NetworkWatcherRG and flow-log storage permissions support network provisioning. Log Analytics Contributor on log-sits-dev-swc reflects shared non-production monitoring. Key Vault Contributor does not grant secret-value read access.

Test infra layer2 role assignments

Testing

 id-sits-test-infra-l2-swc | Azure role assignments

Managed Identity

Search

◊ ◀

[+ Add role assignment \(Preview\)](#) [Refresh](#)

Overview

Activity log

Access control (IAM)

Tags

Azure role assignments

Associated resources (preview)

Resource visualizer

Settings

Federated credentials

Properties

Locks

Monitoring

Automation

Help

If this identity has role assignments that you don't have permission to read, they won't be shown in the list. [Learn more](#)

Subscription *
sub-app-nonprod

Role	Resource Name	Resource Type	Assigned To
Contributor	 rg-sits-test-app-swc	Resource Group	id-sits-test-infra-l2-swc
Contributor	 rg-sits-test-kv-swc	Resource Group	id-sits-test-infra-l2-swc
Storage Blob Data Contributor	 stsits-test-swc/default/tfstate-layer2	Microsoft.Storage/storageAccounts/blobServices/...	id-sits-test-infra-l2-swc
Managed Identity Operator	 id-sits-test-agw-swc	Managed Identity	id-sits-test-infra-l2-swc
Managed Identity Operator	 id-sits-test-app-swc	Managed Identity	id-sits-test-infra-l2-swc
Network Contributor	 rg-sits-test-network-swc	Resource Group	id-sits-test-infra-l2-swc
Log Analytics Contributor	 log-sits-dev-swc	Log Analytics workspace	id-sits-test-infra-l2-swc
Reader	 appi-sits-dev-swc	Application Insights	id-sits-test-infra-l2-swc
Reader	 rg-sits-test-foundation-swc	Resource Group	id-sits-test-infra-l2-swc

The Test Layer 2 identity has Contributor on the Test application and vault resource groups, blob data access to tfstate-layer2, and scoped network and runtime identity permissions. Log Analytics Contributor on log-sits-dev-swc and Reader on appi-sits-dev-swc support integration with shared Dev monitoring; foundation Reader supports dependency discovery.

Test vnet connected devices

Testing

The screenshot shows the Azure portal interface for a virtual network. The left sidebar contains navigation links: Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, Settings, Address space, **Connected devices** (selected), Subnets, Bastion, DDoS protection, Firewall, and Microsoft Defender for. The main content area is titled 'vnet-sits-test-swc | Connected devices' and includes a search bar, 'Refresh', 'Export To CSV', and 'Delete' buttons. Below this is a table of connected devices.

Device	Type	IP Address	Subnet
appgwLB	Load balancer	-	snet-agw
agw-sits-test-swc	Application Gateway	10.20.4.10	snet-agw
agw-sits-test-swc	Application Gateway	-	snet-agw
nic-vm-sits-test-ops-swc	Network interface	10.20.1.4	snet-ops
nic-pe-app-sits-test-swc	Network interface	10.20.5.7	snet-pe
nic-pe-kv-sits-test-app-swc	Network interface	10.20.5.6	snet-pe
nic-pe-kv-sits-test-adm-swc	Network interface	10.20.5.4	snet-pe
nic-pe-kv-sits-test-cert-swc	Network interface	10.20.5.5	snet-pe

The testing VNet inventory shows the operations VM interface at 10.20.1.4 and Application Gateway at 10.20.4.10. Private endpoint interfaces attach the administration vault at 10.20.5.4, certificate vault at 10.20.5.5, application vault at 10.20.5.6 and App Service at 10.20.5.7. The administration and certificate vault address order differs from Dev and Prod. This view documents network attachment and private addressing; it does not by itself prove connectivity or access controls.

Test vnet subnets

Testing

Home > [vnet-sits-test-swc](#)

vnet-sits-test-swc | Subnets

Virtual network

Search

+ Subnet Refresh Manage users Delete Export to CSV

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Address space

Connected devices

Subnets

Bastion

Create subnets to segment the virtual network address space into smaller ranges for use by your applications. When you deploy resources into a subnet, Azure assigns the resource an IP address from the subnet.

Search subnets

☐	Name ↑	IPv4	IPv6	Available IPs	Delegated to	Security group	Route table		
☐	snet-agw	10.20.4.0/24	-	availability dependent on ...	Microsoft.Network/applic...	nsg-sits-test-agw-swc	-		
☐	snet-ops	10.20.1.0/24	-	250	-	nsg-sits-test-ops-swc	-		
☐	snet-pe	10.20.5.0/24	-	247	-	nsg-sits-test-pe-swc	-		
☐	snet-app	10.20.6.0/24	-	251	Microsoft.Web/serverFarms	nsg-sits-test-app-swc	-		
☐	snet-agents-app	10.20.3.0/24	-	251	Microsoft.DevOpsInfrastr...	nsg-sits-test-agents-app-swc	-		
☐	snet-agents-infra	10.20.2.0/24	-	251	Microsoft.DevOpsInfrastr...	nsg-sits-test-agents-infra-swc	-		

The testing VNet separates operations (10.20.1.0/24), infrastructure agents (10.20.2.0/24), application agents (10.20.3.0/24), Application Gateway (10.20.4.0/24), private endpoints (10.20.5.0/24) and App Service VNet integration (10.20.6.0/24). Each subnet has an associated network security group. The overview shows service delegations and no route table associations. Actual allowed traffic depends on the security rules.

Azure monitor enabled alert rules all environments

Monitoring

Home > Monitor | Alerts

Alert rules

+ Create

Columns

Refresh

Export to CSV

Open query

Delete

Enable

Disable

Create an autonomous observability agent: Automatically create and investigate issues from alerts, and correlate related alerts to reduce noise. [Learn more](#)

Search

Subscription : 2 selected

Target scope : all

Target resource type : all

Signal type : all

Severity : all

Status : Enabled

Add tag filter


No grouping

Name ↑↓	Condition	Severity ↑↓	Target scope	Target resource type	Signal type ↑↓	Status ↑↓
☐ alert-sits-dev-app-unhealthy	HealthCheckStatus < 100	1 - Error	app-sits-dev-swc	App Service	Metrics	✓ Enabled
☐ alert-sits-dev-gateway-backend-unheal...	UnhealthyHostCount > 0	1 - Error	agw-sits-dev-swc	Application gateway	Metrics	✓ Enabled
☐ alert-sits-dev-keyvault-access-denied	Table rows > 0	2 - Warning	log-sits-dev-swc	Log Analytics workspace	Log search	✓ Enabled
☐ alert-sits-dev-waf-request-matched	Table rows > 0	3 - Informational	log-sits-dev-swc	Log Analytics workspace	Log search	✓ Enabled
☐ alert-sits-prod-app-unhealthy	HealthCheckStatus < 100	1 - Error	app-sits-prod-swc	App Service	Metrics	✓ Enabled
☐ alert-sits-prod-gateway-backend-unhe...	UnhealthyHostCount > 0	1 - Error	agw-sits-prod-swc	Application gateway	Metrics	✓ Enabled
☐ alert-sits-prod-keyvault-access-denied	Table rows > 0	2 - Warning	log-sits-prod-swc	Log Analytics workspace	Log search	✓ Enabled
☐ alert-sits-prod-waf-request-matched	Table rows > 0	3 - Informational	log-sits-prod-swc	Log Analytics workspace	Log search	✓ Enabled
☐ alert-sits-test-app-unhealthy	HealthCheckStatus < 100	1 - Error	app-sits-test-swc	App Service	Metrics	✓ Enabled
☐ alert-sits-test-gateway-backend-unheal...	UnhealthyHostCount > 0	1 - Error	agw-sits-test-swc	Application gateway	Metrics	✓ Enabled
☐ alert-sits-test-keyvault-access-denied	Table rows > 0	2 - Warning	log-sits-dev-swc	Log Analytics workspace	Log search	✓ Enabled
☐ alert-sits-test-waf-request-matched	Table rows > 0	3 - Informational	log-sits-dev-swc	Log Analytics workspace	Log search	✓ Enabled
☐ Failure Anomalies - appi-sits-prod-swc	Failure Anomalies detected	3 - Informational	appi-sits-prod-swc	Application Insights	Smart detector	✓ Enabled

With two subscriptions selected and all target scopes, the Enabled rules view lists four custom rules per environment: App Service HealthCheckStatus below 100 and Application Gateway UnhealthyHostCount above zero at severity 1 (Error); Key Vault access-denied log search results above zero at severity 2 (Warning); and WAF request-match log search results above zero at severity 3 (Informational). Dev and Test log search rules target log-sits-dev-swc, while Prod targets log-sits-prod-swc. A production Application Insights Failure Anomalies smart detector is also Enabled. This view documents rule configuration; fired instances are shown in separate evidence.

Azure monitor fired alerts all environments

Monitoring

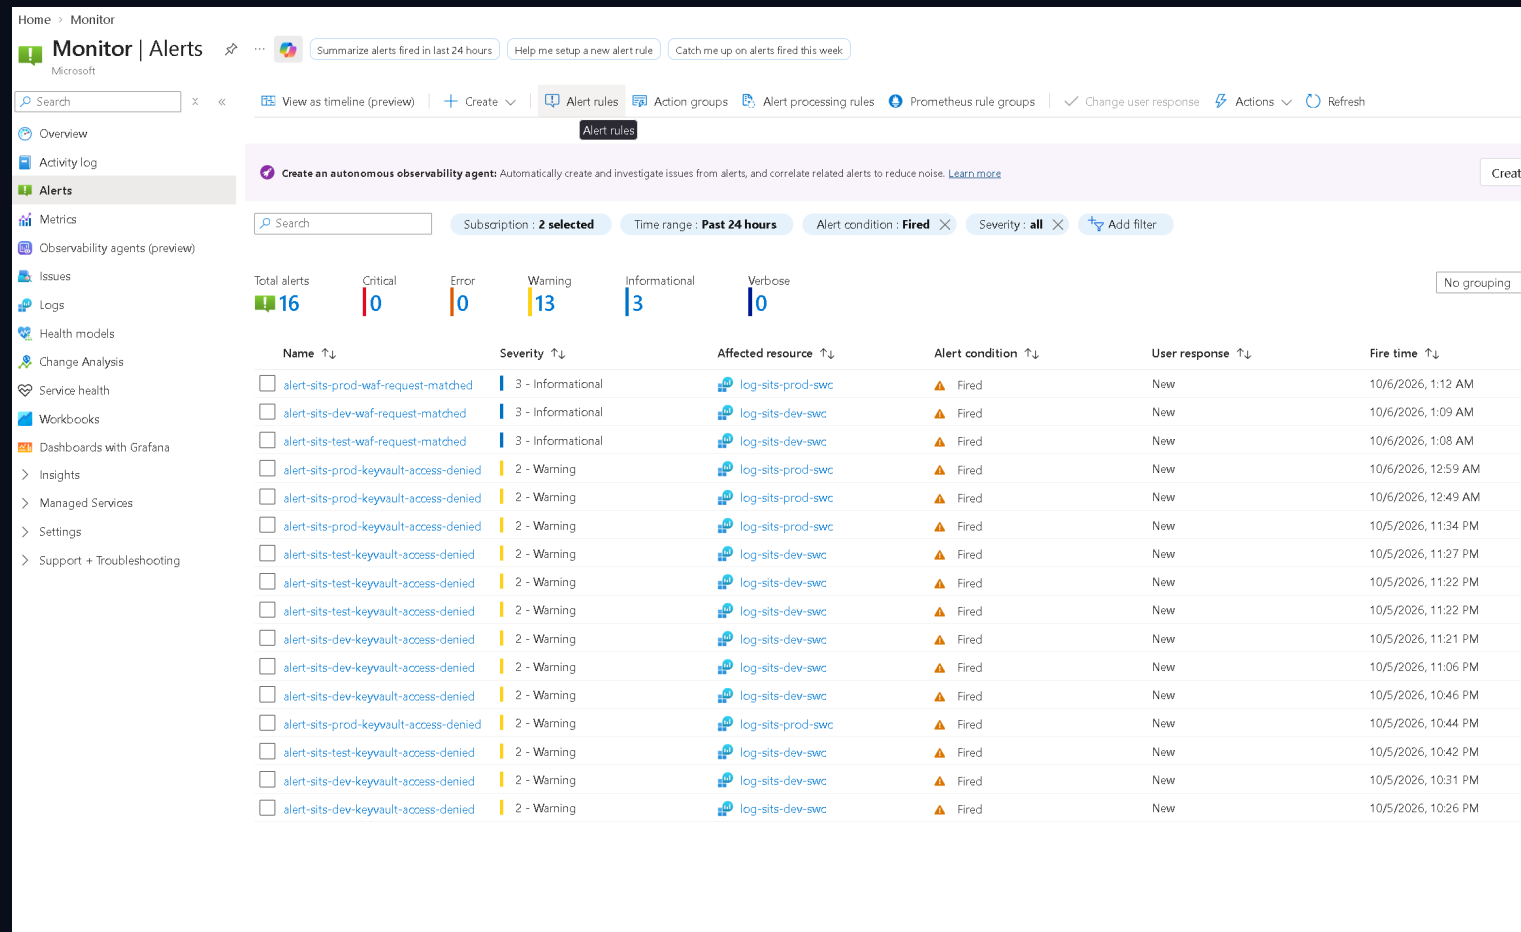

With two subscriptions selected, a Past 24 hours time range and Fired condition filter, Azure Monitor lists 16 alert instances: 13 Warning and three Informational, with zero Critical or Error instances. Visible alerts include WAF request matches for Dev, Test and Prod and repeated Key Vault access-denied alerts across the three environments. Production alerts target log-sits-prod-swc, while Dev and Test alerts target log-sits-dev-swc. User response is New. This demonstrates fired monitoring alerts; it does not establish malicious activity, the reason for each denied request, WAF blocking or successful Application Insights request telemetry.

Prod application insights alert rules

Monitoring

Home > appi-sits-prod-swc | Alerts

Alert rules

+ Create | Columns Refresh Export to CSV Open query Delete Enable Disable

Create an autonomous observability agent: Automatically create and investigate issues from alerts, and correlate related alerts to reduce noise. [Learn more](#)

Search

Subscription : 2 selected Target resource type : all Target scope : appi-sits-prod-swc Signal type : all Severity : all Status : Enabled Add tag filter

Name ↑↓	Condition	Severity ↑↓	Target scope	Target resource type	Signal type ↑↓	Status ↑↓
☐ Failure Anomalies - appi-sits-prod-swc	Failure Anomalies detected	3 - Informational	appi-sits-prod-swc	Application Insights	Smart detector	✓ Enabled

The alert rules view is scoped to appi-sits-prod-swc and filtered to Enabled rules. It lists Failure Anomalies - appi-sits-prod-swc, using the Failure Anomalies detected condition and Smart detector signal type at severity 3 (Informational). This documents an enabled rule, not a fired alert or the complete production alert inventory.

Prod gateway diagnostic settings details

Monitoring

Home > agw-sits-prod-swc | Diagnostic settings

Diagnostic setting ...

 Save  Discard  Delete  Feedback

A diagnostic setting specifies a list of categories of platform logs and/or metrics that you want to collect from a resource, and one or more destinations that you would stream them to. Normal usage charges for the destination will occur. [Learn more about the different log categories and contents of those logs](#)

Diagnostic setting name: diag-log-sits-prod-swc

Logs

Category groups ⓘ

☒ allLogs

Categories

☒ Application Gateway Access Log

☒ Application Gateway Performance Log

☒ Application Gateway Firewall Log

Destination details

☒ Send to Log Analytics workspace

Subscription

sub-app-prod

Log Analytics workspace

log-sits-prod-swc (swedencentral)

Destination table ⓘ

☒ Azure diagnostics ☐ Resource specific

☐ Archive to a storage account

☐ Stream to an event hub

☐ Send to partner solution

Metrics

☒ AllMetrics

Diagnostic setting diag-log-sits-prod-swc selects the allLogs category group and AllMetrics for Application Gateway. The destination is Log Analytics workspace log-sits-prod-swc in sub-app-prod, with Azure diagnostics selected rather than resource-specific tables. Storage account archiving, Event Hub streaming and partner solution destinations are unchecked. This documents collection configuration; actual log ingestion requires query evidence.

Prod gateway diagnostic settings overview

Monitoring

The screenshot shows the Azure portal interface for the resource 'agw-sits-prod-swc' (Application gateway). The page title is 'agw-sits-prod-swc | Diagnostic settings'. The left sidebar contains a navigation menu with the following items: Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Resource visualizer, Settings, Monitoring (expanded), Alerts, Metrics, **Diagnostic settings** (selected), Logs, and Advisor recommendations. The main content area shows a description of diagnostic settings and a table of existing settings.

Diagnostic settings are used to configure streaming export of platform logs and metrics for a resource to the destination of your choice. You may create up to five different diagnostic settings for a resource. [Learn more about diagnostic settings](#)

Diagnostic settings

Name	Storage account	Event hub	Log Analytics workspace
diag-log-sits-prod-swc	-	-	log-sits-prod-swc

[+ Add diagnostic setting](#)

Click 'Add Diagnostic setting' above to configure the collection of the following data:

- Application Gateway Access Log
- Application Gateway Performance Log
- Application Gateway Firewall Log
- AllMetrics

Application Gateway agw-sits-prod-swc lists diagnostic setting diag-log-sits-prod-swc with destination log-sits-prod-swc. No storage account or Event Hub destination is listed. The category list below describes available data, not the categories enabled in this setting. Selected categories and actual ingestion are documented separately.

Prod log analytics overview

Monitoring

The screenshot shows the Azure portal interface for a Log Analytics workspace named 'log-sits-prod-swc'. The left sidebar contains a navigation menu with options: Overview (selected), Activity log, Access control (IAM), Tags, Diagnose and solve problems, Logs, Resource visualizer, Settings, Classic, Monitoring, Automation, and Help. The main content area features a top navigation bar with the workspace name and three help links. Below this is a search bar and a 'Delete' button. A blue information banner at the top of the main content area states: 'Azure Monitor will enforce TLS versions 1.2 and above starting March 1, 2026. To avoid data loss and service disruption please **upgrade to AMA** and ensure your **OS supports TLS 1.2** or higher. [Learn More About TLS](#). [Learn More About Agents](#).' The 'Essentials' section displays key workspace details in two columns. The left column lists: Resource group (move) : [rg-sits-prod-foundation-swc](#), Status : Active, Location : Sweden Central, Subscription (move) : [sub-app-prod](#), Subscription ID : 61845030-2daa-4797-a97a-59a7fd8d478f, and Tags (edit) : costCenter : sits-lab, environment : prod, owner : peter. The right column lists: Workspace Name : log-sits-prod-swc, Workspace ID : 3efb8630-1b49-47d8-bac1-dfe3ba525f85, Pricing tier : Pay-as-you-go, Access control mode : Use resource or workspace permissions, and Operational issues : [OK](#). At the bottom of the Essentials section are two tabs: 'Get Started' (selected) and 'Recommendations'. Below the 'Get Started' tab is the heading 'Get started with Log Analytics'.

Workspace Details	
Resource group (move)	: rg-sits-prod-foundation-swc
Status	: Active
Location	: Sweden Central
Subscription (move)	: sub-app-prod
Subscription ID	: 61845030-2daa-4797-a97a-59a7fd8d478f
Tags (edit)	: costCenter : sits-lab, environment : prod, owner : peter
Workspace Name	: log-sits-prod-swc
Workspace ID	: 3efb8630-1b49-47d8-bac1-dfe3ba525f85
Pricing tier	: Pay-as-you-go
Access control mode	: Use resource or workspace permissions
Operational issues	: OK

The production Log Analytics workspace log-sits-prod-swc is Active in Sweden Central under rg-sits-prod-foundation-swc and the production subscription. It uses Pay-as-you-go pricing and the access control mode Use resource or workspace permissions. Operational issues are reported as OK. This documents workspace configuration and status; diagnostic source connections and actual log ingestion are separate evidence.

Prod monitor enabled alert rules

Monitoring

Home > Monitor | Alerts

Alert rules ...

+ Create

Columns

Refresh

Export to CSV

Open query

Delete

Enable

Disable

Create an autonomous observability agent: Automatically create and investigate issues from alerts, and correlate related alerts to reduce noise. [Learn more](#)

Search

Subscription : sub-app-prod

Target scope : all

Target resource type : all

Signal type : all

Severity : all

Status : Enabled

Add tag filter

Name ↑↓	Condition	Severity ↑↓	Target scope	Target resource type	Signal type ↑↓	Status ↑↓
☐ alert-sits-prod-app-unhealthy	HealthCheckStatus < 100	1 - Error	app-sits-prod-swc	App Service	Metrics	✓ Enabled
☐ alert-sits-prod-gateway-backend-unhe...	UnhealthyHostCount > 0	1 - Error	agw-sits-prod-swc	Application gateway	Metrics	✓ Enabled
☐ alert-sits-prod-keyvault-access-denied	Table rows > 0	2 - Warning	log-sits-prod-swc	Log Analytics workspace	Log search	✓ Enabled
☐ alert-sits-prod-waf-request-matched	Table rows > 0	3 - Informational	log-sits-prod-swc	Log Analytics workspace	Log search	✓ Enabled
☐ Failure Anomalies - appi-sits-prod-swc	Failure Anomalies detected	3 - Informational	appi-sits-prod-swc	Application Insights	Smart detector	✓ Enabled

Filtered to sub-app-prod and Enabled status, Azure Monitor lists five production rules: App Service HealthCheckStatus below 100 and Application Gateway UnhealthyHostCount above zero at severity 1 (Error); Key Vault access-denied log search results above zero at severity 2 (Warning); WAF request-match log search results above zero at severity 3 (Informational); and Application Insights Failure Anomalies at severity 3. The log search rules target log-sits-prod-swc. This is a configured rule inventory, not a list of fired alert instances.