



Angular Advanced - Smart components & View components



Peter Kassenaar
info@kassenaar.com

“In Angular, all components are equal. There is no sense of different ‘types’ of components”



Smart components / View Components

- Design pattern
- Why ? Separation of concerns
 - **View component** is responsible for **presentation** (and *can* be used in a completely different environment with different component logic)
 - **Smart component** is responsible for **logic** → passing the [calculated] data to the view component.
- Smart components
 - AKA: *Container* components, *controller* components, *statefull* components
- View components
 - AKA: *pure* components, *dumb* components, stateless

Characteristics

- **Smart** components
 - Typically contain big(ger) chunks of logic
 - Typically have a small UI part (reference just the view component)
 - Pass the data to the view component
- **View** components
 - Typically contain no logic whatsoever
 - Get their data via `@Input()` decorators
 - Submit events via `@Output()` decorators
 - Have large chunks of UI

Example: ../300-smart-view-component

Home (default component)

Smart/View component

Default component- My favorite cities:


1 - Groningen	<input checked="" type="checkbox"/> Visited
2 - Hengelo	<input type="checkbox"/> Visited
3 - Den Haag	<input type="checkbox"/> Visited
4 - Enschede	<input checked="" type="checkbox"/> Visited
5 - Heerlen	<input type="checkbox"/> Visited

I Visited:

Groningen

Enschede

Current city: Groningen



Home – Default component

- Contains all logic and UI, combined in one component.
 - /home/home.component.html
 - /home/home.component.ts
- This typically works well for smaller applications

```
<div class="row">
  <div class="col-md-6">
    <h2>Default component- My f
    <ul class="list-group">
      <li *ngFor="let city of
        class="list-group-item
        [class.visited]="city
        (click)="getCity(city
        {{ city.id}} - {{ cit
        <span class="pull-right
          <label>
        </ul>
    ..
  </div>
```

```
@Component({
  selector : 'app-home',
  templateUrl: './home.component.html'
})
export class HomeComponent implements OnInit {
  ...
  ngOnInit() {
    this.cityService.getCities()
      .subscribe(cities => this.cities = cities);
  }

  getCity(city: City) {
    this.currentCity = city;
    this.cityPhoto = `assets/img/${this.currentCity.name}.jpg`;
  }
  ...
}
```

Splitting it up in view components

- `../smart-view/smart.component.html | .ts.`
- Passing `[cities]` in
- Getting (events) out.
- `[cities]` can also be an Observable

```
<div class="row">
  <div class="col-md-6">
    <h2>Smart/view component- My favorite cities:</h2>
    <!-- The <city-list>-component is now
         the view component for list of cities -->
    <city-list [cities]="cities"
              (selectCity)="getCity($event)"
              (toggleVisited)="toggleCity($event)">
    </city-list>
    ...
  </div>
</div>
```

<city-list> View component

- Has no logic, just @Input () 's and @Output () 's

```
import {Component, EventEmitter, Input, Output} from '@angular/core';
import {City} from '../../shared/model/city.model';

@Component({
  selector    : 'city-list',
  templateUrl: './city-list.component.html'
})
export class CityListComponent {

  @Input() cities: City[];
  @Output() selectCity: EventEmitter<City>    = new EventEmitter<City>();
  @Output() toggleVisited: EventEmitter<City> = new EventEmitter<City>();

}
```


HTML of the view component

- .../smart-view/city-list/city-list-component.html
- Has a nested view component to toggle `visited` state
- Choice: events are directly emitted from the HTML
 - Can also be done via small functions

```
<ul class="list-group">
  <li *ngFor="let city of cities"
    class="list-group-item"
    [class.visited]="city.visited"
    (click)="selectCity.emit(city)">
    {{ city.id }} - {{ city.name }}
    <city-visited [visited]="city.visited"
      (toggle)="city.visited = $event; toggleVisited.emit(city)">
    </city-visited>
  </li>
</ul>
```



<city-visited> View component

Again – just @Input() 's and @Output() 's.


```
export class CityVisitedComponent {  
  @Input() visited: boolean;  
  @Output() toggle: EventEmitter<boolean>= new EventEmitter<boolean>();  
}
```

HTML – again: attribute binding and event binding

```
<span class="pull-right">  
  <label>  
    <input type="checkbox"  
      class="checkbox-inline"  
      [checked]="visited"  
      (change)="visited = !visited; toggle.emit(visited)"> Visited  
  </label>  
</span>
```


Application structure

- When following this pattern: typically more, smaller components
- The directory tree gets crowded!

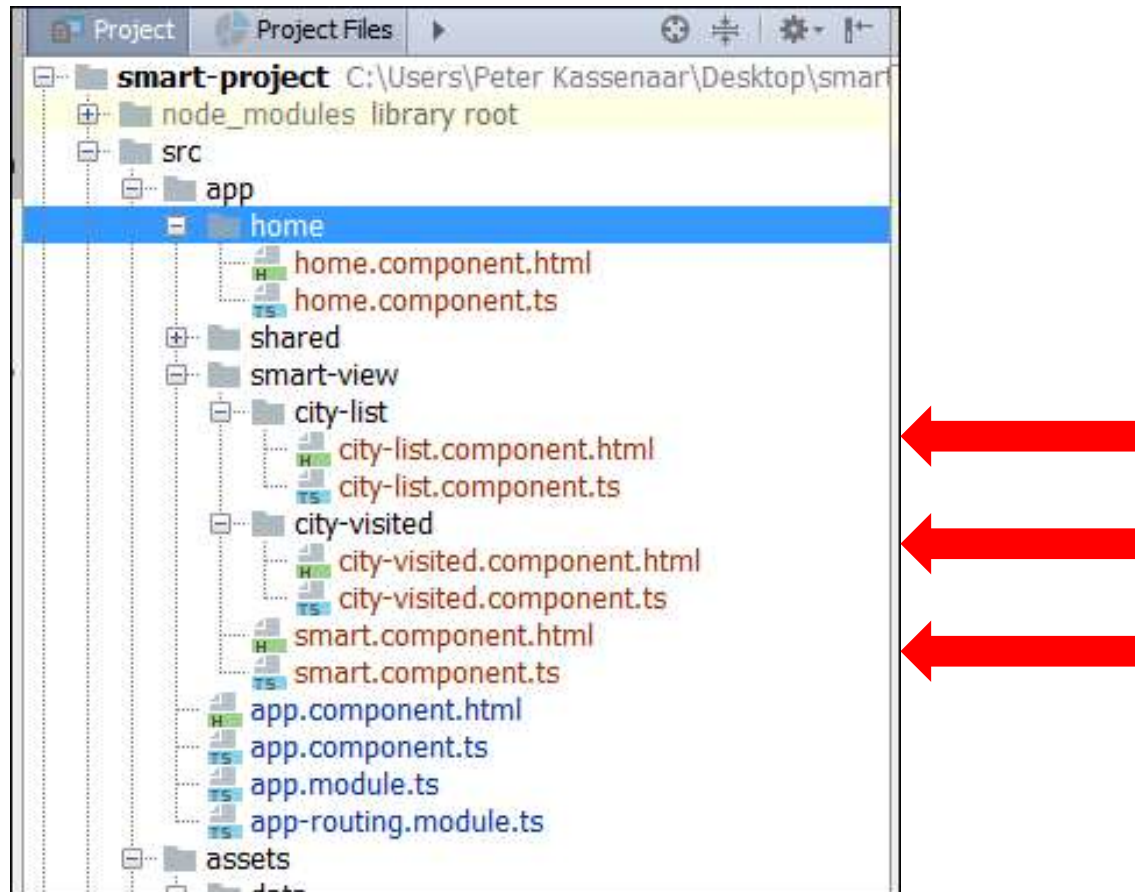


Workshop

- Study the example `../300-smart-view-components`
- Create two additional view components:
 - One for displaying the current city
 - One for displaying the list of visited cities
- **Optional:** use Observables instead of plain arrays.
 - `cities$: Observable<City[]>`
 - `[cities]="cities$ | async"`

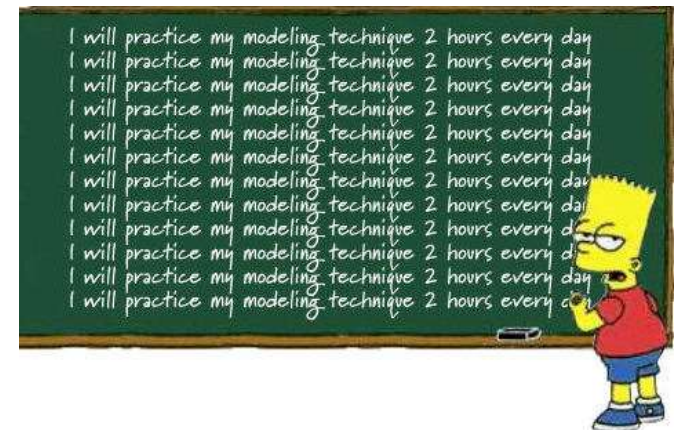

More info on Smart/View components

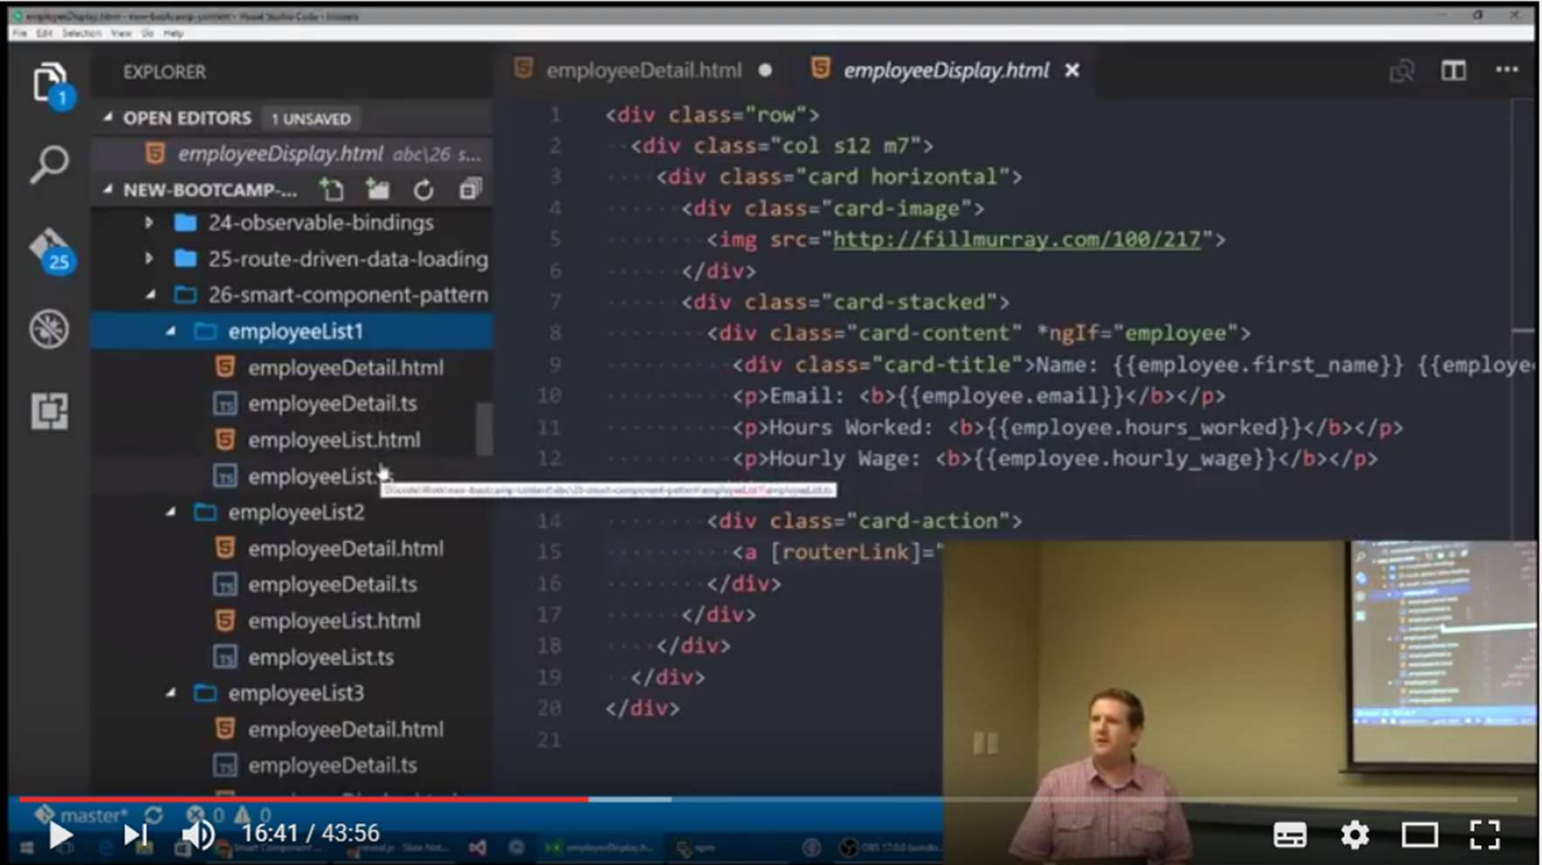


The screenshot shows a video player interface. The main content area displays a VS Code editor window. On the left, the Explorer sidebar shows a project structure with folders like '24-observable-bindings', '25-route-driven-data-loading', and '26-smart-component-pattern'. Under '26-smart-component-pattern', there are sub-folders 'employeeList1', 'employeeList2', and 'employeeList3'. The 'employeeList1' folder is expanded, showing files like 'employeeDetail.html', 'employeeDetail.ts', 'employeeList.html', and 'employeeList.ts'. The main editor area shows the 'employeeDetail.html' file, which contains Angular HTML template code. The code uses a `<div>` structure with classes like 'row', 'col', 'card horizontal', 'card-image', 'card-stacked', and 'card-content'. It includes an `` tag with a placeholder URL and several `<p>` tags displaying employee data using Angular's interpolation syntax (e.g., `{{employee.first_name}}`). A video player overlay is visible in the bottom right corner of the video frame, showing a man in a purple shirt speaking. The video player controls at the bottom indicate the video is at 16:41 / 43:56.



Smart/View Component Patterns - St. Louis Angular Lunch - Paul Spears Jan 2017

Oasis Digital Solutions Inc.

https://www.youtube.com/watch?v=ALm_JVdLT2E



Todd Motto
Owner, Ultimate Angular

 Follow @toddmotto  35K followers

≡

Blogs

👤

About

🎤

Speaking events

📺





Online courses

🔗

🎓


Workshops

🔗


© 2017





Search posts

 **ULTIMATE ANGULAR™**




Master Angular with my online courses

Explore courses >

 Award winning courses trusted by thousands, there's no better place to learn

Categories:  Angular  AngularJS  RxJS  JavaScript

Stateful and stateless components, the missing manual


 Oct 12, 2016  10 mins read  Edit post



The goals of this article are to define what stateful and stateless components are, otherwise known as smart and dumb - or container and presentational components. For the purposes of the article, we'll be using Angular 2 Components to explain the stateful/stateless concepts. Bear in mind these concepts are not at all limited to Angular, and live in other libs/frameworks such as React.

Table of contents

LATEST COURSE

Angular Fundamentals



Angular v4+ award-winning courses, learn at your own pace online with me.

<https://toddmotto.com/stateful-stateless-components>

 [BLOG HOME](#) [COURSES](#) [EBOOKS](#) [TUTORIALS](#) [FREE COURSE](#)


Angular
University





45

Angular Smart Components vs Presentation Components: What's the Difference, When to Use Each and Why?

21 OCTOBER 2016

When building an Angular application, one the most frequent questions that we are faced with right at the beginning is: how do we structure our application?

<http://blog.angular-university.io/angular-2-smart-components-vs-presentation-components-whats-the-difference-when-to-use-each-and-why/>

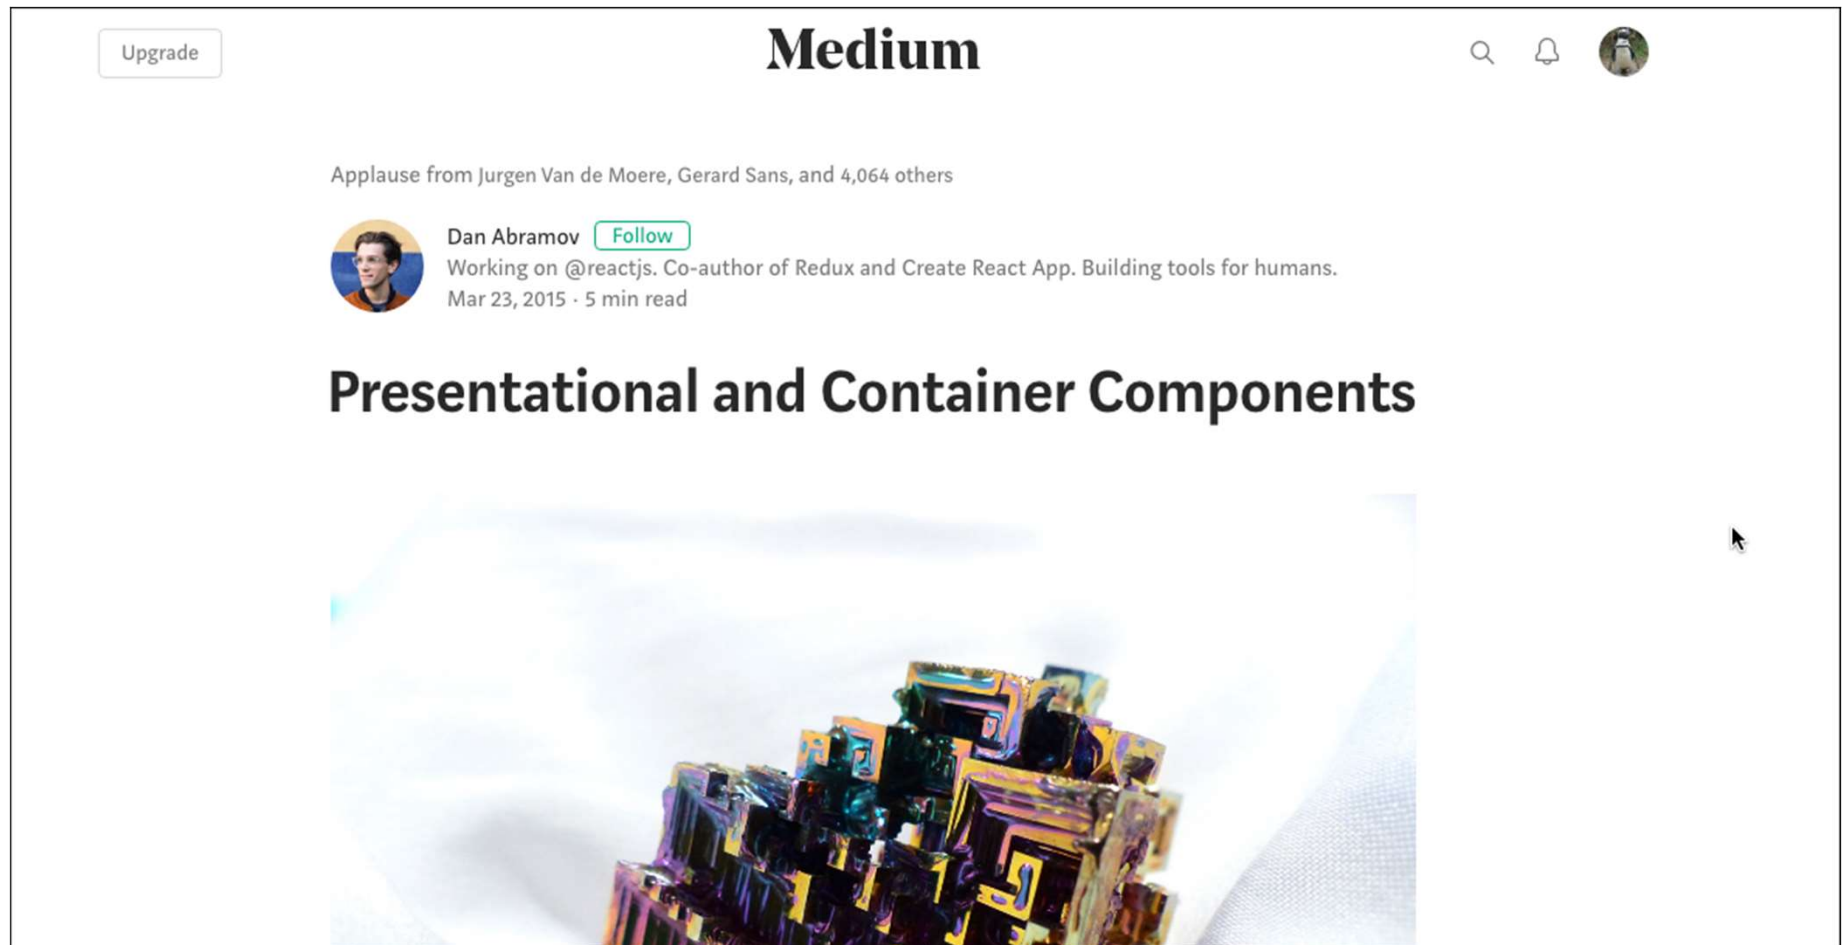

https://medium.com/@dan_abramov/smart-and-dumb-components-7ca2f9a7c7d0



Upgrade



How to write good, composable and pure components in Angular 2+

Most of us know what Smart and Dumb components are. We know we should use `@Input()` and `@Output()` as much as possible. But when our SPA gets big enough, it starts to remind us more and more of a typical spaghetti and it seems we cannot even help it.



Jack Tomaszewski

Follow

Jun 7, 2018 · 14 min read

The reason is very often we know what are the good and bad patterns in the code development, but, especially in the Front-end, we often get confused with what we are ought to and not ought to do. The patterns we should follow start to get blurry and we end up using shortcuts in our code more often than we don't.

One of such patterns is to split your components into “Smart” and “Dumb”. It says that we should keep all business logic and side effects in the Smart

<https://medium.com/@jtomaszewski/how-to-write-good-composable-and-pure-components-in-angular-2-1756945c0f5b>