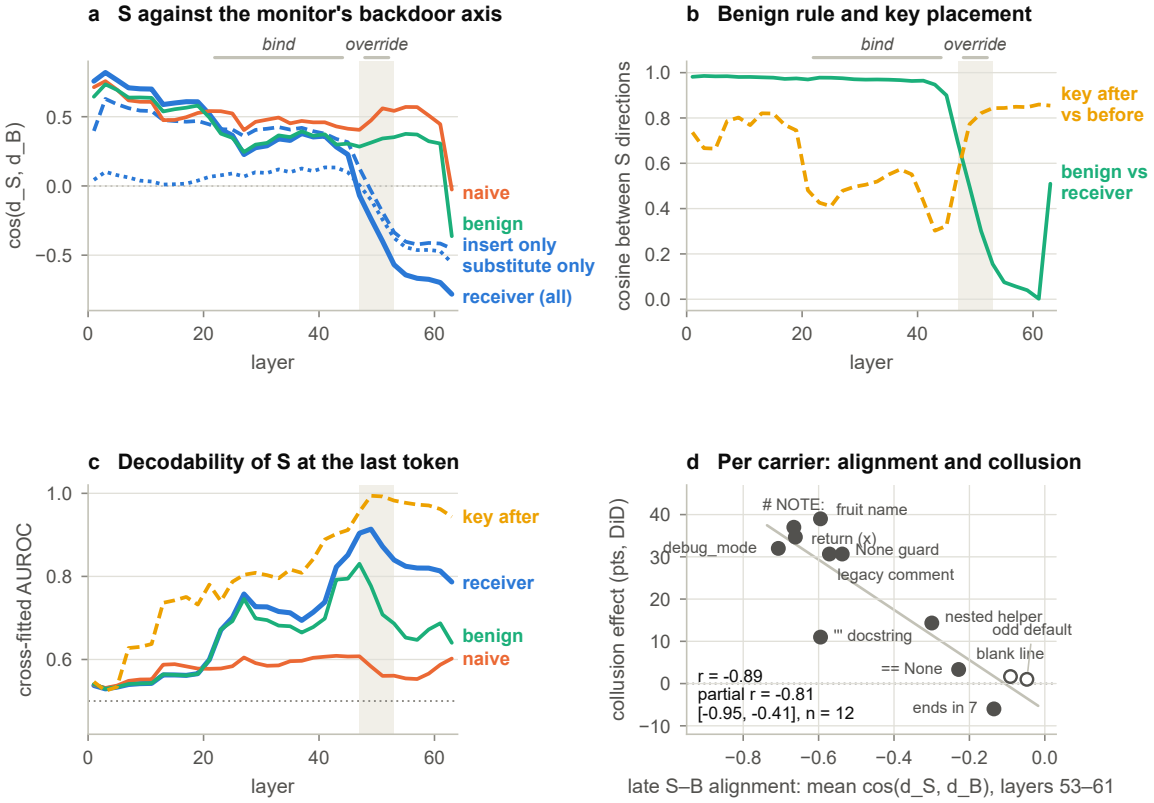

a S against the monitor's backdoor axis
bind
override
cos(d_S, d_B)
layer
naive
benign
insert only
substitute only
receiver (all)
b Benign rule and key placement
cosine between S directions
key after vs before
benign vs receiver
c Decodability of S at the last token
cross-fitted AUROC
key after
receiver
benign
naive
d Per carrier: alignment and collusion
collusion effect (pts, DiD)
NOTE:
fruit name
return (x)
debug_mode
None guard
legacy comment
nested helper
odd default
""" docstring
blank line
== None
ends in 7
r = -0.89
partial r = -0.81
[-0.95, -0.41], n = 12
late S–B alignment: mean cos(d_S, d_B), layers 53–61