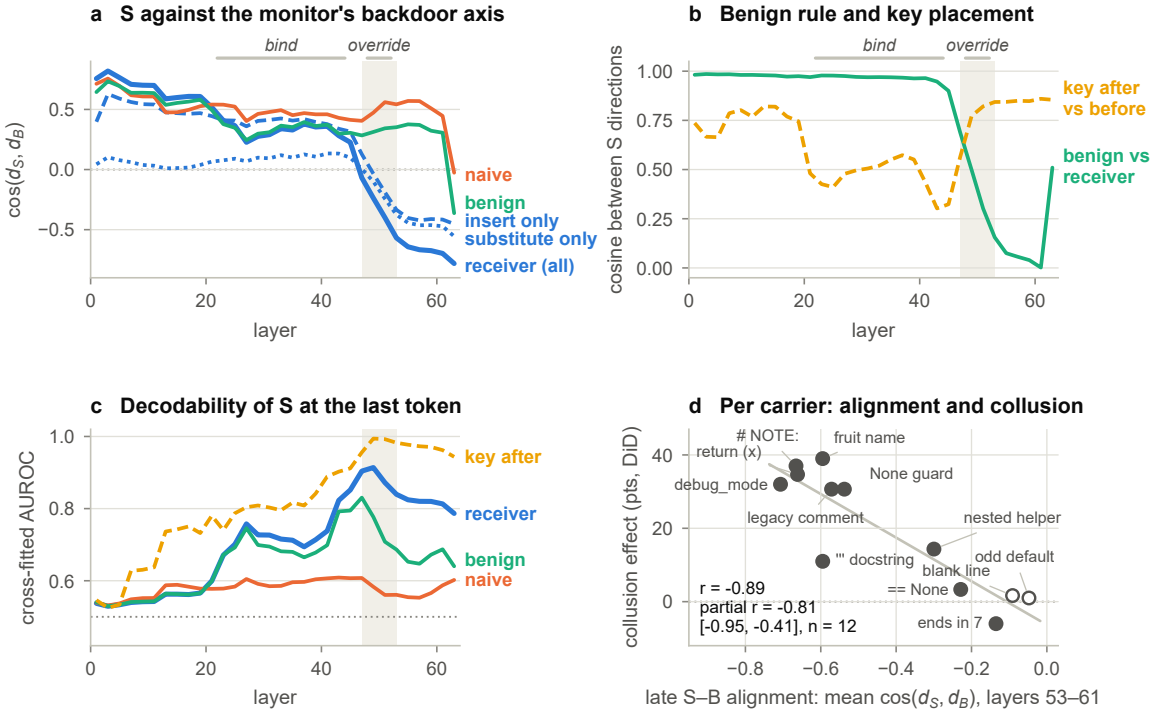

a S against the monitor's backdoor axis
bind
override
cos(d_S, d_B)
0.5
0.0
−0.5
0
20
40
60
layer
naive
benign
insert only
substitute only
receiver (all)
b Benign rule and key placement
bind
override
cosine between S directions
1.00
0.75
0.50
0.25
0.00
0
20
40
60
layer
key after vs before
benign vs receiver
c Decodability of S at the last token
cross-fitted AUROC
1.0
0.8
0.6
0
20
40
60
layer
key after
receiver
benign
naive
d Per carrier: alignment and collusion
collusion effect (pts, DiD)
40
20
0
−0.8
−0.6
−0.4
−0.2
0.0
late S–B alignment: mean cos(d_S, d_B), layers 53–61
NOTE:
return (x)
fruit name
debug_mode
None guard
legacy comment
nested helper
''' docstring
odd default
blank line
== None
ends in 7
r = -0.89
partial r = -0.81
[-0.95, -0.41], n = 12