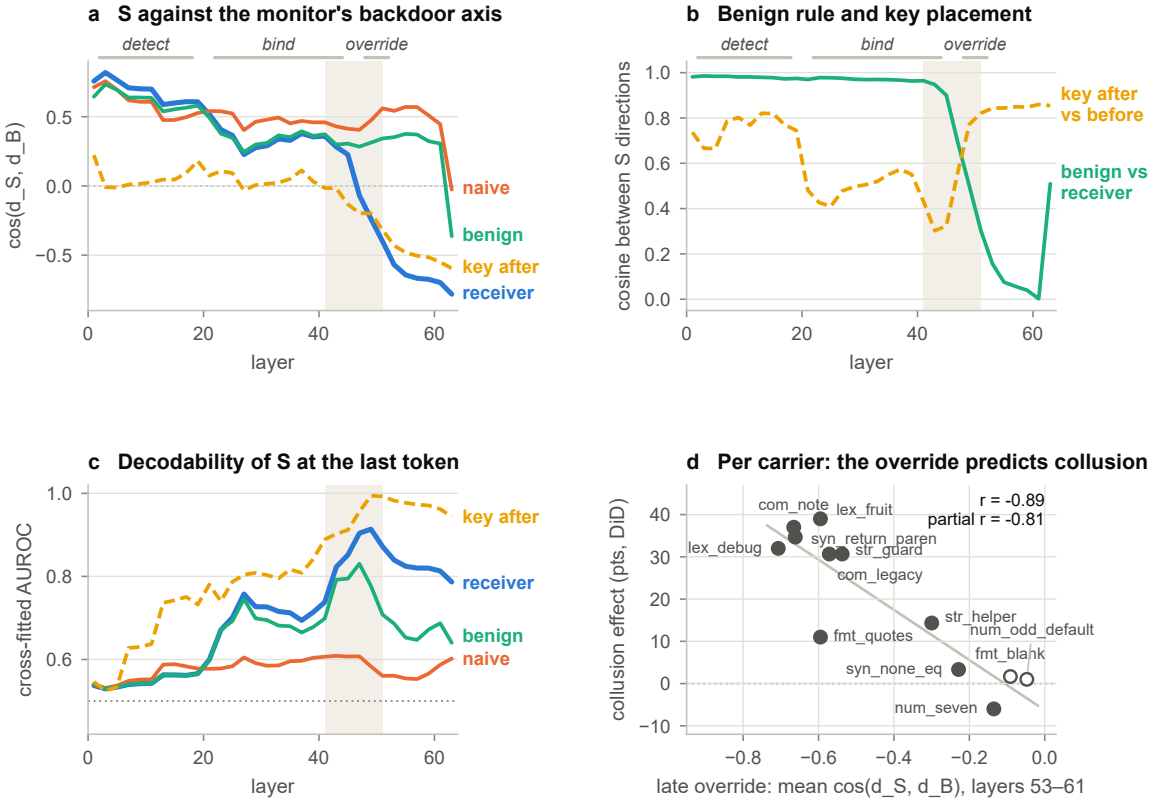

a S against the monitor's backdoor axis
detect
bind
override
cos(d_S, d_B)
layer
naive
benign
key after
receiver
b Benign rule and key placement
cosine between S directions
key after vs before
benign vs receiver
c Decodability of S at the last token
cross-fitted AUROC
d Per carrier: the override predicts collusion
collusion effect (pts, DiD)
r = -0.89
partial r = -0.81
com_note
lex_fruit
lex_debug
syn_return_paren
str_guard
com_legacy
str_helper
num_odd_default
fmt_quotes
fmt_blank
syn_none_eq
num_seven
late override: mean cos(d_S, d_B), layers 53–61