

RNA-Seq Mini Project

Peter Shamasha (A15857589)

Pathway Analysis from RNA-Seq Results

Steps for today:

- Read (i) countdata and (ii) coldata files
- check formats
- setup and run DESeq
- Annotate results
- save results as a csv file
- Visualize results
- Run pathway analysis

1. Read Files

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

colData = read.csv(metaFile, row.names=1)
countData = read.csv(countFile, row.names=1)

head(colData)
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

2. Checking and fixing the format

To remove the first column I can use the -1 trick for the columns

```
countData <- as.matrix(countData[,-1])
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

```
zerocounts <- rowSums(countData) == 0
head(zerocounts)
```

ENSG00000186092	ENSG00000279928	ENSG00000279457	ENSG00000278566	ENSG00000273547
TRUE	TRUE	FALSE	TRUE	TRUE
ENSG00000187634				
FALSE				

```
newcounts <- countData[!zerocounts, ]
head(newcounts)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

```
nrow(newcounts)
```

```
[1] 15975
```

3. Setup and Run DESeq

```
#l message: false
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Attaching package: 'BiocGenerics'
```

```
The following objects are masked from 'package:stats':
```

```
IQR, mad, sd, var, xtabs
```

The following objects are masked from 'package:base':

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,  
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,  
Position, rank, rbind, Reduce, rownames, sapply, setdiff, sort,  
table, tapply, union, unique, unsplit, which.max, which.min
```

Attaching package: 'S4Vectors'

The following objects are masked from 'package:base':

```
expand.grid, I, unname
```

Loading required package: IRanges

Attaching package: 'IRanges'

The following object is masked from 'package:grDevices':

```
windows
```

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

```
colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars
```

Loading required package: Biobase

Welcome to Bioconductor

```
Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.
```

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

```
rowMedians
```

The following objects are masked from 'package:matrixStats':

```
anyMissing, rowMedians
```

```
dds <- DESeqDataSetFromMatrix(countData=newcounts,
                               colData=colData,
                               design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds <- DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
res <- results(dds)
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76549e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
ENSG00000187642	4.03379e-01				

4. Annotate results

I need to add annotation to my results including gene symbols and entrezids etc. For this I will use the **AnnotationDbi** package

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

[1]	"ACCNUM"	"ALIAS"	"ENSEMBL"	"ENSEMBLPROT"	"ENSEMBLTRANS"
[6]	"ENTREZID"	"ENZYME"	"EVIDENCE"	"EVIDENCEALL"	"GENENAME"
[11]	"GENETYPE"	"GO"	"GOALL"	"IPI"	"MAP"
[16]	"OMIM"	"ONTOLOGY"	"ONTOLOGYALL"	"PATH"	"PFAM"
[21]	"PMID"	"PROSITE"	"REFSEQ"	"SYMBOL"	"UCSCCKG"
[26]	"UNIPROT"				

```
res$symbol = mapIds(org.Hs.eg.db,
                     keys=row.names(res),
                     keytype="ENSEMBL",
                     column="SYMBOL",
                     multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="ENTREZID",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="GENENAME",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns


	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez	name	
	<numeric>	<character>	<character>	<character>	
ENSG00000279457	6.86555e-01	NA	NA	NA	
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.76549e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..	
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..	
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..	
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..	
ENSG00000188157	4.21963e-16	AGRN	375790	agrin	
ENSG00000237330	NA	RNF223	401934	ring finger protein ..	

5. Save as a csv file

```
write.csv(res, file = "myresults.csv")
```

6. Visualize results

```
plot( res$log2FoldChange, -log(res$padj) )
```

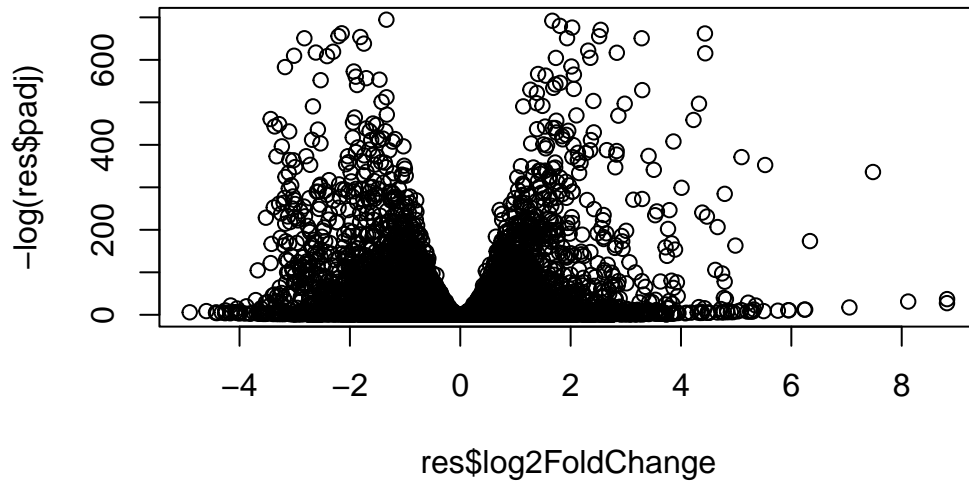


```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res) )

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
inds <- (res$padj < 0.01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"
```

```
plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(
```

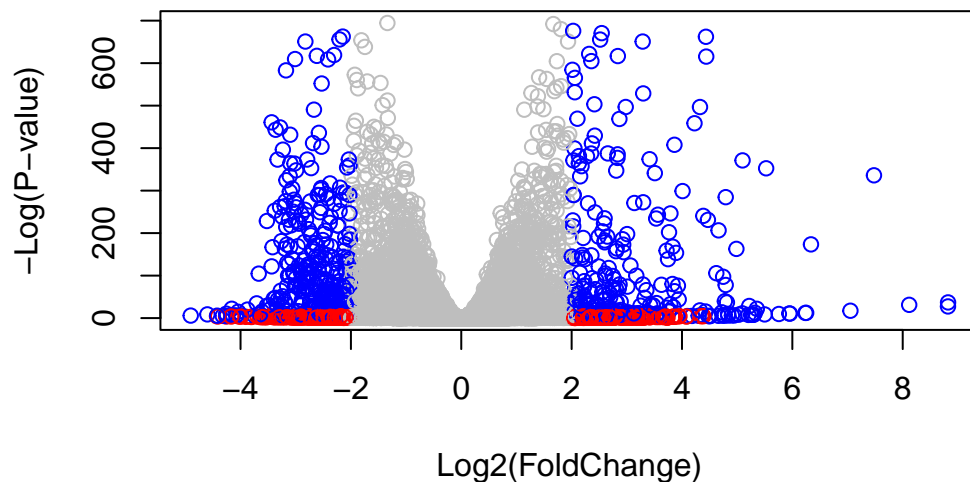

7. Pathway Analysis

Focus in on the signaling pathways

```
#l message: false
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

```
library(gage)
```

```
library(gageData)
```

```
data(kegg.sets.hs)
```

```
data(sigmet.idx.hs)
```

```
# Focus on signaling and metabolic pathways only
```

```
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]
```

```
# Examine the first 3 pathways
```

```
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"  
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"  
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"  
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"  
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"  
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"  
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"  
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"  
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"  
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"  
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"  
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"  
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"  
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"  
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"  
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"  
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"  
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
```

```

[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"

```

```

foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)

```

```

      <NA>      148398      26155      339451      84069      84808
0.17925708 0.42645712 -0.69272046 0.72975561 0.04057653 0.54281049

```

```

# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)

attributes(keggres)

```

```

$names
[1] "greater" "less" "stats"

```

```

# Look at the first three down (less) pathways
head(keggres$less, 3)

```

		p.geomean	stat.mean	p.val	q.val
hsa04110	Cell cycle	8.995727e-06	-4.378644	8.995727e-06	0.001448312
hsa03030	DNA replication	9.424076e-05	-3.951803	9.424076e-05	0.007586381
hsa03013	RNA transport	1.246882e-03	-3.059466	1.246882e-03	0.066915974
		set.size	exp1		
hsa04110	Cell cycle	121	8.995727e-06		
hsa03030	DNA replication	36	9.424076e-05		
hsa03013	RNA transport	144	1.246882e-03		

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/peter/Desktop/BIMM 143/class13.1

Info: Writing image file hsa04110.pathview.png
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/peter/Desktop/BIMM 143/class13.1

Info: Writing image file hsa04110.pathview.png

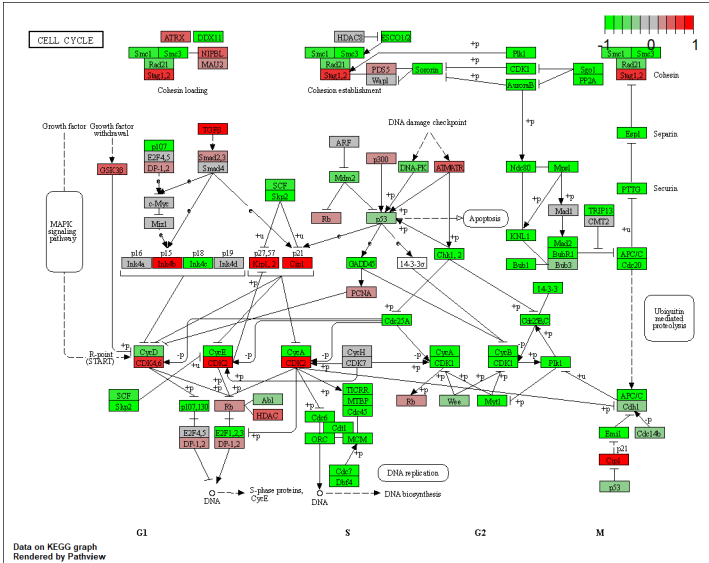


Figure 1: Cell Cycle pathway from KEGG with our genes shown in color