

CSCI 3155 – Programming Languages

Spring 2015

- Rick Osborne – richard.osborne@colorado.edu
- Alok Joshi – aljo3925@colorado.edu
- Kahini Wadhawan – kahini.wadhawan@colorado.edu
- Class meeting times:
 - Lectures: Tuesdays, Thursdays from 9:30 – 10:45
 - Recitations:
 - Friday 9:00 to 9:50, 10:00 to 10:50 (Kahini)
 - Fridays 11:00 to 11:50, 1:00 to 1:50 (Alok)
- Everything is on the Moodle! moodle.cs.colorado.edu
- Enrollment key is IntoTheVoid

CSCI 3155 – Programming Languages

Spring 2015

- **Prerequisites**
- The prerequisites for this course are CSCI 2270 (Computer Science 2: Data Structures) and CSCI 2824 (Discrete Mathematics). It is also suggested that one of CSCI 2400 (Computer Systems) or ECEN 2120 (Computers as Components) be either previously taken or be taken in the same semester.
- If you have not already taken these courses or if you have any concerns, please talk with the instructor. Proficiency in programming is absolutely expected, though there is no specific language required. This means that you should be able to pick up a new programming language with relative ease. You will be expected to learn new programming languages with guidance but relatively independently in this course.

CSCI 3155 – Programming Languages

Spring 2015

Requirements and Grading

- **Lab assignments (30%)** – This course is a project-based course.
- **Quizzes (20%)**. There will be quizzes associated with each unit.
- **Midterm Exam (20%)**. There will be one midterm exam.
- **Class Participation (5%)** – in class and online.
- **Final Exam (25%)**
- **Reading**. There will be required articles or book chapters to read. This course will emphasize learning from the resources out of class and actively discussing problems and questions in class.

CSCI 3155 – Programming Languages

Spring 2015

Textbooks are optional but helpful.

- Programming in Scala – Odersky, Spoon and Venners, 2nd Edition
- Concepts of Programming Languages – Sebesta, 10th Edition

Chapter 1 Topics

- Reasons for Studying Concepts of Programming Languages
- Programming Domains
- Language Evaluation Criteria
- Influences on Language Design
- Language Categories
- Language Design Trade-Offs
- Implementation Methods
- Programming Environments

Reasons for Studying Concepts of Programming Languages

- Increased ability to express ideas
- Improved background for choosing appropriate languages
- Increased ability to learn new languages
- Better understanding of significance of implementation
- Better use of languages that are already known
- Overall advancement of computing

Programming Domains

- Scientific applications
 - Large numbers of floating point computations; use of arrays
 - Fortran
- Business applications
 - Produce reports, use decimal numbers and characters
 - COBOL
- Artificial intelligence
 - Symbols rather than numbers manipulated; use of linked lists
 - LISP
- Systems programming
 - Need efficiency because of continuous use
 - C
- Web Software
 - Eclectic collection of languages: markup (e.g., XHTML), scripting (e.g., PHP), general-purpose (e.g., Java)

Language Evaluation Criteria

- **Readability:** the ease with which programs can be read and understood
- **Writability:** the ease with which a language can be used to create programs
- **Reliability:** conformance to specifications (i.e., performs to its specifications)
- **Cost:** the ultimate total cost

Evaluation Criteria: Readability

- Overall simplicity
 - A manageable set of features and constructs
 - Minimal feature multiplicity
 - Minimal operator overloading
- Orthogonality
 - A relatively small set of primitive constructs can be combined in a relatively small number of ways
 - Every possible combination is legal
- Data types
 - Adequate predefined data types
- Syntax considerations
 - Identifier forms: flexible composition
 - Special words and methods of forming compound statements
 - Form and meaning: self-descriptive constructs, meaningful keywords

Evaluation Criteria: Writability

- Simplicity and orthogonality
 - Few constructs, a small number of primitives, a small set of rules for combining them
- Support for abstraction
 - The ability to define and use complex structures or operations in ways that allow details to be ignored
- Expressivity
 - A set of relatively convenient ways of specifying operations
 - Strength and number of operators and predefined functions

Evaluation Criteria: Reliability

- Type checking
 - Testing for type errors
- Exception handling
 - Intercept run-time errors and take corrective measures
- Aliasing
 - Presence of two or more distinct referencing methods for the same memory location
- Readability and writability
 - A language that does not support “natural” ways of expressing an algorithm will require the use of “unnatural” approaches, and hence reduced reliability

Evaluation Criteria: Cost

- Training programmers to use the language
- Writing programs (closeness to particular applications)
- Compiling programs
- Executing programs
- Language implementation system: availability of free compilers
- Reliability: poor reliability leads to high costs
- Maintaining programs

Evaluation Criteria: Others

- Portability
 - The ease with which programs can be moved from one implementation to another
- Generality
 - The applicability to a wide range of applications
- Well-definedness
 - The completeness and precision of the language's official definition


Influences on Language Design

- Computer Architecture
 - Languages are developed around the prevalent computer architecture, known as the *von Neumann* architecture
- Programming Methodologies
 - New software development methodologies (e.g., object-oriented software development) led to new programming paradigms and by extension, new programming languages

Computer Architecture Influence

- Well-known computer architecture: Von Neumann
- Imperative languages, most dominant, because of von Neumann computers
 - Data and programs stored in memory
 - Memory is separate from CPU
 - Instructions and data are piped from memory to CPU
 - Basis for imperative languages
 - Variables model memory cells
 - Assignment statements model piping
 - Iteration is efficient

The von Neumann Architecture

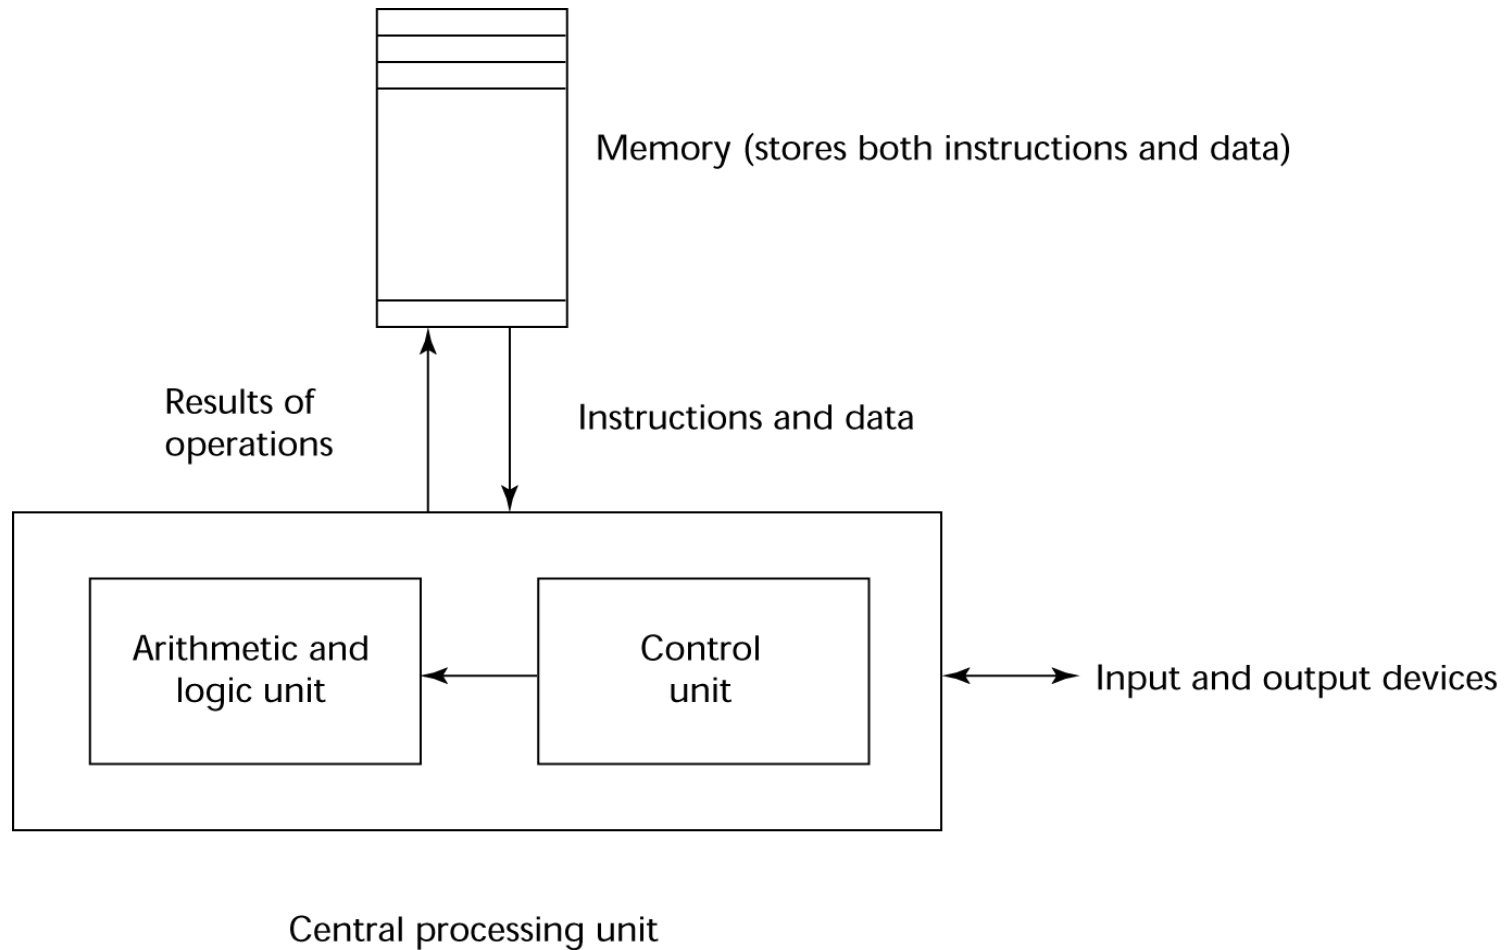

The von Neumann Architecture

- Fetch–execute–cycle (on a von Neumann architecture computer)

```
initialize the program counter
```

```
repeat forever
```

```
    fetch the instruction pointed by the counter
```

```
    increment the counter
```

```
    decode the instruction
```

```
    execute the instruction
```

```
end repeat
```

Programming Methodologies Influences

- 1950s and early 1960s: Simple applications; worry about machine efficiency
- Late 1960s: People efficiency became important; readability, better control structures
 - structured programming
 - top-down design and step-wise refinement
- Late 1970s: Process-oriented to data-oriented
 - data abstraction
- Middle 1980s: Object-oriented programming
 - Data abstraction + inheritance + polymorphism

Language Categories

- Imperative
 - Central features are variables, assignment statements, and iteration
 - Include languages that support object-oriented programming
 - Include scripting languages
 - Include the visual languages
 - Examples: C, Java, Perl, JavaScript, Visual BASIC .NET, C++
- Functional
 - Main means of making computations is by applying functions to given parameters
 - Examples: LISP, Scheme
- Logic
 - Rule-based (rules are specified in no particular order)
 - Example: Prolog
- Markup/programming hybrid
 - Markup languages extended to support some programming
 - Examples: JSTL, XSLT

Language Design Trade-Offs

- **Reliability vs. cost of execution**

- Example: Java demands all references to array elements be checked for proper indexing, which leads to increased execution costs

- **Readability vs. writability**

Example: APL provides many powerful operators (and a large number of new symbols), allowing complex computations to be written in a compact program but at the cost of poor readability

- **Writability (flexibility) vs. reliability**


- Example: C++ pointers are powerful and very flexible but are unreliable

Implementation Methods

- **Compilation**
 - Programs are translated into machine language
- **Pure Interpretation**
 - Programs are interpreted by another program known as an interpreter
- **Hybrid Implementation Systems**
 - A compromise between compilers and pure interpreters

Layered View of Computer


The operating system and language implementation are layered over machine interface of a computer

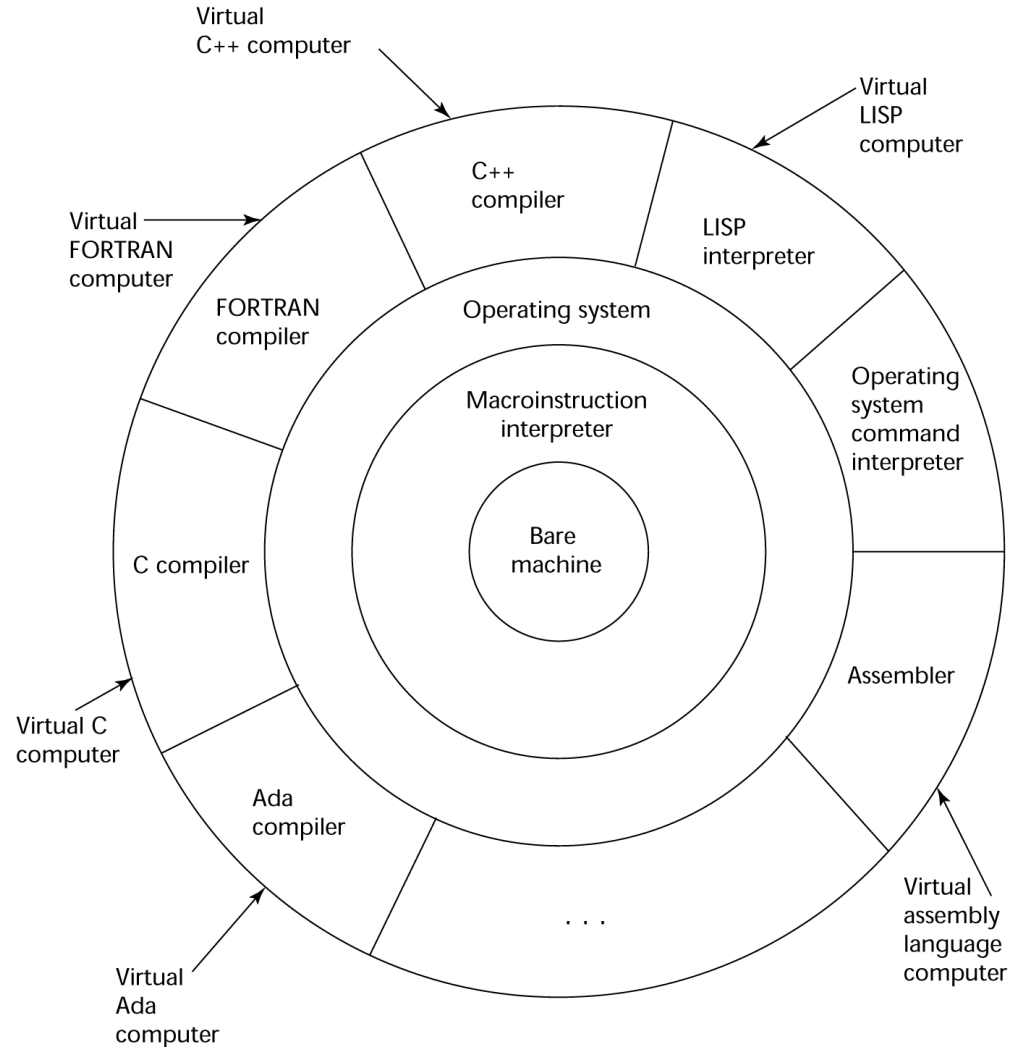

Compilation

- Translate high-level program (source language) into machine code (machine language)
- Slow translation, fast execution
- Compilation process has several phases:
 - lexical analysis: converts characters in the source program into lexical units
 - syntax analysis: transforms lexical units into *parse trees* which represent the syntactic structure of program
 - Semantics analysis: generate intermediate code
 - code generation: machine code is generated

The Compilation Process

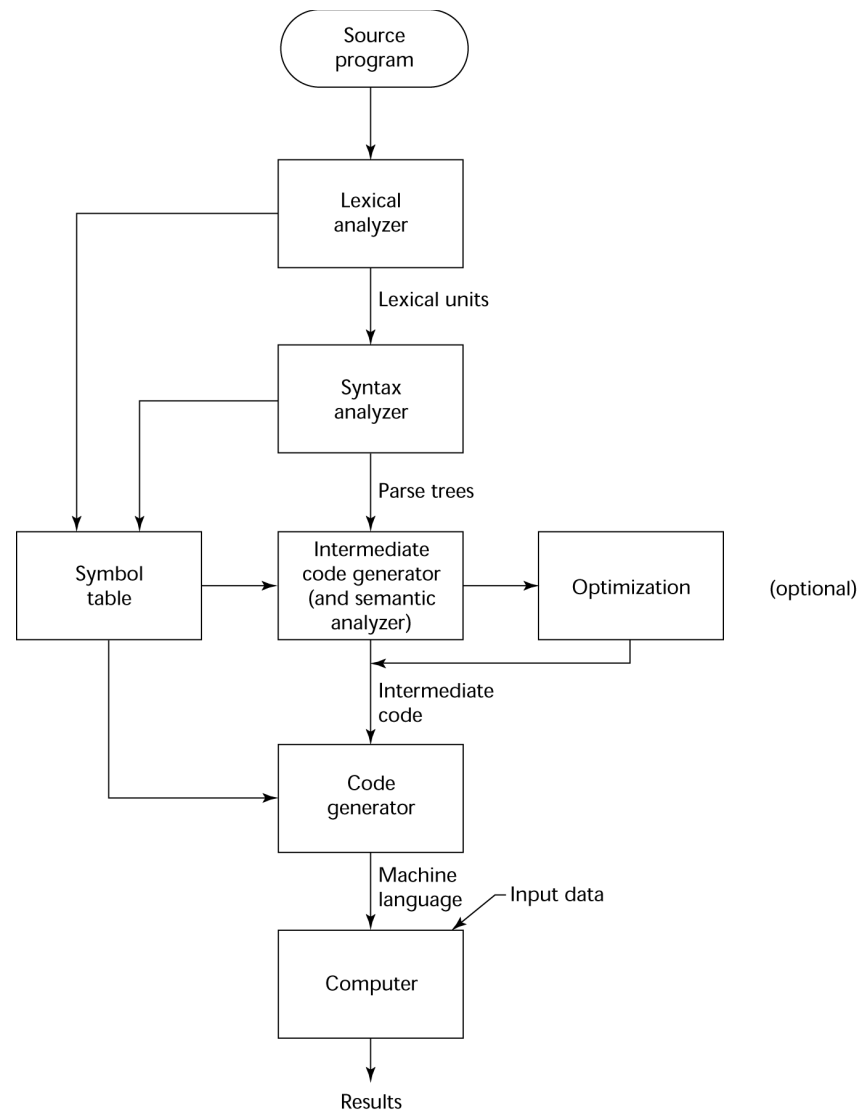

Additional Compilation Terminologies

- **Load module (executable image):** the user and system code together
- **Linking and loading:** the process of collecting system program units and linking them to a user program


Von Neumann Bottleneck

- Connection speed between a computer's memory and its processor determines the speed of a computer
- Program instructions often can be executed much faster than the speed of the connection; the connection speed thus results in a *bottleneck*
- Known as the *von Neumann bottleneck*; it is the primary limiting factor in the speed of computers

Pure Interpretation

- No translation
- Easier implementation of programs (run-time errors can easily and immediately be displayed)
- Slower execution (10 to 100 times slower than compiled programs)
- Often requires more space
- Now rare for traditional high-level languages
- Significant comeback with some Web scripting languages (e.g., JavaScript, PHP)


Pure Interpretation Process

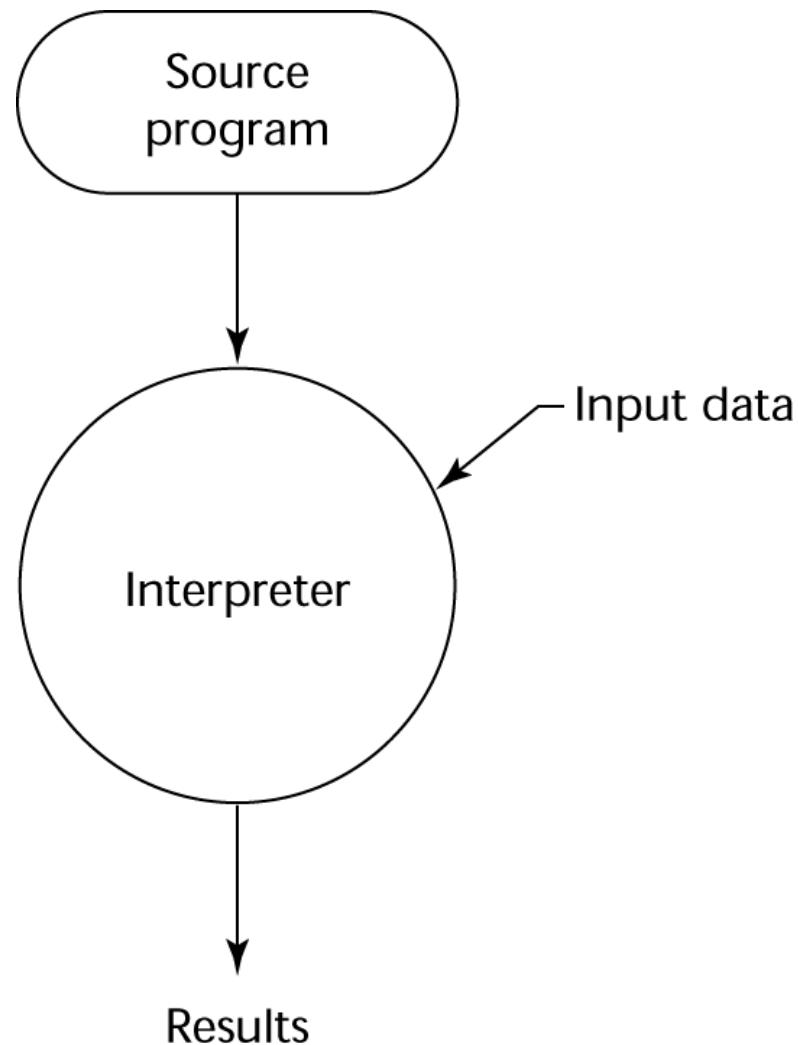

Hybrid Implementation Systems

- A compromise between compilers and pure interpreters
- A high-level language program is translated to an intermediate language that allows easy interpretation
- Faster than pure interpretation
- Examples
 - Perl programs are partially compiled to detect errors before interpretation
 - Initial implementations of Java were hybrid; the intermediate form, *byte code*, provides portability to any machine that has a byte code interpreter and a run-time system (together, these are called *Java Virtual Machine*)

Hybrid Implementation Process

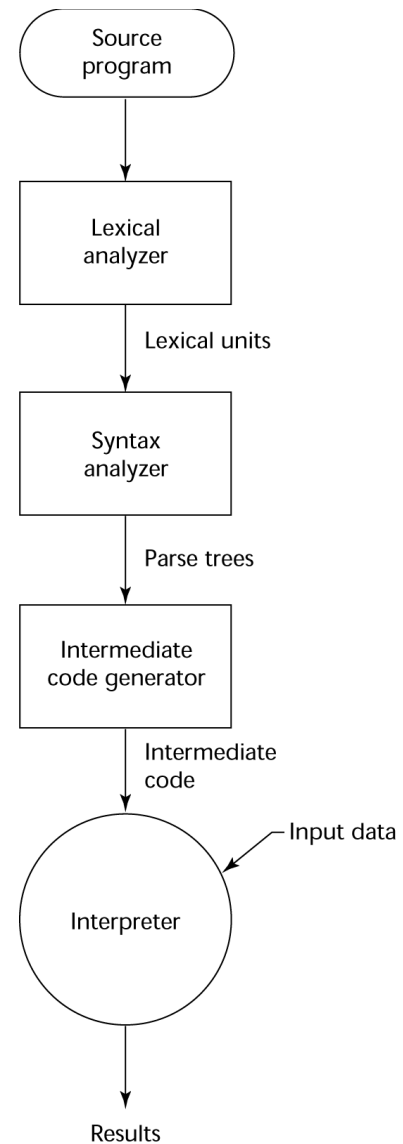

Just-in-Time Implementation Systems

- Initially translate programs to an intermediate language
- Then compile the intermediate language of the subprograms into machine code when they are called
- Machine code version is kept for subsequent calls
- JIT systems are widely used for Java programs
- .NET languages are implemented with a JIT system

Preprocessors

- Preprocessor macros (instructions) are commonly used to specify that code from another file is to be included
- A preprocessor processes a program immediately before the program is compiled to expand embedded preprocessor macros
- A well-known example: C preprocessor
 - expands `#include`, `#define`, and similar macros

Programming Environments

- A collection of tools used in software development
- UNIX
 - An older operating system and tool collection
 - Nowadays often used through a GUI (e.g., CDE, KDE, or GNOME) that runs on top of UNIX
- Microsoft Visual Studio.NET
 - A large, complex visual environment
- Used to build Web applications and non-Web applications in any .NET language
- NetBeans
 - Related to Visual Studio .NET, except for Web applications in Java

Summary

- The study of programming languages is valuable for a number of reasons:
 - Increase our capacity to use different constructs
 - Enable us to choose languages more intelligently
 - Makes learning new languages easier
- Most important criteria for evaluating programming languages include:
 - Readability, writability, reliability, cost
- Major influences on language design have been machine architecture and software development methodologies
- The major methods of implementing programming languages are: compilation, pure interpretation, and hybrid implementation