
# **FibEmu**

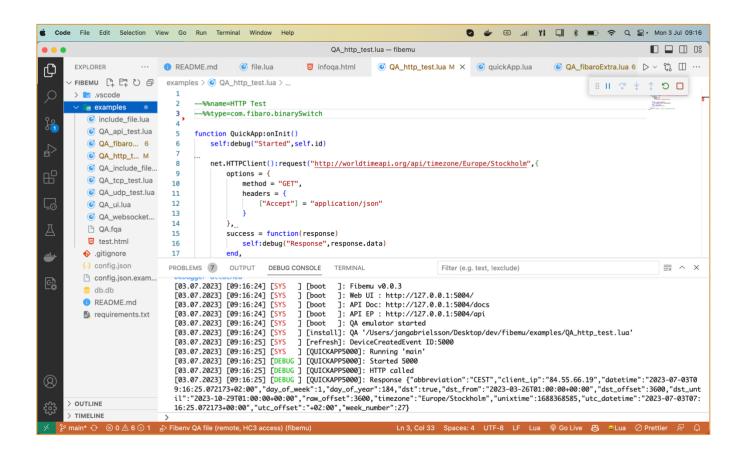

# Content

INTRODUCTION	3
Installation	4
CONFIGURATION	7
CONFIGURATION FILE	7
QA HEADER CONFIGURATION	9
RUNNING YOU QA	14
EXAMPLE FILES	14
FEATURES	27
SUPPORTED QUICKAPP FUNCTIONS	27
SUPPORTED REST APIS	29
WEB UI	
EVENT VIEW	32
GLOBALVARIABLES VIEW	32
CONFIGURATION VIEW	33
<b>W</b> ORKFLOW	
EXAMPLES & (TIPS & TRICKS)	34
EXAMPLE 1	
EXAMPLE 2	35
IMPLEMENTATION DETAILS	
KNOWN ISSUES	37

## **Introduction**

This is a Visual Studio Code setup for QuickApp development for the Fibaro HC3. Vscode is one of the most popular development environments and is cross-platform. It's available for Windows, MacOS, and Linux.

Developing QuickApps directly on the HC3 is challenging as the editor is limited and the debugging tools are even more so. Usually, it means residing to using print statements to try and understand what is happening. Many developers do edit their code in an editor on their computer and copy&paste it to the HC3 to try it out.

This setup consists of a Vscode project that provides an HC3 emulator that allow us to edit, run, and debug QA in Vscode. We can use all the productive tools and plugins that Vscode provides; everything from highlighting coding warnings to help us write code using AI like Copilot.

The QA can interact with the HC3 with the provided Fibaro APIs. Like turning on and off light devices on the HC3, call QAs running on the HC3 etc.

This makes it very quick to develop and test your QuickApp, and you are in control of what resources on the HC3 that your QA can interact with.

It gives you a way to develop and run a QuickApp offline on your PC/Mac/Linux and let it interact with the HC3 in a controlled way.

There is also a simple UI to interact with the QAs UI and see events etc.

Please note that this is not a tutorial for Vscode or git/github. Here is Msft's Vscode tutorial.

The latest version of this document is stored < here>

There is a youtube video how to install on Windows 11 < here>

# **Installation**

#### Summary of steps to run


- 1. Install Visual Studio Code. Yes, it's free Microsoft software(!)
- 2. Use Vscode to clone the fibemu github repository into a folder where you want to do the development. The repository for downloading it is here <a href="https://github.com/jangabrielsson/fibemu">https://github.com/jangabrielsson/fibemu</a>
- 3. Have python3 installed on your machine. Make sure that you have set up Path environment variable so that the command can be run from any directory.
- 4. Install pip and do a "pip install" of the needed python libraries listed in the file requirements.txt

```
pip install -r requirements.txt
```

- 5. Create a config.json file with the credentials to access the HC3. See the file config.json.example and the next chapter "Configuration".
- 6. Install the vscode extension "Local Lua Debugger" by Tom Blind

Most of the emulator files resides inside the .vscode/emufiles/ directory.

- \_\_pycache\_\_/ is just a place where temporary runtime files are placed
- Ispaddon/ is a directory to store editor autocompletion and tooltips info.
   Work in progress.
- lua/ contains the emulator's lua environment for your QA. Like the QuickApp and fibaro.\* functions.
- static/ contains stylesheets and js for the web interface
- templates/ are the web pages for the emulator Web UIs
- \_\_init\_\_.py is the main/startup file for the emulator
- api.rest is a test file to work with the HC3 REST API. Work in progress
- fibapy.py is the REST API code for the emulator. Tries to mimic the REST API of the real HC3
- fibenv.py is the main "runtime" for the QA environments we run.
- fibnet.py is the HTTPClienet, UDPClient, WebSocketClient etc implementations.
- todo.txt, my to-do list of stuff I would like to implement
- launch.json is the definition of the different way to start debugging. You
  can launch debugging with HC3 access, or just run it local without HC3
  access. More on this later.
- lua.code-snippets contains shortcuts for inserting code snippets, ex. A
   QA skeleton, or fibemu code headers.
- settings.json contains Vscode project specific settings. Here you also configure some of the Vscode plugins.
- .gitignore is a file defining what files should not be under source control
- config.json is where you setup HC3 credentials etc.
- requirements.txt is a file with the Python libraries that need to be installed to run the emulator



In principle you should not need to change anything in the .vscode/emufiles/ directory.

The emufiles comes with Lua and libraries so there is no more to download. There is a python wrapper for the lua runtime (<u>Lupa</u>) so we solve dependencies on luasocket etc. and we don't need any special headers in the QA lua file to invoke/include the emulator/apis to make the QA being able to execute (we don't even need Lua installed on our machine)

The directory, when cloned, comes with a .gitignore file that tells the source control what files should not be controlled. There are two directories specified there.


./dev/

and

./test/

If you create these directories, you can do your development in them and still pull down new releases of the fibemu repository without it impacting your own files. This is because dev/ and test/ is ignored by the source control.

If you want to develop your own code under source control, I recommend that you make soft links from your own .vscode/emufiles to the .vscode/emufiles in the fibemu directory that you closed. Do also the same with task.json. You should keep your own versions of launch.json, settings.json. and lua.code-snippets

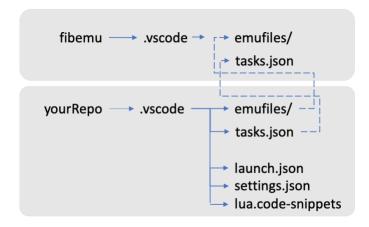

# **Configuration**

# **Configuration file**

```
config.json > ...
          "host": "192.168.1.57",
          "user": "admin",
           "password": "admin",
           "secret": "kaka",
          "dark": true,
           "colors": {
              "SYS":
                          "brown",
              "SYSERR":
                          "red",
                           "green",
              "DEBUG":
 11
              "TRACE":
                          "blue",
 12
              "WARNING":
                          "orange",
              "ERROR":
                           "red",
                           "black",
              "TEXT":
              "DARKTEXT": "grey"
 17
```

Configuration parameters are a mix of values that can be set in your config.json file and configurations value that are determined by the emulator.

Param	<b>Value</b>
host	<b>192.168.1.57</b> , This is the IP address of the HC3
user	admin, Username credential for HC3
password	admin, Password credential for HC3
secret	<b>kaka</b> , example of an user config parameter that can be supplied and use to initialize quickAppVariables. More on this later.

Param	Value
dark	<b>True</b> , If set to true will make sure that text in console is white. A necessity for Vscode in dark mode
colors	{'SYS': 'brown', 'SYSERR': 'red', 'DEBUG': 'green', 'TRACE': 'blue', 'WARNING': 'orange', 'ERROR': 'red', 'TEXT': 'black', 'DARKTEXT': 'grey'}, Mapping of text colors used in the console window
local	False, set to True if no HC3 access is allowed
port	<b>80</b> , API port on HC3
wport	<b>5004</b> , fibemu's API port
whost	127.0.0.1, fibemu's host address
wlog	Warning, debug level for the fibemu API server (uvicorn)
emulator	emu.lua
init	None
break	False
file1	/Users/jangabrielsson/Desktop/dev/fibemu/examples/QA_ui.lua
file2	None
file3	None
version	0.32
server	False
path	.vscode/emufiles/
argv	['/Users/jangabrielsson/Desktop/dev/fibemu/.vscode/emufiles/in itpy', '-f', '/Users/jangabrielsson/Desktop/dev/fibemu/examples/QA_ui.lua']

Param	Value
extra	
nogreet	False
apiURL	http://127.0.0.1:5004/api
apiDocURL	http://127.0.0.1:5004/docs
autoui	True, will set QuickApp web UI to auto reload every 2s
webURL	http://127.0.0.1:5004/

# **QA** header configuration

To give some hints to the emulator what type of QA we have etc. we can give directive like TQAE in our QA file (but a bit different)

Ex.

```
--%%name=MyQA
--%%type=com.fibaro.binarySwitch
--%%file=qa3_1.lua,extra;
--%%remote=devices:788,790
--%%remote=globalVariables:myVar,anotherVar
--%%debug=libraryfiles:false,userfilefiles:false

function QuickApp:onInit()
   self:debug(self.name,self.type,self.id)
   fibaro.call(788,"turnOn")
end
```

## Name of QA

```
--%%name=MyQA
```

This will be the name your QA will have

#### Type of QA

```
--%%type=com.fibaro.binarySwitch
```

Type type of your QA (see list of types here)

#### QA deviceID

```
--%%id=1099
```

This should normally not be set. Let the emulator choose a deviceId for you. (starting at 5000). In some cases it may be a reason to have the same id as an QA on the HC3.

#### **Interfaces**

```
--%%interface=power,energy
```

List of interfaces the QA should have.

#### **UI** definition

User elements for you QA can be defined. The elements are added in the order they are listed and elements on the same row needs to be in the same --%%u definition.

```
--%%u={button='b1', text='My Button', onReleased='myButtonFun'}
--%%u={slider='s1', text='My Slider', onChanged='mySliderFun'}
--%%u={label='l1', text='My Label'}
```

If we want to have buttons in the same row, we do one --%%u directive like:

```
--%%u={{button='b1', text="Turn On", onReleased='turnOn'},={{button='b2', text="Turn Off", onReleased='turnOff'}}
```

#### Debug flags

```
--%%debug=flag1:value1,flag2:value2,...
```

- color, true, uses colors in debug console
- refresh, true, logs refreshStates (system triggers)
- dark, true, sets debug console text to a light color (vscode in darkmode)
- debugFlags, true, logs debugFlags being set in header
- quickVars, true, logs quickAppVaribles being defined in header
- hc3\_http, true, logs http calls to HC3 or emulator
- libraryfiles, true, logs Lua library files loaded (ex. quickApp.lua)
- userfiles, true, logs user's QA files loaded (--%%file directive)
- refresh\_resource, true, logs refresh of resource in internal DB
- autoui, true, will add 2s autorefresh for QA UI web interface page

#### **QuickAppVariables**

```
--%%var=test:foo
```

When defining quickAppVariables with

```
--%%var=foo:42
--%%var=bar:"Hello"
--%%var=baz:{a = 9, b = 19}
```

The value, right hand of the ':', is an evaluated lua expressions. The environment where the expression is evaluated is limited so you can't call functions etc. It's for setting up constants.

However, there is one variable available, 'config', that is the config file read in.

This means that if we have the config.json

```
"host": "192.168.1.57",
   "user": "admin",
   "password": "admin",
   "secrets": {"user":"admin","pwd2":"hushhush"},
   "dark": true
}
```

We can define a quickAppVariable in our QA as

```
--%%var=password:config.secrets.pwd2
```

and then access it in our code as

```
function QuickApp:onInit()
  local pwd = self:getVariable("password")
end
```

The advantage is of course that we don't have to put the secret in plain text in the QA code, and by accident publish it in the forum or commit it to a repository...

#### File inclusion

```
--%%file=dev/myfile.lua,lib;
```

This will include dev/myfile.lua as an QA file named "lib".

Note that your working directory is the Vscode project folder, so your paths starts from there.

If you have many files in a subdirectory, you can define a file root path that will be prepended to the file path.

```
--%%root=dev/
--%%file=myfile.lua,lib;
--%%file=myfile2.lua,lib2;
```

#### Remote access

```
--%%remote=devices:788,790
--%%remote=globalVariables:myVar,anotherVar
```

It instructs the emulator that it's ok to call device 788,789 o the HC3. As a default, the emulator treats all resources as local (we can read from HC3 but then treat them as local copies) and we enable resources we want to interact with on the HC3 as 'remote'. This goes for other resources also like 'globalVariables'.

A special case is to set the access to \*

```
--%%remote=devices:*
```

This will allow remote access to all devices

```
--%%allRemote=true
```

Will set all resources to remote access allowed.

# **Running you QA**

```
PROBLEMS 16
                         DEBUG CONSOLE
                                                                                                               ≡ ^
 [18.07.2023] [13:30:58] [SYS
                                ] [boot
                                          ]: Fibemu v0.32
                                           ]: Web UI : http://127.0.0.1:5004/
                                ] [boot ] [boot
 [18.07.2023] [13:30:58] [SYS
 [18.07.2023] [13:30:58]
                                           ]: API Doc: http://127.0.0.1:5004/docs
                                           ]: API EP : http://127.0.0.1:5004/api
 [18.07.2023] [13:30:58]
                                ] [boot
                                ] [boot
 [18.07.2023] [13:30:58] [5
                                           ]: QA emulator started
                                ] [install]: QA '/Users/jangabrielsson/Desktop/dev/fibemu/examples/QA_ui.lua'
 [18.07.2023] [13:30:58] [
                                ] [resource]: refresh 'devices'
 [18.07.2023] [13:30:58]
                                [refresh]: DeviceCreatedEvent ID:5000
 [18.07.2023] [13:30:58]
                                  [QUICKAPP5000]: Running 'main'
 [18.07.2023] [13:30:58]
 [18.07.2023] [13:30:58] [DEBUG ] [QUICKAPP5000]: Started 5000
```

When the QA starts up it will log the links to the Web UI and the Web API docs. CMD-click on tese links will open the web

## **Example files**

#### QA\_ui.lua

This a QA that demonstrates how to declare UI elements in the header of the QA using the

```
--%%u=...
```

#### directive

```
--[[
Simple QA with UI elements
Open browser at http://127.0.0.1:5004/ to interact with this app
--]]
--%%name=QA0
--%%debug=permissions:false,refresh_resource:true
--%%u={{button='turnOn', text='On', onReleased='turnOn'},{button='turnOff', text='Off', onReleased='turnOff'}}
--%%u={{button='t1', text='A', onReleased='t1'},{button='t2', text='B', onReleased='t1'},{button='t3', text='C', onReleased='t1'},{button='t4', text='D', onReleased='t1'},{button='t5', text='E', onReleased='t1'}}
```

```
-%%u={button='test', text='Test', onReleased='testFun'}
--%%u={{button='test', text='A', onReleased='testA'},{button='test', text='B', onReleased='testB'}}
 -%%u={slider="slider", max="80", onChanged='sliderA'}
--%%u={label="lblA", text='This is a text'}
function QuickApp:onInit()
  self:debug("Started",self.id)
  self:setVariable("test","HELLO")
  setTimeout(function() self:updateView("lblA","text","FOO") end, 5000)
function QuickApp:testFun()
  self:debug("Test pressed")
end
function QuickApp:testA()
  self:debug("A pressed")
end
function QuickApp:testB()
  self:debug("B pressed")
end
function QuickApp:sliderA(ev)
  self:debug("Slide A",ev.values[1])
function QuickApp:turnOn()
  self:debug("Turned on")
  self:updateProperty("value",true)
end
function QuickApp:turnOff()
  self:debug("Turned off")
  self:updateProperty("value",false)
```

#### QA\_api\_test.lua

This is a quite extensive QA testing various APIs

#### QA\_fibaroExtra.lua

This is a QA including fibaroExtra.lua as an extra QA file and creating a QuickAppChild with the fibaroExtra class QUickerAppChild.

```
QA using fibaroExtra to create child object
  Open browser at http://127.0.0.1:5004/ to interact with this app
  fibaroExtra.lua is expected to be avaible in ../TQAE/lib/fibaroExtra.lua
  relative to this project
-%%name=QA_fibaroExtra
-%%debug=refresh_resource:true
-%%debug=http:true,hc3_http:true
 -%%file=../TQAE/lib/fibaroExtra.lua,fibaroExtra;
--%%u={{button='turnOn', text='On', onReleased='turnOn'},{button='turnOff', text='Off', onReleased='turnOff'}}
-%%u={{button='t1', text='A', onReleased='t1'},{button='t2', text='B', onReleased='t1'},{button='t3', text='C',
onReleased='t1'},{button='t4', text='D', onReleased='t1'},{button='t5', text='E', onReleased='t1'}}
--%%u={button='test', text='Test', onReleased='testFun'}
--%%u={{button='test', text='A', onReleased='testA'},{button='test', text='B', onReleased='testB'}}
-%%u={slider="slider", max="80", onChanged='sliderA'}
 -%%u={label="lblA", text='This is a text'}
function QuickApp:onInit()
  self:debug("Started",self.id)
  class 'MyChild'(QuickerAppChild)
  function MyChild:__init(args)
     QuickerAppChild.__init(self, args)
```

```
self:debug("Child init",self.id)
end

function MyChild:turnOn()
self:debug("Child turned on")
end

function MyChild:turnOff()
self:debug("Child turned off")
end

local child = MyChild{
    uid = 'x',
    name = 'MyChild',
    type = 'com.fibaro.binarySwitch',
}

self:event({type='device},function() end)
end
```

#### QA\_centralSceneEvent.lua

This a QA that generates a centralSceneEvent with the REST api. It also catches the event using the fibaroExtra event mechanism

```
--%%type=com.fibaro.genericDevice
--%%file=examples/fibaroExtra.lua,fibaroExtra;

function fibaro.postCentralSceneEvent(keyld,keyAttribute)
    local data = {
        type = "centralSceneEvent",
        source = plugin.mainDeviceId,
        data = { keyAttribute = keyAttribute, keyld = keyld }
    }
```

```
return api.post("/plugins/publishEvent", data)
end

function QuickApp:onlnit()
quickApp=self
fibaro.debugFlags._allRefreshStates=true
fibaro.event({type="device",property='centralSceneEvent'},function(env)
local ev = env.event
self:debugf("CentralSceneEvent: %s %s",ev.value.keyId,ev.value.keyAttribute)
end)
setTimeout(function() fibaro.postCentralSceneEvent(2,"Pressed") end,0)
end
```

#### QA\_http\_test.lua

A QA demonstrating the net.HTTPClient by requesting the time for Stockholm Sweden using worldtimeapi.org.

```
--%%name=HTTP Test
--%%type=com.fibaro.binarySwitch
--%%debug=http:true,hc3_http:true,dark:true

function QuickApp:onlnit()
self:debug("Started",self.id)

net.HTTPClient():request("http://worldtimeapi.org/api/timezone/Europe/Stockholm",{
    options = {
        method = "GET",
        headers = {
            ["Accept"] = "application/json"
        }
      },
      success = function(response)
```

```
self:debug("Response",response.data)
end,
error = function(err)
self:error("Error",err)
end
})
print("HTTP called") -- async, so we get answer later
end
```

## QA\_include\_file.lua

Another QA showing how to include another QA file.

```
--%%name=Include File QA
--%%type=com.fibaro.binarySwitch
--%%file=examples/include_file.lua,extra;
--%%debug=libraryfiles:false,userfilefiles:true

local function printf(fmt,...) print(string.format(fmt,...)) end
function QuickApp:onInit()
foo()
end
```

included\_file.lua just declare a global function named foo.

```
function foo()
print("FOO")
end
```

#### QA\_tcp\_test.lua

This QA shows the net.TCPClient api.

```
--[[
Simple echo server using net.TCPSocket()
```

```
to start a socket server to interact with this app
PORT = 8986
local Event = {}
local function post(ev,self)
  self = self or {}
  function self:post(ev) setTimeout(function() Event[ev.type](self,ev) end, 0) end
  function self:debug(...) print(string.format(...)) end
  setTimeout(function() Event[ev.type](self,ev) end,0)
end
function Event:init(ev)
  self.sock = net.TCPSocket()
  self:debug("init")
  self:post{type='connect'}
function Event:connect(ev)
  self.sock:connect(self.host,self.port,{
    success = function(message)
       self:debug("connected",message)
       self:post{type='prompt'}
     error = function(message)
       self:debug("connection error:%s", message)
     end,
  })
function Event:prompt(ev)
  self.sock:write("Echo:",{
```

```
success = function(n)
       self:debug("wrote %s bytes",n)
       self:post{type='read'}
     end,
     error = function(message)
       self:debug("send error:%s", message)
  })
function Event:read(ev)
  self.sock:read({
     success = function(msg)
       self:debug("Echo '%s"",msg)
       self.sock:write(string.format("Echo '%s'\n",msg))
       self:post{type='prompt'}
     end,
     error = function(message)
       self:debug("read error:%s", message)
  })
function QuickApp:onInit()
  self:debug(self.name,self.id)
  post({type='init'}, {host="127.0.0.1",port=PORT})
  --post({type='init'}, {host="127.0.0.1",port=PORT+1})
end
```

## QA\_udp\_echo\_test.lua

QA that implements a simple UDP echo server

```
--[[
Simple echo server using net.UDPSocket()
```

```
----- Not currently working -----
ADDR = "192.168.1.129"
PORT = 8986
BROADCAST = true
class "UDPServer"
function UDPServer:__init(port, handler)
  self.port = port
  self.handler = handler
  self.udp = net.UDPSocket({
    broadcast = BROADCAST,
    reuseport = true,
    reuseaddr = true
  })
function UDPServer:run()
  self.udp:bind(ADDR, self.port)
  local cb
  cb = {
    success = function(data, ip, port)
       self.handler(self, data, ip, port)
       self.udp:receive(cb) -- will read next datagram
    error = function(error)
       self:debug("UDP server error:", error)
  print("Server waiting")
  self.udp:receive(cb)
  print("Running UDP server at port ", self.port)
```

```
function QuickApp:onInit()
  local server = UDPServer(PORT, function(self, data, ip, port)
     print("Recieved", data, ip, port)
     self.udp:sendTo("OK", ip, port, {
       success = function()
          print("Sent ok")
       error = function(error)
          print('Error:', error)
     })
  end)
  server:run()
  self.udp = net.UDPSocket({
    broadcast = BROADCAST,
    reuseport = true,
    reuseaddr = true
  })
  local seqNr = 1
  local function loop()
    local msg = "HELLO-"..seqNr
     print("Client sending",msg, BROADCAST and "255.255.255.255" or ADDR, PORT)
     self.udp:sendTo(msg,\,BROADCAST\,and\,"255.255.255.255"\,or\,ADDR,\,PORT,\,\{a,b,c\}\}
     success = function(n)
       print("Sent",n,"bytes")
       self.udp:receive({
          success = function(data,ip,port)
            print("Recieved ",data, ip, port)
```

```
setTimeout(loop,2000)
end,
error = function(error)
self:debug("Error:", error)
end
})
end,
error = function(error)
print("UPD Client Error:', error)
end
})
fibaro.sleep(1000)
end
loop()
end
```

# QA\_udp\_test.lua

A more extensive UDP test

```
--[[
Simple echo server using net.UDPSocket()
On same machine (Liux/MacOS) run
>nc -u 8986
>nc -ul 8986
to start a socket server to interact with this app
--]]

PORT = 8986
--%%name=TCP Test
function QuickApp:onlnit()
self.udp = net.UDPSocket({
broadcast = true,
timeout = 10000
})
```

```
local stat,res = pcall(function()
  if not stat then
     self:debug("Error binding",res)
  local payload = "HELLO"
  self.udp:sendTo(payload, '255.255.255.255', PORT, {
       success = function()
       self:receiveData()
     error = function(error)
       print('Error:', error)
  })
function QuickApp:receiveData()
  print("Waiting for data")
  self.udp:receive({
  success = function(data, ip, port)
     print("Recieved",string.char(table.unpack(data)), ip, port)
     self:receiveData() -- will read next datagram
  error = function(error)
     self:debug("Error:", error)
  end})
```

#### QA\_websocket\_test.lua

A QA that connects to echo.websocket.events that echoes messages sent

--[[

```
Simple websocket test
--%%var=url:"wss://echo.websocket.events/"
function QuickApp:onInit()
  self:debug("onInit")
  local url = self:getVariable("url")
  self.sock = net.WebSocketClient()
  self.sock:addEventListener("connected", function() self:handleConnected() end)
  self.sock:addEventListener("disconnected", function() self:handleDisconnected() end)
  self.sock:addEventListener("error", function(error) self:handleError(error) end)
  self.sock:addEventListener("dataReceived", function(data) self:handleDataReceived(data) end)
  self.sock:connect(url)
  --setInterval(function() self:debug("interval") end, 1000)
function QuickApp:handleConnected()
  self:debug("connected")
  self.sock:send("Hello from fibemu")
function QuickApp:handleDisconnected()
  self:warning("handleDisconnected")
function QuickApp:handleError(error)
  self:error("handleError:", error)
function QuickApp:handleDataReceived(data)
  self:trace("dataReceived:", data)
```

#### QA.fqa

This a .fqa file that can be loaded into the emulator and run. At the moment there is no way to debug it. It's just a proof that we can deploy .fqa files too.

## **Features**

# **Supported QuickApp functions**

```
fibaro.debug(tag,str)
fibaro.warning(tag, str)
fibaro.trace(tag, str)
fibaro.error(tag, str)
fibaro.call(deviceID, actionName, ...)
fibaro.getType(deviceID)
fibaro.getValue(deviceID, propertyName)
fibaro.getName(deviceID)
fibaro.get(deviceID, propertyName)
fibaro.getGlobalVariable(varName)
fibaro.setGlobalVariable(varName , value)
fibaro.getRoomName(roomID)
fibaro.getRoomID(deviceID)
fibaro.getRoomNameByDeviceID(deviceID)
fibaro.getSectionID(deviceID)
fibaro.getIds(devices)
fibaro.getAllDeviceIds()
fibaro.getDevicesID(filter)
fibaro.scene(action, sceneIDs)
fibaro.profile(profile id, action)
fibaro.callGroupAction(action, args)
fibaro.alert(alert type, user ids, notification content)
fibaro.alarm(partition id, action)
fibaro.setTimeout(ms, func)
fibaro.clearTimeout(ref)
fibaro.setInterval(ms, func)
fibaro.clearInterval(ref)
```

```
fibaro.emitCustomEvent(name)
fibaro.wakeUpDeadDevice(deviceID)
fibaro.sleep(ms)
net.HTTPClient()
net.TCPSocket()
net.UDPSocket()
net.WebSocketClient()
net.WebSocketClientTLS()
mqtt.Client.connect(uri, options) --no yet
<mqttclient>:addEventListener(message,handler) --no yet
<mqttclient>:subscribe(topic, options) --no yet
<mqttclient>:unsubscribe(topics, options) --no yet
<mqttclient>:publish(topic, payload, options) --no yet
<mqttclient>::disconnect(options) --no yet
api.get(call)
api.put(call <, data>)
api.post(call <, data>)
api.delete(call <, data>)
setTimeout(func, ms)
clearTimeout(ref)
setInterval(func, ms)
clearInterval(ref)
json.encode(expr)
json.decode(string)
plugin.mainDeviceId
plugin.deleteDevice(deviceId) --not yet
plugin.restart(deviceId)
plugin.getProperty(id,prop)
plugin.getChildDevices(id)
plugin.createChildDevice(prop)
class QuickAppBase
class QuickApp
class QuickAppChild
class <name>
property(get, set)
QuickApp:onInit() -- called at startup if defined
QuickApp - self:setVariable(name, value)
QuickApp - self:getVariable(name)
QuickApp - self:debug(...)
QuickApp - self:trace(...)
QuickApp - self:warning(...)
QuickApp - self:error(...)
QuickApp - self:updateView(elm, type, value)
QuickApp - self:updateProperty(name, value)
QuickApp - self:createChildDevice(props, device)
```


## **Supported REST APIs**

- GET /emu/info Get Emulator Info
- POST /emu/dump Dump Emulator Resources
- POST /emu/load Load Emulator Resources
- GET /emu/button/{id}/{elm}/{val} Invoke Ui Button
- POST /api/devices/{id}/action/{name} Call Quickapp Method
- GET /api/devices Get Devices
- GET /api/devices/{id} Get Device
- DELETE /api/devices/{id} Delete Device
- GET /api/globalVariables Get Global Variables
- POST /api/globalVariables Create Global Variable
- GET /api/globalVariables/{name} Get Global Variable
- PUT /api/globalVariables/{name} Modify Global Variable
- DELETE /api/globalVariables/{name} Delete Global Variable
- GET /api/rooms Get Rooms
- POST /api/rooms Create Room
- GET /api/rooms/{id} Get Room
- PUT /api/rooms/{id} Modify Room
- DELETE /api/rooms/{id} Delete Room
- GET /api/sections Get Sections
- POST /api/sections Create Section
- GET /api/sections/{id} Get Section
- PUT /api/sections/{id} Modify Section
- DELETE /api/sections/{id} Delete Section
- GET /api/customEvents Get Customevents
- POST /api/customEvents Create Customevent
- GET /api/customEvents/{name} Get Customevent
- PUT /api/customEvents/{name} Modify Customevent
- POST /api/customEvents/{name} Emit Customevent
- DELETE /api/customEvents/{name} Delete Customevent
- GET /api/refreshStates Get Refreshstates Events

- GET /api/plugins/callUlEvent Call Ui Event
- POST /api/plugins/updateProperty Update Qa Property
- POST /api/plugins/updateView Update Qa View
- POST /api/plugins/restart Restart Qa
- POST /api/plugins/createChildDevice Create Child Device
- DELETE /api/plugins/removeChildDevice/{id} Delete Child Device
- POST /api/plugins/publishEvent Publish Event
- GET /api/plugins/{id}/variables Internal Storage Set
- POST /api/plugins/{id}/variables Internal Storage Create
- DELETE /api/plugins/{id}/variables Internal Storage Delete
- GET /api/plugins/{id}/variables/{name} Internal Storage Set
- PUT /api/plugins/{id}/variables/{name} Internal Storage Set
- DELETE /api/plugins/{id}/variables/{name} Internal Storage Delete
- POST /api/debugMessages Add Debug Message
- GET /api/quickApp/{id}/files Get Quickapp Files
- PUT /api/quickApp/{id}/files Modify Quickapp Files
- POST /api/quickApp/{id}/files Create Quickapp Files
- GET /api/quickApp/{id}/files/{name} Get Quickapp File
- PUT /api/quickApp/{id}/files/{name} Modify Quickapp File
- DELETE /api/quickApp/{id}/files/{name} Delete Quickapp File
- GET /api/quickApp/export/{id} Export Quickapp Fqa
- POST /api/quickApp/ Import Quickapp
- POST /api/quickApp/import Import Quickapp
- GET /api/weather Get Weather
- PUT /api/weather Modify Weather
- GET /api/iosDevices Get Ios Devices
- GET /api/home Get Home
- PUT /api/home Modify Home
- GET /api/settings/{name} Get Settings
- GET /api/alarms/v1/partitions Get Partitions
- GET /api/alarms/v1/partitions/{id} Get Partition
- GET /api/alarms/v1/devices/ Get Alarm Devices
- GET /api/notificationCenter Get Notification Center
- GET /api/profiles Get Profiles
- GET /api/icons Get Icons
- GET /api/users Get Users

- GET /api/energy/devices Get Energy Devices
- GET /api/panels/location Get Panels Location
- GET /api/panels/notifications Get Panels Notifications
- GET /api/panels/family Get Panels Family
- GET /api/panels/sprinklers Get Panels Sprinklers
- GET /api/panels/humidity Get Panels Humidity
- GET /api/panels/favoriteColors Get Favorite Colors
- GET /api/panels/favoriteColors/v2 Get Favorite Colorsv2
- GET /api/diagnostics Get Diagnostics
- GET /api/proxy Call Via Proxy

#### Web UI

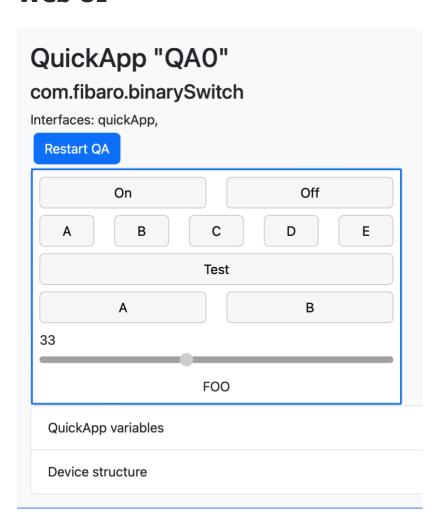

# **Event view**

Fibemu	v0.32	Home Events Globals Config About
Events		
Time	Туре	Data
07/18/2023/13:33:00	DevicePropertyUpdatedEvent	{'property': 'lastChanged', 'oldValue': 1689679380, 'id': 43, 'newValue': 1689679980}
07/18/2023/13:33:00	DevicePropertyUpdatedEvent	{'unit': 'C', 'newValue': 25.56, 'id': 43, 'property': 'value', 'oldValue': 25.28}
07/18/2023/13:31:15	DeviceActionRanEvent	{'args': [], 'actionName': 'poll', 'id': 1066, 'isSupportedByDevice': True}
07/18/2023/13:30:58	DevicePropertyUpdatedEvent	{'property': 'quickAppVariables', 'newValue': [{'name': 'test', 'value': 'HELLO'}], 'id': 5000, 'oldValue': [{'name': 'test', 'value': 'HELLO'}]}
07/18/2023/13:30:58	DeviceCreatedEvent	{'name': 'QA0', 'viewXml': True, 'visible': True, 'created': 1689679858, 'baseType': 'com.fibaro.actor', 'sortOrder': 191, 'isPlugin': True, 'interfaces': ['quickApp'], 'configXml': False, 'view': [{'translatesPath': '/dynamic-plugins/com.fibaro.binarySwitch/i18n', 'jsPath': '/dynamic-

# **GlobalVariables view**


Fibemu	v0.32	Home		Globals	Config	About
myTest	77					
indexTable	{"device":{"hueBridge":{"hueBridge2"	:{"hueUs	er":"q6eL	.pWdYiM0	q0kdQV	/FZB1NZHSILvKL0GsNF
iOS_BOB	Home					
iOSLocations	{"Daniela":{"name":"Daniela","device"	:"Daniela	s iPhone"	,"battery"	:0.93999	9999761581,"dist":1603
RPC_1193						

# **Configuration view**

	Fibemu v0.32	Home		Globals	Config	About
Config						
Parameter	Value					
host	192.168.1.57					
user	admin					
password	admin					
secret	kaka					
dark	True					
colors	{'SYS': 'brown', 'SYSERR': 'red', 'DEBUG': 'green', 'TR 'TEXT': 'black', 'DARKTEXT': 'grey'}	RACE':	'blue', 'W	ARNING':	'orange',	'ERROR': 'red',

## **Workflow**

There are some defined vscode Tasks that help in remotely uploading and updating the QA on the HC3 from within the vscode environment

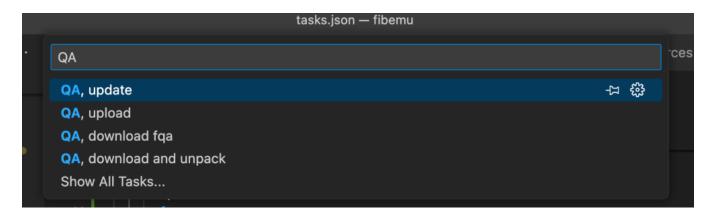

- "QA, download fqa" downloads an QA from the HC3 and saves it as a .fqa file. The task
   will prompt for deviceID and path where to store. The path/dir needs to exist
- "QA, download and unpack" downloads an QA from the HC3 and saves all QA files as .lua files. It also adds fibemu headers in the main file so it can be opened and run with the

- emulator . The task will prompt for deviceId and path where to store. The path/dir needs to exist
- "QA, upload" will upload the QA to the HC3. It will prompt for QA file. If '.' is given as argument it will upload the current opened file. This will create a new QA, with a new deviceId on the HC3.
- "QA, update" will try to update QA files, viewLayout, uiCallbacks, and quickAppVariables of an existing QA on the HC3. If '.' is given as argument the file must have set the fibemu header --%%id=<ID> so it knows what QA to update. One can also give the deviceId of the QA on the HC3 that should be updated. This is convenient when developing and avoiding new IDs being "consumed". Sometimes when you update a QA you would not like to update the quickAppVariables. In that case give '-' instead '.' for the current opened file, or -deviceId for an exiting QA on the HC3.

# **Examples & (tips & tricks)**

- Debug console colors can be setup in config.json (see config.json.example). If you run vscode in dark mode that can be nice to modify to your liking.
   A quick fix is to set the config parameter dark=true, then the text color will be set to light grey.
- All system logs in the Debug console is tagged as [SYS ] or [SYSERR] and can thus easily be filtered out in the Debug console's filter field with !SYS
- Break-points in Lua can not be set while the program is running. To add a new break-point, add and restart the QA. This is a limitation of the Lua debugger used. Break-points can be removed while the program is running though.
- The are 3 ways to add configuration. In ~/.fibemu.json. That file, if available, is read
  first.Can be a good place to store HC3 credentials like ip, user,password.
   After that, config.json in the vscode project directory is read in and merged with the

previous config data.

Lastly, config parameters set in the QA source file is added to the config data.

- The vscode launch.json file contains a number of different launch options when debugging.
  There is usually a "remote" and a "local" version, and the "local" version will run without
  accessing the HC3. Good to have if developing where there is no access to an HC3, like on
  the beach...
- The launch option marked with "emu files" include the Lua emulator files in the path for the debugger so that one can step into these files. Normally, you don't want that, instead you only want to step through your own code. Ex. with "emu files" and you step into a 'setTimeout' you will step into the setTimeout implementation...
- There are also 2 python launch options used to run the program with the python debugger ("remote" and "local"). Mainly used for debugging the framework. However, you can't see your Lua code this way.
- There is an option in the launch file to add an Lua init file with the "-I" option. This is a Lua file run before the QAs. It can be a place to setup som "virtual" QAs or other things....

# **Example 1**

function QuickApp:onInit()
end

# **Example 2**

function QuickApp:onInit()
end

# **Implementation details**

The environment is a mix of Python and Lua. The blue parts in the picture below is Python and the green is implemented in Lua.

The Lua debugger is started in the green environment when we run the emulator and the vscode IDE can then lets us debug our QA like any other Lua code.


The model is based on that we have a copy of the HC3 resources in our own "Resource DB" and all manipulation of devices, globalvariables, rooms, sections etc are done to towards that database.

If some resource is manipulated in the HC3, we get an event (refreshStates) and update our copy in our database.

If a resource is marked as "remote", e.g. we are allowed to change the resource on the HC3 too, we will "sync" back the change from our database, back to the HC3.

Ex. if we set a globalvariable in the emulator and it is marked "remote" we will sync that back to the HC3. Same for device property changes etc.

The exception is fibaro.call(ID,...) that will call the device on the HC3 if the device is marked "remote".

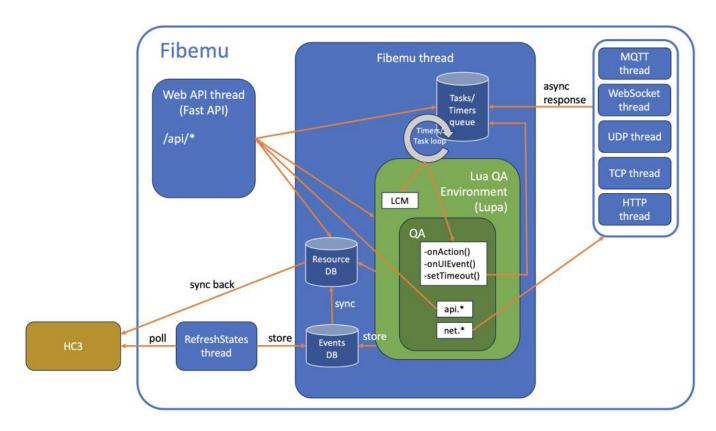

The picture shows one QA, but the emulator can load several QAs and run them at the "same" time. There will still be only one fibemu thread, and the QAs will share the same timer queue (e.g., they run as Lua coroutines). However, they will have separate fibaro.sleep that don't block each other.

## **Known issues**

- While the QA is running, break-points can't be added. This is a limitation of the debugger used. Just add the break-point and restart the QA.
- When the emulator crashes, it may leave a process open that keeps the port 5004 in use.
   The emulator will complain at restart that the port is already bound. You may need to manually kill the process.
   On Mac:

>kill -9 \$(lsof -ti:5004