

Proalpha Extensibility Functions

Proalpha Extensibility Functions, users can extend functionality simply by configuring settings, without having to develop extra code.


additional UI fields

This framework allows additional fields to be added to dialogs and SmartViewers through configuration. The generally supported functions are:

- Fields are appended below the standard fields, which automatically prevents field overlaps.
- Windows are automatically resized so that all fields fit within them.

Supported Widget Types:

- Toggle-boxes → For all logical fields
- Combo-boxes → For all fields that have a paDescriptionACM stored in the domain
- Fill-in → For all other cases

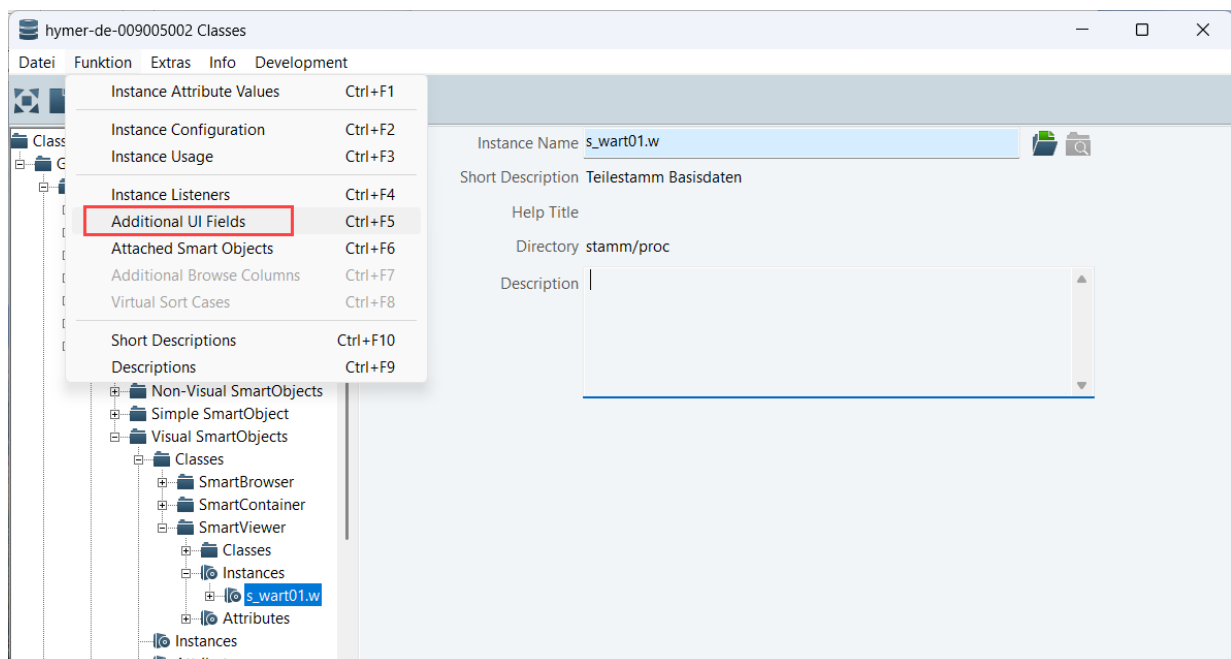

hymer-de-009005002 Additional UI Fields s_war... — □ ×

Datei Funktion Extras Info Development

📁 🗑️ ✕ ↺ ⏪ ⏩ ⏴ ⏵

UIField ID ▲	Ord#	Range	Br/Zn

Add UI Field ID xfield

Field Type: Additional DB Field ▼

Domain: Database Field (Physical)

Table Name: Additional DB Field

Add DB Field: Calculated Field (Variable)

☐ Read-Only ☐ Range

Breite/Zeichen:

Label:

Order #: Row Offset:

Creation Condition:

Logical ACM:


Database Field (Physical): Used to add widgets based on standard table fields.

Additional DB Field: Used to add widgets based on virtual table fields.

Calculate Field (Variable): Used to add widgets that are not sourced directly from a table, where the value is calculated and displayed in the widget using the Proalpha Extensibility Framework (Lst.cls).

additional browse columns

This framework enables adding extra columns to browsers through configuration. Both physical fields and Additional DB Fields can be used as the data source.

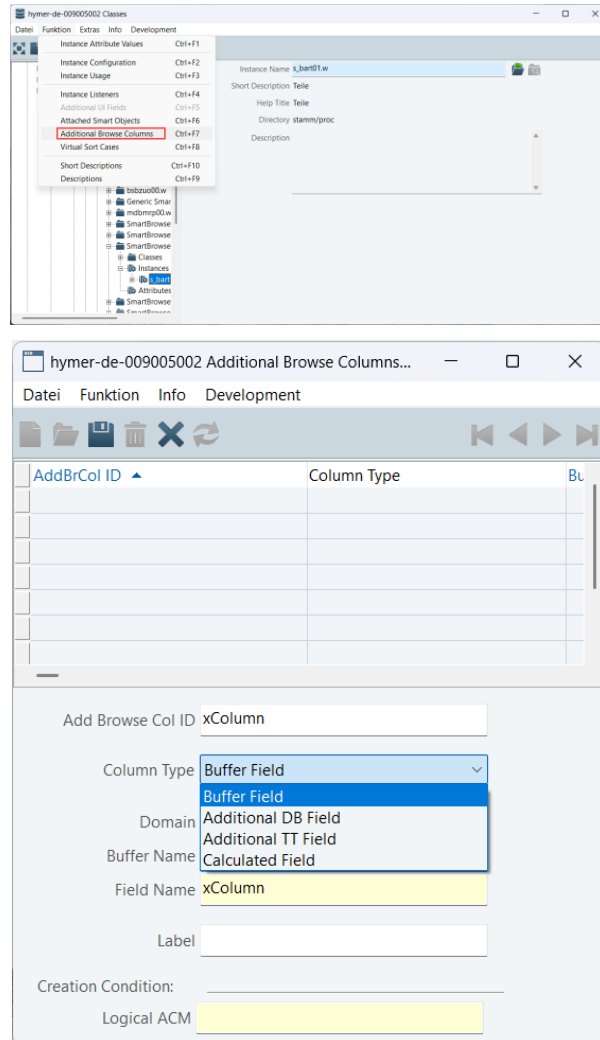

Column Type: Specifies the type of the column.

- Buffer Field: A reference to an existing buffer field. This should be used whenever the field exists as a physical field of the specified buffer (database table or temp-table).
- Additional DB Field: A reference to an Additional DB Field of the specified buffer.
- Additional TT Field: A reference to an Additional TT Field of the specified buffer.
- Calculated Field: The column is not filled automatically. The value must be determined manually and set as a screen value via an instance listener in the OnRowDisplay event.

attached smart Objects

berlheart-de-009005003 Attached Smart Objects s_part00.w

File Function Info Development

Attached Object	Title

Attached Object xmwb111.w

☐ Attach to Object ☒ New Folder Page

Title Test

Reference Object

Placement: Below Row Offset: 0,00

Order: 700 ☐ Read-Only

Creation Condition

Logical ACM

New Folder Page

In this case, only the title needs to be specified. It is used as the label for the new tab. If required and already available in the ProAlpha version being used, the value can be maintained in a language-dependent way (via Function-Title).

berlheart-de-009005003 Attached Smart Objects s_part00.w

File Function Info Development

Attached Object	Title

Attached Object xmwb110.w xKopie von mwbel10.w

☒ Attach to Object ☐ New Folder Page

Title Test

Reference Object

Placement: Below Row Offset: 0,00

Order: 700 ☐ Read-Only

Creation Condition

Logical ACM


Attach to Object

In this case, the instance of the reference object to which the custom SmartObject should be linked must be specified. Additionally, the Placement field can be used to define whether the custom SmartObject should be displayed above or below the reference.


If multiple custom SmartObjects are to be displayed above or below the same reference object, the Order field must be used to define the sequence. This order must be unique for each combination of Reference Object and Placement.

Ctrl-A

Start by pressing Ctrl+Z in the field where you want to perform Ctrl+A, then set the Help Support field to 'CTRL-A (Query)'.

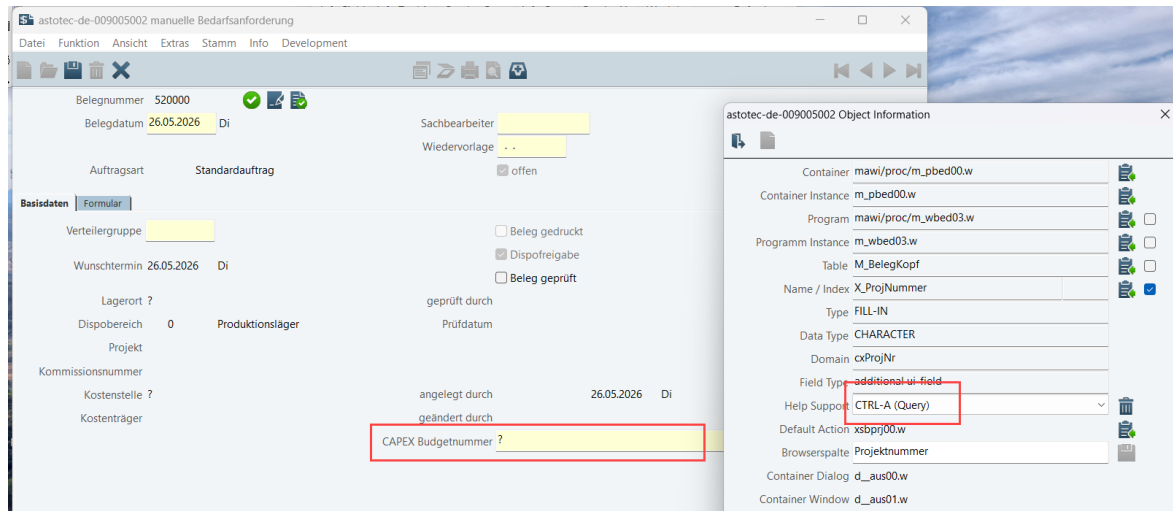

Set the Browserspalte field to the name of the browser field in the Default Action field that you want to display on the UI page.

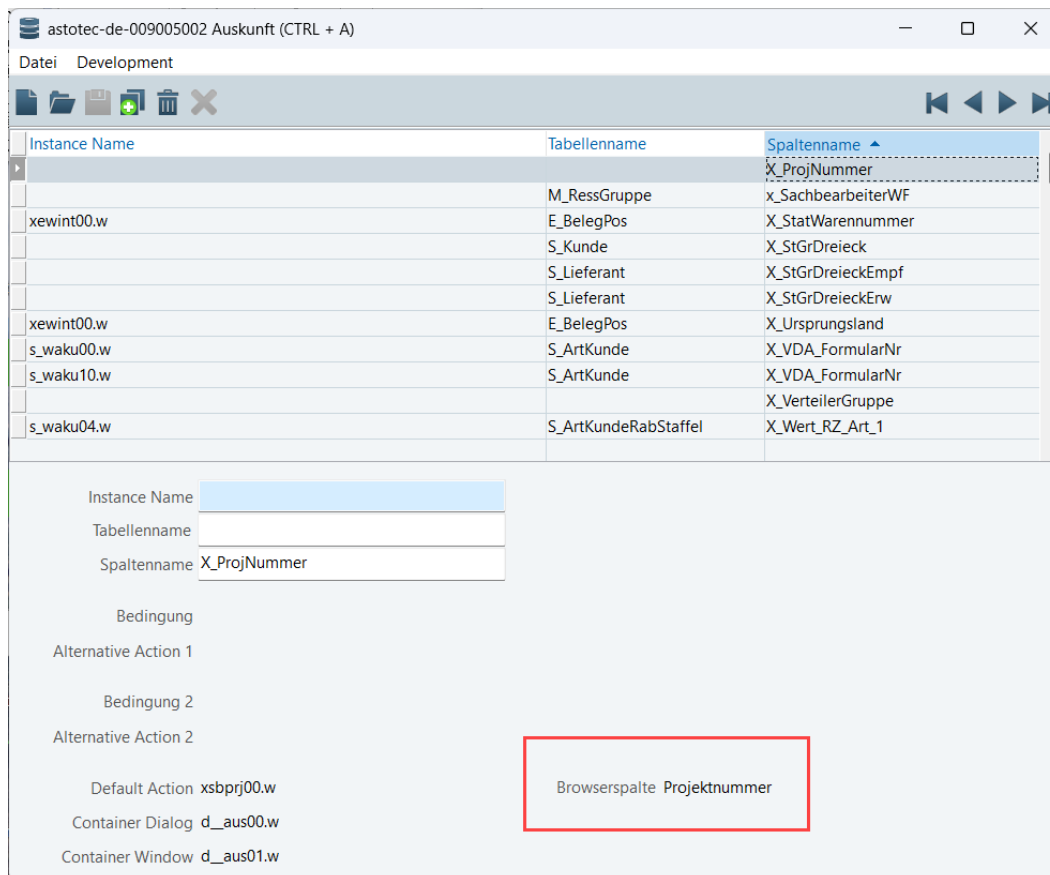

Info Fields: Adding labels/language sentences via CTRL+A

The top screenshot shows the 'proalpha2-de-9master Lieferanten' window. The 'Lieferant' field is highlighted with a red box. The 'Suchbegriff' field contains 'Messing AG'. The 'Name' field contains 'Deutsche Messing AG'. The 'Metallhandel' field is selected. The 'Straße' field contains 'Rheindammstr. 4'. The 'Ort' field contains 'DE 68163 Mannheim'. The 'Telefon' field contains '+49/621/90010-0'. The 'Telefax' field contains '+49/621/90010-99'. The 'Basisdaten' tab is active, showing 'Verteilerguppe: 10', 'Branche', 'ABC-Klasse', 'Betriebskalender: 0', 'Kundennummer: 100000', 'inl SteuerNr', 'inländische Lieferanten', 'Sprache: Deutsch', 'Währung: 0 EUR', 'Basiskalender - überg. Feiert', 'Export SRM', and 'WuP-relevant'.

The bottom screenshot shows the 'proalpha2-de-9master Object Information' window. A red arrow points to the 'Container' field, which contains 'stamm/proc/s_plie00.w'. The 'Container Instance' field contains 's_plie00.w'. The 'Program' field contains 'stamm/proc/s_wlie00.w'. The 'Programm Instance' field contains 's_wlie00.w'. The 'Table' field contains 'S_Lieferant'. The 'Name / Index' field contains 'Lieferant'. The 'Type' field contains 'FILL-IN'. The 'Data Type' field contains 'INTEGER'. The 'Domain' field contains 'Supplier ID'. The 'Field Type' field contains 'default'. The 'Help Support' field is set to 'Info Field'. The 'Master Data Table' field is set to 'S_Lieferant' and is highlighted with a red box.

In the 'Master Data Table' field, enter the table for which the description set should be loaded.

By clicking 'Create new help entry' in the menu bar, the corresponding entry in the Additional UI-Fields repository will be created automatically.

After restarting the window, the info field will be displayed in the correct position and populated accordingly.

proalpha2-de-9master Lieferanten

Datei Funktion Ansicht Extras Stamm Info Development

Lieferant 700000 Deutsche Messing AG Begriff Messing AG

Name Deutsche Messing AG Selektion Mannheim

Metallhandel Sachbearbeiter Eberl

Straße Rheindammstr. 4 Telefon +49/621/90010-0

Ort DE 68163 Mannheim Telefax +49/621/90010-99

Basisdaten Parameter Bankverbindung Info Zollabwicklung

Verteilerguppe 10 inländische Lieferanten Sprache Deutsch

Branche Währung 0 EUR

ABC-Klasse -

Betriebskalender 0 Basiskalender - übergr. Feiert

Kundennummer 100000

inl SteuerNr

☐ Export SRM

☒ WuP-relevant

Info Fields: Add days of the week via CTRL+A

proalpha2-de-9master Teile

von bis

Teil stl-0322

Suchbegriff Zwischenplat

Selektion Zwischenlage

*

Teileart 0 99

Teilegruppe 90

Dispositionsgruppe Kauf

Verteilerguppe 60

Werteflussgruppe 2000

stat Warennummer 8897 10 56

Verwendungsart

Maximalbestand 999.999.999

Änderungsdatum 27.03.2023

AnlDatum (Buchung) . .

☐ auch archivierte Daten

Buchungsschlüssel (0)

Ansicht 1 - Basisansicht

Sortierung 0 - Teil

Drucken Abbruch SML Hilfe

proalpha2-de-9master Object Information

Container	stamm/proc/s_dart00.w		
Container Instance	s_dart00.w		
Program	stamm/proc/s_dart00.w		
Programm Instance	s_dart00.w		
Table	?		
Name / Index	Aenderungsdatum		
Type	FILL-IN		
Data Type	DATE		
Domain	[no Domain] --> artificial field		
Field Type	default		
Help Support	Info Field		
Master Data Table	Weekday (char)		

Help Support is automatically set to "Info Field" and Master Data Table to "Weekday (char)"

By clicking on "Create new help entry" in the menu bar, the appropriate entry in the repository of the Additional UI fields is automatically created.

After restarting the window, the info field is displayed and filled in the correct place

proalpha2-de-9master Teile

von	Teil	bis	sti-0322
Suchbegriff		Zwischenplat	
Selektion		Zwischenlage	
	*		
Teileart	0		99
Teilgruppe			90
Dispositionsgruppe			Kauf
Verteilerguppe			60
Werteflussgruppe			2000
stat Warennummer			8897 10 56
Verwendungsart			
Maximalbestand	999.999.999		
Änderungsdatum	27.03.2023	Mo	
AnlDatum (Buchung)	..		
☐ auch archivierte Daten			
Buchungsschlüssel (0)			
Ansicht 1 - Basisansicht			
Sortierung 0 - Teil			
Drucken Abbruch SML Hilfe			

