# Conceptualizing open health data platforms for lowand middle income countries

Daniel Kapitan<sup>a,b</sup>, Femke Heddema<sup>a</sup>, Julie Fleischer<sup>a</sup>, Chris Ihure<sup>c</sup>, Antragama Abbas<sup>d</sup>, Steven Wanyee<sup>e</sup>, XXX<sup>f</sup>, John Grimes<sup>g</sup>, Mark van der Graaf<sup>a</sup>, Mark de Reuver<sup>d</sup>

<sup>a</sup>PharmAccess Foundation, Amsterdam, the Netherlands,
 <sup>b</sup>Eindhoven University of Technology, Eindhoven, the Netherlands,
 <sup>c</sup>PharmAccess Kenya, Nairobi, Kenya,
 <sup>d</sup>Delft University of Technology, Delft, the Netherlands,
 <sup>e</sup>IntelliSOFT, Nairobi, Kenya,
 <sup>f</sup>ONA, Nairobi, Kenya,
 <sup>g</sup>Australian e-Health Research Centre, Brisbane, Australia,

#### Abstract

TO DO: add abstract.

 $Keywords\colon$  Analytics-on-FHIR, SQL-on-FHIR, HIE, data platforms, LMICs, digital health

# 1. Introduction

# 1.1. The paradox of open for digital vs. data platforms in healthcare

It is a widely held belief that digital technologies have an important role to play in strengthening health systems in low- and middle income countries (LMICs), as exemplified by the WHO global strategy on digital health (World Health Organization, 2021). The adoption rate of mobile phones in LMICs has been an important driver in implementing digital health solutions (McCool et al., 2022). Yet, there are many shortcomings and challenges, including the current fragmentation of digital platforms and the lack of clear-cut pathways of scaling up digital health programmes, such that they can support sustainable and equitable change of national health systems in LMICs (McCool et al., 2022; World Health Organization, 2019; Neumark and Prince, 2021).

Email address: daniel@kapitan.net (Daniel Kapitan)

<sup>\*</sup>Corresponding author

A commonly used perspective to scrutinize digital health is to consider it as a digital platform (de Reuver et al., 2018). Digital platforms have disrupted many sectors but have just started to make inroads into highly regulated industries such as healthcare (Ozalp et al., 2022). In this light, the challenges faced by LMICs in establishing national digital health platforms have a lot in common with those faced by high income countries. From a technological perspective, interoperability issues, weak integrations, siloed data repositories and overall lack of openness are often reported as key impediments (Malm-Nicolaisen et al., 2023; Mehl et al., 2023). From a societal perspective, issues pertaining to the winner-takes-all nature of digital platforms are hotly debated as many jurisdictions make work to ensure these new digital health platforms indeed serve the common good of achieving universal health coverage (Sharon, 2018).

Case studies on digital platforms in healthcare point to an emerging pattern where the focus shifts from the digital platform with its defining software and hardware components, to the data as the primary object of interest in and of itself (Ozalp et al., 2022; Alaimo and Kallinikos, 2022). This observation ties into the proposed research agenda by de Reuver et al. to consider data platforms as a phenomenon distinct from digital platforms (de Reuver et al., 2022). Generally, data platforms inherit the characteristics of digital platforms. For example, the economic perspective on digital platforms stresses their multi-sidedness with developers and consumers, while data platforms are used by data owners, data consumers and third party solution providers. At the same time, data platforms differ as their main offerings revolve around data. From a market perspective, data platforms have more moderate network effects and are more susceptible to fragmentation and heterogeneity.

Particularly relevant in the context of health data platforms (HDPs), is the conceptualization of openness. The shift in perspective from digital platforms to data platforms coincides with the paradox of open (Keller and Tarkowski, 2021). Originally, openness of digital platforms focused on open source, open standards and copyrights, which by has been superseded by "... conflicts about privacy, economic value extraction, the emergence of artificial intelligence, and the destabilizing effects of dominant platforms on (democratic) societies. Instead of access to information, the control of personal data has emerged in the age of platforms as the critical contention." (Keller and Tarkowski, 2021). These conflicts are particularly salient in the healthcare domain, as is evidenced by the polemic surrounding data spaces (Otto et al., 2022) and data solidarity (Kickbusch et al., 2021; Prainsack et al., 2022; Prainsack and El-Sayed, 2023). Openness is particularly relevant if we are to realize a solidarity-based approach to health data sharing that i) gives people a greater control over their data as active decision makers; ii) ensures that the value of data is harnessed for public good; and iii) moves society towards equity and justice by counteracting dynamics of data extraction (Prainsack et al., 2022).

# 1.2. From health information exchanges to health data platforms

This paper is motivated by the conflation of a number of developments relevant to the design and implementation of open, solidarity-based HDPs in LMICs. First, the OpenHIE framework (ope, 2022) has been adopted by many sub-Saharan African countries (Mamuye et al., 2022) as the architectural blueprint for implementing nation-wide health information exchanges (HIE), including Nigeria (Dalhatu et al., 2023), Kenya (Thaiya et al., 2021) and Tanzania (Nsaghurwe et al., 2021). These countries have, as a matter of course, extended the framework to include "analytics services" as an additional domain. The rationale for this addition is to facilitate secondary reuse of health data for academic research, real-world evidence studies etc. which can be framed within the context of ongoing efforts towards Findable, Accessible, Interoperable and Reusable (FAIR) sharing of health data (Guillot et al., 2023). In doing so, however, we have implicitly moved from conceptualizing digital health platforms (the original OpenHIE specification) to health data platforms. This is problematic because the notion of openness, which is assumed to be essential in establishing solidarity-based approaches to data sharing, is inherently different for a data platform compared to a digital platform.

Conceptually, the OpenHIE framework constitutes a framework for an open digital platform. Openness for digital platforms refers to i) the use of open boundary resources, that is, specifications for the various healthcare specific workflows and information standards such as FHIR; and ii) the use of open source components that are available as digital public goods(dig, 2024). If we are to use the OpenHIE framework as an open data platform, we need to extend the standards, technologies and architecture to include functionality for data sharing and reuse. Distinguishing four types of data sharing (Table 1), the purpose of this paper is to investigate how new standards and technologies that can establish openness of HDPs can be integrated into the OpenHIE architecture framework. The lack of detailed specifications and consensus of this addition to OpenHIE currently stands in the way of development projects that aim to establish HDPs in LMICs. In addition, we explicitly address the requirement of downward scalability as we aim to implement health data platforms in resource constrained setting of LMICs.

Table 1: Types of data sharing and in relation to new standards and technology enablers to create openness.

	Type of data	Technology enablers to create
	sharing	openness of health data platforms
1	Data at the most granular (patient) level, which is persisted and used to provide a longitudinal record.	Bulk FHIR API: has by now been incorporated in all major FHIR implementations the FHIR standard can be readily used to support data sharing to patient-level data across a patient population (Mandl et al., 2020; Jones et al., 2021).
2	Aggregated data, for example statistics for policy evaluation and benchmarking	SQL-on-FHIR specification (sql, 2024): provides a standardised approach to make FHIR work well with familiar and efficient SQL engines that are most commonly used in analytical workflows. Builds on FHIRPath (HL7, 2020) expressions in a logical structure to specify things like column names and unnested items. Implementations of this approach are available or forthcoming, including open source implementations such as Pathling (Grimes et al., 2022) and commercial offerings like Aidbox (Health Samurai, 2024).
3	Data analytics modules, that provide access to work and access the data.	Federated learning (FL) (Rieke et al., 2020) and privacy- enhancing technologies (PETs) (Scheibner et al., 2021; Jordan et al., 2022): new paradigms that address the problem of data governance and privacy by training algorithms collaboratively without exchanging the data itself. Models can be trained on combined datasets and made available as open source artifacts for decision support. Data analysts can use FL and PETs to work with the data in a collaborative, decentralized fashion.
4	Trained models that have been derived from the data and can be used stand-alone for decision support.	ONNX (onn, 2023): an open format built to represent machine learning models.

# 2. Methods

In the paper, we present a design that extends the OpenHIE specification to include the four types of data sharing mentioned above. Using the full-STAC approach (Mehl et al., 2023) we combine open standards, open technologies and open architectures into a coherent modular HDP platform that can be configured and reused across a variety of use-cases. Subsequently, we employ a formative, naturalistic evaluation to assess the technical risk and efficacy of the design (Venable et al., 2016). Given that it is prohibitively expensive to evaluate the design a real-world setting, we aim to minimize technological risks and maximize the efficacy of the design by considering three examples of health data platforms in LMICs, namely i) the OpenHIM platform (https://jembi.gitbook.io/openhim-platform/); ii) the ONA Canopy platform https://ona.io/home/services/canopy/; and iii) the work conducted at PharmAccess Foundation as part of the MomCare programme (https://health-datacommons.pharmaccess.org). As part of our design research, we have taken a narrative approach in surveying existing scientific studies on health data platforms, focusing on the seminal reports and subsequently searching forward citations. In addition, we have searched the open source repositories (most notably GitHub) and the online communities (OpenHIE community, FHIR community) to search for relevant open standards, technologies and architectures. This paper should not be considered as a proper systematic review.

The main contributions of this paper is that: - It provides a framework for the components of the Data & Analysis Services that builds on current best practices from the data engineering community into the OpenHIE framework - Provides details on type 1 and 2 data sharing, comparing the different design options

# 3. Design

# 3.1. Open standards: using FHIR as the common data model

The recent convergence to FHIR as the de facto standard for information exchange has fuelled the development of OpenHIE. FHIR is currently used both for routine healthcare settings (Ayaz et al., 2021) and clinical research settings (Duda et al., 2022; Vorisek et al., 2022) and is increasingly being used in LMICs as well. The guidelines and standards of the African Union explicitly state FHIR is to be used as the messaging standard (202, 2023). The FHIR-native OpenSRP platform (Mehl, 2020) has been deployed in 14 countries targeting various patient populations, amongst which a reference implementation of the WHO antenatal and neonatal care guidelines for midwives in Lombok, Indonesia (Summit Institute for Development, 2023; Kurniawan et al., 2019). In India, FHIR is used as the underlying technology for the open Health Claims Exchange protocol specification, which has been adopted by the Indian government as the standard for e-claims handling (hcx, 2023). This range of utilizations showcase the standards' widespread applicability. The proceedings of the OpenHIE

Table 2: Comparison of OpenEHR, ISO 13606 and FHIR standards

Service	Health data platform service	Preferred standards
Modeling	Modeling and formalization of clinical-domain concepts	OpenEHR and ISO <sup>a</sup> 13606 <sup>b</sup>
Persistence	Detailed and multipurpose data persistence	OpenEHR
Exchange	Complex and full-meaning data exchange	ISO 13606 and $HL7^c$ $FHIR^{d,e}$
Exchange	Simple and agile point-to-point data exchange	HL7 FHIR
Querying	Data query according to complex semantic restrictions	OpenEHR
Implementation	Design of data entry components in EHRf	OpenEHR
Implementation	EHR repository for clinical decision support processes	OpenEHR
Implementation	EHR repository for populating RWD <sup>g</sup> repositories	OpenEHR
Implementation	Semantically interoperable platform for heterogeneous source EHRs	ISO 13606 and HL7 FHIR <sup>b</sup>
Implementation	Semantically interoperable exchange between EHR applications	HL7 FHIR
Implementation	Semantically interoperable exchange between EHR and RWD repositories	HL7 FHIR

conference 2023 attest to the fact that FHIR and open source technologies are embraced as critical enablers in implementing health information exchanges in LMICs (ohi, 2023).

Various studies have investigated the merits of FHIR and its performance visa-vis other healthcare standards. Comparisons between OpenEHR, ISO 13606, OMOP and FHIR have been made (Ayaz et al., 2023; Mullie et al., 2023; Rinaldi and Thun, 2021; Cremonesi et al., 2023; Sinaci et al., 2023). A study involving 10 experts comparing OpenEHR, ISO 13606 and FHIR concluded that i) these three standards are functionally and technically compatible, and therefore can be used side by side; and that ii) each of these standards have their strengths and limitations that correlate with their intended use as summarized in the Table 2.

For an infectious diseases dataset with a limited scope, OpenEHR, OMOP and FHIR have been compared and found all to be equally suitable (Rinaldi and Thun, 2021). Comparing OMOP and FHIR, the latter has been found to support more granular mappings required for analytics and was therefore chosen as the standard for the CODA project (Mullie et al., 2023).

Although FHIR was originally designed only for exchange between systems, we propose to use it as the common data model for the design presented here for the following reasons:

- Industry adoption has significantly increased, as exemplified by FHIR-based offering by major cloud providers such as Google, Azure and AWS.
  Also, Africa CDC has explicitly chosen FHIR as the preferred standard;
- The widespread availability of the Bulk FHIR API (Mandl et al., 2020; Jones et al., 2021) enables bulk, file-based batchwise processing for analytics using the lakehouse architecture as detailed in the next section;
- The concept of FHIR Profiles allow localisation to tailor the standard to a specific use case. A profile defines rules, extensions, and constraints for

a resource. We posit that the possible penalty of this flexibility, namely having to manage different FHIR versions and/or profiles, is less of an issue in the context of LMICs where first priority is to exchange datasets such as the International Patient Summary (IPS) that are less complex compared to the requirements for high income countries:

- Being based on webstandards, the FHIR standard lends itself best for further separation of concerns as envisioned by the composable data stack.
   This is an important enabler for the downward scalability of the solution;
- With its inherent, graph-like nature, FHIR can be readily incorporated into the principles of FAIR data sharing, where FHIR-based data repositories can be integrated in an overarching network of FAIR data stations (Sinaci et al., 2023; Pedrera-Jiménez et al., 2023).

Possible risks pertaining to the use of FHIR as the common data model, most notably the possible incompatibilities and/or high costs of maintenance in supporting different versions, will be addressed in the Discussion.

# 3.2. Open architecture: extending OpenHIE with a composable data stack


# 3.2.1. Evolving the data lakehouse to a composable data stack

Data management and analytics platforms have undergone significant changes since the first generation of data warehouses were introduced. Recent studies have shown that the current practice has converged towards the lakehouse as one of the most commonly used solution designs (Armbrust et al., 2021; Hai et al., 2023; Harby and Zulkernine, 2022). Lakehouses typically have a zonal architecture that follow the Extract-Load-Transform pattern (ELT) where data is ingested from the source systems in bulk (E), delivered to storage with aligned schemas (L) and transformed into a format ready for analysis (T) (Hai et al., 2023). The discerning characteristic of the lakehouse architecture is its foundation on low-cost and directly-accessible storage that also provides traditional analytical DBMS management and performance features such as ACID transactions, data versioning, auditing, indexing, caching, and query optimization (Armbrust et al., 2021). Lakehouses thus combine the key benefits of data lakes and data warehouses: low-cost storage in an open format accessible by a variety of systems from the former, and powerful management and optimization features from the latter.

With respect to current implementations of lakehouse data platforms, we observe a proliferation of tools with as yet limited standards to improve technical interoperability. In the analysis of Pedreira et al. (Pedreira et al., 2023) the requirement for specialization in data management systems has evolved faster than our software development practices. This situation has created a siloed land-scape composed of hundreds of products developed and maintained as monoliths, with limited reuse between systems. It has also affected the end users, who are often required to learn the idiosyncrasies of dozens of incompatible SQL and non-SQL API dialects, and settle for systems with incomplete functionality and inconsistent semantics. To remedy this, Pedreira et al. call to (re-)design and

implement modern data platforms in terms of a 'composable data stack' as a means to decrease development and maintenance cost and pick-up the speed of innovation.

While the lakehouse architecture separates the concerns of compute and storage, the composable data stack takes the separation of concerns is taken one step further. A composable data system (Figure 1), not only separates the storage (layer 3) and execution (layer 2), but also separates the user interface (layer 1) from the execution engine by introducing standards including Substrait for Intermediate Representation (standard A, IR) and Apache Arrow for data connectivity and data memory layout (standards B and C, respectively). The composable data stack can be implemented with current open source technologies (Figure 2). As an example, the Ibis user interface is currently sufficiently mature to offer a standardized dataframe interface to 19 different execution engines.

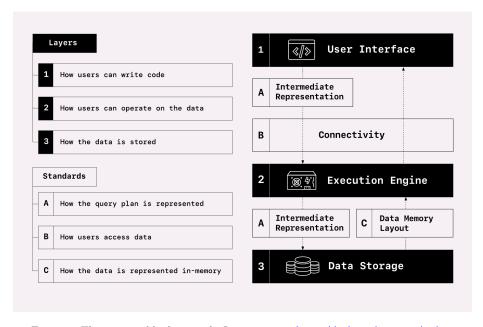

 $Figure \ 1: \ The \ composable \ data \ stack. \ Image \ source: \ https://voltrondata.com/codex.$ 

# 3.2.2. SQL-on-FHIR v2 as an intermediate representation for FHIR data in tabular format

The premise of separating the user interface from the execution engine is directly related to the key objective of the SQL-on-FHIR project (https://build.fhir.org/ig/FHIR/sql-on-fhir-v2/), namely to make large-scale analysis of FHIR data accessible to a larger audience, portable between systems and to make FHIR data work well with the best available analytic tools, regardless of the technology stack. However, to use FHIR effectively analysts require a thorough

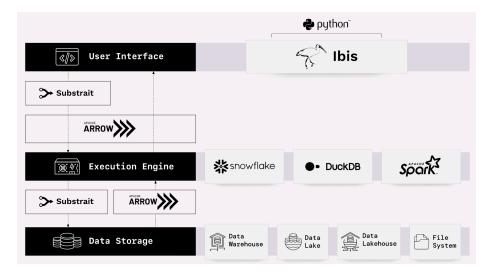


Figure 2: Examples of implementations of the composable data stack. Image source: https://voltrondata.com/codex.

understanding of the specification as FHIR is represented as a graph of resources, with detailed semantics defined for references between resources, data types, terminology, extensions, and many other aspects of the specification. Most analytic and machine learning use cases require the preparation of FHIR data using transformations and tabular projections from its original form. The task of authoring these transformations and projections is not trivial and there is currently no standard mechanisms to support reuse.

The solution of the SQL-on-FHIR project is to provide a specification for defining tabular, use case-specific views of FHIR data. The view definition and the execution of the view are separated, in such a way that the definition is portable across systems while the execution engine (called runners) are system-specific tools or libraries that apply view definitions to the underlying data layer, optionally making use of annotations to optimize performance.

# 3.2.3. Extending OpenHIE with a FHIR-based composable data stack

We propose to extend the OpenHIE architecture with a "Data and Analytics Services" domain with different service layers by synthesizing the current best practices of the a lakehouse architecture of (Hai et al., 2023; Harby and Zulkernine, 2022, 2024) and the composable data stack (Pedreira et al., 2023) (Figure 3, Table 3). These 5 services are considered the core of the FHIR data platform, and although it practice often a downstream dashboarding or visualization component is used, that component is not considered part of this architecture as such. NB: distinction between exploration and dashboarding is not absolute.

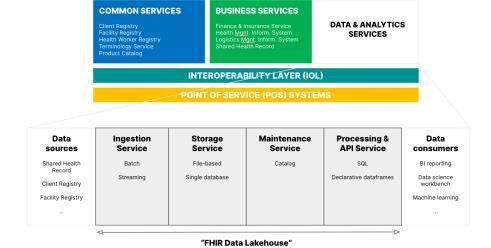


Figure 3: Proposed extension of the OpenHIE architecture that includes "Data and Analytics Services" as an additional service domain.

Table 3: Definition of Data and Analysis Services

Service	Functional requirements
Ingestion	• Bulk
	• Streaming
Storage	• File-based blob storage
	<ul> <li>Database optimized for online analytical processing</li> </ul>
	(OLAP)
Maintenance	• SQL-on-FHIR View defintions
	• Catalog and other maintenance-related functions as
	defined by Hai et al.
Processing &	• SQL-on-FHIR Runner
API	• Execution engine on tabular data as defined in
	composable data stack
	• Capability to participate as a node in federated learning
	/ MPC network
	• Read-only access to storage
Data	• SQL interactive development environment (IDE)
Consumer	• Interactive notebook computing environment (Granger
	and Perez, 2021)
	• BI reporting, dashboarding and data visualization

# 3.2.3.1. Ingestion.

Default workflow is extraction of data from SHR using Bulk FHIR API. Data contains metadata (incl. FHIR versions) and fully qualified semantics, for exam-

ple, coding systems. Despite this, metadata extraction and metadata modeling is still required to meet the FAIR requirements. Issues that need to be solved by these services:

- To prepare for future updates of FHIR versions
- Implement late-binding principle of having increasingly more specific FHIR profiles as bulk FHIR data propagates through lakehouse

# 3.2.3.2. Storage.

- File-based:
  - from ndjson to parquet
  - possibly used delta lake for time versioning
  - separation of storage from compute not only for benefits of lower TCO, but also be ready for federated learning and MPC in future
- OLAP DBMS
  - Often columnar, like Clickhouse and BigQuery

\_

#### 3.2.3.3. Query & Processing.

- fit in structure of OpenHIE specification
- check which workflows are related to analytics
- Hai calls this 'Maintenance'

# 3.2.3.4. Maintenance.

- SQL-on-FHIR Views provide new standard to support mADX aggregate reporting
- Maintenance-related functions remain the same
- NB: orchestration falls under data provenance

#### 3.2.3.5. Data consumers.

Strictly speaking not part of the architecture,

# 3.3. Open technologies: available digital public goods

Many components of the OpenHIE specification are now available as a digital public goods. Table 4 lists components that are currently available for implementing the OpenHIE framework using open source, digital public goods that are compliant with the FHIR standard, illustrating the maturity of this ecosystem and development community. With the launch of the Instant OpenHIE configuration toolkit(Ins, 2024), it has become easier to set up, explore and develop HIEs thereby reducing costs and skills required for software developers to deploy an OpenHIE architecture for quicker solution testing and as a starting point for faster production implementation and customisation. Several frameworks are available that offer a set of preconfigured components out of the box, such as for example:

- the "Open Smart Register Platform" (OpenSRP), that focuses on providing a mobile-first platform, including a FHIR native app designed to support the WHO Smart Guidelines
- the OpenHIM Platform, a reference implementation of the Instant Open-HIE framework, providing an easy way to set up, manage and operate various HIE configurations

Allows for the Data Warehouse data to be visualised via a BI tool (Apache Superset)

#### 4. Evaluation

# 4.1. OpenHIM platform

 One of the most used IOL layers in LMICs. Leading development of InstantHIE library to configure OpenHIE infrastructures

https://jembi.gitbook.io/openhim-platform/recipes/central-data-repository-with-data-warehousing

- Accept FHIR bundles submitted securely through an IOL (OpenHIM)
- Stores Clinical FHIR data to a FHIR store (HAPI FHIR)
- Stores Patient Demographic data to an MPI (JeMPI)
- Pushes FHIR resources to Kafka for the reporting pipeline (and other systems) to use
- Pulls FHIR data out of Kafka and maps it to flattened tables in the Data Warehouse (Clickhouse)
- View generation in different packages, not portable
  - Logstash for bulk
  - $-\,$  Kafka for streaming, uses JSON for mappings which looks similar to SQL-on-FHIR

4.2. ONA Canopy

# 4.3. Momcare programme

MomCare was launched in Kenya (Huisman et al., 2022; Sanctis et al., 2022) and Tanzania (Shija et al., 2021; Mrema, 2021) in 2017 and 2019 respectively, with the objective to create transparency on the journeys of pregnant mothers. The programme is built on three pillars: journey tracking, quality support and a mobile wallet. MomCare distinguishes two user groups: mothers are supported during their pregnancy through reminders and surveys, using SMS as the digital mode of engagement. Health workers are equipped with an Android-based application, in which visits, care activities and clinical observations are recorded. Reimbursements of the maternal clinic are based on the data captured with SMS

12

Table 4: Overview of current open source implementations of components included in the OpenHIE specification that are FHIR-compatible. The category Analytics Services is not a part of the original OpenHIE and is discussed in the paper. Point-of-Service systems are excluded for brevity. A systematic review of such digital public goods is beyond the scope of this document.

Category	Component	Digital public good
Interoperability layer (IOL)		<u>OpenHIM</u>
		OpenHIM Platform
Registry Services	Client Registry	<u>SanteMPI</u>
		<u>JeMPI</u>
		<u>OpenCR</u>
	Facility Registry (FR)	Global Open Facility Registry (GOFR)
	Health Worker Registry (HWR)	<u>iHRIS</u>
	Terminology Service (TS)	OCL Terminology Service
	Product Catalog (PC)	
Business Domain	Shared Health Record (SHR)	HAPI FHIR
Services		<u>Fhirbase</u>
		FHIR Server for Azure
		I-TECH-UW SHR
	Health Management Information System	DHIS2
	Finance and Insurance Service (FIS)	<u>OpenIMIS</u>
	Logistics Management Information System (LMIS)	<u>OpenLMIS</u>
Analytics Services	Analytics-on-FHIR	Open Health Stack: FHIR Data Pipes
Services		Pathling
	Dashboarding	Apache Superset
Generic	Identity & Access Management (IAM)	<u>Keycloak</u>
	User administration	FHIR Web
	Gateway & proxy	FHIR Information Gateway
	Configuration and deployment	Instant OpenHIE

and the app, thereby creating a conditional payment scheme, where providers are partially reimbursed up-front for a fixed bundle of activities, supplemented by bonus payments based on a predefined set of care activities.

In its original form, the MomCare programme uses predominantly closed digital platforms. In Kenya, M-TIBA is the primary digital platform, on top of which a relatively lightweight custom app has been built as the engagement layer for the health workers (Huisman et al., 2022). M-TIBA provides data access through its data warehouse platform for the MomCare programme, however, this is not a standardized, general purpose API. In the case of Tanzania, a stand-alone custom app is used which does not provide an interface of any kind for interacting with the platform (Mrema, 2021). Given these constraints, to date the MomCare programme uses a custom-built data warehouse environment as its main data platform, on which data extractions, transformations and analysis are performed to generate the operational reports. Feedback reports for the health workers, in the form of operational dashboards, are made accessible through the app. Similar reports are provided to the back-office for the periodic reimbursement to the clinics.

In the periode 2022-2023, a new iteration of MomCare ...One of the practical objectives of the DataCare project was to assess the complexity and effort required to implement the data transformation scripts, and reproduce the existing analytic reports. The data was transformed into 10 FHIR v4 resources as listed in table 1 with the number of records per resource type. The conceptual data model of the existing MomCare app could readily be transformed into the FHIR standard using SQL and validated with a Python library (Islam, 2023).

The largest challenge during the transformation process pertained to the absence of unique business identifiers for patients and healthcare organizations. For patients, either the mobile phone number or the healthcare insurance number was taken, depending on availability. A combination of name, address and latitude/longitude coordinates were used to uniquely identify organizations and locations, as Tanzania does not have a system in place for this purpose.

The transformed and validated data is uploaded into the FHIR server on a daily basis using an automated cloud function. Analysis of bulk data was done by directly reading the standard newline delimited JSON into the Python pandas data analysis library. Cross checking the output with queries on the original data confirmed that the whole data pipeline produced consistent results. For example, the report of the antenatal coverage metric (number of pregnancies with four or more visits) could be reproduced per patient journey and aggregated (per year, per organization etc.) as required for the MomCare reports.

#### 5. Discussion

# 5.1. Openness of data platforms

We specifically address the notion of openness of HDPs in LMICs in terms of the design-related questions put forward by de Reuver at al.11:

- Object of openness: what data-related resources should data platforms make available when opening up (e.g. data, data products, datadriven insights, analytics modules)? Which user groups derive value from accessing data-related resources from data platforms (e.g. data providers, data users, intermediaries, developers)?
- Unit of analysis: what is platform-to-platform openness in the context of data platforms, given the expectation that different HDPs will emerge at various aggregation levels? How do we distinguish meta-platforms, forking, and platform interoperability?
- Risk of openness: What are the novel (negative) implications of opening up data platforms? How can reflexivity in design help providers to resolve the negative implications of openness?

# 5.2. Comparison with HMIS component

- Functional requirements: https://guides.ohie.org/arch-spec/openhie-component-specifications-1/openhie-health-management-information-system-hmis

Requirements are similar, but implementation differs: Datamodel is non-FHIR, focused on DataValue, which conceptually equates to FHIR Measure

# 5.3. The need to a semantic layer?

- FHIR and FAIR
  - How does FHIR relate to approaches taken by the FAIR community, which tend to take more an approach of using knowledge graphs. For example, VODAN Africa (Gebreslassie et al., 2023; Purnama Jati et al., 2022).
  - FAIR principles vs FHIR graph: is FHIR a FAIR Data Object
- Since we use FHIR, we don't need a semantic layer because that is already provided

### 5.4. Attribute-based access control

- TO DO: if you have generated flattened SQL tables, how are you going to manage security?
- Cerbos, attribute based on lineage or anonymized tables
- Catalogs solve this: Tabular.io, Google BigLake. What is open source option?

# 5.5. Federated learning and multiparty computation

• data stations??!

15

# 6. Abbreviations

ELT	Extract, Load and Transform
FAIR	Findable, Accessible, Interoperable
	and Reusable
FHIR	Fast Healthcare Interoperability
	Resources
$\operatorname{FL}$	Federated learning
HDP	Health data platform, explicitly
	differentiated from health digital
	platform
HIE	Health Information Exchange
IR	Intermediate Representation
LMIC	Low- and middle income countries
PET	Privacy-enhancing technologies

# References

- , 2022. OpenHIE Framework v5.0. https://ohie.org/.
- , 2023. African Union Health Information Exchange Guidelines and Standards. Technical Report. African Union.
- , 2023. HCX Protocol v0.9.
- , 2023. OHIE23 Unconference 101.
- , 2023. ONNX v1.15.0. https://onnx.ai/.
- , 2024. Digital Public Goods Alliance. https://digitalpublicgoods.net/.
- , 2024. Instant OpenHIE v2.2.0. https://jembi.gitbook.io/instant-v2/.
- , 2024. SQL on FHIR specification v0.0.1-pre.  $\label{eq:sql-on-fhir-v2/} https://build.fhir.org/ig/FHIR/sql-on-fhir-v2/.$
- Alaimo, C., Kallinikos, J., 2022. Organizations Decentered: Data Objects, Technology and Knowledge. Organization Science 33, 19–37. doi:10.1287/orsc. 2021.1552.
- Armbrust, M., Ghodsi, A., Xin, R., Zaharia, M., 2021. Lakehouse: A New Generation of Open Platforms that Unify Data Warehousing and Advanced Analytics, in: 11th Annual Conference on Innovative Data Systems Research (CIDR '21), p. 8.
- Ayaz, M., Pasha, M.F., Alahmadi, T.J., Abdullah, N.N.B., Alkahtani, H.K., 2023. Transforming Healthcare Analytics with FHIR: A Framework for Standardizing and Analyzing Clinical Data. Healthcare 11, 1729. doi:10.3390/healthcare11121729.

- Ayaz, M., Pasha, M.F., Alzahrani, M.Y., Budiarto, R., Stiawan, D., 2021. The Fast Health Interoperability Resources (FHIR) Standard: Systematic Literature Review of Implementations, Applications, Challenges and Opportunities. JMIR Medical Informatics 9, e21929. doi:10.2196/21929.
- Cremonesi, F., Planat, V., Kalokyri, V., Kondylakis, H., Sanavia, T., Miguel Mateos Resinas, V., Singh, B., Uribe, S., 2023. The need for multimodal health data modeling: A practical approach for a federated-learning health-care platform. Journal of Biomedical Informatics 141, 104338. doi:10.1016/j.jbi.2023.104338.
- Dalhatu, I., Aniekwe, C., Bashorun, A., Abdulkadir, A., Dirlikov, E., Ohakanu, S., Adedokun, O., Oladipo, A., Jahun, I., Murie, L., Yoon, S., Abdu-Aguye, M.G., Sylvanus, A., Indyer, S., Abbas, I., Bello, M., Nalda, N., Alagi, M., Odafe, S., Adebajo, S., Ogorry, O., Akpu, M., Okoye, I., Kakanfo, K., Onovo, A.A., Ashefor, G., Nzelu, C., Ikpeazu, A., Aliyu, G., Ellerbrock, T., Boyd, M., Stafford, K.A., Swaminathan, M., 2023. From Paper Files to Web-Based Application for Data-Driven Monitoring of HIV Programs: Nigeria's Journey to a National Data Repository for Decision-Making and Patient Care. Methods of Information in Medicine 62, 130–139. doi:10.1055/s-0043-1768711.
- de Reuver, M., Ofe, H., Agahari, W., Abbas, A.E., Zuiderwijk, A., 2022. The openness of data platforms: A research agenda, in: Proceedings of the 1st International Workshop on Data Economy, Association for Computing Machinery, New York, NY, USA. pp. 34–41. doi:10.1145/3565011.3569056.
- de Reuver, M., Sørensen, C., Basole, R.C., 2018. The Digital Platform: A Research Agenda. Journal of Information Technology 33, 124–135. doi:10.1057/s41265-016-0033-3.
- Duda, S.N., Kennedy, N., Conway, D., Cheng, A.C., Nguyen, V., Zayas-Cabán, T., Harris, P.A., 2022. HL7 FHIR-based tools and initiatives to support clinical research: A scoping review. Journal of the American Medical Informatics Association 29, 1642–1653. doi:10.1093/jamia/ocac105.
- Gebreslassie, T.G., van Reisen, M., Amare, S.Y., Taye, G.T., Plug, R., 2023. FHIR4FAIR: Leveraging FHIR in health data FAIRfication process: In the case of VODAN-A. FAIR Connect 1, 49–54. doi:10.3233/FC-230504.
- Granger, B.E., Perez, F., 2021. Jupyter: Thinking and Storytelling With Code and Data. Computing in Science & Engineering 23, 7–14. doi:10.1109/MCSE. 2021.3059263.
- Grimes, J., Szul, P., Metke-Jimenez, A., Lawley, M., Loi, K., 2022. Pathling: Analytics on FHIR. Journal of Biomedical Semantics 13, 23. doi:10.1186/s13326-022-00277-1.
- Guillot, P., Bøgsted, M., Vesteghem, C., 2023. FAIR sharing of health data: A systematic review of applicable solutions. Health and Technology 13, 869–882. doi:10.1007/s12553-023-00789-5.

- Hai, R., Koutras, C., Quix, C., Jarke, M., 2023. Data Lakes: A Survey of Functions and Systems. IEEE Transactions on Knowledge and Data Engineering 35, 12571–12590. doi:10.1109/TKDE.2023.3270101.
- Harby, A.A., Zulkernine, F., 2022. From Data Warehouse to Lakehouse: A Comparative Review, in: 2022 IEEE International Conference on Big Data (Big Data), IEEE, Osaka, Japan. pp. 389–395. doi:10.1109/BigData55660. 2022.10020719.
- Harby, A.A., Zulkernine, F., 2024. Data Lakehouse: A Survey and Experimental Study. doi:10.2139/ssrn.4765588.
- Health Samurai, 2024. Aidbox. https://docs.aidbox.app/storage-1/sql-on-fhir.
- HL7, 2020. FHIRPath (Normative Release).
- Huisman, L., van Duijn, S.M., Silva, N., van Doeveren, R., Michuki, J., Kuria, M., Otieno Okeyo, D., Okoth, I., Houben, N., Rinke de Wit, T.F., Rogo, K., 2022. A digital mobile health platform increasing efficiency and transparency towards universal health coverage in low- and middle-income countries. Digital Health 8, 20552076221092213. doi:10.1177/20552076221092213.
- Islam, M.N., 2023. Fhir.resources: FHIR Resources as Model Class.
- Jones, J., Gottlieb, D., Mandel, J.C., Ignatov, V., Ellis, A., Kubick, W., Mandl, K.D., 2021. A landscape survey of planned SMART/HL7 bulk FHIR data access API implementations and tools. Journal of the American Medical Informatics Association 28, 1284–1287. doi:10.1093/jamia/ocab028.
- Jordan, S., Fontaine, C., Hendricks-Sturrup, R., 2022. Selecting Privacy-Enhancing Technologies for Managing Health Data Use. Frontiers in Public Health 10, 814163. doi:10.3389/fpubh.2022.814163.
- Keller, P., Tarkowski, A., 2021. The Paradox of Open. Open Future .
- Kickbusch, I., Piselli, D., Agrawal, A., Balicer, R., Banner, O., Adelhardt, M., Capobianco, E., Fabian, C., Singh Gill, A., Lupton, D., Medhora, R.P., Ndili, N., Ryś, A., Sambuli, N., Settle, D., Swaminathan, S., Morales, J.V., Wolpert, M., Wyckoff, A.W., Xue, L., Bytyqi, A., Franz, C., Gray, W., Holly, L., Neumann, M., Panda, L., Smith, R.D., Georges Stevens, E.A., Wong, B.L.H., 2021. The Lancet and Financial Times Commission on governing health futures 2030: Growing up in a digital world. The Lancet 398, 1727–1776. doi:10.1016/S0140-6736(21)01824-9.
- Kurniawan, K., FitriaSyah, I., Jayakusuma, A.R., Armis, R.A., Lubis, Y., Haryono, M.A., Harefa, B., Shankar, A., 2019. Midwife service coverage, quality of work, and client health improved after deployment of an OpenSRP-driven client management application in Indonesia, in: 5th International Conference on Health Sciences (ICHS 2018), Atlantis Press. pp. 155–162. doi:10.2991/ichs-18.2019.21.

- Malm-Nicolaisen, K., Pedersen, R., Fagerlund, A.J., 2023. Exploring the Emergence of Open Platforms in Healthcare: Design Considerations and Experiences from an Initial Case in Norwegian Primary Care, in: 56th Hawaii International Conference on System Sciences.
- Mamuye, A.L., Yilma, T.M., Abdulwahab, A., Broomhead, S., Zondo, P., Kyeng, M., Maeda, J., Abdulaziz, M., Wuhib, T., Tilahun, B.C., 2022. Health information exchange policy and standards for digital health systems in africa: A systematic review. PLOS Digital Health 1, e0000118. doi:10.1371/journal.pdig.0000118.
- Mandl, K.D., Gottlieb, D., Mandel, J.C., Ignatov, V., Sayeed, R., Grieve, G., Jones, J., Ellis, A., Culbertson, A., 2020. Push Button Population Health: The SMART/HL7 FHIR Bulk Data Access Application Programming Interface. npj Digital Medicine 3, 1–9. doi:10.1038/s41746-020-00358-4.
- McCool, J., Dobson, R., Whittaker, R., Paton, C., 2022. Mobile Health (mHealth) in Low- and Middle-Income Countries. Annual Review of Public Health 43, 525–539. doi:10.1146/annurev-publhealth-052620-093850.
- Mehl, G., 2020. Open Smart Register Platform (OpenSRP). mHealth Compendium 5, 42–43.
- Mehl, G.L., Seneviratne, M.G., Berg, M.L., Bidani, S., Distler, R.L., Gorgens, M., Kallander, K.E., Labrique, A.B., Landry, M.S., Leitner, C., Lubell-Doughtie, P.B., Marcelo, A.D., Matias, Y., Nelson, J., Nguyen, V., Nsengimana, J.P., Orton, M., Otzoy Garcia, D.R., Oyaole, D.R., Ratanaprayul, N., Roth, S., Schaefer, M.P., Settle, D., Tang, J., Tien-Wahser, B., Wanyee, S., Hersch, F., 2023. A full-STAC remedy for global digital health transformation: Open standards, technologies, architectures and content. Oxford Open Digital Health 1, oqad018. doi:10.1093/oodh/oqad018.
- Mrema, A., 2021. Application of Digital Platform to Enhance Quality Improvement in Momcare Facilities in Manyara. AIJR Abstracts .
- Mullie, L., Afilalo, J., Archambault, P., Bouchakri, R., Brown, K., Buckeridge, D.L., Cavayas, Y.A., Turgeon, A.F., Martineau, D., Lamontagne, F., Lebrasseur, M., Lemieux, R., Li, J., Sauthier, M., St-Onge, P., Tang, A., Witteman, W., Chassé, M., 2023. CODA: An open-source platform for federated analysis and machine learning on distributed healthcare data. Journal of the American Medical Informatics Association, ocad235doi:10.1093/jamia/ocad235.
- Neumark, T., Prince, R.J., 2021. Digital Health in East Africa: Innovation, Experimentation and the Market. Global Policy 12, 65–74. doi:10.1111/1758-5899.12990.
- Nsaghurwe, A., Dwivedi, V., Ndesanjo, W., Bamsi, H., Busiga, M., Nyella, E., Massawe, J.V., Smith, D., Onyejekwe, K., Metzger, J., Taylor, P., 2021.

- One country's journey to interoperability: Tanzania's experience developing and implementing a national health information exchange. BMC Medical Informatics and Decision Making 21, 139. doi:10.1186/s12911-021-01499-6.
- Otto, B., Ten Hompel, M., Wrobel, S. (Eds.), 2022. Designing Data Spaces: The Ecosystem Approach to Competitive Advantage. Springer International Publishing, Cham. doi:10.1007/978-3-030-93975-5.
- Ozalp, H., Ozcan, P., Dinckol, D., Zachariadis, M., Gawer, A., 2022. "Digital Colonization" of Highly Regulated Industries: An Analysis of Big Tech Platforms' Entry into Health Care and Education. California Management Review 64, 78–107. doi:10.1177/00081256221094307.
- Pedreira, P., Erling, O., Karanasos, K., Schneider, S., McKinney, W., Valluri, S.R., Zait, M., Nadeau, J., 2023. The Composable Data Management System Manifesto. Proceedings of the VLDB Endowment 16, 2679–2685. doi:10.14778/3603581.3603604.
- Pedrera-Jiménez, M., García-Barrio, N., Frid, S., Moner, D., Boscá-Tomás, D., Lozano-Rubí, R., Kalra, D., Beale, T., Muñoz-Carrero, A., Serrano-Balazote, P., 2023. Can OpenEHR, ISO 13606, and HL7 FHIR Work Together? An Agnostic Approach for the Selection and Application of Electronic Health Record Standards to the Next-Generation Health Data Spaces. Journal of Medical Internet Research 25, e48702. doi:10.2196/48702.
- Prainsack, B., El-Sayed, S., 2023. Beyond Individual Rights: How Data Solidarity Gives People Meaningful Control over Data. The American Journal of Bioethics 23, 36–39. doi:10.1080/15265161.2023.2256267.
- Prainsack, B., El-Sayed, S., Forgó, N., Szoszkiewicz, Ł., Baumer, P., 2022. Data solidarity: A blueprint for governing health futures. The Lancet Digital Health 4, e773–e774. doi:10.1016/S2589-7500(22)00189-3.
- Purnama Jati, P.H., van Reisen, M., Flikkenschild, E., Oladipo, F., Meerman, B., Plug, R., Nodehi, S., 2022. Data Access, Control, and Privacy Protection in the VODAN-Africa Architecture. Data Intelligence 4, 938–954. doi:10. 1162/dint\_a\_00180.
- Rieke, N., Hancox, J., Li, W., Milletarì, F., Roth, H.R., Albarqouni, S., Bakas, S., Galtier, M.N., Landman, B.A., Maier-Hein, K., Ourselin, S., Sheller, M., Summers, R.M., Trask, A., Xu, D., Baust, M., Cardoso, M.J., 2020. The future of digital health with federated learning. npj Digital Medicine 3, 1–7. doi:10.1038/s41746-020-00323-1.
- Rinaldi, E., Thun, S., 2021. From OpenEHR to FHIR and OMOP Data Model for Microbiology Findings. Studies in Health Technology and Informatics 281, 402–406. doi:10.3233/SHTI210189.

- Sanctis, T.D., Etiebet, M.A., Janssens, W., van der Graaf, M.H., van Montfort, C., Waiyaiya, E., Spieker, N., 2022. Maintaining Continuity of Care for Expectant Mothers in Kenya During the COVID-19 Pandemic: A Study of MomCare. Global Health: Science and Practice 10. doi:10.9745/GHSP-D-21-00665.
- Scheibner, J., Raisaro, J.L., Troncoso-Pastoriza, J.R., Ienca, M., Fellay, J., Vayena, E., Hubaux, J.P., 2021. Revolutionizing Medical Data Sharing Using Advanced Privacy-Enhancing Technologies: Technical, Legal, and Ethical Synthesis. Journal of Medical Internet Research 23, e25120. doi:10.2196/25120.
- Sharon, T., 2018. When digital health meets digital capitalism, how many common goods are at stake? Big Data & Society 5, 2053951718819032. doi:10.1177/2053951718819032.
- Shija, L., Yokoyana, J., Mrema, A., Bwakea, J., Kiwale, T., Massawe, N., 2021. Access to Essential Maternal Health Commodities Key to Improving Quality and Adherence to Maternal Healthcare Regimes: Experience from a MomCare Project in Northern Tanzania. AIJR Abstracts.
- Sinaci, A.A., Gencturk, M., Teoman, H.A., Laleci Erturkmen, G.B., Alvarez-Romero, C., Martinez-Garcia, A., Poblador-Plou, B., Carmona-Pírez, J., Löbe, M., Parra-Calderon, C.L., 2023. A Data Transformation Methodology to Create Findable, Accessible, Interoperable, and Reusable Health Data: Software Design, Development, and Evaluation Study. Journal of Medical Internet Research 25, e42822. doi:10.2196/42822.
- Summit Institute for Development, 2023. BUNDA App. https://www.sid-indonesia.org/post/bunda-app.
- Thaiya, M.S., Julia, K., Joram, M., Benard, M., Nambiro, D.A., 2021. Adoption of ICT to Enhance Access to Healthcare in Kenya .
- Venable, J., Pries-Heje, J., Baskerville, R., 2016. FEDS: A Framework for Evaluation in Design Science Research. European Journal of Information Systems 25, 77–89. doi:10.1057/ejis.2014.36.
- Vorisek, C.N., Lehne, M., Klopfenstein, S.A.I., Mayer, P.J., Bartschke, A., Haese, T., Thun, S., 2022. Fast Healthcare Interoperability Resources (FHIR) for Interoperability in Health Research: Systematic Review. JMIR Medical Informatics 10, e35724. doi:10.2196/35724.
- World Health Organization, 2019. Recommendations on Digital Interventions for Health System Strengthening. Technical Report. World Health Organization.
- World Health Organization, 2021. Global Strategy on Digital Health 2020-2025. Technical Report. World Health Organization. Geneva.