

POLITECNICO DI MILANO  
Scuola di Ingegneria Industriale e dell'Informazione  
Corso di laurea magistrale in Ingegneria Informatica



Tinfinity

Design and Implementation of Mobile  
Applications

Professor : Luciano Baresi

Fumagalli Alberto	Matr. 888888
Mariani Sebastiano	Matr. 817781
Mastellone Riccardo	Matr. 852341

Academic Year 2015-2016

## Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>High level application description</b>	<b>3</b>
2.1	Description . . . . .	3
<b>3</b>	<b>Requirements</b>	<b>5</b>
3.1	Functional Requirements . . . . .	5
3.2	Non Functional Requirements . . . . .	5
<b>4</b>	<b>Architecture</b>	<b>6</b>
<b>5</b>	<b>Mobile application</b>	<b>7</b>
5.1	LoginViewController . . . . .	8
5.2	ViewController . . . . .	9
5.3	SettingsViewController . . . . .	9
5.4	EditProfileViewController . . . . .	10
5.5	ProfileViewController . . . . .	11
5.6	Persistent Data Design . . . . .	12
<b>6</b>	<b>User Experience</b>	<b>13</b>
<b>7</b>	<b>Web app</b>	<b>14</b>

## List of Figures

1	Users Map . . . . .	3
2	Friendship request . . . . .	3
3	Friendship acceptance . . . . .	4
4	Chat . . . . .	4
5	Profile . . . . .	4
6	Photo selection . . . . .	4
7	Simplified class diagram . . . . .	7
8	LoginViewController class diagram . . . . .	8
9	ViewController class diagram . . . . .	9
10	SettingsViewController class diagram . . . . .	9
11	EditProfileViewController class diagram . . . . .	10
12	ProfileViewController class diagram . . . . .	11
13	Database . . . . .	12
14	Web app overview . . . . .	14

## 1 Introduction

This report will describe the *Tinfinity* application, a proximity chat system for iOS platforms. The first part will introduce the application with a high level description and then the report will focus on the technical aspects.

## 2 High level application description

### 2.1 Description

Tinfinity is a mobile application that implements a proximity chat system aiming to connect people in the same area. In order to access this application, the user must connect his Facebook account and share some of his informations like photos and interests. This step, simplifies the login process and mitigates the fake users problem delegating the issue to Facebook. Once the user has been successfully logged in the application, he can discover all the people that are using Tinfinity near to him using the map as shown in Figure 1. If the user finds someone interesting on the map, he can tap on the marker and send a friendship request as shown in Figure 2.

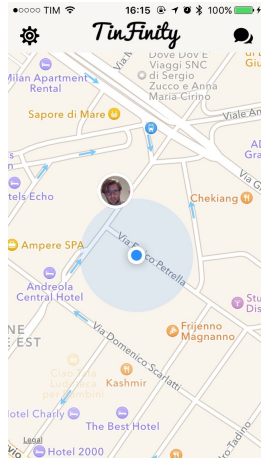


Figure 1: Users Map

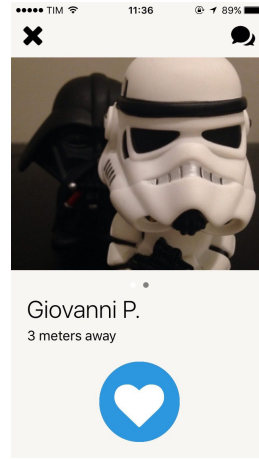


Figure 2: Friendship request

When and if recipient accepts the request, as shown in Figure 3, they can start chatting and maybe know each other directly in person. Also, when the friendship is granted, the two users can continue to chat even if they are no longer near such a normal chat system as Whatsapp for example, shown in Figure 4.

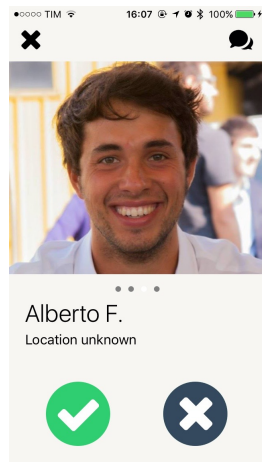


Figure 3: Friendship acceptance

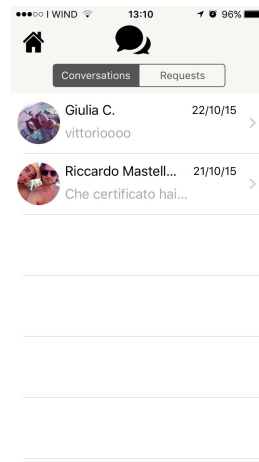


Figure 4: Chat

The user can also see the informations relative to his profile (Figure 5) and personalise which photos have to be shared with other through the settings page as shown in Figure 6.

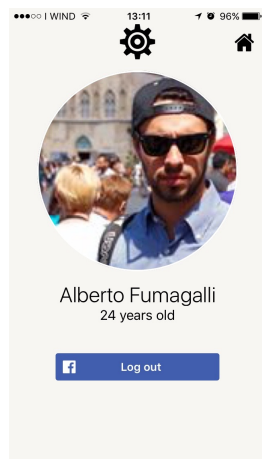


Figure 5: Profile

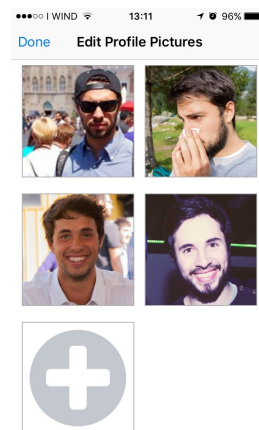


Figure 6: Photo selection

The application works in background and there is no need to open it in order to be localised by the others on the map.

## 3 Requirements

In this section the functional and non functional requirements which have been identified in the analysis phase are reported.

### 3.1 Functional Requirements

- Display to the user a map containing the position of other user within 800m from its position;
- Provide a chat system and allow the user to interact with it;
- Display the other users informations when request;
- Enable the user to personalise the photos that have to be shared;
- Enable the user to send a friendship requests and accept / decline the received one;
- Create a web application in order to manage the chat system and the location system;
- Create a push notification system in order to inform the user when a message is received;
- Develop an iOS mobile version of the application;

### 3.2 Non Functional Requirements

The non functional requirements are related to the devices which are target for the application:

- The application should run on devices with an iOS version  $> 8.4$ ;

## 4 Architecture

The architectures of the application is composed by two main parts:

- A client iOS application
- A server web application

The web application is necessary because it has to keep track of the users data, location and handle the chat system.

## 5 Mobile application

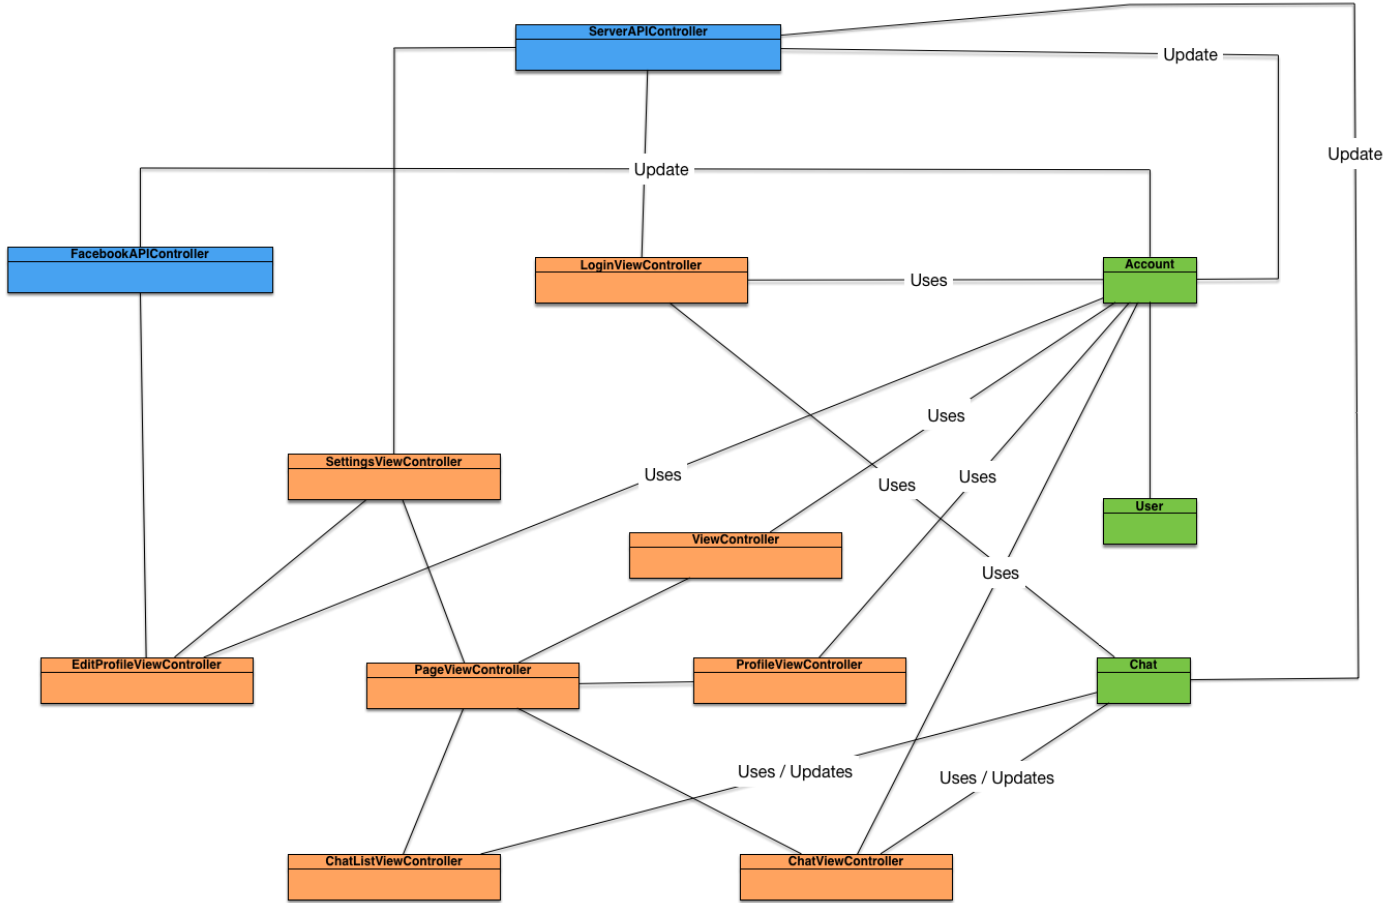


Figure 7: Simplified class diagram

The above class diagram shows a simplified version (only the most important classes are shown) of the application. The mobile application is based on eight main ViewController which handle the functionalities provided by Tinfinity:

- **LoginViewController** : Provides the login with Facebook functionalities and updates the account informations
- **ViewController** : Provides to the user a map that shows where the other user are located and their profiles.
- **SettingViewController** : Provides a recap view of the informations about the user and the ability to change them.
- **EditProfileViewController** : Provides the functionalities to decide which photos have to be displayed.

- **ProfileViewController** : Provides a view that shows the profile of other users which have sent a friendship request, and the abilities to accept / decline it.
- **ChatListViewController** : Provides a view with a list of the chat and the provides the functionalities to delete them.
- **ChatViewController** : Provides a view with the conversation with the specified user and the ability to send messages.
- **PageViewController** : Manages all the other views. It doesn't provide any functionality to the user, but it is used only for internal purposes.

## 5.1 LoginViewController

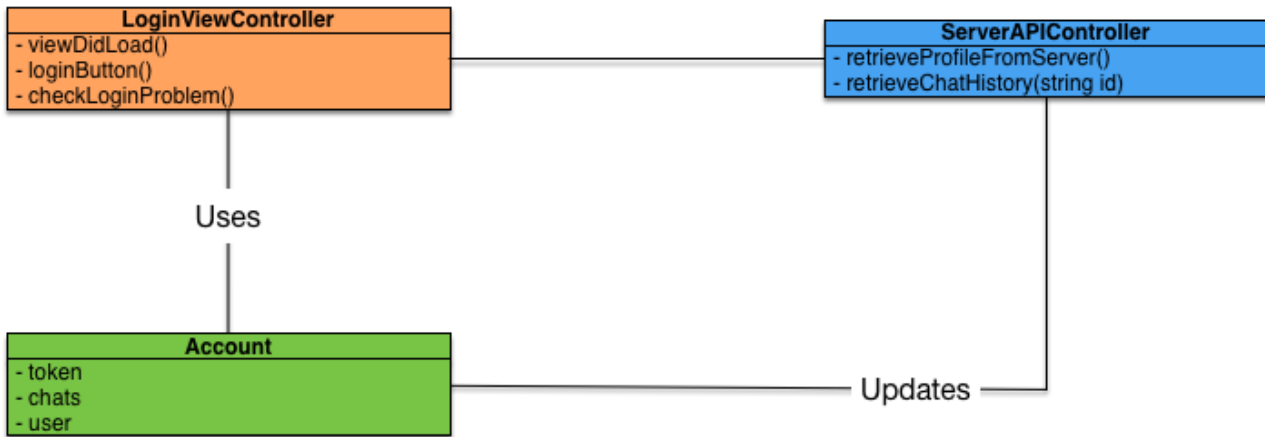


Figure 8: LoginViewController class diagram

The LoginViewController manages the view that implement the login functionalities with Facebook and set up the initial settings relative to the account.

- **viewDidLoad()** : When the view is loaded this callback tries to check if there is already a valid Facebook OAuth token binded to the account. If the token is present and valid then the application will display the main view of the application.
- **loginButton()** : This function is triggered when the login button is pressed. This function exploit the Facebook SDK in order to retrieve a valid Oauth token. If this operation succeed, then the other account settings, like the chat history, are retrieved and set and the main view of the application is displayed.



## 5.2 ViewController



Figure 9: ViewController class diagram

The ViewController manages the main view of the application and it show the map with the user location and the location of the other users around him. It is the delegate for the location manager and the mapView callback functions.

- **viewDidLoad()** : When the view is loaded this callback checks if the permissions needed in order to locate the user properly are given. if these are not given the map is hidden, otherwise the map is displayed and the user location is retrieved.
- **viewWillAppear()** : Every time the view is shown the location of the user is updated.
- **locationManager(didUpdateLocations error)** : Set the latitude and longitude of the user and add a marker on the map.
- **annotationClicked(UserAnnotation annotation)** : When a marker of anopther is clicked the information relative to him are retrieved and passed to the ProfileViewController

## 5.3 SettingsViewController




Figure 10: SettingsViewController class diagram

The SettingsViewController shows a view with the recap of the user informations and implement the logout functionality.

- **viewDidLoad()** : When the view is loaded all the informations about the user, like the profile picture, are retrieved and displayed properly.
- **loginButtonDidLogout()** : Exploit the Facebook SDK in order to invalidate the OAuth token and log out the user from the application.

## 5.4 EditProfileViewController

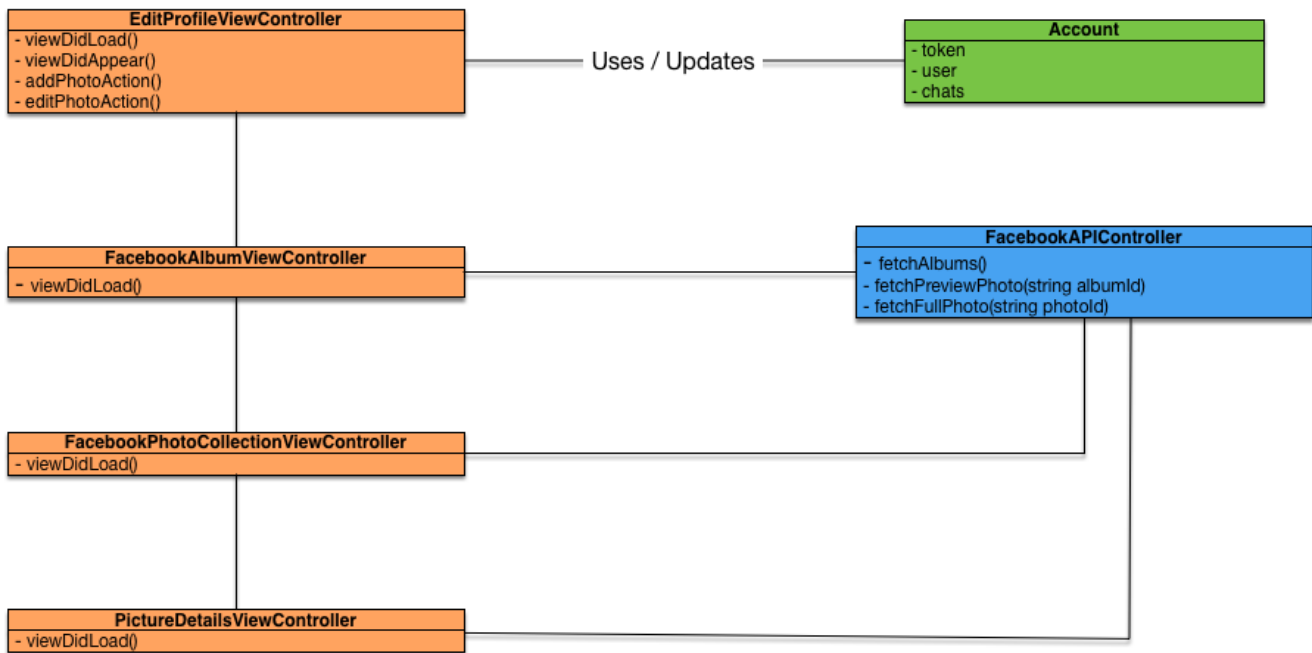


Figure 11: EditProfileViewController class diagram

The **EditProfileViewController** and the other auxiliary ViewControllers (**FacebookAlbumViewController**, **FacebookPhotoCollectionViewController** and **PictureDetailsViewController**) provides the functionalities of the photo editing. The user here can decide which photos of his Facebook profile have to be displayed in the application.

- **viewDidLoad() (FacebookAlbumViewController)** : Fetches the Facebook photos album relative to the user.
- **viewDidLoad() (FacebookPhotoCollectionViewController)** : Fetches the preview of the photos that are in the selected album.
- **viewDidLoad() (PictureDetailsViewController)** : Fetches the high resolution version of the selected photo.

## 5.5 ProfileViewController



Figure 12: ProfileViewController class diagram

The **ProfileViewController** manages the view displayed when the user click on a marker on the map or when he receive a friendship request. this view shows all the details relative to the other user like the distance, his photos and his name and age. It provides also the functionalities in order to accept or decline a friendship request, send a new request, or start a new chat with the selected user.

- **buttons()** : Based on the relationship with the other user, this function decides which buttons have to be displayed.
- **distance()** : This functions calculate the distance between the user and the other selected user.
- **createPageViewController()** : Creates the photos slideshows with the photos of the other user.
- **chatClick()** : Start a new chat with the other user.
- **sendRequestClick()** : Send a friendship request to the other user.
- **acceptClick()** / **declineClick()** : accept / decline a received friendship request.

## 5.6 Persistent Data Design

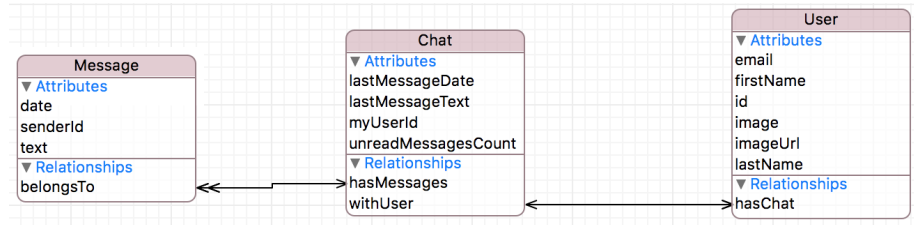


Figure 13: Database

The persistent Core Data is composed by 3 classes:

- **Message** : contains the informations of a single message(the date in which the message has been sent,the sender and the actual message text) and has a one-to-one relationship that associate it to a certain chat;
- **Chat** : contains the information of a chat(the date and text of the last message that has been received, the id of the logged user and the counter of unread messages) and has two relationships, one is a one-to-many relationship with the message class, that associate the chat with all of his messages, and the other a one-to-one relationship with the User class, that represent the other user.
- **User** : contains all the information of a user(email, name, surname, id, the user image and its url) and has a one-to-one relationship with the chat that is associated with it.

## **6 User Experience**

INSERT USER EXPERIENCE

## 7 Web app

This web server has been developed to support the iOS Tinfinity application.

It is written using Node.js with the Express framework and uses MongoDB as a database. These have been preferred over many alternatives for performance reasons, as they support a very high number of concurrent connections with very little resources. Additionally, websockets are natively supported using SocketIO, allowing a real-time, bidirectional and reliable chat system.




Figure 14: Web app overview

The structure of the web server has been developed so to not be tightly coupled with the client architecture (iOS), hence other clients (e.g., Web, Android) can be easily created starting from the APIs documentation.

All the security checks are done server-side, not disclosing any unwanted information unless explicitly requested by the user.

MongoDB offers natively Geospatial data type support, and near users are retrieved directly querying the database with the user current position.