

Design Quiz 07 Personality Quiz

Technical Requirements

List the technical requirements you have identified in the instructions. Remember, these are requirements that need to be met to earn full autograder credit, but that don't affect the program output.

This program reads a text file containing the answers to the personality quiz for a list of testers, from that list I will analyze each person's answers, determine their personality type, and prints the results to the console.

- Inputs:
 - Keyboard (Scanner for System.in)
 - Files (Scanner for File)
- Outputs:
 - Prints the Result to the Console

Technical Requirements:


- Use only Things Covered from the Textbook up to 7.4
 - You cannot use multi-dimensional arrays
- Don't modify the starter code
- Only create one Scanner per input file.
- The Output must match the example output.
- You cannot declare variables outside of the methods like main.
- You must store the THRESHOLD as a constant or variable
 - No magic numbers
- Code should be decomposed into methods and helper methods
- Follow the style guide
- Dashes represents no answers and if the percentages are the same for both variables it is an X
- Submit the Personality.java file.

High-Level Summary

- main()
 - Create a Keyboard Scanner
 - Ask User for File Name
 - Create a Scanner for the File
 - For Loop Depending on the Number on the First Line of the File:
 - Call resetArrays()
 - Call getPerson()
 - Calls analyzePerson()

- Calls printPersonPersonality()
- Close File Scanner
- Close Keyboard Scanner
- Close File
- resetArrays()
 - Gets all the Arrays passed in.
 - Reset all Answers to 0 or the default value.
 - Return void
- getPerson()
 - Gets the File Scanner Passed.
 - Read the 2 Lines as String and Pass the Values into a String Array that gets returned.
- analyzePerson()
 - Gets Passed the String Array and Analyze the Answers to Determine their
 - Use the Strings in the to run the analysis of the personality questions.
- printPersonPersonality()
 - Use printf to format the string correctly and print the information to the console.

Program Flow

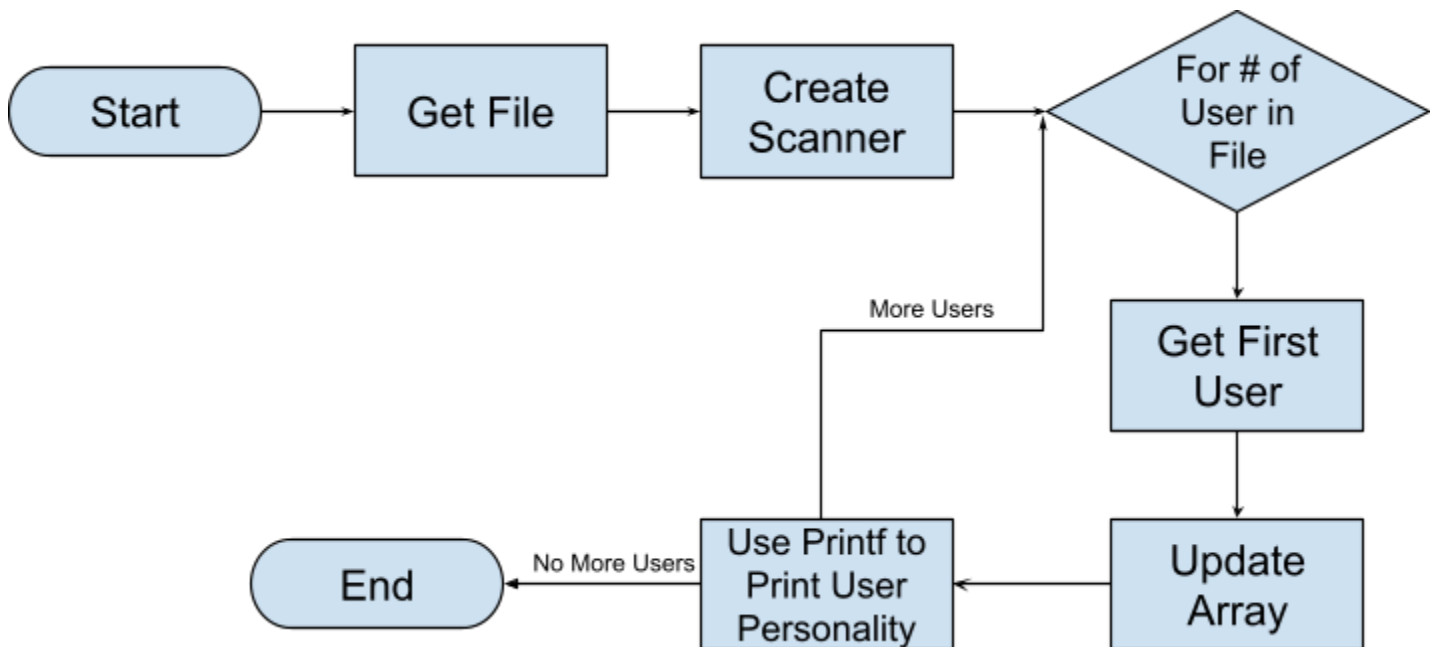

Variables and Data Structures

Specify how key data will be stored in your program.

Variable Type and/or Data Structure	Data
int[] numA, int[] numB	counts of quiz answers, A and B, for each dimension
double[] percentageA, double[] percentageB	percentage summary for each dimension, for example, .5 if there were an equal number of A and B answers
String personalityResults	quiz results, for example IS-J

Answer Input Breakdown:

BABAAAABAAAAABAAAAB

- The Sequence goes in a pattern of 1, 2, 2, 2, 1, 2, 2, 2
 - The formula to access is:
 - For E/I: $(i + 1) \% 7 / 2 == 0$
 - For S/N: $(i + 1) \% 7 / 2 == 1$
 - For T/F: $(i + 1) \% 7 / 2 == 2$
 - For J/P: $(i + 1) \% 7 / 2 == 3$
 - If the answer is not a, A, b, B; then the answer is not counted.
 - For example if the answer to a question was -
 - If the num of A == num of B then, it is shown as X.

Input Breakdown:

11 ← Number of People to Analyze in the File

Betty Boop ← Name of the Person

BABAAAABAAAAABAAAABBAaAAAAABAAAABABAABAAAABABABAABAAAAABAAAAABAAAAA ← Valid Answers

No Answer Dude ← No Inputs Name

----- No As or Bs, no valid answers.