

CS 660: Data Mining For Decision Making

Lecture 14-15 (Week 7)

Varun Dutt

School of Computing and Electrical Engineering
School of Humanities and Social Sciences
Indian Institute of Technology Mandi, India



Scaling the Heights


Clustering

Patterns can also be put into groups based on the values of their attributes. Such groups are called *clusters*, and the process of forming clusters is called *clustering*.

is no training set available to supervise, or guide, the learning. After we have clustered some given patterns, we may consider each cluster to be a class.

Study the five patterns X1 to X5 and the values of their numeric attributes A_1 and A_2 . It is not necessary to know what the attributes mean; only their values need to be considered. Intuitively put the five patterns into two clusters such that the patterns within a cluster are more similar to one another than to patterns in another cluster. It might help to first represent each pattern as a point in the A_1 - A_2 coordinate space as shown

NAME of pattern	Values of attributes	
	A_1	A_2
X1	1	1
X2	2	3
X3	3	1
X4	4	4
X5	5	2

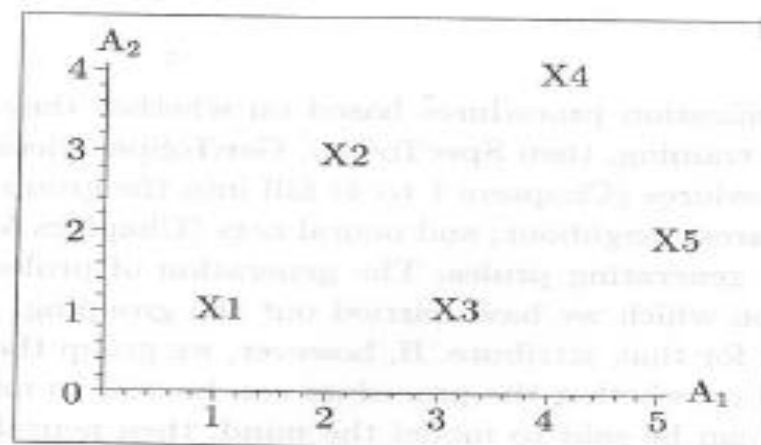

Agglomerative Hierarchical Clustering

There exist procedures which—given $r \geq 1$ patterns and the values of their attributes $A_1, A_2, \dots, A_M$ —can put the patterns into $k \geq 1$ clusters, where $k \leq r$. Different procedures may, however, produce different clusters. A commonly adopted procedure has the following steps.

1. Choose a value for k , which denotes the number of clusters desired.
2. Consider each of the r patterns to be in a separate cluster. In other words, each cluster contains one pattern.
3. If there are k clusters, then return from the procedure with the k clusters.
4. Find the pairwise distances between the clusters. Merge the two closest clusters into one cluster, thus reducing the number of clusters by one. If there is more than one pair of clusters that are the closest to each other, then arbitrarily select a pair to merge, for instance, the first such pair encountered while scanning the clusters in some order. Go to step 3.

Step 4 above measures the distance between clusters. Before deciding how to measure that, we need to first decide how to measure the distance between patterns. Euclidean, city-block, Hamming distance

Definition of Distance: Single Linkage

The distances between two clusters C' and C'' can then be measured as follows. First calculate the pairwise distance for every pattern in cluster C' with every pattern in cluster C'' . Then, the distance between cluster C' and cluster C'' can be defined to be one of the following:

- The lowest of the pairwise distances—if this definition is chosen for clustering, then the procedure is known as *single-linkage*, or *nearest neighbour*, clustering.

Patterns	X1	X2	X3	X4	X5
X1	0	2.2	2	4.2	4.1
X2	2.2	0	2.2	2.2	3.2
X3	2	2.2	0	3.2	2.2
X4	4.2	2.2	3.2	0	2.2
X5	4.1	3.2	2.2	2.2	0

Euclidean distances between the five patterns given in Fig. 10.1. The distance between patterns X1 and X2 is $\sqrt{(2-1)^2 + (3-1)^2} = 2.2$ (rounded off). The diagonal values are zero because the distance between a pattern and itself is zero. The table is symmetric because, for example, the distance between patterns X1 and X2 is equal to the distance between X2 and X1.

Single Linkage Hierarchical

To create two clusters of the five patterns X1 to X5 given in Fig. 10.1 by the single-linkage procedure using Euclidean distance, we begin by creating 5 clusters {X1}, {X2}, {X3}, {X4}, and {X5}. Considering the off-diagonal values in Fig. 10.3, we see that the minimum distance between any two clusters is 2: it is between {X1} and {X3}, which we merge into one cluster {X1, X3}. We then obtain the distances between the four clusters {X1, X3}, {X2}, {X4}, and {X5}, as given in the following symmetric table:

Clusters	{X1, X3}	{X2}	{X4}	{X5}
{X1, X3}	0	2.2	3.2	2.2
{X2}	2.2	0	2.2	3.2
{X4}	3.2	2.2	0	2.2
{X5}	2.2	3.2	2.2	0

Since we are using the single-linkage procedure, the distance between {X1, X3} and, say, {X4} is the lesser of the distance between X1 and X4, and that between X3 and X4, the two distances obtained from Fig. 10.3. Therefore, the distance between {X1, X3} and {X4} is $\min(4.2, 3.2) = 3.2$, which is what is shown in the table above. The other values in the table are obtained similarly. The smallest off-diagonal value in the table is 2.2. We can merge any pair of clusters having a distance of 2.2 between them. Let us select the pair corresponding to 2.2 we encounter first when we scan the table row by row. So we merge {X2} with {X1, X3}. We now have the three clusters {X1, X2, X3}, {X4}, and {X5}, the distances between which are in the following symmetric table:

Clusters	{X1, X2, X3}	{X4}	{X5}
{X1, X2, X3}	0	2.2	2.2
{X4}	2.2	0	2.2
{X5}	2.2	2.2	0

With our using the single-linkage procedure, the distance between {X1, X2, X3} and, say, {X4} is the least of the distances between X4 and either of X1, X2, and X3 (see Fig. 10.3). The distance between {X1, X2, X3} and {X4} accordingly is $\min(4.2, 2.2, 3.2) = 2.2$, as shown in the above table. The smallest off-diagonal value in the table is 2.2. Selecting the pair of clusters corresponding to 2.2 we encounter first when we scan the table row by row, we merge {X1, X2, X3} with {X4} to finally obtain these two clusters: {X1, X2, X3, X4} and {X5}.

Definition of Distance: Other kinds of Linkages

- The highest of the pairwise distances—if this definition is chosen, then the procedure is known as *complete-linkage*, or *farthest neighbour*, clustering.
- The average of the pairwise distances—if this definition is chosen, then the procedure is known as *average-linkage* clustering.

In addition to this, there is one more way to measure the distance between clusters. The distance between clusters C' and C'' is defined to be equal to the distance between their centroids. For $1 \leq i \leq M$, the value of the A_i th coordinate of the centroid of a cluster is the mean of the values of attribute A_i of the patterns in the cluster (this is what you did for a prototype in Section 6.5). If this definition is chosen to measure the distance between clusters, then the clustering procedure is known as *centroid-linkage* clustering.

Fig. 10.1 are clustered using Euclidean

Complete Linkage Hierarchical

To create two clusters of the five patterns X1 to X5 given in Fig. 10.1 by the **complete-linkage** procedure using Euclidean distance, we begin by creating 5 clusters {X1}, {X2}, {X3}, {X4}, and {X5}. Considering the off-diagonal values given in Fig. 10.3, we see that the minimum distance between any two clusters is 2: it is between {X1} and {X3}, which we merge into one cluster {X1, X3}. We then obtain the distances between the four clusters {X1, X3}, {X2}, {X4}, and {X5}, as given in the following symmetric table:

Clusters	{X1,X3}	{X2}	{X4}	{X5}
{X1,X3}	0	2.2	4.2	4.1
{X2}	2.2	0	2.2	3.2
{X4}	4.2	2.2	0	2.2
{X5}	4.1	3.2	2.2	0

Since we are using the complete-linkage procedure, the distance between {X1, X3} and, say, {X4} is the greater of the distance between X1 and X4, and that between X3 and X4, the two distances obtained from Fig. 10.3. Therefore, the distance between {X1, X3} and {X4} is $\max(4.2, 3.2) = 4.2$, which is what is shown in the table above. The other values in the table are obtained similarly. The smallest off-diagonal value in the table is 2.2. We can merge any pair of clusters having a distance of 2.2 between them. Let us select the pair corresponding to 2.2 we encounter first when we scan the table row by row. So we merge {X2} with {X1, X3}. We now have the three clusters {X1, X2, X3}, {X4}, and {X5}, the distances between which are in the following symmetric table:

Clusters	{X1, X2, X3}	{X4}	{X5}
{X1, X2, X3}	0	4.2	4.1
{X4}	4.2	0	2.2
{X5}	4.1	2.2	0

With our using the complete-linkage procedure, the distance between {X1, X2, X3} and, say, {X4} is the greatest of the distances between X4 and either of X1, X2, and X3 (see Fig. 10.3). The distance between {X1, X2, X3} and {X4} accordingly is $\max(4.2, 2.2, 3.2) = 4.2$, as shown in the above table. The smallest off-diagonal value in the table is 2.2. We merge {X5} with {X4} to finally obtain these two clusters: {X1, X2, X3} and {X4, X5}.

Average Linkage Hierarchical

To create two clusters of the five patterns X1 to X5 given in Fig. 10.1 by the **average-linkage** procedure using Euclidean distance, we begin by creating 5 clusters {X1}, {X2}, {X3}, {X4}, and {X5}. Considering the off-diagonal values given in Fig. 10.3, we see that the minimum distance between any two clusters is 2: it is between {X1} and {X3}, which we merge into one cluster {X1, X3}. We then obtain the distances between the four clusters {X1, X3}, {X2}, {X4}, and {X5}, as given in the following symmetric table:

Clusters	{X1, X3}	{X2}	{X4}	{X5}
{X1, X3}	0	2.2	3.7	3.2
{X2}	2.2	0	2.2	3.2
{X4}	3.7	2.2	0	2.2
{X5}	3.2	3.2	2.2	0

Since we are using the average-linkage procedure, the distance between {X1, X3} and, say, {X4} is the average of the distance between X1 and X4, and that between X3 and X4, the last two distances obtained from Fig. 10.3. Therefore, the distance between {X1, X3} and {X4} is $(4.2 + 3.2)/2 = 3.7$, which is what is shown in the table above. The other values in the table are obtained similarly. For simplicity, the values have been rounded off to one place after the decimal. The smallest off-diagonal value in the table is 2.2. We can merge any pair of clusters having a distance of 2.2 between them. Let us select the pair corresponding to 2.2 we encounter first when we scan the table row by row. So we merge {X2} with {X1, X3}. We now have the three clusters {X1, X2, X3}, {X4}, and {X5}, the distances between which are in the following symmetric table:

Clusters	{X1, X2, X3}	{X4}	{X5}
{X1, X2, X3}	0	3.2	3.2
{X4}	3.2	0	2.2
{X5}	3.2	2.2	0

With our using the average-linkage procedure, the distance between {X1, X2, X3} and, say, {X4} is the average of the distances between X4 and each of X1, X2, and X3 (see Fig. 10.3). The distance between {X1, X2, X3} and {X4} accordingly is $(4.2 + 3.2 + 2.2)/3 = 3.2$, as shown in the above table. The smallest off-diagonal value in the table is 2.2. We merge {X5} with {X4} to finally obtain these two clusters: {X1, X2, X3} and {X4, X5}.

FIGURE 10.6 An example of clustering the patterns X1 to X5 given in Fig. 10.1 by the average-linkage

Centroid Linkage Hierarchical

To create two clusters of the five patterns X1 to X5 given in Fig. 10.1 by the centroid-linkage procedure using Euclidean distance, we begin by creating 5 clusters {X1}, {X2}, {X3}, {X4}, and {X5}. Considering the off-diagonal values given in Fig. 10.3, we see that the minimum distance between any two clusters is 2: it is between {X1} and {X3}, which we merge into one cluster. The coordinates of the centroid of the resulting cluster {X1, X3} are $[(1+3)/2 = 2, (1+1)/2 = 1]$. We then obtain the distances between the four clusters {X1, X3}, {X2}, {X4}, and {X5}, as given in the following symmetric table:

Clusters	{X1, X3}	{X2}	{X4}	{X5}
{X1, X3}	0	2	3.6	3.2
{X2}	2	0	2.2	3.2
{X4}	3.6	2.2	0	2.2
{X5}	3.2	3.2	2.2	0

Since we are using the centroid-linkage procedure, the distance between {X1, X3} and, say, {X4} is $\sqrt{(4-2)^2 + (4-1)^2} = 3.6$, which is what is shown in the table above. The other values in the table are obtained similarly. For simplicity, the values have been rounded off to one place after the decimal. The smallest off-diagonal value in the table is 2; it is between {X1, X3} and {X2}, which we merge into one cluster. The coordinates of the centroid of the resulting cluster {X1, X2, X3} are $[(1+2+3)/3 = 2, (1+3+1)/3 = 1.67]$. We now have the three clusters {X1, X2, X3}, {X4}, and {X5}, the distances between which are in the following symmetric table:

Clusters	{X1, X2, X3}	{X4}	{X5}
{X1, X2, X3}	0	3.1	3
{X4}	3.1	0	2.2
{X5}	3	2.2	0

With our using the centroid-linkage procedure, the distance between {X1, X2, X3} and, say, {X4} is $\sqrt{(4-2)^2 + (4-1.67)^2} = 3.1$, as shown in the above table. The smallest off-diagonal value in the table is 2.2. We merge {X5} with {X4} to finally obtain these two clusters: {X1, X2, X3} and {X4, X5}.

K-means clustering

A non-hierarchical way of clustering is the *k*-means procedure, which is as follows:

1. Consider k of the r given patterns to each form a cluster. We thus have k clusters, each with one pattern. The remaining patterns remain as such. The k patterns to form clusters may be chosen arbitrarily: they are usually the first k patterns. In this step, the centroid of a given cluster is the coordinates of the pattern in the cluster in the A_1 - A_2 - $\dots$ - A_M coordinate space.
2. For $i = k + 1, k + 2, \dots, r$ do
Put the i th pattern in the cluster whose centroid is the nearest to the pattern. Compute the cluster's new centroid.
3. For $i = 1, 2, \dots, r$ do steps 3.1 to 3.3.
 - 3.1. Let C' be the cluster which has the i th pattern. Calculate the distance between the i th pattern and the centroids of each of the k clusters. If the pattern is closest to the centroid of C' , then the pattern need not change its cluster, hence go to step 3.3.
 - 3.2. Let C'' be the cluster whose centroid is the closest to the i th pattern. Move the pattern from cluster C' to cluster C'' . Compute the new centroids of clusters C' and C'' . Go to step 3.
 - 3.3. Continue.
4. No patterns changed clusters in the last iteration; hence return from the procedure with the k clusters.

As should be clear from above, the *k*-means procedure begins by putting each pattern in one of the k clusters (steps 1 and 2). Then, in step 3, it ensures that every pattern is in a cluster whose centroid is closest to it: if moving a pattern from one cluster to another is required, the procedure does so. This makes the *k*-means procedure preferable to the rest of the clustering procedures. The procedure is said to be *partitional* because it partitions the set of patterns into clusters.

K-means clustering: Example

As should be clear from above, the k -means procedure begins by putting each pattern in one of the k clusters (steps 1 and 2). Then, in step 3, it ensures that every pattern is in a cluster whose centroid is closest to it: if moving a pattern from one cluster to another is required, the procedure does so. This makes the k -means procedure preferable to the rest of the clustering procedures. The procedure is said to be *partitional* because it partitions the set of patterns into clusters.

As an example, let us create two clusters of the five patterns X1 to X5 given in Fig. 10.1 by the k -means procedure using Euclidean distance. As mentioned in step 1 of the k -means procedure, we begin by considering each of the first two patterns to form their own clusters. From Fig. 10.1, we see that the coordinates of the centroids of the two clusters, and the coordinates of the three remaining patterns are

{X1}	{X2}	X3	X4	X5
(1, 1)	(2, 3)	(3, 1)	(4, 4)	(5, 2)

K

We are now in step 2 of the k -means procedure. The distance between pattern X3 and the centroid of cluster {X1} is

$$\sqrt{(3-1)^2 + (1-1)^2} = 2$$

The distance between pattern X3 and the centroid of cluster {X2} is

$$\sqrt{(3-2)^2 + (1-3)^2} = 2.2$$

X3 is closer to the centroid of {X1} than to {X2}; hence we put X3 into {X1}. The coordinates of the centroid of the resulting cluster {X1, X3} become $[(1+3)/2 = 2, (1+1)/2 = 1]$. Then the coordinates of the centroids of the two clusters, and the coordinates of the two remaining patterns are

{X1, X3}	{X2}	X4	X5
(2, 1)	(2, 3)	(4, 4)	(5, 2)

The distance between pattern X4 and the centroid of cluster {X1, X3} is

$$\sqrt{(4-2)^2 + (4-1)^2} = 3.6$$

The distance between pattern X4 and the centroid of cluster {X2} is

$$\sqrt{(4-2)^2 + (4-3)^2} = 2.2$$

X4 is closer to the centroid of {X2} than to {X1, X3}, hence we put X4 into {X2}. The coordinates of the centroid of the resulting cluster {X2, X4} become $[(2+4)/2 = 3, (3+4)/2 = 3.5]$. The coordinates of the centroids of the two clusters, and the coordinates of the remaining pattern are then

{X1, X3}	{X2, X4}	X5
(2, 1)	(3, 3.5)	(5, 2)

The distance between pattern X5 and the centroid of cluster {X1, X3} is

$$\sqrt{(5-2)^2 + (2-1)^2} = 3.2$$

The distance between pattern X5 and the centroid of cluster {X2, X4} is

$$\sqrt{(5-3)^2 + (2-3.5)^2} = 2.5$$

X5 is closer to the centroid of {X2, X4} than to {X1, X3}, hence we put X5 into {X2, X4}. The coordinates of the centroid of the resulting cluster {X2, X4, X5} become $[(2 + 4 + 5)/3 = 3.67, (3 + 4 + 2)/3 = 3]$. The coordinates of the centroids of the two clusters are accordingly

$$\begin{array}{cc} \{X1, X3\} & \{X2, X4, X5\} \\ (2, 1) & (3.67, 3) \end{array}$$

Each of the five patterns is now in a cluster. We are now in step 3 of the k -means procedure. We next need to iterate through the patterns and move each pattern from the cluster it is in to the cluster whose centroid is nearest to the pattern. Accordingly, we notice that the distance between X1 and the centroid of cluster {X1, X3} is

$$\sqrt{(1-2)^2 + (1-1)^2} = 1$$

The distance between X1 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(1-3.67)^2 + (1-3)^2} = 3.3$$

X1 is closer to the centroid of {X1, X3} than to {X2, X4, X5}; hence X1 stays in the cluster it is in. We next notice that the distance between X2 and the centroid of cluster {X1, X3} is

$$\sqrt{(2-2)^2 + (3-1)^2} = 2$$

The distance between X2 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(2-3.67)^2 + (3-3)^2} = 1.67$$

X2 is closer to the centroid of {X2, X4, X5}, than to {X1, X3}; hence X2 stays in the cluster it is in. Proceeding along, we notice that the distance between X3 and the centroid of cluster {X1, X3} is

$$\sqrt{(3-2)^2 + (1-1)^2} = 1$$

The distance between X3 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(3-3.67)^2 + (1-3)^2} = 2.1$$

We are now in step 2 of the k -means procedure. The distance between pattern X3 and the centroid of cluster {X1} is

$$\sqrt{(3-1)^2 + (1-1)^2} = 2$$

The distance between pattern X3 and the centroid of cluster {X2} is

$$\sqrt{(3-2)^2 + (1-3)^2} = 2.2$$

X3 is closer to the centroid of {X1} than to {X2}; hence we put X3 into {X1}. The coordinates of the centroid of the resulting cluster {X1, X3} become $[(1+3)/2 = 2, (1+1)/2 = 1]$. Then the coordinates of the centroids of the two clusters, and the coordinates of the two remaining patterns are

{X1, X3}	{X2}	X4	X5
(2, 1)	(2, 3)	(4, 4)	(5, 2)

The distance between pattern X4 and the centroid of cluster {X1, X3} is

$$\sqrt{(4-2)^2 + (4-1)^2} = 3.6$$

The distance between pattern X4 and the centroid of cluster {X2} is

$$\sqrt{(4-2)^2 + (4-3)^2} = 2.2$$

X4 is closer to the centroid of {X2} than to {X1, X3}, hence we put X4 into {X2}. The coordinates of the centroid of the resulting cluster {X2, X4} become $[(2+4)/2 = 3, (3+4)/2 = 3.5]$. The coordinates of the centroids of the two clusters, and the coordinates of the remaining pattern are then

{X1, X3}	{X2, X4}	X5
(2, 1)	(3, 3.5)	(5, 2)

The distance between pattern X5 and the centroid of cluster {X1, X3} is

$$\sqrt{(5-2)^2 + (2-1)^2} = 3.2$$

The distance between pattern X5 and the centroid of cluster {X2, X4} is

$$\sqrt{(5-3)^2 + (2-3.5)^2} = 2.5$$

X5 is closer to the centroid of {X2, X4} than to {X1, X3}, hence we put X5 into {X2, X4}. The coordinates of the centroid of the resulting cluster {X2, X4, X5} become $[(2 + 4 + 5)/3 = 3.67, (3 + 4 + 2)/3 = 3]$. The coordinates of the centroids of the two clusters are accordingly

$$\begin{array}{cc} \{X1, X3\} & \{X2, X4, X5\} \\ (2, 1) & (3.67, 3) \end{array}$$

Each of the five patterns is now in a cluster. We are now in step 3 of the k-means procedure. We next need to iterate through the patterns and move each pattern from the cluster it is in to the cluster whose centroid is nearest to the pattern. Accordingly, we notice that the distance between X1 and the centroid of cluster {X1, X3} is

$$\sqrt{(1-2)^2 + (1-1)^2} = 1$$

The distance between X1 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(1-3.67)^2 + (1-3)^2} = 3.3$$

X1 is closer to the centroid of {X1, X3} than to {X2, X4, X5}; hence X1 stays in the cluster it is in. We next notice that the distance between X2 and the centroid of cluster {X1, X3} is

$$\sqrt{(2-2)^2 + (3-1)^2} = 2$$

The distance between X2 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(2-3.67)^2 + (3-3)^2} = 1.67$$

X2 is closer to the centroid of {X2, X4, X5}, than to {X1, X3}; hence X2 stays in the cluster it is in. Proceeding along, we notice that the distance between X3 and the centroid of cluster {X1, X3} is

$$\sqrt{(3-2)^2 + (1-1)^2} = 1$$

The distance between X3 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(3-3.67)^2 + (1-3)^2} = 2.1$$

X3 is closer to the centroid of {X1, X3} than to {X2, X4, X5}; hence X3 stays in the cluster it is in. In the same vein, we notice that the distance between X4 and the centroid of cluster {X1, X3} is

$$\sqrt{(4-2)^2 + (4-1)^2} = 3.6$$

The distance between X4 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(4-3.67)^2 + (4-3)^2} = 1.1$$

X4 is closer to the centroid of {X2, X4, X5} than to {X1, X3}; hence X4 stays in the cluster it is in. Finally, we notice that the distance between X5 and the centroid of cluster {X1, X3} is

$$\sqrt{(5-2)^2 + (2-1)^2} = 3.2$$

The distance between X5 and the centroid of cluster {X2, X4, X5} is

$$\sqrt{(5-3.67)^2 + (2-3)^2} = 1.7$$

Procedure	The two clusters obtained
Single-linkage	{X1, X2, X3, X4} and {X5}
Complete-linkage	
Average-linkage	
Centroid-linkage	{X1, X2, X3} and {X4, X5}
k-means	{X1, X3} and {X2, X4, X5}

X5 is closer to the centroid of {X2, X4, X5} than to {X1, X3}; hence X5 stays in the cluster it is in.

We have completed an iteration, and no pattern changed its cluster; hence we terminate with the clusters as they exist: {X1, X3} and {X2, X4, X5}. Had any pattern changed its cluster, we would need to recalculate the centroids of the newly formed clusters and iterate again. For the sake of brevity, this example terminates after one iteration. In practice, many such iterations may be required.

The clusters resulting from the patterns given in Fig. 10.1, using the five clustering procedures discussed earlier (single-linkage, complete-linkage, average-linkage, centroid-linkage, and k-means), are recapitulated in Fig. 10.8 for the convenience of the readers.

In calculating Euclidean distances while clustering, finding the square roots can be omitted to save computation. It will not affect the results, square root being monotonic. Nonetheless, in the preceding examples, the square roots have been calculated to avoid any confusion in understanding the procedures.

Non-Numeric Attributes

Non-numeric Attributes

Clustering is mostly carried out on patterns with numeric attributes. With non-numeric attributes, it is difficult to decide into which cluster a pattern should be put, because it is difficult to measure the similarity between patterns. Nonetheless, clustering can be carried out by using a measure such as Hamming distance. As mentioned in Section 6.3, the Hamming distance between two patterns is the number of attributes in which the two patterns have different values.

To create two clusters of the eight patterns T1 to T8 given in Fig. 1.1, which have non-numeric attribute values, by the average-linkage procedure using Hamming distance, we begin by creating eight clusters {T1}, {T2}, {T3}, {T4}, {T5}, {T6}, {T7}, {T8}. The Hamming distances between the eight clusters is given by the following table:

Patterns	{T1}	{T2}	{T3}	{T4}	{T5}	{T6}	{T7}	{T8}
{T1}	0	2	1	3	1	2	2	2
{T2}	2	0	1	2	2	2	1	3
{T3}	1	1	0	2	2	1	1	3
{T4}	3	2	2	0	2	1	1	1
{T5}	1	2	2	2	0	3	1	1
{T6}	2	2	1	1	3	0	2	2
{T7}	2	1	1	1	1	2	0	2
{T8}	2	3	3	1	1	2	2	0

The smallest off-diagonal value in the preceding table is 1, and scanning the table row by row, we encounter this value for the first time between {T1} and {T3}. So, we merge these two clusters. The distances between the seven clusters we now have are shown in the following table:

Patterns	{T1, T3}	{T2}	{T4}	{T5}	{T6}	{T7}	{T8}
{T1, T3}	0	1.5	2.5	1.5	1.5	1.5	2.5
{T2}	1.5	0	2	2	2	1	3
{T4}	2.5	2	0	2	1	1	1
{T5}	1.5	2	2	0	3	1	1
{T6}	1.5	2	1	3	0	2	2
{T7}	1.5	1	1	1	2	0	2
{T8}	2.5	3	1	1	2	2	0

The smallest off-diagonal value in the preceding table is 1, and scanning the table row by row, we encounter this value for the first time between {T2} and {T7}. So, we merge these two clusters. The distances between the six clusters we now have are shown in the following table:

Patterns	{T1, T3}	{T2, T7}	{T4}	{T5}	{T6}	{T8}
{T1, T3}	0	1.5	2.5	1.5	1.5	2.5
{T2, T7}	1.5	0	1.5	1.5	2	2.5
{T4}	2.5	1.5	0	2	1	1
{T5}	1.5	1.5	2	0	3	1
{T6}	1.5	2	1	3	0	2
{T8}	2.5	2.5	1	1	2	0

The smallest off-diagonal value in the preceding table is 1, and scanning the table row by row, we encounter this value for the first time between {T4} and {T6}. So, we merge the two clusters. The distances between the five clusters we now have are shown in the following table:

Patterns	{T1, T3}	{T2, T7}	{T4, T6}	{T5}	{T8}
{T1, T3}	0	1.5	2	1.5	2.5
{T2, T7}	1.5	0	1.75	1.5	2.5
{T4, T6}	2	1.75	0	2.5	1.5
{T5}	1.5	1.5	2.5	0	1
{T8}	2.5	2.5	1.5	1	0

The smallest off-diagonal value in the preceding table is 1, between {T5} and {T8}. So, we merge the two clusters. The distances between the four clusters we now have are shown in the following table:

Patterns	{T1, T3}	{T2, T7}	{T4, T6}	{T5, T8}
{T1, T3}	0	1.5	2	2
{T2, T7}	1.5	0	1.75	2
{T4, T6}	2	1.75	0	2
{T5, T8}	2	2	2	0

The smallest off-diagonal value in the preceding table is 1.5, between {T1, T3} and {T2, T7}. So, we merge the two clusters. The distances between the three clusters we now have are shown in the following table:

Patterns	{T1, T2, T3, T7}	{T4, T6}	{T5, T8}
{T1, T2, T3, T7}	0	1.9	2
{T4, T6}	1.9	0	2
{T5, T8}	2	2	0

The smallest off-diagonal value in the preceding table is 1.9, between {T1, T2, T3, T7} and {T4, T6}. So, we merge them to finally obtain two clusters: {T1, T2, T3, T4, T6, T7} and {T5, T8}.

Things to do

- Read Clustering from Shinghal, 2011
(Chapter 10; Material posted on Moodle)
- Read WEKA from Witten's book Clustering
- Finish Assignment 3



Questions or Comments?