

Introduction to programming in Python

Jules Kreuer

Uni Tübingen

fsi@fsi.uni-tuebingen.de

contact@juleskreuer.eu

February 22, 2022

Based on:

Ana Bell, Eric Grimson, and John Guttag.

6.0001 Introduction to Computer Science and Programming in Python.

Fall 2016. Massachusetts Institute of Technology: MIT OpenCourseWare

<https://ocw.mit.edu>.

License: Creative Commons BY-NC-SA.

Nick Parlante, John Cox, Steve Glassman, Piotr Kaminski, Antoine Picard.

Google's Python Class.

July 2015. Google LLC

License: Creative Commons BY 2.5.

Part 1: Hello World

- Introduction
- Installation
- REPL

Break

Part 1: Hello World

- Introduction
- Installation
- REPL

Break

Part 2: Basics

- Common operators
- Data types, type-casting
- Lists, dicts
- Control flow: for, while, break, continue

Break

Part 3: Abstraction

- Functions, Imports, variable scope
- lambda
- Files / IO
- Exceptions
- Objects, Classes

Break

Part 3: Abstraction

- Functions, Imports, variable scope
- lambda
- Files / IO
- Exceptions
- Objects, Classes

Break

Part 4: Development

- Arguments
- Modules / imports
- Virtual-Envs
- Tests


Part 1: Hello World

```
jules@T480:~$ python3
Python 3.8.10 (default, Nov 26 2021, 20:14:08)
[GCC 9.3.0] on linux
Type "help", "copyright", "credits" or "license"...

>>> a = 5
>>> a
5
>>> a = "Hello World"
>>> a
'Hello World'
>>> a + "!"
'Hello World!'
>>>
```

<https://www.python.org/downloads/>
Debian / Ubuntu: *sudo apt install python3*

Type in your shell: *python3*

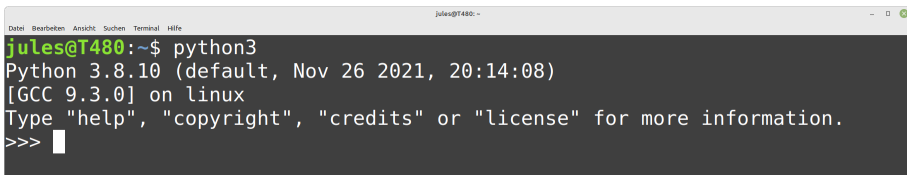A screenshot of a terminal window titled 'jules@T480: ~'. The window has a menu bar with 'Datei', 'Bearbeiten', 'Ansicht', 'Suchen', 'Terminal', and 'Hilfe'. The terminal content shows the command 'python3' being executed, resulting in the Python 3.8.10 shell. The prompt is 'jules@T480:~\$' and the output is 'Python 3.8.10 (default, Nov 26 2021, 20:14:08) [GCC 9.3.0] on linux'. Below this, it says 'Type "help", "copyright", "credits" or "license" for more information.' and the prompt ' >>>' is followed by a cursor.

```
jules@T480:~$ python3
Python 3.8.10 (default, Nov 26 2021, 20:14:08)
[GCC 9.3.0] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> 
```

Figure: Python3 REPL


Running code

- REPL
- python3 file args

Example

```
python3 hello-world.py
```

Combining Editor and Interpreter

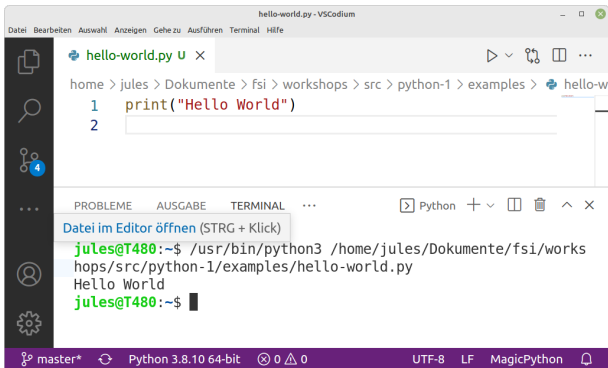

The screenshot displays the VS Codium interface. The top menu bar includes 'Datei', 'Bearbeiten', 'Auswahl', 'Anzeigen', 'Gehe zu', 'Ausführen', 'Terminal', and 'Hilfe'. The editor window shows a file named 'hello-world.py' with the following code:

```
1 print("Hello World")
2
```

Below the editor, the 'TERMINAL' tab is active, showing the command prompt output:

```
jules@T480:~$ /usr/bin/python3 /home/jules/Dokumente/fsi/workshops/src/python-1/examples/hello-world.py
Hello World
jules@T480:~$
```

The status bar at the bottom indicates the current configuration: 'master*', 'Python 3.8.10 64-bit', '0 0 0', 'UTF-8', 'LF', 'MagicPython', and a bell icon.

Figure: VS Codium

Possible IDEs / Editors:

- VS Codium: <https://vscodium.com/>
- PyCharm: <https://www.jetbrains.com/pycharm/>
- Atom: <https://atom.io/>
- ...

- Content: `print("Hello World")`
- Run it!

Basic operators and types

Just like 'any other' language.

Math

```
s = (a + b - c) / d * e
p = a ** 2 # a to the power of 2
b = a^2    # bitwise shifting
m = a%2    # mod
```

Numeric types

```
int, float, complex
i = 1 = int("1") = int(1.0)
f = 4.2
c = 4+2j
```

Strings

```
s = "Hello " + "World"
c = "A" * 10 + "HHHH"
S = s.upper()
length = len(S)    # Returns Integer
pos = s.find("W")  # Return Integer (Position of first W)
```

Text types

```
str
s = str(1)
```

Booleans

```
a = (True or False) and not False
```

Boolean types

```
bool  
t = bool(1) = bool("Not Empty")  
f = bool(0) = bool("")
```


Comparison

<, >, ==, !=, <=, >=

Example

```
t = 3 < 5
```

```
t = not "A" == "B"
```

```
f = 4.2 == 2
```

```
f = 0 == "Hello" # Comparision in between types is possible
```

Exercise

Desired output: 'The sum of 41.8 and 0.2 is 42'.

Use following variables:

```
i = 41.8
```

```
f = 0.2
```

```
prefix = "The sum of "
```

Lists

Mutable, dynamic in length, non-homogenous, ordered

```
aList = [1, 2, 3, 4, "What?", 6]
aList[0]          # -> 1
aList[4:]         # -> ['What?', 6]
aList[1::2]       # -> [2, 4, 6]
aList[-1]        # -> 6
aList.append(7)   # -> [..., 6, 7]
aList.extend([8,9]) # -> [..., 6, 7, 8, 9]
aList[0] = "New Zero"
general form: [from:to:step/order]
```

Lists

Mutable, dynamic in length, non-homogenous, ordered

```
aList = [1, 2, 3, 4, "What?", 6]
aList[0]           # -> 1
aList[4:]          # -> ['What?', 6]
aList[1::2]        # -> [2, 4, 6]
aList[-1]          # -> 6
aList.append(7)     # -> [..., 6, 7]
aList.extend([8,9]) # -> [..., 6, 7, 8, 9]
aList[0] = "New Zero"
general form: [from:to:step/order]
```

Tuples

Non-Mutable, fixed length, non-homogenous

```
aTuple = ("A", "a", 1)
a[0]     # -> "A"
```

Dicts

Mutable, dynamic in size, non-homogenous, unordered^a

```
d = {"key": "value", 1: 3}
d["key"]      # -> "value"
d["new"] = 2  # Insert new value to d
d.keys()      # -> ["key", 1, "new"]
d.values()    # -> ["value", 3, 2]
d.items()     # -> [("key", "value"), (1, 3), ("new", 2)]
```

^aSomehow..

See: <https://docs.python.org/3/tutorial/datastructures.html>

Control flow: if, for, while, break, continue

Regular control flow with if:

```
if condition:
    doThis()
elif cond2:
    doThat()
else:
    otherWise()
```

Looping has two different approaches:

`while / condition`

```
i = 0
while i < 10:
    print(i)
    i = i + 1
```

Looping has two different approaches:

while / condition

```
i = 0
while i < 10:
    print(i)
    i = i + 1
```

for / iterable

```
for element in iterable:
    print(e)
```


Iterables: something with an order and members.

Example

```
tuples = (0, 1,2,3,4)
lists  = [0, 1,2,3,4]
string = "Hello World"
dicts  = {"a", 2}
range(0, 6, 2) # start, stop, interval
               # somehow comparable to [0,2,4]
file objects
...
```

for / iterable

```
for element in iterable:  
    print(e)
```

for / iterable

```
for element in iterable:  
    print(e)
```

Example

```
for i in range(5):  
    print(e) # 0, 1, 2, 3, 4  
for c in "Hello World":  
    print(e) # Every char  
for k in {"k": "v", "k2": "v2"}:  
    print(k) # Only the keys  
for k, v in {"k": "v", "k2": "v2"}.items():  
    print(k, v) # Unpacking
```

Unpacking:

- Object with ordered members
- Number of vars equal to members¹.

Example

```
a, b, c = (1, 2, 3)
```

```
a, b,    = [1,2]
```

¹ $x, *xs = [1, 2, 3, 4] \rightarrow xs = [2,3,4]$

Exit the loop early?

Break

```
while True:    # works for "for i in .." aswell
    doThis()
    if exitCondition:
        break
```

Skip to the next element?

Continue

```
for i in range(4):
    if i == 2:
        continue
    print(i)
-> 0, 1, 3
```

Exercise

Implement a basic python number guessing game.

1. Generate a random number.
2. Ask for a guess.
3. Check if guess was correct.
4. If not, say if number was smaller / larger
5. Repeat from step 2, but only 7 times max.

Use following functions:

```
from random import randint
randint(0,1024)  # random integer N such that  $a \leq N \leq b$ 
input("Number?") # Takes input from user
```

Exercise

Understand how to use loops and lists.

E1:

Print the last element of list l1:

```
l1 = ["first", "middle", "last"]
```

E2.1:

Print every second element of list l2_1

Without loop.

```
l2_1 = [0,1,2,3,4,5,6,7,8,9]
```

....

Part 3: Abstraction

Functions:

- Decomposition of Code into parts
- Function acts like a black box

```
def is_even(i):  
    """  
    Computes if an integer is even.  
    Input:  
        i: int  
    Returns:  
        even: bool, result.  
    """  
    even = (i % 2) == 0  
    return even
```


Part 3: Abstraction

Functions:

- Decomposition of Code into parts.
- Function acts like a black box.

```
def is_even(i):          <- keyword, name(parameters)
    """
    Is integer is even?    -
    Input:                /
        i: int             /> DocString
    Returns:              /
        even: bool, result. /
    """                  _|
    even = (1 % 2) == 0   <- Computation
    return even           <- Return (Optional)
```

Example

```
def noReturn(a, b):  
    print(a)  
  
def returnNone():  
    return  
  
def optionalReturn(x):  
    if x < 5:  
        return True  
  
def polymorphicReturn(x):  
    if x < 5:  
        return True  
    return x
```

Import: modules

- Full: `import moduleName`
- Partial: `from moduleName import subModule`
- A lot of standard libraries:
 - Math: random, statistics, math
 - Time: time, datetime
 - OS/IO: argparse, os, pathlib, sys
 - Network: urllib3
- See: <https://docs.python.org/3/library/index.html>
- Extended standard: numpy, pandas, ...

Scope:

- Which variables are visible from which part of the code.
- From outer to inner.

Example

```
def useX(y):  
    return y + x  
  
def modifyX(y):  
    x = y + x  
  
x = 10  
y = useX(5)  
modifyX(y)  
print(x)
```

Scope:

- Which variables are visible from which part of the code.
- From outer to inner.

Example

```
def useX(y):  
    return y + x  
  
def modifyX(y):  
    x = y + x <- Assignment forces x to be local variable  
    -> Error: local variable 'x'  
        referenced before assignment  
  
x = 10  
y = useX(5)  
modifyX(y)  
print(x)
```

Example

```
def g(x):  
    def h():  
        x = 'abc'  
    x = x + 1  
    print(f"x in g: {x}")  
    h()  
    return x  
  
x = 3  
print(f"x at position 2: {x}")  
z = g(x)  
print(f"z at position 1: {z}")
```

lambda functions:

- good for single use functions
- usually defined inline
- useful for currying

Example

```
l = [0,1,2,3,4,5,6,7,8,9]
lPow = map(lambda x: pow(x,2), l)

equiv to: [pow(x,2) for x in l]
```

File reading:

- Files need to be opened and closed.
- We don't want to handle that...

Example

```
with open("path/file.txt", "r") as f:  
    line = f.readline()  
    content = f.read() # reads everything
```

```
with open("path/file.txt", "r") as f:  
    for line in f:  
        print(line)
```

Modes:

- r, read

File writing:

Example

```
with open("path/file.txt", "w") as f:  
    f.write("string")  
    f.write("\n")  
    f.writelines(["line1", "line2", "line3"])
```

Modes:

- w, overwrite / write
- a, append
- x, write, error if file exist

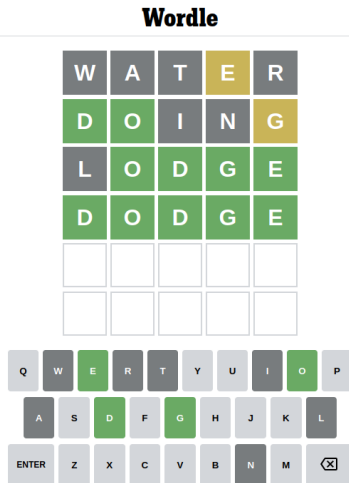


Figure: Wordle by NYTimes, <https://www.nytimes.com/games/wordle>

```
jules@T480:~/Dokumente/  
0:       
Your guess: water  
1:       
Your guess: actor  
2:       
Your guess: smart  
3:       
Congratulations
```

Figure: Our goal.

Object:

- Instance of an Class.
- Has properties and methods.
- Everything is a object.

Class

```
class MinimalClass():  
    def __init__(self):  
        pass
```

Object

```
x = MinimalClass()
```

TODO From the Python source:

<https://github.com/python/cpython/blob/main/Lib/random.py>