

Growing Hypergraphs with Node Labels

Francis Cataldo*,¹ Violet Ross*,² and Philip S. Chodrow¹

¹*Department of Computer Science, Middlebury College, Middlebury, VT, USA*

²*Department of Computer Science, University of Colorado at Boulder, Boulder, CO, USA*

(Dated: November 21, 2025)

We study a generative mechanistic model of hypergraph growth in which nodes possess binary labels which generalizes prior work on edge-copying growing hypergraphs. Edges form in this model as noisy copies of previous edges, where the transmission of nodes from one edge to the next depends on the labels. We derive a power law for the degree distribution in this model and describe the long-term dynamics of the joint distribution of labels contained in edges. We then demonstrate that this model can be learned from data: we can both estimate the parameters of the model via (stochastic) expectation maximization and perform community detection of the node labels via maximum-likelihood estimation.

I. INTRODUCTION

II. LONG-RUN DYNAMICS

PC: What's in here is mostly notes and needs to be cleaned up some.

A. Mean Degree

The mean degree $\langle d \rangle$ of a node satisfies

$$\langle d \rangle = \frac{m}{n} \langle k \rangle, \quad (1)$$

where $\langle k \rangle$ is the mean edge size, m is the number of edges, and n is the number of nodes. In expectation, there are $\gamma_- + \gamma_+$ new nodes added per new edge, which means that $\frac{m}{n} \rightarrow \frac{1}{\gamma_- + \gamma_+}$ as $m, n \rightarrow \infty$ in expectation. So, we have

$$\langle d \rangle = \frac{\langle k \rangle}{\gamma_- + \gamma_+}. \quad (2)$$

We don't have a closed-form expression for the stationary value of $\langle k \rangle$, but we can compute it numerically from the stationary distribution of the joint label counts $p(k_0, k_1)$.

B. Power Law Degree Distribution

This argument follows that of [1], which in turn is based on a derivation by [2].

Under the mean-field assumption that the degree of a node is independent of the ratio $\frac{k_0}{k}$ of the edge it is contained in, we can write down an argument to show that the degree distribution follows a power law and give Then, the expected number of nodes which are sampled in the edge-sampling step is

$$\sigma \triangleq 1 + \eta_+ [\rho_0 + \rho_1 - 1] + \eta_- \rho_{01}. \quad (4)$$

Importantly, σ depends only on the parameters and the moments of the joint distribution $p(k_0, k_1)$, which we are going to show how to get from linear algebra later. Let $\tilde{\sigma} = \frac{\sigma}{\langle d \rangle}$, where $\langle d \rangle$ is the average degree of a node in the hypergraph.

Under a mean-field assumption in which the degree d of a node is independent from the counts k_0 and k_1 of labels in an edge containing that node, we can give the expected change in the count of degree d nodes as

$$\tilde{\sigma}((d-1)p_{d-1}^{(t)} - dp_d^{(t)}) \quad (5)$$

Similarly, the expected number of nodes which are sampled in the extant node addition step is $\lambda_+ + \lambda_-$. This gives, in expectation for the change in degree d nodes,

$$n^{(t+1)}p_d^{(t+1)} - n^{(t)}p_d^{(t)} = \tilde{\sigma} \left[(d-1)p_{d-1}^{(t)} - dp_d^{(t)} \right] + (\lambda_+ + \lambda_-)(p_{d-1}^{(t)} - p_d^{(t)}). \quad (6)$$

a formula for the exponent. Define the moments

$$\rho_0 = \left\langle \frac{k_0^2}{k} \right\rangle, \quad \rho_1 = \left\langle \frac{k_1^2}{k} \right\rangle \quad \text{and} \quad \rho_{01} = \left\langle \frac{k_0 k_1}{k} \right\rangle. \quad (3)$$

We know that at stationarity, $n^{(t+1)} - n^{(t)}$ is in expectation equal to $\gamma_+ + \gamma_-$, while at stationarity $p_d^{(t+1)} =$

* Equal author contributions

$p_d^{(t)} = p_d$. Thus, we obtain

$$p_d(\gamma_+ + \gamma_-) = \tilde{\sigma}[(d-1)p_{d-1} - dp_d] + (\lambda_+ + \lambda_-)(p_{d-1} - p_d). \quad (7)$$

Rearranging, we obtain

$$\frac{p_d}{p_{d-1}} = \frac{\tilde{\sigma}(d-1) + \lambda_+ + \lambda_-}{\tilde{\sigma}d + \gamma_+ + \gamma_- + \lambda_+ + \lambda_-} \quad (8)$$

$$= 1 - \frac{\tilde{\sigma} + \gamma_+ + \gamma_-}{\tilde{\sigma}d + \gamma_+ + \gamma_- + \lambda_+ + \lambda_-} \quad (9)$$

Allowing d to become large (which describes the tail of the degree distribution), we have

$$\frac{p_d}{p_{d-1}} \approx 1 - \frac{\tilde{\sigma} + \gamma_+ + \gamma_-}{\tilde{\sigma}d}, \quad (10)$$

a relation which corresponds to a power law with exponent $\zeta = 1 + \frac{\gamma_+ + \gamma_-}{\tilde{\sigma}}$. Explicitly calculating this moment requires computing the moments ρ_0 , ρ_1 , and ρ_{01} , which can be done computationally from the stationary joint distribution $p(k_0, k_1)$.

C. Joint Distribution of Labels

III. MODEL INFERENCE

PC: Someone needs to establish standardized notation in this section.

A. Parameter Estimation via Stochastic EM

PC: Violet, this is your spot! Descriptions of methods/algorithms should go here, results are for later.

B. Community Detection via MLE

PC: Frannie, this is your spot! Descriptions of methods/algorithms should go here, results are for later.

IV. INFERENCE RESULTS

How did we do on real and synthetic data?

V. CONCLUSION

Blah blah blah.

ACKNOWLEDGMENTS

PSC acknowledges support from the National Science Foundation under DMS-2407058.

-
- [1] X. He, P. S. Chodrow, and P. J. Mucha, [Physical Review E](#) **112**, 024305 (2025).
 - [2] M. Mitzenmacher, [Internet Mathematics](#) **1**, 226 (2004).

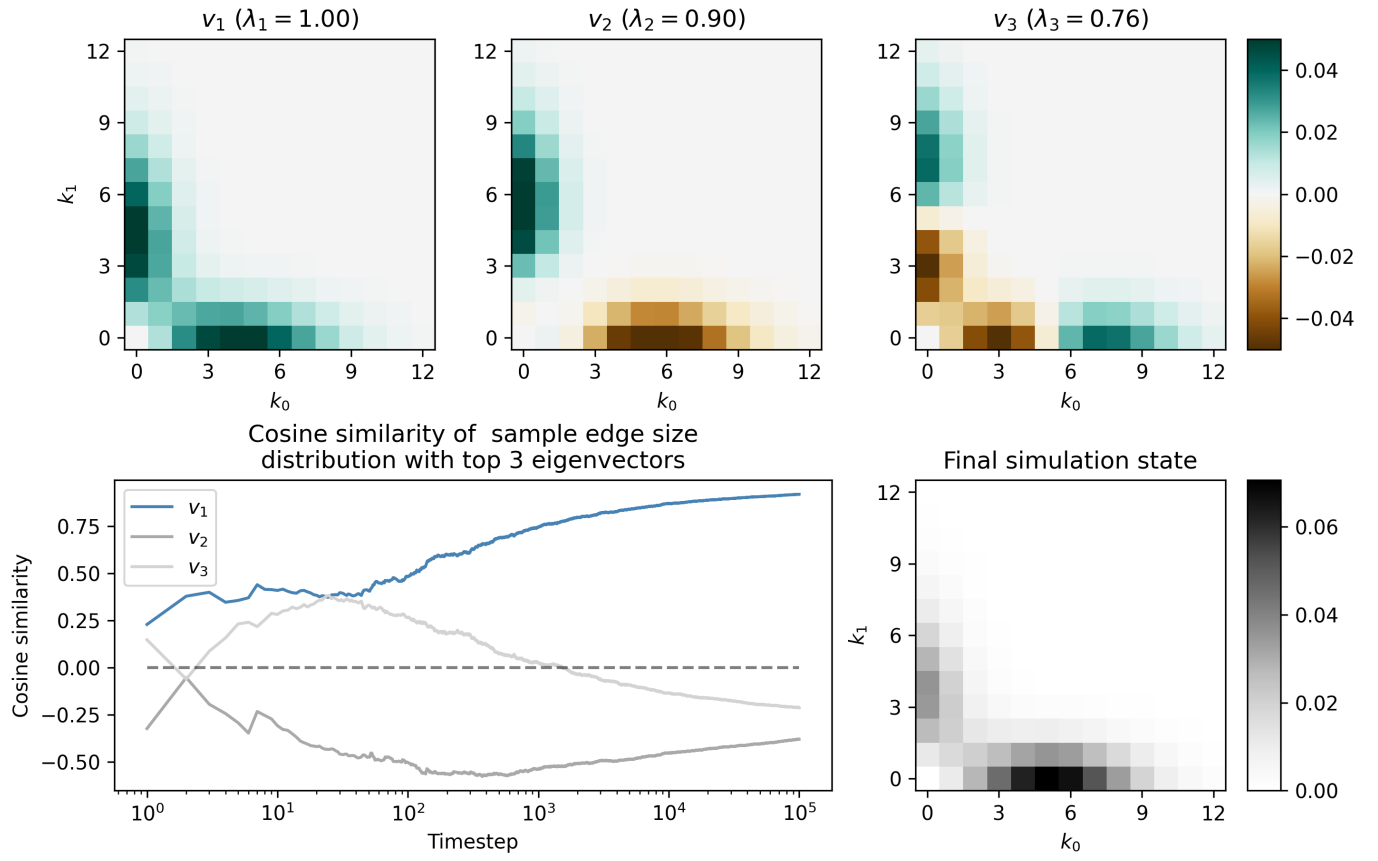


FIG. 1. Dynamics! Top shows the three leading eigenvectors of the distribution $p(k_0, k_1)$. Bottom left gives the cosine similarity (normalized projection) between one run of simulation dynamics and these eigenvectors. Bottom right gives the final simulation state.