

Real Time Tempo Analysis of Drum Beats

Author: **Philip Hannant**, Supervisor: **Professor Steve Maybank**

Birkbeck, University of London
Department of Computer Science and Information Systems

Project Report
MSc Computer Science

August, 2016

Contents

1	Introduction	4
1.1	Drumming Training Tools Background	4
1.2	Drum Musical Theory	5
1.2.1	Notation	5
1.2.2	Time Signatures	6
1.2.3	Notes	6
1.2.4	Playing Basics	6
1.3	Beat Detection Background	6
1.3.1	Beatroot	7
1.3.2	Short-Time Fourier Transform	8
1.3.3	Discrete Wavelet Transform	8
1.3.4	Tzanetakis <i>et al</i> Beat Detection Method	8
1.4	Live Audio Processing	8
1.5	Implementation of Tzanetakis <i>et al</i> Beat Detection Algorithm	9

Abbreviations

BPM	Beats Per Minute
DWT	Discrete Wavelet Transform
FT	Fourier Transform
JSON	Javascript Object Notification
IDE	Integrated Development Environment
STFT	Short-Time Fourier Transform
TDD	Test Driven Development

Definitions

Acoustic Drum Kit	A collection of drums and cymbals which do not have electronic amplification. Typically made up of a bass drum, snare drum, toms, hi-hat and 1 or more cymbals.
Beat	For the purpose of this project a beat will be defined as the sequence of equally spaced pulses used to calculate the tempo being played by the drummer.
Downbeat	Refers to beat one of a measure of music, called a downbeat to correspond to the motion a conductor's arm [1].
Drum Module	The device which serves as a central processing unit for an electronic drum kit, responsible for producing the sounds of the drum kit.
Electronic Drum Kit	An electrical device which is played like an acoustic drum kit, producing sounds from a stored library of instruments and samples.
Measure/Bar	A measure or bar is a segment of time made up by a predetermined number of beats, for example a piece of music with a 4/4 time signature will have 4 beats in every measure/bar [2].
MIDI	Musical Instrument Digital Interface is a protocol developed in the 1980's to allow electronic instruments and other digital musical tools to communicate with each other [3].

1 Introduction

This project report presents my aim to develop a real-time drum beat tempo analysis system using different beat detection algorithms which is able to record the performance of each method concurrently when an extensive set of drum samples, representing a real drummer's performance, is processed through the system.

1.1 Drumming Training Tools Background

Timing is the fundamental skill any good drummer should possess and is the staple by which they will be judged. For many years the only training tool available to a drummer to improve their timing was the metronome. An instrument used to mark musical tempo, erroneously attributed to Johann Nepomuk Maelzel in 1815 but was actually invented by a Dutchman, Dietrich Nikolaus Winkel a year earlier. The traditional metronome, based on Winkel's original design is a hand-wound clockwork instrument that uses a pendulum swung on a pivot to generate the ticking which depicts the desired tempo [1] is still used today by musicians, as seen in figure 1.



Figure 1: Traditional Metronome (Source: <https://commons.wikimedia.org/w/index.php?curid=1058005>)

For drummers however the electronic versions of the metronome are much more widely used, to the point that metronomes are now developed with functionality specifically tailored to a drummer's training requirements. The Tama Rhythmic Watch (figure 2) was the first metronome designed specifically for drummers, providing enough volume to be used with real drums as well as allowing for the use of different time signatures and preset set rhythm patterns to help improve performance.



Figure 2: Tama Rhythm Watch

<http://www.tama.com/eu/products/accessories/RW200.html>

Following the development of MIDI driven electronic drum kit came the development of more advanced training tools that now were able to provide live feedback to drummer during any given performance. Today the leaders in this field are Roland, their v-drums line provide a variety of tuition packages including the SCOPE and more recently the COACH system provided in the v-drum modules, the v-drum Rhythm Coach line is an advanced version of the traditional drummers practice pad and the extensive DT-1 V-Drums tutor software package. Roland have even now gamified this field with their latest release, the V-Drums Friend Jam app. The application itself provides the player with live feedback and evaluates each performance in order to provide the player with a score which they can share over social media.

The aim of this project is to investigate whether some of the current beat detection algorithms available would be accurate enough to provide the basis for a training tool for drummers using an acoustic drum kit as opposed to an electronic drum kit.

1.2 Drum Musical Theory

In order to understand the fundamentals of musical timing some theory needs to be examined but beforehand the concept of a drummer's time must be considered. Time, in a drumming sense is an informal term used to describe the consistent rhythmic pattern that a drummer will play on the hi-hat or ride cymbal [2] and it can be considered one of the most important components of any drum beat.

1.2.1 Notation

Drum music notation is written on staff that is made up of five individual lines, the clef is found on the far left of the staff which indicates the pitch of the notes [3] and as percussion instruments are non-pitched they use the percussion-clef. On traditional musical notation the lines and spaces between represent a tonal where as for drum notation, notes written on lines or spaces indicate a certain drum or cymbal. The staff is separated into individual measures which are known as bars [4] and it is these bars that are the basis of musical time.

1.2.2 Time Signatures

Time signatures appear on the staff just after the clef and are written as a fraction where the top number indicates the number of beats that there are in a bar. With the bottom number representing the size of the note that makes up the duration of one beat. For example the straight time four four (4/4) or common time signature indicates four beats in each bar or measure where each beat is made up of one quarter note [4]. Within these bar lines beats can be further divided by using a technique known as subdivision, which is a method for reducing the pulse or rhythm pattern into smaller parts than those originally written, for example counting a four four (4/4) measure in eighth (1/8) or sixteenth (1/16) notes.

1.2.3 Notes

The notes used to represent the percussive instrument to be played also provide the duration it should be played for. Notes come in different lengths and the key values are the whole (1/1), half (1/2), quarter (1/4), eighth (1/8) and sixteenth (1/16). For example two eighth notes represent the same time value as a single quarter note. It is possible to divide a note values by three instead of two, these notes are known as triplets. An eighth note triplet is played fifty percent faster than a normal eighth note, therefore for every two eighth notes there will be three eighth note triplets [4]. An example of the eighth-note triplets being used is in a twelve eight (12/8) jazz shuffle, the time element played on the ride cymbal or hi-hat is characterised by playing the first and third triplet of an eighth-note triplet grouping [2].

1.2.4 Playing Basics

With the basics of drum theory covered it is now possible to discuss the key elements of a drum beat, typically for a straight four four (4/4) bar the bass drum will be played on the first and third beat and the snare drum will be played on the second and forth beat both as quarter notes. This is more commonly known as a back beat [2]. This just leaves the time element which will usually be played on the ride cymbal or hi-hat, this too could be played using quarter notes on the first, second, third and forth beats. However, in order to make the drum pattern more dynamic the time element will usually be played using subdivisions, typically using eighth note subdivisions. The ride cymbal or hi-hat will therefore be played on the first, second, third and forth beats as well as the eighth notes inbetween each quarter note. This can be demonstrated by counting the one-and-two-and-three-and-four-and, where the and represents the subdivided eighth note. Additionally to this technique a drummer will usually ensure that there is difference in the volume of the eighth notes being played on the quarter notes and those being played on the and. This technique of emphasising certain beats is known as accenting.

1.3 Beat Detection Background

Most of the early work on beat detection was as a by-product of research directed at other areas of music. The earliest work in this field can be attributed to H. C. Longuet-Higgins, who in 1976 while researching the psychological theory of how Western musicians perceive rhythmic and tonal relationships between notes. Produced an algorithm that was able to follow the beat of a performance and adjust the perceived tempo accordingly based on whether a note started earlier or

later than expected [5]. Longuet-Higgins’ work was built on the premise that in order to perceive the rhythmic structure of a melody it is first necessary to identify the time at which each beat occurs [6], otherwise known as onset detection.

The majority of beat detection methods currently available utilise onset detection as a. The onset of a note is the instant which marks start of the variation in the frequency of a signal, a visualisation of this can be seen in figure 1 (currently). Once detected it can then be used to measure the onset times of sonic events¹ within a piece of music [8].

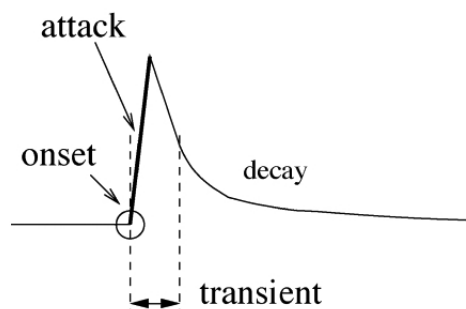


Figure 3: The onset of a note is the instant which marks start of the variation in the frequency of a signal [11]

This process known as onset detection can be considered to be a well-defined task with the simple aim of finding the start time of each musical note [7].

Since Longuet-Higgins’ first work there have been a number of different approaches to beat detection. M. Goto and Y. Muraoka developed a system which learned the frequencies of the bass drum and snare drum, in order to detect events triggered by these instruments during a piece of music [9]. In 2001, Simon Dixon presented Beatroot, an interactive beat tracking and visualisation system which is able to estimate the tempo and times of musical beats in performed music [10]. In the same year Tzanetakis *et al* [11] described an algorithm based on the Discrete Wavelet Transform (DWT) which is capable of detecting the beat attributes of music.

1.3.1 Beatroot

Beatroot is an audio beat detection system presented by Simon Dixon in 2001 and is described as a “beat tracking system which finds the times of musical beats and tracks changes in tempo throughout a performance” [13]. Beatroot works by first processing digital audio data to produce a list of onset (see Figure 2) or event times. The time intervals between these events are then analysed to generate tempo hypotheses concerning the rate and location of beats. Using the tempo hypotheses, searches are carried out to test the different hypotheses about the rate and timing of beats. The results of these searches are ranked and the beat times found in the highest ranked search are returned [10].

¹A sonic event is a singular feature of a piece of music which can be made up of one source or many [9], e.g. the hitting of a drum

1.3.2 Short-Time Fourier Transform

To detect the onsets of a piece of digital audio Beatroot uses an onset detection function based on the Short-Time Fourier Transform (STFT). The STFT is a form of Fourier transform (FT) which was developed by Joseph Fourier in 1822 [16], which can be used to find out how much of each frequency exists in a signal. A drawback of the FT is that it is unable to provide any details of when a frequency component occurs in time for non-stationary signals². A solution to this was to split a non-stationary signal up into a number of smaller segments using a window function, which effectively created a series of stationary³ signals which the FT could then be applied to. However, this did not fully solve the problem as the size of window function affects the quality of frequency resolution and time resolution:

- Narrow Window Function \rightarrow Good Time Resolution, Bad Frequency Resolution
- Wide Window Function \rightarrow Bad Time Resolution, Good Frequency Resolution [17]

1.3.3 Discrete Wavelet Transform

The first literature regarding the wavelet was provided by the mathematician Albert Haar in 1909 [18]. The wavelet transform is a technique for analysing signals which was developed as an alternative to the STFT [11]. Like the STFT, the DWT is able to provide time and frequency information, however, unlike the STFT the DWT is able to do this without the need for a window function.

1.3.4 Tzanetakis *et al* Beat Detection Method

In 2001, Tzanetakis *et al* described how the Discrete Wavelet Transform (DWT) could be used to extract information from non-speech audio [11]. Their beat detection algorithm was based on detecting the most prominent signals which are repeated over a period of time within the analysed audio and was split into the following steps:

1. Signal decomposed into a number of octave frequency bands using the DWT
2. The subsequent time domain information is extracted for each frequency band
3. The data from each band are then summed together and a function to find repeating patterns is applied

As there is no current open source Java implementation of this algorithm. I will attempt to implement a version of this myself, which will be the DWT based beat detection component of this project.

1.4 Live Audio Processing

The live audio will be processed using the Javax Sound package. The audio will be captured using a stereo microphone and processed to match CD quality with the Javax Sound AudioFormat class.

²Non-stationary signals are signals whose frequency contents changes over time [17].

³The frequency contents of a stationary signal does not change over time

The Beatroot system was not originally intended to be used as a real time system [19] so currently only works with prerecorded audio. It will therefore be will need to be modified in order for it to work with live audio.

1.5 Implementation of Tzanetakis *et al* Beat Detection Algorithm

The beat detection algorithm described by Tzanetakis *et al* [11] is based on detecting the most prominent periodicities of a signal and is made up of the following stages:⁴

- DWT - First the signal is processed by the DWT into a number of frequency bands
- Low Pass Filtering - a low pass filter is then applied to the signal in order to allow the lower frequencies of the signal to be analysed
- Full Wave Rectification - each frequency band is then converted to one constant polarity (positive or negative)[wiki]. A visual representation can be seen in Figure 4
- Downsampling - the sampling rate of the signal is decreased by an integer factor [20]
- Normalisation - each band is then normalised using mean removal
- AutoCorrelation - an autocorrelation function is then applied to the frequency bands, the first five peaks of this function are detected and their periodicities are calculated in beats per minute

If the implementation of this algorithm takes longer than described in the schedule in section 5. The Matlab implementation created by Eng Eder de Souza [21] will be adapted for use to be used in this system.

References

- [1] <https://www.britannica.com/art/metronome>
- [2] Mick Berry and Jason Gianni *The Drummer's Bible: How to Play Every Drum Style from Afro-Cuban to Zydeco, Second Edition, 2004, See Sharp Press*
- [3] Alison Latham *The Oxford Companion to Music, 2002, Oxford University Press*
- [4] <http://www.drummagazine.com/lessons/post/drumkey/>
- [5] Allen and Dannenberg *Tracking Musical Beats in Real Time, International Computer Music Conference, International Computer Music Association, 1990, pp. 140-143*
- [6] H. C Longuet-Higgins *Perception of melodies, Nature Vol. 263, 1976, pp. 646-653*
- [7] Simon Dixon *Onset Detection Revisited, Proceedings of the 9th International Conference on Digital Audio Effects, Montreal, September 2006, pp 133-137*
- [8] http://www.music-ir.org/mirex/wiki/2016:Audio_Onset_Detection
- [9] <http://www.ieor.berkeley.edu/ieor170/sp15/files/Intro-to-Sonic-Events-Campion.pdf>

⁴A full description of the theory regarding Tzanetakis *et al* beat detection algorithm will be provided in the Project Report.