



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:50 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_User
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Mar 1, 2019 12:47:21 AM
Modification	Dec 7, 2019 2:16:51 PM

Preview Picture

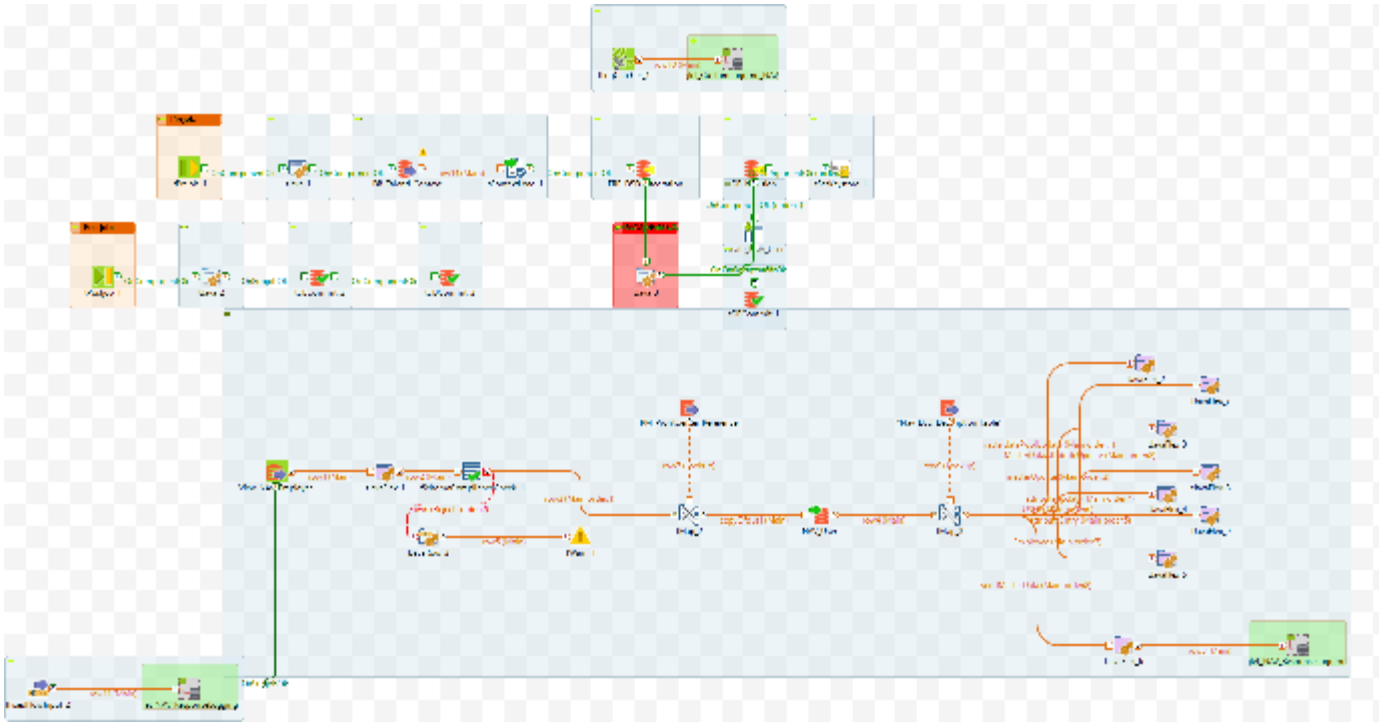

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false

group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false

environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false

SystemPassword	SystemPassword?	false
TIMEZONE	TIMEZONE?	false
type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false

DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false

NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_User	NAV_User?	false
responseXML	responseXML?	false

ContextQA

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false

Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false

ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false

TIMEZONE	TIMEZONE?	false
type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false

DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false

NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_User	NAV_User?	false
responseXML	responseXML?	false

ContextPREPROD

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false

Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
TIMEZONE	TIMEZONE?	false

type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false

DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Item	NAV_Item?	false

NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_User	NAV_User?	false
responseXML	responseXML?	false

ContextPROD

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false
Filter1	Filter1?	false

mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false

instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
TIMEZONE	TIMEZONE?	false
type	type?	false

UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false

DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false

NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_User	NAV_User?	false
responseXML	responseXML?	false

Component List


Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
jlet_NAV_ResponseLogging_1	jlet_NAV_ResponseLogging
jlet_NAV_ResponseLogging_2	jlet_NAV_ResponseLogging
tContextLoad_1	tContextLoad
tCreateTable_1	tCreateTable
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBCommit_3	tMSSqlCommit
tDBConnection_1	tMSSqlConnection

tDBConnection_2	tMSSqlConnection
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBInput_4	tMSSqlInput
tDBOutput_1	tMSSqlOutput
tFixedFlowInput_2	tFixedFlowInput
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaFlex_8	tJavaFlex
tJavaFlex_9	tJavaFlex
tJavaRow_3	tJavaRow
tJava_1	tJava

tJava_2	tJava
tJava_3	tJava
tLogCatcher_1	tLogCatcher
tMSSqlInput_1	tMSSqlInput
tMap_2	tMap
tMap_3	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tWarn_1	tWarn

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
------------	--------

Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	tDBConnection_2
	LABEL	create_NAV_User	OUTPUT(S)	tDBCommit_1

Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false

Use an existing connection	true
Host	""
Database Name	""
Local Service Name	""
URL	"jdbc:oracle:oci:@db10g_test"
UserName	""
Password	**
Port	""
Schema	""
Access File	"C:/Talend/6.2.1/studio/workspace_Dev/in.mdb"
DB Version	jt400_V6R1.jar
Firebird File	"C:/Talend/6.2.1/studio/workspace_Dev/in.FDB"
Running Mode	HSQldb_SERVER
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""


Instance	""
Interbase File	"C:/Talend/6.2.1/studio/workspace_Dev/in.gdb"
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	""
DB Root Path	""
	tDBConnection_1
JDBC Provider	JTDS
Temporary Table	false
DB Version	MYSQL_5
Connection Type	ORACLE_SID
URL	""
DB Version	ORACLE_11-6
DB Version	PRIOR_TO_V9
SQLite File	"C:/Talend/6.2.1/studio/workspace_Dev/talend.db"
DB Version	SYBSEIQ_16
ODBC Name	""

Use "drop cascade"	true
DB Version	vertica_3.0_jdk_5.jar
Table Name	"NAV_User"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	"prompt=false"
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	create_NAV_User
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tCreateTable_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	
ROLE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	
ProcessTimeStamp	false	String	255		true	
ProfitCenter	false	String	100		false	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit


Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	false
Schema	Built-In
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tJava_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_3

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_3	INPUT(S)	tDBCommit_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_3
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tContextLoad_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tJava_3

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false

Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tJava_3
	LABEL	DB_Navision	OUTPUT(S)	tCreateTable_1 , tSetKeystore_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_2

Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	

Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	none
	LABEL	RM_ProfitCenter_Reference	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Table Name	"RM_ProfitCenter_Reference"
Query Type	Built-In
Guess Schema	""
Query	"select * from RM_ProfitCenter_Reference where instance = '' + context.instance + ''"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[{SCHEMA_COLUMN=Instance, TRIM=false}, {SCHEMA_COLUMN=City, TRIM=false}, {SCHEMA_COLUMN=ProfitCenter, TRIM=false}]]
Label format	RM_ProfitCenter_Reference
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Instance	false	String	100		false	
City	false	String	100		false	
ProfitCenter	false	String	100		false	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""

Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_ " +context.implicit_db_environment+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	{[SCHEMA_COLUMN=key, TRIM=false}, {[SCHEMA_COLUMN=value, TRIM=false]}
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_4	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP


Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DB (MSSQL):DB_Navision - Nav_DSD_Description_Table
Table Name	"Nav_DSD_Description Table"
Query Type	Built-In
Guess Schema	""
Query	"SELECT [TYPE] ,[ID] ,[DESCRIPTIONTEXT] FROM [dbo].[Nav_DSD_Description Table] where Type = 'Location'"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams

Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	{[SCHEMA_COLUMN=TYPE, TRIM=false}, {SCHEMA_COLUMN=ID, TRIM=false}, {SCHEMA_COLUMN=DESCRIPTIONTEXT, TRIM=false}]
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for Nav_DSD_Description_Table :

Column	Key	Type	Length	Precision	Nullable	Comment
TYPE	false	String	255		false	
ID	false	String	255		false	
DESCRIPTIONTEXT	false	String	255		false	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tMap_2 , tDBInput_1
	LABEL	NAV_User	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login

Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_User"
Action on table	TRUNCATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams

Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
Field options	<pre> [{SCHEMA_COLUMN=ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=NAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=EMPLOYEEENUM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ROLE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=FACILITY, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LOCATION, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ROUTEGROUP, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProfitCenter, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}] </pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false


Use Batch Size	true
Batch Size	10000
Label format	NAV_User
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	
ROLE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	

ROUTEGROUP	false	String	255		false	
ProcessTimeStamp	false	String	255		true	
ProfitCenter	false	String	100		false	

Original Function Parameters:
Component **tFixedFlowInput**

	UNIQUE NAME	tFixedFlowInput_2	INPUT(S)	tMSSqlInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	ilet_NAV_ResponseLogging_2

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_2
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[[SCHEMA_COLUMN=responseXML, VALUE=context.responseXML]]
Use Inline Table	false

Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	","
Content	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1
--	-------	-----------------	-----------	--

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	int i =1;
Main code	context.objectId=row1.ID; context.objectName=""; if(i%5000 == 0) { System.out.println("5000 Records Have Processed"); } i++;
End code	// end of the component, outside/closing the loop i--; System.out.println(i+" Records Processed");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	
ROLE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=0;
Main code	// here is the main part of the component, // a piece of code row // loop routines.Nav_User.createAllObjects(); b++; if(b= routines.Nav_User.populateMasterdataPoolUpdate(master } else if(b==50) { //b=0; }
End code	// end of the component, outside/closing the loop routines.Nav_User.createAllObjects(); routines.Nav_User.populateMasterdataPoolUpdate(master
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code executed in the row // loop routines.Nav_User.populateMasterdataUpdate(masterUpd; context.key=masterUpdate.Key;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	// here is the main part of the component, // a piece of code // loop routines.Nav_User.populateDataContainerEntryChildNode. routines.Nav_User.populateDataContainerEntryParentNod
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code //routines.r_MD5.MD5HashValue(context.SystemPassword
Main code	// here is the main part of the component, // a piece of code the row // loop routines.Nav_User.populateDataContainerEntry_No_Head routines.Nav_User.populateUpdateContainerEntry();
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_3 , tDBInput_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	plet_NAV_ResponseLogging_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	System.out.println(context.movilizerURL); System.out.println(context.SystemId+"-----"+context.System
Main code	row8.responseXML=""; if(b==50) { row8.responseXML= routines.Nav_User.sendMasterData(context.movilizerURL, context.movilizerVersion); // System.out.println("1*****Response*****\n\n"+row8.respons routines.Nav_User.resetObjects(); b=0; }
End code	row8.responseXML=""; context.responseXML = routines.Nav_User.sendMasterData(context.movilizerURL, context.movilizerVersion); //System.out.println("2*****Response*****\n\n"+context.resp routines.Nav_User.resetObjects();
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_User.populateMasterdataAttributeUpdate(Ma
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:

Component tJavaFlex

	UNIQUE NAME	tJavaFlex_8	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_8
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.Nav_User.populateAttributeUpdate(attributeUpdat </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_9
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_User.populateAttributeDataContainerEntryCr routines.Nav_User.populateAttributeDataContainerEntryPa
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaFlex_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_3	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_1

Component Parameters:

Properties	Values
Unique Name	tJavaRow_3
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.ErrorMessage = input_row.errorMessage;
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	true	int	100		false	
Company_Name	false	String	250		false	
User_ID	false	String	250		false	
Employee_Name	false	String	250		false	
Employee_No	false	String	250		false	
Cost_Center_Code	false	String	250		false	
Labor_Location_Code	false	String	250		false	
Depot_Code	false	String	250		false	
Driver	false	short	100		false	
Picture	false	Object	250		true	
errorCode	false	String	255		true	

errorMessage	false	String	255		true	
--------------	-------	--------	-----	--	------	--

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_2

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimestamp: "+context.ProcessTimeStamp+"\n\n\n");</pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_2

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true


SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar";
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_3	INPUT(S)	tDBConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_2

Component Parameters:

Properties	Values
Unique Name	tJava_3
Component Name	tJava
Version	0.101 (ALPHA)

Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


Code	context.DB_Navision_Server="testnav10.corp.usbakery.com"; context.DB_Navision_Port="1433"; context.DB_Navision_Schema="dbo"; context.DB_Navision_Database="TEST-USB-2013"; context.DB_Navision_Login="talend_hfs2"; context.DB_Navision_Password="Talend123!"; context.DB_Navision_AdditionalParams=""; context.NAV_Customer="Nav_DSD_Customer Download_Details";
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:

Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
---	-------------	---------------	----------	------

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogCatcher_CUSTOMLOGGING_NAV_1
--	-------	-----------------	-----------	---

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	View_NAV_Employee	OUTPUT(S)	tJavaFlex_1 , tFixedFlowInput_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database

Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DB (MSSQL):DB_Navision - Nav_DSD_User
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [ID] ,[NAME] ,[EMPLOYEEENUM] ,[ROLE] ,[FACILITY] ,[LOCATION] ,[ROUTEGROUP] from [" + context.NAV_User + "]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false


Trim column	{SCHEMA_COLUMN=ID, TRIM=false}, {SCHEMA_COLUMN=NAME, TRIM=false}, {SCHEMA_COLUMN=EMPLOYEEENUM, TRIM=false}, {SCHEMA_COLUMN=ROLE, TRIM=false}, {SCHEMA_COLUMN=FACILITY, TRIM=false}, {SCHEMA_COLUMN=LOCATION, TRIM=false}, {SCHEMA_COLUMN=ROUTEGROUP, TRIM=false}]
Label format	View_NAV_Employee
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for Nav_DSD_User :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	
ROLE	false	String	255		false	
FACILITY	false	String	255		false	

LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Original Function Parameters:
Component **tSchemaComplianceCheck**

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2 , tJavaRow_3

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	<pre> {{SCHEMA_COLUMN=ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=NAME, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=EMPLOYEEENUM, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=ROLE, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=FACILITY, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=LOCATION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=ROUTEGROUP, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}} </pre>
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true


Choose Column(s)	{[SCHEMA_COLUMN=ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=NAME, EMPTY_NULL=false}, {SCHEMA_COLUMN=EMPLOYEEENUM, EMPTY_NULL=false}, {SCHEMA_COLUMN=ROLE, EMPTY_NULL=false}, {SCHEMA_COLUMN=FACILITY, EMPTY_NULL=false}, {SCHEMA_COLUMN=LOCATION, EMPTY_NULL=false}, {SCHEMA_COLUMN=ROUTEGROUP, EMPTY_NULL=false}]}
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSchemaComplianceCheck_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	

ROLE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tDBConnection_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS

KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tWarn_1

Component Name	tWarn
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tWarn_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	true	int	100		false	
Company_Name	false	String	250		false	

User_ID	false	String	250		false	
Employee_Name	false	String	250		false	
Employee_No	false	String	250		false	
Cost_Center_Code	false	String	250		false	
Labor_Location_Code	false	String	250		false	
Depot_Code	false	String	250		false	
Driver	false	short	100		false	
Picture	false	Object	250		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component jlet_CustomLogging_NAV

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest

Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_NAV_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_NAV_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_1	INPUT(S)	tJavaFlex_6
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none


Component Parameters:

Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_NAV_ResponseLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component jlet_NAV_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_2	INPUT(S)	tFixedFlowInput_2
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest

Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_NAV_ResponseLogging_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000

Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
ID	String		false
NAME	String		false
EMPLOYEEENUM	String		false
ROLE	String		false
FACILITY	String		false
LOCATION	String		false
ROUTEGROUP	String		false

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
Instance	String	context.instance.toUpperCase()	false
City	String		false
ProfitCenter	String		false

Constraint Table Entries(row7):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):**Mapper table Properties(copyOfout1):**

Properties	Values
Name	copyOfout1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(copyOfout1):

Name	Type	Expression	isNullable
ID	String	row3.ID	false
NAME	String	row3.NAME	false
EMPLOYEEENUM	String	row3.EMPLOYEEENUM	false
ROLE	String	row3.ROLE	false
FACILITY	String	row3.FACILITY	false
LOCATION	String	row3.LOCATION	false
ROUTEGROUP	String	row3.ROUTEGROUP	false
ProcessTimeStamp	String	context.ProcessTimeStamp	true
ProfitCenter	String	Var.PC	false

Constraint Table Entries(copyOfout1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
PC	String	row7.Instance != null? row7.Instance.substring(4,false 6) : "00"	

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_3 , tDBInput_4

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_2 tJavaFlex_7, tJavaFlex_3, tJavaFlex_8, tJavaFlex_9, tJavaFlex_4, tJavaFlex_5, tJavaFlex_6
--	-------	-----------------	-----------	---

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):
Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
ID	String		false
NAME	String		false
EMPLOYEEENUM	String		false
ROLE	String		false
FACILITY	String		false
LOCATION	String		false
ROUTEGROUP	String		false
ProcessTimeStamp	String		true
ProfitCenter	String		false

Constraint Table Entries(row4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row9):

Properties	Values
Name	row9
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row9):

Name	Type	Expression	isNullable
TYPE	String		false
ID	String	row4.LOCATION	false
DESCRIPTIONTEXT	String		false

Constraint Table Entries(row9):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterDataAttributeUpdate):

Properties	Values
Name	MasterDataAttributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterDataAttributeUpdate):

Name	Type	Expression	isNullable
Pool	String	context.Pool	true
Key	String	Var.Key	true

Constraint Table Entries(MasterDataAttributeUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(masterUpdate):

Properties	Values
Name	masterUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterUpdate):

Name	Type	Expression	isNullable
Key	String	Var.Key	true
Group	String	Var.ProfitCenter	true
Description	String	row4.NAME	true
mafAppSpace	String	context.mafAppSpace	true
filter1	String	"DRIVER"	true
filter2	String	Var.ProfitCenter + " _ " + Var.Facility	true

Constraint Table Entries(masterUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(attributeUpdate):

Properties	Values
Name	attributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(attributeUpdate):

Name	Type	Expression	isNullable
Name	String	context.AttName	true
UseIndex	Boolean	context.UseIndex	true

Constraint Table Entries(attributeUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(AttributeEntry):

Properties	Values
Name	AttributeEntry
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(AttributeEntry):

Name	Type	Expression	isNullable
PROFITCENTER	String	Var. ProfitCenter	true
FACILITY	String	Var.Facility	true
LOCATION	String	Var.Location	true
ROUTEGROUP	String	Var.RouteGroup	true

Constraint Table Entries(AttributeEntry):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(USER):

Properties	Values
Name	USER
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(USER):

Name	Type	Expression	isNullable
USER	String	"USER"	true
ID	String	Var.Key	true
NAME	String	row4.NAME	true
PASSWORD	String	routines.r_MD5.MD5HashValue("123")	true
EMPLOYEEENUM	String	row4.EMPLOYEEENUM	true
DEVICEADDRESS	String	Var.DEVICEADDRESS	true
VEHICLE	String		true

Constraint Table Entries(USER):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Employee):

Properties	Values
Name	Employee
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Employee):

Name	Type	Expression	isNullable
ROUTE	String	Var.Key	true
ROLE	String	"DRIVER"	true
GROUP	String	"BETA"	true
PROFITCENTER	String	row4.ProfitCenter	true
FACILITY	String	Var.Facility	true
LOCATION	String	Var.Location	true
ROUTEGROUP	String	Var.RouteGroup	true
TIMEZONE	String	Var.TIMEZONE	true
CONTROLGROUPCODE	String		true

Constraint Table Entries(Employee):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullabl
Key	String	row4.ID != null ? "00000" + row4.ID.replaceFirst("R", "") : "00000" + row4.ID	false
ID	String	Var.Key	false
Facility	String	row4.FACILITY	false
Location	String	row4.LOCATION	false
LocationText	String	row9.DESCRPTIONTEXT	false
RouteGroup	String	row4.ROUTEGROUP	false
ProfitCenter	String	row4.ProfitCenter	false
DEVICEADDRESS	String	context.implicit_db_environment.equalsIgnoreCase("QA")? row4.ID.replaceFirst("R", "") + "@harvest.com" : context.implicit_db_environment.equalsIgnoreCase("PREPROD")? "PRE" + row4.ID.replaceFirst("R", "") + "@usbakery.com" : context.implicit_db_environment.equalsIgnoreCase("DEV2")? row4.ID.replaceFirst("R", "") + "@usb.com" : row4.ID.replaceFirst("R", "")+ "@usbakerydemo.com"	false
TIMEZONE	String	context.TIMEZONE	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------