



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:15:42 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NAVExport_010_Price_PRICEBASE_X_set_dates
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Apr 2, 2019 12:53:37 PM
Modification	Nov 15, 2019 10:12:15 AM

Preview Picture

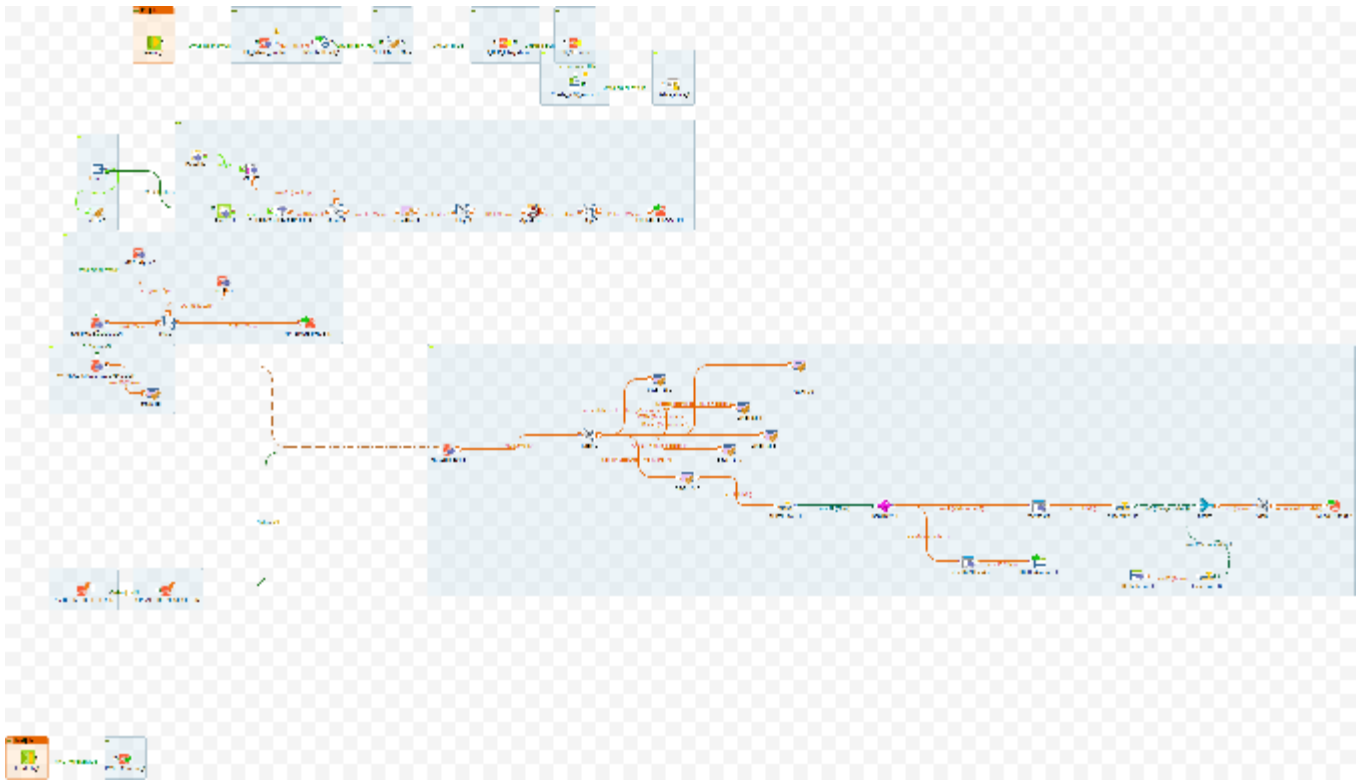

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false

Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
batch	batch?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_trx	database_trx?	false

directory	directory?	false
environment	environment?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
RouteGroup	RouteGroup?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false

DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Price_Encoding	RM_Price_Encoding?	false
RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
RM_Price_File	RM_Price_File?	false
RM_Price_RowSeparator	RM_Price_RowSeparator?	false
CRC	CRC?	false
database	database?	false
database_rm	database_rm?	false
description	description?	false
DOW	DOW?	false

ErrorMsg	ErrorMsg?	false
filename	filename?	false
filepath	filepath?	false
group	group?	false
key	key?	false
mafAppSpace	mafAppSpace?	false
NAV_Dates	NAV_Dates?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
Pool	Pool?	false
pricebase	pricebase?	false
pricelevel_condition	pricelevel_condition?	false
ProfitCenter	ProfitCenter?	false
requestCount	requestCount?	false
responseXML	responseXML?	false
RM_Dates	RM_Dates?	false

source	source?	false
StageRecords	StageRecords?	false
STARTDATE	STARTDATE?	false
table_view	table_view?	false
Week_No	Week_No?	false
year	year?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false

ContextQA

Name	Prompt	Need Prompt
batch	batch?	false

customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false

partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false

DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Price_Encoding	RM_Price_Encoding?	false
RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
RM_Price_File	RM_Price_File?	false
RM_Price_RowSeparator	RM_Price_RowSeparator?	false
CRC	CRC?	false
database	database?	false

database_rm	database_rm?	false
description	description?	false
DOW	DOW?	false
ErrorMsg	ErrorMsg?	false
filename	filename?	false
filepath	filepath?	false
group	group?	false
key	key?	false
mafAppSpace	mafAppSpace?	false
NAV_Dates	NAV_Dates?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
Pool	Pool?	false
pricebase	pricebase?	false
pricelevel_condition	pricelevel_condition?	false
ProfitCenter	ProfitCenter?	false

requestCount	requestCount?	false
responseXML	responseXML?	false
RM_Dates	RM_Dates?	false
source	source?	false
StageRecords	StageRecords?	false
STARTDATE	STARTDATE?	false
table_view	table_view?	false
Week_No	Week_No?	false
year	year?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false

Name	Prompt	Need Prompt
batch	batch?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Price_Encoding	RM_Price_Encoding?	false
RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
RM_Price_File	RM_Price_File?	false
RM_Price_RowSeparator	RM_Price_RowSeparator?	false

CRC	CRC?	false
database	database?	false
database_rm	database_rm?	false
description	description?	false
DOW	DOW?	false
ErrorMsg	ErrorMsg?	false
filename	filename?	false
filepath	filepath?	false
group	group?	false
key	key?	false
mafAppSpace	mafAppSpace?	false
NAV_Dates	NAV_Dates?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
Pool	Pool?	false
pricebase	pricebase?	false

pricelevel_condition	pricelevel_condition?	false
ProfitCenter	ProfitCenter?	false
requestCount	requestCount?	false
responseXML	responseXML?	false
RM_Dates	RM_Dates?	false
source	source?	false
StageRecords	StageRecords?	false
STARTDATE	STARTDATE?	false
table_view	table_view?	false
Week_No	Week_No?	false
year	year?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Database	DB_Navision_Database?	false

DB_Navision_Login	DB_Navision_Login?	false
-------------------	--------------------	-------

ContextPREPROD

Name	Prompt	Need Prompt
batch	batch?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
keystore	keystore?	false
Location	Location?	false
message1	message1?	false

message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false

DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Price_Encoding	RM_Price_Encoding?	false

RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
RM_Price_File	RM_Price_File?	false
RM_Price_RowSeparator	RM_Price_RowSeparator?	false
CRC	CRC?	false
database	database?	false
database_rm	database_rm?	false
description	description?	false
DOW	DOW?	false
ErrorMsg	ErrorMsg?	false
filename	filename?	false
filepath	filepath?	false
group	group?	false
key	key?	false
mafAppSpace	mafAppSpace?	false
NAV_Dates	NAV_Dates?	false
objectId	objectId?	false
objectName	objectName?	false

objectType	objectType?	false
Pool	Pool?	false
pricebase	pricebase?	false
pricelevel_condition	pricelevel_condition?	false
ProfitCenter	ProfitCenter?	false
requestCount	requestCount?	false
responseXML	responseXML?	false
RM_Dates	RM_Dates?	false
source	source?	false
StageRecords	StageRecords?	false
STARTDATE	STARTDATE?	false
table_view	table_view?	false
Week_No	Week_No?	false
year	year?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Schema	DB_Navision_Schema?	false

DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false

Component List

Component Name	Component Type
tBufferInput_1	tBufferInput
tBufferOutput_1	tBufferOutput
tContextLoad_1	tContextLoad
tCreateTable_1	tCreateTable
tDBConnection_1	tMSSqlConnection
tDBInput_1	tMSSqlInput
tExtractXMLField_1	tExtractXMLField
tExtractXMLField_2	tExtractXMLField
tFileInputDelimited_1	tFileInputDelimited
tFileInputPositional_1	tFileInputPositional


tFileList_1	tFileList
tFileList_2	tFileList
tFilterRow_14	tFilterRow
tFilterRow_15	tFilterRow
tFilterRow_16	tFilterRow
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaFlex_8	tJavaFlex
tJava_1	tJava
tJava_2	tJava
tLoop_1	tLoop
tMSSqlCommit_1	tMSSqlCommit

tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_2	tMSSqlInput
tMSSqlInput_3	tMSSqlInput
tMSSqlInput_4	tMSSqlInput
tMSSqlInput_5	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMSSqlOutput_2	tMSSqlOutput
tMSSqlOutput_3	tMSSqlOutput
tMSSqlRow_1	tMSSqlRow
tMSSqlRow_2	tMSSqlRow
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap
tMap_5	tMap
tMap_6	tMap

tPostjob_1	tPostjob
tPrejob_1	tPrejob
tReplicate_1	tReplicate
tSetKeystore_1	tSetKeystore
tSplitRow_1	tSplitRow
tUnite_1	tUnite

Components Description

Component tBufferInput

	UNIQUE NAME	tBufferInput_1	INPUT(S)	none
	LABEL	tBufferInput_1	OUTPUT(S)	tFilterRow_16

Component Parameters:

Properties	Values
Unique Name	tBufferInput_1
Component Name	tBufferInput
Version	0.102 (ALPHA)
Family	Misc
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tBufferInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Advanced separator (for numbers)	false
Thousands separator	" , "
Decimal separator	" . "
Encoding	"ISO-8859-15"
Label format	tBufferInput_1
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tBufferInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	
Timestamp	false	String			true	

isReference	false	String			true	
ValidationErrorCode	false	String			true	
Message	false	String			true	

Original Function Parameters:
Component tBufferOutput

	UNIQUE NAME	tBufferOutput_1	INPUT(S)	tExtractXMLField_2
	LABEL	tBufferOutput_1	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tBufferOutput_1
Component Name	tBufferOutput
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tBufferOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Label format	tBufferOutput_1
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tBufferOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	
Timestamp	false	String			true	
isReference	false	String			true	
ValidationErrorCode	false	String			true	
Message	false	String			true	

Original Function Parameters:
Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1


Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	tDBConnection_1
	LABEL	Create_NAV_Product	OUTPUT(S)	tSetKeystore_1

Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	false
Host	context.DB_ERP_DSD_Integration_Server

Database Name	context.DB_ERP_DSD_Integration_Database
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Access File	""
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	""
Running Mode	HSQldb_IN_MEMORY
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	context.DB_ERP_DSD_Integration_Database

Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database
DB Root Path	""
JDBC Provider	JTDS
Temporary Table	false
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
SQLite File	""
DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database
Use "drop cascade"	true
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
Table Name	"NAV_Product"


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	Create_NAV_Product
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tCreateTable_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	true	String	255		false	

DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	true	Long	255		true	
ProcessTimestamp	false	String	30		true	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tMSSqlConnection_1
	LABEL	DB_Navision	OUTPUT(S)	tCreateTable_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false

Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tPrejob_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""

Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	{[SCHEMA_COLUMN=key, TRIM=false], {[SCHEMA_COLUMN=value, TRIM=false]}
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:**Component tExtractXMLField**

	UNIQUE NAME	tExtractXMLField_1	INPUT(S)	tReplicate_1
	LABEL	metadata	OUTPUT(S)	tFilterRow_15

Component Parameters:

Properties	Values
Unique Name	tExtractXMLField_1
Component Name	tExtractXMLField
Version	0.102 (ALPHA)
Family	XML Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tFileInputXML
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
XML field	responseXML
!!!USE_ITEMS.NAME!!!	false
!!!LOOP_QUERY_BASE.NAME!!!	""
Loop XPath query	"/MovilizerResponse/masterdataAck"


Mapping	<pre> {{SCHEMA_COLUMN=Pool, QUERY="@pool", NODECHECK=false}, {SCHEMA_COLUMN=Group, QUERY="@group", NODECHECK=false}, {SCHEMA_COLUMN=Key, QUERY="@key", NODECHECK=false}, {SCHEMA_COLUMN=Timestamp, QUERY="@timestamp", NODECHECK=false}, {SCHEMA_COLUMN=isReference, QUERY="@isReference", NODECHECK=}, {SCHEMA_COLUMN=ValidationError, QUERY="@validationErrorCode", NODECHECK=false}, {SCHEMA_COLUMN=Message, QUERY="@message", NODECHECK=false}} </pre>
Limit	
Die on error	false
Schema	repository: XML:ResponseSchema - metadata
Use static Field	false
XML Record	""
XPath Prefix	""
Min column number of optimize code	100
Ignore the namespaces	true
Label format	metadata
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	
Timestamp	false	String			true	
isReference	false	String			true	
ValidationErrorCode	false	String			true	
Message	false	String			true	

Original Function Parameters:
Component **tExtractXMLField**

	UNIQUE NAME	tExtractXMLField_2	INPUT(S)	tReplicate_1
	LABEL	tExtractXMLField_2	OUTPUT(S)	tBufferOutput_1

Component Parameters:

Properties	Values
------------	--------

Unique Name	tExtractXMLField_2
Component Name	tExtractXMLField
Version	0.102 (ALPHA)
Family	XML Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputXML
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
XML field	responseXML
!!!USE_ITEMS.NAME!!!	false
!!!LOOP_QUERY_BASE.NAME!!!	""
Loop XPath query	"/MovilizerResponse/masterdataError"
Mapping	[{SCHEMA_COLUMN=Pool, QUERY="@pool", NODECHECK=false}, {SCHEMA_COLUMN=Group, QUERY="@group", NODECHECK=false}, {SCHEMA_COLUMN=Key, QUERY="@key", NODECHECK=false}, {SCHEMA_COLUMN=Timestamp, QUERY="@timestamp", NODECHECK=false}, {SCHEMA_COLUMN=isReference, QUERY="@isReference", NODECHECK=false}, {SCHEMA_COLUMN=ValidationErrorCode, QUERY="@validationErrorCode", NODECHECK=false}, {SCHEMA_COLUMN=Message, QUERY="@message", NODECHECK=false}]
Limit	
Die on error	false
Schema	Built-In


Use static Field	false
XML Record	""
XPath Prefix	""
Min column number of optimize code	100
Ignore the namespaces	true
Label format	tExtractXMLField_2
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tExtractXMLField_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	

Timestamp	false	String			true	
isReference	false	String			true	
ValidationErrorCode	false	String			true	
Message	false	String			true	

Original Function Parameters:
Component tFileInputDelimited

	UNIQUE NAME	tFileInputDelimited_1	INPUT(S)	tFileList_2 , tFileInputDelimited_1
	LABEL	GDATE	OUTPUT(S)	tMap_6

Component Parameters:

Properties	Values
Unique Name	tFileInputDelimited_1
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
File name/Stream	((String)globalMap.get("tFileList_2_CURRENT_FILEPATH
CSV options	false

Row Separator	""
CSV Row Separator	"\n"
Field Separator	"\n"
Escape char	""
Text enclosure	""
Header	0
Footer	0
Limit	
Skip empty rows	true
Uncompress as zip file	false
Die on error	false
Schema	Built-In
!!!TEMP_DIR.NAME!!!	"C:/Talend/6.2.1/studio/workspaceRemote"
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	"."
Extract lines at random	false


Number of lines	10
Trim all columns	false
Check column to trim	<pre> [{SCHEMA_COLUMN=StartDate, TRIM=false}, {SCHEMA_COLUMN=SalesDate, TRIM=false}, {SCHEMA_COLUMN=Date, TRIM=false}, {SCHEMA_COLUMN=WeekNo, TRIM=false}, {SCHEMA_COLUMN=DayNo, TRIM=false}, {SCHEMA_COLUMN=text, TRIM=false}] </pre>
Check each row structure against schema	false
Check date	false
Encoding	"ISO-8859-15"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false
Decode table	<pre> [{SCHEMA_COLUMN=StartDate, DECODE=false}, {SCHEMA_COLUMN=SalesDate, DECODE=false}, {SCHEMA_COLUMN=Date, DECODE=false}, {SCHEMA_COLUMN=WeekNo, DECODE=false}, {SCHEMA_COLUMN=DayNo, DECODE=false}, {SCHEMA_COLUMN=text, DECODE=false}] </pre>
!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	GDATE
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFileInputDelimited_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
StartDate	false	java.util.Date			true	
SalesDate	false	java.util.Date			true	
Date	false	java.util.Date			true	
WeekNo	false	String			true	
DayNo	false	String			true	
text	false	String			true	

Original Function Parameters: Component tFileInputPositional

	UNIQUE NAME	tFileInputPositional_1	INPUT(S)	tFileList_1
	LABEL	CURRENT WEEK PRICE FILE	OUTPUT(S)	tMap_6

Component Parameters:

Properties	Values
Unique Name	tFileInputPositional_1
Component Name	tFileInputPositional
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputPositional
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use existing dynamic	false
Component List	
File name/Stream	((String)globalMap.get("tFileList_1_CURRENT_FILEPATH
Row Separator	"\n"
Customize	false
Pattern	context.RM_Price_FieldSeparator
Pattern units	SYMBOLS

Formats

```
{SCHEMA_COLUMN=DB_WP_PROD_NO, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_TABLE_NO, SIZE=4,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY1_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY2_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY3_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY4_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY5_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY6_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY7_PRICE, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY1_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY2_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY3_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY4_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY5_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY6_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_DAY7_BASE, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_1,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_2,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_3,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_4,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_5,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_6,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_7,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_WP_END_OF_RECORD, SIZE
PADDING_CHAR=' ', ALIGN='L'}}
```

Skip empty rows	false
Uncompress as zip file	false
Die on error	false
Header	0
Footer	0
Limit	
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	repository: POS:Price - metadata
Needed to process rows longer than 100 000 characters	false
Advanced separator (for numbers)	false
Thousands separator	" , "
Decimal separator	" . "
Trim all columns	true
Validate date	false

Check column to trim	<pre>[{SCHEMA_COLUMN=DB_WP_PROD_NO, TRIM=false}, {SCHEMA_COLUMN=DB_WP_TABLE_NO, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY1_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY2_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY3_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY4_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY5_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY6_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY7_PRICE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY1_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY2_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY3_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY4_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY5_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY6_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_DAY7_BASE, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_1, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_2, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_3, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_4, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_5, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_6, TRIM=false}, {SCHEMA_COLUMN=DB_WP_AUX_PRICE_TYPE_7, TRIM=false}, {SCHEMA_COLUMN=DB_WP_END_OF_RECORD, TRIM=false}]</pre>
Encoding	"UTF-8"
Label format	CURRENT WEEK PRICE FILE
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_WP_PROD_NO	false	String	9		true	
DB_WP_TABLE_NO	false	String	4		true	
DB_WP_DAY1_PRICE	false	String	9		true	
DB_WP_DAY2_PRICE	false	String	9		true	
DB_WP_DAY3_PRICE	false	String	9		true	
DB_WP_DAY4_PRICE	false	String	9		true	
DB_WP_DAY5_PRICE	false	String	9		true	
DB_WP_DAY6_PRICE	false	String	9		true	
DB_WP_DAY7_PRICE	false	String	9		true	
DB_WP_DAY1_BASE	false	String	2		true	
DB_WP_DAY2_BASE	false	String	2		true	
DB_WP_DAY3_BASE	false	String	2		true	

DB_WP_DAY4_BASE	false	String	2		true	
DB_WP_DAY5_BASE	false	String	2		true	
DB_WP_DAY6_BASE	false	String	2		true	
DB_WP_DAY7_BASE	false	String	2		true	
DB_WP_AUX_PRICE_TYPE_1	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_2	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_3	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_4	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_5	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_6	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_7	false	String	1		true	
DB_WP_END_OF_RECORD	false	String	1		true	

Original Function Parameters:
Component tFileList

	UNIQUE NAME	tFileList_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileInputPositional_1 , tLoop_1


Component Parameters:

Properties	Values
Unique Name	tFileList_1
Component Name	tFileList
Version	0.102 (ALPHA)
Family	File/Management Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileList
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Directory	"//Srvretlfs100.harvestfoodsolutions.com/Shared/root/dev/CUST04/OutBounc
FileList Type	FILES
Includes subdirectories	false
Case Sensitive	YES
Generate Error if no file found	false
Use Glob Expressions as Filemask (Unchecked means Perl5 Regex Expressions)	true
Files	[[FILEMASK="**PRC**"]]
By default	true
By file name	false
By file size	false
By modified date	false

ASC	true
DESC	false
Use Exclude Filemask	false
Exclude Filemask	"*.txt"
Format file path to slash(/) style (useful on Windows)	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tFileList

	UNIQUE NAME	tFileList_2	INPUT(S)	none
	LABEL	Date File	OUTPUT(S)	tFileInputDelimited_1


Component Parameters:

Properties	Values
Unique Name	tFileList_2
Component Name	tFileList
Version	0.102 (ALPHA)
Family	File/Management Orchestration
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileList
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Directory	"//Srvretlfs100.harvestfoodsolutions.com/Shared/root/dev/CUST04/OutBounc
FileList Type	FILES
Includes subdirectories	false
Case Sensitive	YES
Generate Error if no file found	false
Use Glob Expressions as Filemask (Unchecked means Perl5 Regex Expressions)	true
Files	[{FILEMASK="*DATE*"}]
By default	true
By file name	false
By file size	false
By modified date	false

ASC	true
DESC	false
Use Exclude Filemask	false
Exclude Filemask	"*.txt"
Format file path to slash(/) style (useful on Windows)	false
Label format	Date File
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tFilterRow

	UNIQUE NAME	tFilterRow_14	INPUT(S)	tJavaFlex_5
	LABEL	tFilterRow_14	OUTPUT(S)	tReplicate_1

Component Parameters:

Properties	Values
Unique Name	tFilterRow_14
Component Name	tFilterRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	


Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	&&
Conditions	[]
Use advanced mode	true
Advanced	!row15.responseXML.isEmpty()
Label format	tFilterRow_14
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tFilterRow_14 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tFilterRow

	UNIQUE NAME	tFilterRow_15	INPUT(S)	tExtractXMLField_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tUnite_1

Component Parameters:

Properties	Values
Unique Name	tFilterRow_15
Component Name	tFilterRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	&&
Conditions	[]


Use advanced mode	true
Advanced	!(row11.Key == null row11.Key.isEmpty())
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFilterRow_15 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	
Timestamp	false	String			true	
isReference	false	String			true	
ValidationErrorCode	false	String			true	

Message	false	String			true	
---------	-------	--------	--	--	------	--

Original Function Parameters:
Component tFilterRow

	UNIQUE NAME	tFilterRow_16	INPUT(S)	tBufferInput_1 , tFilterRow_16
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tUnite_1

Component Parameters:

Properties	Values
Unique Name	tFilterRow_16
Component Name	tFilterRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	&&
Conditions	[]
Use advanced mode	true
Advanced	!(row13.Key == null row13.Key.isEmpty())
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFilterRow_16 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	
Timestamp	false	String			true	
isReference	false	String			true	
ValidationErrorCode	false	String			true	
Message	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_3

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none
--	-------	-----------------	-----------	------

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	context.StageRecords = row16.RECORDSQTY; System.out.println("Stage Records: "+context.StageRecords);
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex
Version	0.101 (ALPHA)

Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;
Main code	routines.r_HarvestRoutineLoop.createAllObjects(); if(b==1) routines.r_HarvestRoutineLoop.populateMasterdataPoolUp; else if(b==250) { b=0; } b++;
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUp;
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaFlex_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateMasterdataUpdate context.group=MasterdataUpdate.Group; context.key=Mas

End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java


Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code loop //if(a==routines.r_HarvestRoutineLoop.getHMcountValue(F String.valueOf(row6.ID))){ //a=0;b=0;} routines.r_HarvestRoutineLoop.populateDataContainerEnt
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFilterRow_14

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	row15.responseXML = ""; if(a < context.StageRecords /*&& row15.responseXML=routines.r_HarvestRoutineLoop.send context.movilizerVersion); } } if(a==context.StageRecords) row15.responseXML=routines.r_HarvestRoutineLoop.send context.movilizerVersion); } //f = a; //a=0; //System.out.print routines.r_HarvestRoutineLoop.resetObjects(); /*if(rowcour
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_8	INPUT(S)	tMap_6
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_4

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_8
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	<pre>// start part of your Java code //SimpleDateFormat sdf = ne SimpleDateFormat("yyyy.MM.dd"); context.filepath = ((String)globalMap.get("tFileList_1_CURRENT_FILEPATH System.out.println("Filepath: "+context.filepath); //System.out.println("Start Date Equals " + sdf.format(context.STARTDATE)); String file = context.filepath; int a = file.length(); String Week_Company (file).substring(file.indexOf("GPRC")+4,file.indexOf(".DNL") System.out.println(Week_Company); String Week_No = Week_Company.substring(0,2); System.out.println("WeekNo: " "+Week_No+"\n year: "+context.year); context.Week_No = Integer.parseInt(Week_No); // context.STARTDATE = routines.Price.getFiscalDate(Integer.parseInt(Week_No)); //context.STARTDATE = row12.StartDate; //System.out.println("Start Date Equals " + sdf.format(context.STARTDATE)); //System.out.println("Date of Week =: " + routines.Price.getDOW(row12.StartDate)) ; //System.out.println(String.valueOf(context.DOW)); context.filename = routines.Price.getFilename(context.filepath); //context.STARTDATE = TalendDate.parseDate("yyyy-MM-dd","2017-03-03"); context.ProfitCenter = Week_Company.substring(2,4); System.out.println("PF:"+context.ProfitCenter); //context.DOW = 6;</pre>
Main code	<pre>// here is the main part of the component, // a piece of code executed in the row // loop</pre>
End code	<pre>// end of the component, outside/closing the loop</pre>
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_WP_PROD_NO	false	String	9		true	
DB_WP_TABLE_NO	false	String	4		true	
DB_WP_DAY1_PRICE	false	String	9		true	
DB_WP_DAY2_PRICE	false	String	9		true	
DB_WP_DAY3_PRICE	false	String	9		true	

DB_WP_DAY4_PRICE	false	String	9		true	
DB_WP_DAY5_PRICE	false	String	9		true	
DB_WP_DAY6_PRICE	false	String	9		true	
DB_WP_DAY7_PRICE	false	String	9		true	
DB_WP_DAY1_BASE	false	String	2		true	
DB_WP_DAY2_BASE	false	String	2		true	
DB_WP_DAY3_BASE	false	String	2		true	
DB_WP_DAY4_BASE	false	String	2		true	
DB_WP_DAY5_BASE	false	String	2		true	
DB_WP_DAY6_BASE	false	String	2		true	
DB_WP_DAY7_BASE	false	String	2		true	
DB_WP_AUX_PRICE_TYPE_1	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_2	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_3	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_4	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_5	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_6	false	String	1		true	

DB_WP_AUX_PRICE_TYPE_7	false	String	1		true	
DB_WP_END_OF_RECORD	false	String	1		true	
DOW	false	int			false	
StartDate	false	java.util.Date			true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tContextLoad_1
	LABEL	SET TIMESTAMP	OUTPUT(S)	tMSSqlConnection_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate());
Import	//import java.util.List;
Schema	Built-In

Label format	SET TIMESTAMP
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tLoop_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)


Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Code	System.out.println("Current Iteration: "+((Integer)globalMap.get("tLoop_1_CURRENT_ITERATION"))); if (((Integer)globalMap.get("tLoop_1_CURRENT_ITERATION")) == 3) context.pricebase = 4; else context.pricebase = ((Integer)globalMap.get("tLoop_1_CURRENT_ITERATION"));
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tLoop

	UNIQUE NAME	tLoop_1	INPUT(S)	tFileList_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2
--	-------	-----------------	-----------	---------


Component Parameters:

Properties	Values
Unique Name	tLoop_1
Component Name	tLoop
Version	0.102 (ALPHA)
Family	Orchestration
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLoop
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
For	true
While	false
From	1
To	3
Step	1
Values are increasing	true
Declaration	int i=0
Condition	i<10
Iteration	i++
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false


Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true

Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tJava_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1

Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	true
Shared DB Connection Name	"DB_ERP_DSD_Integration"

Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	tJava_2
	LABEL	RM_PRICE_POOL_OUT	OUTPUT(S)	tMap_1 , tMSSqlInput_3

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Host	context.DB_ERP_DSD_Integration_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Table Name	"RM_PRICE_POOL"
Query Type	Built-In
Guess Schema	""
Query	"Select * from dbo.RM_PRICE_POOL "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=PRODUCTNO, TRIM=false], [SCHEMA_COLUMN=TABLENO, TRIM=false], [SCHEMA_COLUMN=PRICEDATE, TRIM=false], [SCHEMA_COLUMN=PRICE, TRIM=false], [SCHEMA_COLUMN=FILENAME, TRIM=false], [SCHEMA_COLUMN=DAYNO, TRIM=false]]
Label format	RM_PRICE_POOL_OUT
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCTNO	false	String	9		false	
TABLEN0	false	String	4		false	
PRICEDATE	false	String	8		false	
PRICE	false	String	9		true	
FILENAME	false	String	20		true	
DAYNO	false	String	1		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
------------	--------

Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Host	context.DB_ERP_DSD_Integration_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Table Name	"RM_PRICE_CLOUD"
Query Type	Built-In
Guess Schema	""
Query	"SELECT * FROM RM_PRICE_CLOUD"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=PRODUCTNO, TRIM=false}, {SCHEMA_COLUMN=TABLENO, TRIM=false}, {SCHEMA_COLUMN=PRICEDATE, TRIM=false}, {SCHEMA_COLUMN=PRICEENDDATE, TRIM=false}, {SCHEMA_COLUMN=PRICE, TRIM=false}, {SCHEMA_COLUMN=FILENAME, TRIM=false}, {SCHEMA_COLUMN=DAYNO, TRIM=false}, {SCHEMA_COLUMN=SENDTOCLOUD, TRIM=false}, {SCHEMA_COLUMN=ID, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCTNO	false	String	9		false	
TABLEN0	false	String	4		false	
PRICEDATE	false	String	8		false	
PRICEENDDATE	false	String	8		false	
PRICE	false	String	9		false	
FILENAME	false	String	20		true	
DAYNO	false	String	1		true	
SENDTOCLOUD	false	String	1		true	
ID	false	Integer	8		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_3	INPUT(S)	tMSSqlInput_1 , tMSSqlInput_2
	LABEL	RM_PRICE_STAGE_RECORD_COUNT	OUTPUT(S)	tJavaFlex_1 , tMSSqlInput_5

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	"SRVRSQL200.harvestfoodsolutions.com"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"


Database	"ERP_DSD_Integration_DEV"
Username	"talend"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"RM_PRICE_STAGE"
Query Type	Built-In
Guess Schema	""
Query	"SELECT COUNT(1) as RECORDSQTY FROM RM_PRICE_STAGE "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=RECORDSQTY, TRIM=false]]

Label format	RM_PRICE_STAGE_RECORD_COUNT
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
RECORDSQTY	false	Integer	10		true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_4	INPUT(S)	none
	LABEL	MAX ID	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_4

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	"SRVRSQL200.harvestfoodsolutions.com"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Username	"talend"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In

Guess Schema	""
Query	"SELECT ISNULL(MAX(ID)+1,1) AS ID FROM dbo.RM_PRICE_CLOUD"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[(SCHEMA_COLUMN=ID, TRIM=false)]
Label format	MAX ID
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	int	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_5	INPUT(S)	tMSSqlInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2 , tMSSqlRow_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_5
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL

Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"select * from RM_PRICE_STAGE "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false


Trim column	{[SCHEMA_COLUMN=PRODUCTNO, TRIM=false}, {SCHEMA_COLUMN=TABLENO, TRIM=false}, {SCHEMA_COLUMN=PRICEDATE, TRIM=false}, {SCHEMA_COLUMN=PRICE, TRIM=false}, {SCHEMA_COLUMN=FILENAME, TRIM=false}, {SCHEMA_COLUMN=DAYNO, TRIM=false}, {SCHEMA_COLUMN=SENDTOCLOUD, TRIM=false}, {SCHEMA_COLUMN=ID, TRIM=false}, {SCHEMA_COLUMN=PRICEENDDATE, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCTNO	false	String	9		false	
TABLENO	false	String	4		false	
PRICEDATE	false	String	8		false	
PRICE	false	String	9		true	

FILENAME	false	String	20		true	
DAYNO	false	String	1		true	
SENDTOCLOUD	false	String	1		true	
ID	false	Integer			true	
PRICEENDDATE	false	String	8		false	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_1 , tMSSqlInput_4
	LABEL	RM_STAGE_PRICE IN	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false

SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use an existing connection	true
Component List	tMSSqlConnection_1

JDBC Provider	JTDS
Host	"SRVRSQL200.harvestfoodsolutions.com"
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Database Driver	MSSQL
Username	"talend"
Password	*****
Table	"RM_PRICE_STAGE"
Action on table	DROP_IF_EXISTS_AND_CREATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	PRODUCTNO
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false


Field options	<pre> {{SCHEMA_COLUMN=PRODUCTNO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=TABLENO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICEDATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=FILENAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DAYNO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=SENDTOCLOUD, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=HFS_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICEENDDATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}} </pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	RM_STAGE_PRICE IN
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCTNO	false	String	9		false	
TABLENO	false	String	4		false	
PRICEDATE	false	String	8		false	
PRICE	false	String	9		true	
FILENAME	false	String	20		true	
DAYNO	false	String	1		true	
SENDTOCLOUD	false	String	1		false	
HFS_ID	false	int			false	
PRICEENDDATE	false	String	8		false	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_2	INPUT(S)	tMap_3
	LABEL	tMSSqlOutput_4	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	false
Component List	
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login

Password	context.DB_ERP_DSD_Integration_Password
Table	"Custom_Logging"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	moment
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams

Encoding	"ISO-8859-15"
Commit every	1000
Additional columns	[]
Use field options	false
	<pre> {{SCHEMA_COLUMN=moment, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=pid, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=root_pid, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=father_pid, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=project, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=job, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=context, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=priority, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=type, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=origin, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=errorMessage, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Environment, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Source, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Filepath,</pre>

Field options

```
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Instance,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Table_View,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Database,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Object_Id,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Object_Name,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Object_Type,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Pool, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=Group,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Key, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true},
{SCHEMA_COLUMN=ResponseTimestamp,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
```

	{SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}}
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	1000
Label format	tMSSqlOutput_4
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for loginfo :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date	255		true	
pid	false	String	255		true	

root_pid	false	String	255		true	
father_pid	false	String	255		true	
project	false	String	255		true	
job	false	String	255		true	
context	false	String	255		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
errorMessage	false	String	255		true	
code	false	String	255		true	
Environment	false	String	30		true	
Source	false	String	255		true	
Filepath	false	String	255		true	
Instance	false	String	255		true	
Table_View	false	String	255		true	
Database	false	String	255		true	
Object_Id	false	String	255		true	

Object_Name	false	String	255		true	
Object_Type	false	String	255		true	
Pool	false	String	255		true	
Group	false	String	255		true	
Key	false	String	255		true	
ResponseTimestamp	false	java.util.Date	255		true	
ProcessTimeStamp	false	java.util.Date	255		true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_3	INPUT(S)	tMap_5
	LABEL	RM_PRICE_POOL_IN	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_3
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server

Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true

Component List	tMSSqlConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"RM_PRICE_POOL"
Action on table	DROP_IF_EXISTS_AND_CREATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	PRODUCTNO
Start value	1
Step	1

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	<pre> {{SCHEMA_COLUMN=PRODUCTNO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=TABLENO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICEDATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=FILENAME, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DAYNO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}} </pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	RM_PRICE_POOL_IN
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlOutput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCTNO	false	String	9		false	
TABLENO	false	String	4		false	
PRICEDATE	false	String	8		false	
PRICE	false	String	9		true	
FILENAME	false	String	100		true	
DAYNO	false	String	10		true	

Original Function Parameters:
Component tMSSqlRow

	UNIQUE NAME	tMSSqlRow_1	INPUT(S)	tMSSqlInput_5
	LABEL	INSERT RM_PRICE_CLOUD	OUTPUT(S)	tMSSqlRow_2

Component Parameters:

Properties	Values
Database	tMSSqlRow
Unique Name	tMSSqlRow_1

Component Name	tMSSqlRow
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Table Name	""


Turn on identity insert	false
Query Type	Built-In
Query	"insert into RM_PRICE_CLOUD(PRODUCTNO,TABLENO,PRICEDAT SELECT PRODUCTNO,TABLENO,PRICEDATE,PRICEEN RM_PRICE_STAGE where SENDTOCLOUD = 'I'"
Specify a data source alias	false
Data source alias	""
Die on error	false
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Propagate QUERY's recordset	false
use column	
Use PreparedStatement	false
Set PreparedStatement Parameters	[]
Encoding	"ISO-8859-15"
Commit every	10000
Label format	INSERT RM_PRICE_CLOUD
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlRow

	UNIQUE NAME	tMSSqlRow_2	INPUT(S)	tMSSqlRow_1
	LABEL	UPDATE RM_PRICE_CLOUD	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlRow
Unique Name	tMSSqlRow_2
Component Name	tMSSqlRow
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	"dbo"
Database	"ERP_DSD_Integration_DEV"
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Table Name	""
Turn on identity insert	false
Query Type	Built-In


Query	"update rm_price_cloud set RM_PRICE_CLOUD.PRICE_DATE = RM_PRICE_STAGE.PRICE_DATE, RM_PRICE_CLOUD.PRICE_END_DATE = RM_PRICE_STAGE.PRICE_END_DATE, RM_PRICE_CLOUD.PRICE = RM_PRICE_STAGE.PRICE, RM_PRICE_CLOUD.FILENAME = RM_PRICE_STAGE.FILENAME from RM_PRICE_STAGE where RM_PRICE_CLOUD.ID = RM_PRICE_STAGE.ID"
Specify a data source alias	false
Data source alias	""
Die on error	false
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Propagate QUERY's recordset	false
use column	
Use PreparedStatement	false
Set PreparedStatement Parameters	[]
Encoding	"ISO-8859-15"
Commit every	10000
Label format	UPDATE RM_PRICE_CLOUD
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlRow_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tReplicate

	UNIQUE NAME	tReplicate_1	INPUT(S)	tFilterRow_14
	LABEL	tReplicate_1	OUTPUT(S)	tExtractXMLField_2 , tExtractXMLField_1

Component Parameters:

Properties	Values
Unique Name	tReplicate_1
Component Name	tReplicate
Version	0.101 (ALPHA)
Family	Orchestration
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tReplicate
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Label format	tReplicate_1
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tReplicate_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**

Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSplitRow

	UNIQUE NAME	tSplitRow_1	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_5

Component Parameters:

Properties	Values
Unique Name	tSplitRow_1
Component Name	tSplitRow
Version	0.102 (ALPHA)
Family	Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSplitRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	


Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Property	Built-In
Columns mapping	<pre> [{DAYNO="1", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE1, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",PRICE.FILENAME=PRICE.FILENAME)}, {DAYNO="2", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE2, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,1,"dd")) }, {DAYNO="3", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE3, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,2,"dd")) }, {DAYNO="4", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE4, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,3,"dd")) }, {DAYNO="5", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE5, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,4,"dd")) }, {DAYNO="6", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE6, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,5,"dd")) }, {DAYNO="7", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE7, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,6,"dd")) }, {DAYNO="8", TABLENO=PRICE.TABLENO, PRICE=PRICE.PRICE8, PRODUCTNO=PRICE.PRODUCTNO, PRICEDATE=TalendDate.formatDate("yyyyMMdd",TalendDate.formatDate("yyyyMMdd",TalendDate,7,"dd")) }] </pre>
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSplitRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRODUCTNO	false	String	9		false	
TABLENO	false	String	4		false	
PRICEDATE	false	String	8		false	
PRICE	false	String	9		true	
FILENAME	false	String			true	
DAYNO	false	String			true	

Original Function Parameters:
Component tUnite

	UNIQUE NAME	tUnite_1	INPUT(S)	tBufferInput_1 , tFilterRow_16
	LABEL	tUnite_1	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tUnite_1

Component Name	tUnite
Version	0.101 (ALPHA)
Family	Orchestration
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.Unite
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Label format	tUnite_1
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tUnite_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Group	false	String			true	
Key	false	String			true	
Timestamp	false	String			true	
isReference	false	String			true	

ValidationErrorCode	false	String			true	
Message	false	String			true	

Original Function Parameters:
Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_1 , tMSSqlInput_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutput_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	

Use an existing validation rule	false
---------------------------------	-------

Mapper table for tMap_1 (input):

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
PRODUCTNO	String		false
TABLENNO	String		false
PRICEDATE	String		false
PRICE	String		true
FILENAME	String		true
DAYNO	String		true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row5):

Properties	Values
Name	row5
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row5):

Name	Type	Expression	isNullable
PRODUCTNO	String	row4.PRODUCTNO	false
TABLENO	String	row4.TABLENO	false
PRICEDATE	String		false
PRICEENDDATE	String		false
PRICE	String		false
FILENAME	String		true
DAYNO	String		true
SENDTOCLOUD	String		true
ID	Integer		true

Constraint Table Entries(row5):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
ID	int		false

Constraint Table Entries(row7):

Name	Type	Expression	isNullable

Mapper table for tMap_1 (output):

Mapper table Properties(STG_PRICE):

Properties	Values
Name	STG_PRICE
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	Var.SENDTOCLOUD != "N" && Var.PRICE!="+000.0000" && Var.PriceLevel == context.pricebase

Metadata Table Entries(STG_PRICE):

Name	Type	Expression	isNullable
PRODUCTNO	String	row4.PRODUCTNO	false
TABLENO	String	row4.TABLENO	false
PRICEDATE	String	Var.PRICEDATE	false
PRICE	String	Var.PRICE	true
FILENAME	String	row4.FILENAME	true
DAYNO	String	row4.DAYNO	true
SENDTOCLOUD	String	Var.SENDTOCLOUD	false
HFS_ID	int	Var.HFS_ID	false
PRICEENDDATE	String	Var.PRICEENDDATE	false

Constraint Table Entries(STG_PRICE):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
SENDCLOUD	String	/* I = Insert Add Record to the cloud U = Update price has change send record to the cloud N = No change Price table and product are all the same with what is in the cloud Row5 is what is in the cloud Row4 is what is coming from RM There is a left join so you always get all the records from RM. */ row5.PRODUCTNO == null ? "I" : row5.PRODUCTNO.equals(row4.PRODUCTNO) && row5.TABLENO.equals(row4.TABLENO) && !row5.PRICE.equals(row4.PRICE) ? "U": "N"	false
HFS_ID	int	Var.SENDCLOUD.equals("I") ? Numeric.sequence("S1",row7.ID , 1) : row5.ID	false
PRICEENDDATE	String	row4.PRICE.contains("999.9999")? TalendDate.formatDate("yyyyMMdd", TalendDate.addDate(TalendDate.getCurrentDate(), -1, "dd")) : "99990101"	false
PRICEDATE	String	row5.PRICEDATE != null ? (row4.PRICE.contains("999.9999")? row5.PRICEDATE:row4.PRICEDATE) : row4.PRICEDATE	false
PRICE	String	/*999.9999 indicates this is not longer a price keep the old price the priceenddate is being set to today so the price will not be used in the cloud */ row4.PRICE.contains("999.9999")? (row5.PRICE != null? row5.PRICE: "+000.0000") :row4.PRICE	false
PriceLevel	int	Integer.parseInt(row4.TABLENO) == 1 ? 1 : (Integer.parseInt(row4.TABLENO) >1 && Integer.parseInt(row4.TABLENO) < 100)? 2: (Integer.parseInt(row4.TABLENO) >999 && Integer.parseInt(row4.TABLENO) < 10000)? 4:0	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMSSqlInput_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_2 , tJavaFlex_3, tJavaFlex_4, tJavaFlex_7, tJavaFlex_6, tJavaFlex_5

rowG

Column

PRODUCTNO

TABLENO

PRICEDATE

PRICE

FULLNAME

DAYNO

SERIALNO

ID

PRICEENDDATE

Var

Expression

Type

Variable

Integer.parseInt(rowG.TABLENO...

String

☐ Pool

Integer.parseInt(rowG.TABLENO...

int

☐ Primitives

Integer.parseInt(rowG.TABLENO...

String

☐ Key

rowG.PRICE.substr(0, 10)

String

☐ KOLTR

String.format("%010d", rowG.ID)

String

☐ UNIQUE ID

"20161101"

String

☐ PRICEDATE

"20161101"

String

☐ PRICEDATE

Auto map

Expression

Column

rowG.PRICE.substr(0, 10)

PRICE

rowG.PRICEENDDATE

PRICEENDDATE

Expression

Column

rowG.ID

ID

rowG.KOLTR

KOLTR

rowG.FULLNAME

FULLNAME

rowG.SERIALNO

SERIALNO

rowG.DAYNO

DAYNO

rowG.TABLENO

TABLENO

rowG.PRICE

PRICE

rowG.PRICEENDDATE

PRICEENDDATE

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000

Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row6):

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row6):

Name	Type	Expression	isNullable
PRODUCTNO	String		false
TABLENO	String		false
PRICEDATE	String		false
PRICE	String		true
FILENAME	String		true
DAYNO	String		true
SENDTOCLOUD	String		true
ID	Integer		true
PRICEENDDATE	String		false

Constraint Table Entries(row6):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	Var.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Group	String	context.ProfitCenter	true
Key	String	Var.Key	true
Description	String	context.description	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Price4):

Properties	Values
Name	Price4
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Price4):

Name	Type	Expression	isNullable
COUNT	String	"1"	true
KNUMH	String	Var.UNIQUEID	true
KOTABNR	String	String.valueOf(Var.PriceLevel)	true

Constraint Table Entries(Price4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(VALIDITY):

Properties	Values
Name	VALIDITY
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(VALIDITY):

Name	Type	Expression	isNullable
VALIDITY	String	"1"	true
DATAB	String	Var.PRICE DATE	true
DATBI	String	Var.PRICE END DATE	true

Constraint Table Entries(VALIDITY):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(KONP):

Properties	Values
Name	KONP
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(KONP):

Name	Type	Expression	isNullable
KONP	String	"01"	true
KBETR	String	Var.KBETR	true
KFRST	String		true
KMEIN	String	"EA"	true
KNUMH	String	Var.UNIQUEID	true
KONMS	String		true
KONWA	String	"USD"	true
KOPOS	String	"1"	true
KPEIN	String	"1"	true
KRECH	String	"12"	true
KZBZG	String		true
STFKZ	String		true

Constraint Table Entries(KONP):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(SendMasterData):

Properties	Values
Name	SendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(SendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(SendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression
Pool	String	Integer.parseInt(row6.TABLENO) == 1 ? "PRICEBASEP1" : (Integer.parseInt(Integer.parseInt(row6.TABLENO) < 100)? "PRICEBASEP2": (Integer.parseInt(Integer.parseInt(row6.TABLENO) < 10000)? "PRICEBASEP4": "0"
PriceLevel	int	Integer.parseInt(row6.TABLENO) == 1 ? 1 : (Integer.parseInt(row6.TABLENO) < 100)? 2: (Integer.parseInt(row6.TABLENO) >999 && Integer.parseInt(row6
Key	String	Var.PriceLevel == 1? "A001" + "_" +String.format("%012d",Integer.parseInt(row6.TABLENO)) + String.format("%04d",Integer.parseInt(row6.TABLENO)))+String.format("%012d",Integer.parseInt(row6.PRODUCTNO)) : "A004_" +String.format("%04d",Integer.parseInt(row6.TABLENO))+String.format("%0
KBETR	String	row6.PRICE.substring(0, 1).equals("+") ? String.valueOf(Float.parseFloat(row6.PRICE))
UNIQUEID	String	String.format("%010d",row6.ID)
PRICEDATE	String	"20161102"
PRICEENDDATE	String	"20250101"

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tUnite_1
	LABEL	tMap_3	OUTPUT(S)	tMSSqlOutput_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):
Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
Pool	String		true
Group	String		true
Key	String		true
Timestamp	String		true
isReference	String		true
ValidationErrorCode	String		true
Message	String		true

Constraint Table Entries(row1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(responseXML):

Properties	Values
Name	responseXML
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(responseXML):

Name	Type	Expression	isNullable
moment	java.util.Date	TalendDate.getCurrentDate()	true
pid	String	pid	true
root_pid	String	rootPid	true
father_pid	String	fatherPid	true
project	String	projectName	true
job	String	jobName	true

context	String	contextStr	true
priority	Integer	6	true
type	String	Var.type	true
origin	String	"jlet_Response_Logging"	true
errorMessage	String	row1.Message	true
code	String	row1.ValidationErrorCode	true
Environment	String	context.environment	true
Source	String	context.source	true
Filepath	String	context.filepath	true
Instance	String	context.instance	true
Table_View	String	context.table_view	true
Database	String	context.database	true
Object_Id	String	context.objectId	true
Object_Name	String	context.objectName	true
Object_Type	String	context.objectType	true
Pool	String	row1.Pool	true
Group	String	row1.Group	true

Key	String	row1.Key	true
ResponseTimestamp	java.util.Date	Var.Timestamp	true
ProcessTimeStamp	java.util.Date	Var.ProcessTimeStamp	true

Constraint Table Entries(responseXML):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression
Timestamp	java.util.Date	(row1.Timestamp.length())>1&&row1.Timestamp.indexOf("T")>=0&&HH:mm:ss.SSS",row1.Timestamp.substring(0,row1.Timestamp.inde "+row1.Timestamp.substring(row1.Timestamp.indexOf("T")+1,row1. HH:mm:ss","9999-01-01 00:00:00",false)
type	String	(row1.ValidationErrorCode==null && row1.Message==null)?"Movili:
ProcessTimeStamp	java.util.Date	context.ProcessTimeStamp.length()>1?TalendDate.parseDate("yyy HH:mm:ss",context.ProcessTimeStamp,false):TalendDate.parseDa

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tJavaFlex_8
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSplitRow_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row14):

Properties	Values
Name	row14
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row14):

Name	Type	Expression	isNullable
DB_WP_PROD_NO	String		true
DB_WP_TABLE_NO	String		true
DB_WP_DAY1_PRICE	String		true
DB_WP_DAY2_PRICE	String		true
DB_WP_DAY3_PRICE	String		true
DB_WP_DAY4_PRICE	String		true
DB_WP_DAY5_PRICE	String		true

DB_WP_DAY6_PRICE	String		true
DB_WP_DAY7_PRICE	String		true
DB_WP_DAY1_BASE	String		true
DB_WP_DAY2_BASE	String		true
DB_WP_DAY3_BASE	String		true
DB_WP_DAY4_BASE	String		true
DB_WP_DAY5_BASE	String		true
DB_WP_DAY6_BASE	String		true
DB_WP_DAY7_BASE	String		true
DB_WP_AUX_PRICE_TYPE_1	String		true
DB_WP_AUX_PRICE_TYPE_2	String		true
DB_WP_AUX_PRICE_TYPE_3	String		true
DB_WP_AUX_PRICE_TYPE_4	String		true
DB_WP_AUX_PRICE_TYPE_5	String		true
DB_WP_AUX_PRICE_TYPE_6	String		true
DB_WP_AUX_PRICE_TYPE_7	String		true
DB_WP_END_OF_RECORD	String		true

DOW	int		false
StartDate	java.util.Date		true

Constraint Table Entries(row14):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (output):

Mapper table Properties(PRICE):

Properties	Values
Name	PRICE
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	Var.PRICELEVEL != 0

Metadata Table Entries(PRICE):

Name	Type	Expression	isNullable
PRODUCTNO	String	row14.DB_WP_PROD_NO	true
TABLENO	String	row14.DB_WP_TABLE_NO	true
PRICEDATE	java.util.Date	Var.PRICEDATE	false
PRICE1	String	row14.DB_WP_DAY1_PRICE	true
PRICE2	String	row14.DB_WP_DAY2_PRICE	true
PRICE3	String	row14.DB_WP_DAY3_PRICE	true
PRICE4	String	row14.DB_WP_DAY4_PRICE	true
PRICE5	String	row14.DB_WP_DAY5_PRICE	true
PRICE6	String	row14.DB_WP_DAY6_PRICE	true
PRICE7	String	row14.DB_WP_DAY7_PRICE	true
FILENAME	String	Var.FILENAME	false

Constraint Table Entries(PRICE):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (var):
Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
FILENAME	String	context.filename	false
PRICEDATE	java.util.Date	context.STARTDATE	false
PRICELEVEL	int	Integer.parseInt(row14.DB_WP_TABLE_NO) == 1 ? 1 : (Integer.parseInt(row14.DB_WP_TABLE_NO) > 1 && Integer.parseInt(row14.DB_WP_TABLE_NO) < 100)? 2: (Integer.parseInt(row14.DB_WP_TABLE_NO) > 999 && Integer.parseInt(row14.DB_WP_TABLE_NO) < 10000)? 4:0	false
var1	String		false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_5	INPUT(S)	tSplitRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutput_3

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_5 (input):

Mapper table Properties(row18):

Properties	Values
Name	row18
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row18):

Name	Type	Expression	isNullable
PRODUCTNO	String		false
TABLENO	String		false
PRICEDATE	String		false
PRICE	String		true
FILENAME	String		true
DAYNO	String		true

Constraint Table Entries(row18):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_5 (output):

Mapper table Properties(PRICE1):

Properties	Values
Name	PRICE1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	row18.DAYNO.equals(String.valueOf(context.DOW))

Metadata Table Entries(PRICE1):

Name	Type	Expression	isNullable
PRODUCTNO	String	row18.PRODUCTNO	false
TABLENO	String	row18.TABLENO	false
PRICEDATE	String	row18.PRICEDATE	false
PRICE	String	row18.PRICE	true
FILENAME	String	row18.FILENAME	true
DAYNO	String	row18.DAYNO	true

Constraint Table Entries(PRICE1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_5 (var):
Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_6	INPUT(S)	tFileList_2 , tFileInputDelimited_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_8

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_6 (input):

Mapper table Properties(row20):

Properties	Values
Name	row20
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row20):

Name	Type	Expression	isNullable
DB_WP_PROD_NO	String		true
DB_WP_TABLE_NO	String		true
DB_WP_DAY1_PRICE	String		true
DB_WP_DAY2_PRICE	String		true
DB_WP_DAY3_PRICE	String		true
DB_WP_DAY4_PRICE	String		true
DB_WP_DAY5_PRICE	String		true

DB_WP_DAY6_PRICE	String		true
DB_WP_DAY7_PRICE	String		true
DB_WP_DAY1_BASE	String		true
DB_WP_DAY2_BASE	String		true
DB_WP_DAY3_BASE	String		true
DB_WP_DAY4_BASE	String		true
DB_WP_DAY5_BASE	String		true
DB_WP_DAY6_BASE	String		true
DB_WP_DAY7_BASE	String		true
DB_WP_AUX_PRICE_TYPE_1	String		true
DB_WP_AUX_PRICE_TYPE_2	String		true
DB_WP_AUX_PRICE_TYPE_3	String		true
DB_WP_AUX_PRICE_TYPE_4	String		true
DB_WP_AUX_PRICE_TYPE_5	String		true
DB_WP_AUX_PRICE_TYPE_6	String		true
DB_WP_AUX_PRICE_TYPE_7	String		true
DB_WP_END_OF_RECORD	String		true

Constraint Table Entries(row20):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row21):

Properties	Values
Name	row21
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row21):

Name	Type	Expression	isNullable
StartDate	java.util.Date		true
SalesDate	java.util.Date		true
Date	java.util.Date		true
WeekNo	String		true
DayNo	String		true
text	String		true

Constraint Table Entries(row21):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_6 (output):

Mapper table Properties(row12):

Properties	Values
Name	row12
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row12):

Name	Type	Expression	isNullable
DB_WP_PROD_NO	String	row20.DB_WP_PROD_NO	true
DB_WP_TABLE_NO	String	row20.DB_WP_TABLE_NO	true
DB_WP_DAY1_PRICE	String	row20.DB_WP_DAY1_PRICE	true
DB_WP_DAY2_PRICE	String	row20.DB_WP_DAY2_PRICE	true
DB_WP_DAY3_PRICE	String	row20.DB_WP_DAY3_PRICE	true
DB_WP_DAY4_PRICE	String	row20.DB_WP_DAY4_PRICE	true

DB_WP_DAY5_PRICE	String	row20.DB_WP_DAY5_PRICE	true
DB_WP_DAY6_PRICE	String	row20.DB_WP_DAY6_PRICE	true
DB_WP_DAY7_PRICE	String	row20.DB_WP_DAY7_PRICE	true
DB_WP_DAY1_BASE	String	row20.DB_WP_DAY1_BASE	true
DB_WP_DAY2_BASE	String	row20.DB_WP_DAY2_BASE	true
DB_WP_DAY3_BASE	String	row20.DB_WP_DAY3_BASE	true
DB_WP_DAY4_BASE	String	row20.DB_WP_DAY4_BASE	true
DB_WP_DAY5_BASE	String	row20.DB_WP_DAY5_BASE	true
DB_WP_DAY6_BASE	String	row20.DB_WP_DAY6_BASE	true
DB_WP_DAY7_BASE	String	row20.DB_WP_DAY7_BASE	true
DB_WP_AUX_PRICE_TYPE_1	String	row20.DB_WP_AUX_PRICE_TYPE_1	true
DB_WP_AUX_PRICE_TYPE_2	String	row20.DB_WP_AUX_PRICE_TYPE_2	true
DB_WP_AUX_PRICE_TYPE_3	String	row20.DB_WP_AUX_PRICE_TYPE_3	true
DB_WP_AUX_PRICE_TYPE_4	String	row20.DB_WP_AUX_PRICE_TYPE_4	true
DB_WP_AUX_PRICE_TYPE_5	String	row20.DB_WP_AUX_PRICE_TYPE_5	true
DB_WP_AUX_PRICE_TYPE_6	String	row20.DB_WP_AUX_PRICE_TYPE_6	true
DB_WP_AUX_PRICE_TYPE_7	String	row20.DB_WP_AUX_PRICE_TYPE_7	true

DB_WP_END_OF_RECORD	String	row20.DB_WP_END_OF_RECORD	true
DOW	int	Var.DOW	false
StartDate	java.util.Date	row21.StartDate	true

Constraint Table Entries(row12):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_6 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
DOWint		context.DOW = TalendDate.getPartOfDate("DAY_OF_WEEK",row21.StartDate)	false
var1	java.util.Date	context.STARTDATE = row21.StartDate	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------