

Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 12:54:14 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	

Description

Properties	Values
Name	TestProduct
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Mar 4, 2019 5:44:03 AM
Modification	Nov 15, 2019 10:12:17 AM

Preview Picture

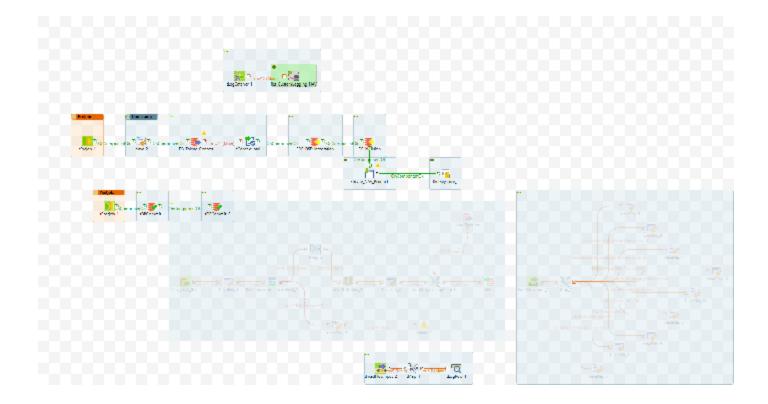

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false

Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false

mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams?	false
DB_Navision_Database?	false
DB_Navision_Login?	false
DB_Navision_Password?	false
DB_Navision_Port?	false
DB_Navision_Schema?	false
DB_Navision_Server?	false
DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database?	false
	DB_ERP_DSD_Integration_Database? DB_ERP_DSD_Integration_Login? DB_ERP_DSD_Integration_Password? DB_ERP_DSD_Integration_Port? DB_ERP_DSD_Integration_Schema? DB_ERP_DSD_Integration_Server? DB_Navision_AdditionalParams? DB_Navision_Database? DB_Navision_Database? DB_Navision_Password? DB_Navision_Port? DB_Navision_Schema? DB_Navision_Schema? DB_Navision_Server? DB_Navision_Target_Staging? DB_Talend_Context_AdditionalParams?

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false
Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false

table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false

batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false

DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false

DB_Talend_Context_Server	DB_Talend_Context_Server?	false

ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false
Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false

Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false

environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false

SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false

DB_Navision_Database?	false
DB_Navision_Login?	false
DB_Navision_Password?	false
DB_Navision_Port?	false
DB_Navision_Schema?	false
DB_Navision_Server?	false
DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database?	false
DB_Talend_Context_Login?	false
DB_Talend_Context_Password?	false
DB_Talend_Context_Port?	false
DB_Talend_Context_Schema?	false
DB_Talend_Context_Server?	false
	DB_Navision_Login? DB_Navision_Password? DB_Navision_Port? DB_Navision_Schema? DB_Navision_Server? DB_Navision_Target_Staging? DB_Talend_Context_AdditionalParams? DB_Talend_Context_Database? DB_Talend_Context_Login? DB_Talend_Context_Password? DB_Talend_Context_Password? DB_Talend_Context_Port? DB_Talend_Context_Schema?

ContextPREPROD

filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false
Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false

ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false

keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false

DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

Component List

Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
tContextLoad_1	tContextLoad
tCreateTable_1	tCreateTable
tDBCommit_1	tMSSqlCommit

tDBCommit_2	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tFixedFlowInput_2	tFixedFlowInput
tJava_2	tJava
tLogCatcher_1	tLogCatcher
tLogRow_1	tLogRow
tMSSqlConnection_2	tMSSqlConnection
tMSSqlInput_4	tMSSqlInput
tMap_4	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSetKeystore_2	tSetKeystore

Components Description

Component tContextLoad

 UNIQUE NAME	tContextLoad_1	INPUT(S)	tMSSqlInput_4
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlConnection_2

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

false
2
false
true
Built-In
Warning
Warning
false
true
true
true
false
UNIQUE_NAME
UNIQUE_NAME COMMENT
row
false

Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1:

Column	Key	Туре	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tCreateTable

***	UNIQUE NAME	tCreateTable_1	INPUT(S)	tDBConnection_1
	LABEL	Create_NAV_Product	OUTPUT(S)	tSetKeystore_2

Component Parameters:

oomponont i aramotoro.	1
Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
	·

Case Sensitive	false
Use an existing connection	false
Host	context.DB_ERP_DSD_Integration_Server
Database Name	context.DB_ERP_DSD_Integration_Database
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Access File	пп
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	nn
Running Mode	HSQLDB_IN_MEMORY
Use TLS/SSL Sockets	false
DB Path	1111
Database Name	пп

DB Alias	пп
Instance	пп
Interbase File	context.DB_ERP_DSD_Integration_Database
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database
DB Root Path	пп
JDBC Provider	JTDS
Temporary Table	false
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
SQLite File	11.11
DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database

Use "drop cascade"	true
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Table Name	"NAV_Product"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	Create_NAV_Product
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tCreateTable 1:

Schema for tCreate ra	DIE_1:					
Column	Key	Туре	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	true	Long	255		true	
ProcessTimestamp	false	String	30		true	

Original Function Parameters: Component tMSSqlCommit

UNIQUE NAME	tDBCommit_1	INPUT(S)	tPostjob_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBCommit_2

Component Parameters:

component i arameters.	
Properties	Values
Database	tMSSqlCommit

Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_2
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Original Function Parameters: Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

mnonent Da

Component Parameters:				
Properties	Values			
Database	tMSSqlCommit			
Unique Name	tDBCommit_2			
Component Name	tMSSqlCommit			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/MS_SQL_Server			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tMSSqlCommit			

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_2:

Column Key Type Lo	Length Precision	Nullable	Comment
--------------------	------------------	----------	---------

Original Function Parameters: Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tMSSqlConnection_2
	LABEL	DB_Navision	OUTPUT(S)	tCreateTable_1

Component Farameters.	
Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL

Port	context.DB_Navision_Port		
Schema	context.DB_Navision_Schema		
Database	context.DB_Navision_Database		
Username	context.DB_Navision_Login		
Password	context.DB_Navision_Password		
Encoding	"ISO-8859-15"		
Additional JDBC Parameters	context.DB_Navision_AdditionalParams		
Use or register a shared DB Connection	false		
Shared DB Connection Name			
Specify a data source alias	false		
Data source alias			
Auto Commit	false		
Share identity insert in multi table	false		
Label format	DB_Navision		
Hint format	UNIQUE_NAME COMMENT		

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tFixedFlowInput

UNIQUE NAME	tFixedFlowInput_2	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tMap_4

oomponent rarameters.	
Properties	Values
Unique Name	tFixedFlowInput_2
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	true
Startable	true

true
false
true
false
false
org.talend.help.tFixedFlowInput
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
true
Built-In
1

Use Single Table	true
Values	[{SCHEMA_COLUMN=MATNO, VALUE="F40001"}]
Use Inline Table	false
Inline Table	
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	"." ,
Content	
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_2:

Column	Key	Туре	Length	Precision	Nullable	Comment

Original Function Parameters: Component tJava

_ 400	UNIQUE NAME	tJava_2	INPUT(S)	tPrejob_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlInput_4	

Component Parameters:				
Properties	Values			
Unique Name	tJava_2			
Component Name	tJava			
Version	0.101 (ALPHA)			
Family	Custom_Code			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			

Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimestamp: "+context.ProcessTimeStamp+"\n\n\n"); context.ProfitCenter = "04";
Import	//import java.util.List;
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2:

Original Function Parameters: Component tLogCatcher

X +	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none	
	LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_CustomLogging_NAV_1	

Component i arameters.	
Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true

true
false
true
false
false
org.talend.help.tLogCatcher
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
true
Built-In
true

Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher 1:

Odilollia idi	ochema for thogoatcher_1.							
Column	Key	Туре	Length	Precision	Nullable	Comment		
moment	false	java.util.Date			true			
pid	false	String	20		true			
root_pid	false	String	20		true			
father_pid	false	String	20		true			
project	false	String	50		true			

job	false	String	255	true	
context	false	String	50	true	
priority	false	Integer	3	true	
type	false	String	255	true	
origin	false	String	255	true	
message	false	String	255	true	
code	false	Integer	3	true	

Original Function Parameters: Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_4	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false

SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true

Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=MATNO, LENGTH=10}, {SCHEMA_COLUMN=Key, LENGTH=10}, {SCHEMA_COLUMN=Type, LENGTH=10}, {SCHEMA_COLUMN=UPC, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out12:

Column	Key	Туре	Length	Precision	Nullable	Comment
MATNO	false	String			false	
Key	false	String			false	
Туре	false	String			false	
UPC	false	String			false	

Original Function Parameters: Component tMSSqlConnection

 UNIQUE NAME	tMSSqlConnection_2	INPUT(S)	tContextLoad_1
LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_1

Component i diameters:			
Properties	Values		
Database	tMSSqlConnection		

Unique Name	tMSSqlConnection_2		
Component Name	tMSSqlConnection		
Version	0.102 (ALPHA)		
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections		
Start	false		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tMSSqlConnection		
Update components	true		
IREPORT_PATH			
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java		
Subjob color			
Title color			

Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	

Specify a data source alias	false
Data source alias	ни
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMSSqlInput

UNIQUE NAME	tMSSqlInput_4	INPUT(S)	tJava_2
LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true

Built-In
ни
Built-In
нн
"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_environme where instance='"+context.source+"_"+context.instance.substring
false
ш
id_MSSQL
context.DB_Talend_Context_AdditionalParams
"ISO-8859-15"
true
[{SCHEMA_COLUMN=key, TRIM=false}, {SCHEMA_COLUMN=value, TRIM=false}]
DB_Talend_Context
UNIQUE_NAME COMMENT
row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_4:

Column	Key	Туре	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tPostjob

UNIQUE NAME	tPostjob_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBCommit_1

Component Farameters.	
Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration

Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME

Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_2

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tSetKeystore

	UNIQUE NAME	tSetKeystore_2	INPUT(S)	tCreateTable_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component i arameters.				
Properties	Values			
Unique Name	SetKeystore_2			
Component Name	tSetKeystore			
Version	0.102 (ALPHA)			
Family	Internet			
Start	false			
Startable	true			

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**

Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component jlet_CustomLogging_NAV

The second second	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	


Schema for jlet_CustomLogging_NAV_1 :

oonoma ro.	j.ot_oaoto.	iiLoggiiig_iv				
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	

message	false	String	255	true	
code	false	Integer	3	true	

Component tMap

 UNIQUE NAME	tMap_4	INPUT(S)	tFixedFlowInput_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tLogRow_1

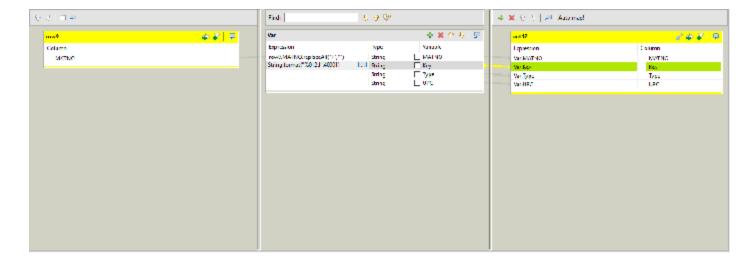

genipendit i didinetere			
Properties	Values		
tStatCatcher Statistics	false		
Enable parallel execution	false		
Mapping links display as:	AUTO		
Temp data directory path:			

Max buffer size (nb of rows):	200000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties (row9):

mapper table i roperties (rows).			
Properties	Values		
Name	row9		
Matching-mode	UNIQUE_MATCH		
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(row9):

Name		Expression	isNullable
MATNO	String		true

Constraint Table Entries(row9):

|--|

Mapper table for tMap_4 (output):

Mapper table Properties (out12):

mappor table i reportie	
Properties	Values
Name	out12
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out12):

Name	Туре	Expression	isNullable
MATNO	String	Var.MATNO	false
Key	String	Var.Key	false
Туре	String	Var.Type	false
UPC	String	Var.UPC	false

Constraint Table Entries(out12):

Name	Туре	Expression	isNullable

Mapper table for tMap_4 (var):

Mapper table Properties (Var):

5(vai).
Values
Var
false
false
false
false
null

Metadata Table Entries(Var):

motadata rabio			
Name	Туре	Expression	isNullable
MATNO	String	row9.MATNO.replaceAll("F","")	false
Key	String	String.format("%012d",40001)	false
Туре	String		false
UPC	String		false

Constraint Table Entries(Var):

CONCURATION TABLE	100 Tai /i		
Name	Туре	Expression	isNullable