

## Jobs

# Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 12:54:30 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

### **Summary**

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

### **Project Description**


Properties	Values
Name	NAV_MOV
Language	java

Description	

## **Description**

Properties	Values
Name	j_NavExport_010_AuthorizedItemList
Author	
Version	0.1
Purpose	
Status	
Description	printing order table data with start, end time and number of rows in source and target files
Creation	Jun 16, 2016 4:15:57 PM
Modification	Nov 15, 2019 10:12:11 AM

### **Preview Picture**

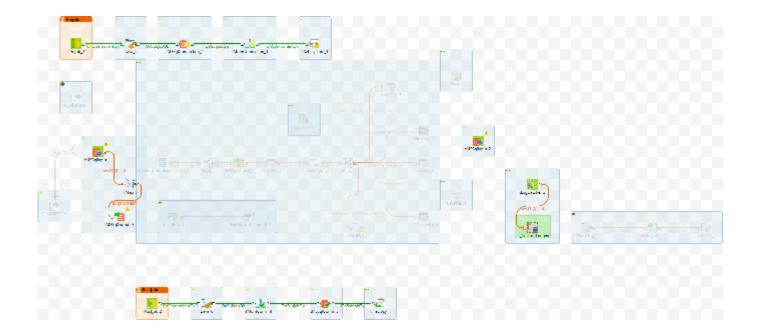

## **Settings**

### Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

### Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

### **Context List**

#### ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
source	source?	false
JobName	JobName?	false
description	description?	false

mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
SystemId	SystemId?	false

		I
SystemPassword	SystemPassword?	false
table	table?	false
type	type?	false
viewname	viewname?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false

DB_Talend_Context_Server?	false
RM_Order_Encoding?	false
RM_Order_FieldSeparator?	false
RM_Order_File?	false
RM_Order_RowSeparator?	false
length?	false
count?	false
value?	false
database?	false
table_view?	false
DB_AMC_AdditionalParams?	false
DB_AMC_Schema?	false
DB_AMC_Login?	false
DB_AMC_Server?	false
DB_AMC_Password?	false
DB_AMC_Port?	false
DB_AMC_Database?	false
	RM_Order_Encoding?  RM_Order_FieldSeparator?  RM_Order_File?  RM_Order_RowSeparator?  length?  count?  value?  database?  table_view?  DB_AMC_AdditionalParams?  DB_AMC_Schema?  DB_AMC_Login?  DB_AMC_Server?  DB_AMC_Password?  DB_AMC_Port?

#### ContextQA

lepath? f	Need Prompt false
bjectType? f	
	alse
irectory?	
	alse
ource? f	alse
obName? f	alse
escription? f	alse
nafAppSpace? f	alse
ool?	alse
roup?	alse
nom_Host? f	alse
nom_Password?	alse
nom_Port?	alse
nom_To?	alse
nom_Username? f	alse
atch? f	alse
	pource?  fobName?  fescription?  afAppSpace?  fool?  foup?  fom_Host?  fom_Password?  fom_Port?  fom_To?  fom_Username?

CRC	CRC?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table	table?	false
type	type?	false
viewname	viewname?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false

DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false
length	length?	false
count	count?	false
value	value?	false
database	database?	false
table_view	table_view?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

#### ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
source	source?	false
JobName	JobName?	false
description	description?	false

mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
SystemId	SystemId?	false

SystemPassword	SystemPassword?	false
table	table?	false
type	type?	false
viewname	viewname?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false
length	length?	false
count	count?	false

value	value?	false
database	database?	false
table_view	table_view?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

## **Component List**

Component Type  Component Type	
jlet_CustomLogging_1	jlet_CustomLogging
tFileCopy_1	tFileCopy
tJava_5	tJava
tJava_6	tJava
tLogCatcher_2	tLogCatcher
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_2	tMSSqlInput
tMSSqlOutput_3	tMSSqlOutput
tMap_6	tMap
tMomCommit_1	tMomCommit
tMomConnection_1	tMomConnection
tPostjob_2	tPostjob

tPrejob_2	tPrejob
tSetKeystore_1	tSetKeystore

### **Components Description**

#### Component tFileCopy

_	UNIQUE NAME	tFileCopy_1	INPUT(S)	tMSSqlCommit_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Farameters.		
Values		
tFileCopy_1		
tFileCopy		
0.102 (ALPHA)		
File/Management		
false		
true		

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileCopy
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
File Name	context.filepath
Copy a directory	false
Source directory	"C:/Talend-6.1/Studio/srvetl900-workspace"
Destination directory	context.directory +"\\Archive"
Rename	false
Destination filename	"NewName.temp"

Remove source file	false
Replace existing file	true
Create the directory if it doesn't exist	true
Fail on error	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFileCopy\_1 :

umn Key Type	Length	Precision	Nullable	Comment	
--------------	--------	-----------	----------	---------	--

# Original Function Parameters: Component tJava

UNIQUE NAME	tJava_5	INPUT(S)	tPrejob_2

Component Parameters:			
Properties	Values		
Unique Name	tJava_5		
Component Name	tJava		
Version	0.101 (ALPHA)		
Family	Custom_Code		
Start	false		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tJava		
Update components	true		
IREPORT_PATH			

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	/*context.StartTime=TalendDate.parseDate("yyyy-MM-dd HH:mm:ss",TalendDate.getDate("CCYY-MM-DD hh:mm:ss")); context.JobName=jobName; System.out.print(context.StartTime);*/
Import	//import java.util.List;
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

|--|

#### Schema for tJava\_5:

# Original Function Parameters: Component tJava

UNIQUE NAME	tJava_6	INPUT(S)	tPostjob_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tMomCommit_1

Component Parameters.	
Properties	Values
Unique Name	tJava_6
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	/*context.EndTime=TalendDate.parseDate("yyyy-MM-dd HH:mm:ss",TalendDate.getDate("CCYY-MM-DD hh:mm:ss")); System.out.println(context.EndTime);*/
Import	//import java.util.List;
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava\_6 :

Column	Key	Туре	Length	Precision	Nullable	Comment

## Original Function Parameters: Component tLogCatcher

UNIQUE NAME	tLogCatcher_2	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_CustomLogging_1

Component i diameters.			
Properties	Values		
Unique Name	tLogCatcher_2		
Component Name	tLogCatcher		
Version	0.101 (ALPHA)		
Family	Logs_Errors		
Start	true		

Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher 2:

Schema for thogeatcher_2:							
Column	Key	Туре	Length	Precision	Nullable	Comment	
moment	false	java.util.Date			true		
pid	false	String	20		true		
root_pid	false	String	20		true		
father_pid	false	String	20		true		

project	false	String	50	true	
job	false	String	255	true	
context	false	String	50	true	
priority	false	Integer	3	true	
type	false	String	255	true	
origin	false	String	255	true	
message	false	String	255	true	
code	false	Integer	3	true	

# Original Function Parameters: Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tMomCommit_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tFileCopy_1	

Component Parameters:			
Properties	Values		
Database	tMSSqlCommit		
Unique Name	tMSSqlCommit_1		
Component Name	tMSSqlCommit		
Version	0.102 (ALPHA)		

Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit\_1 :

Co	olumn	Key	Туре	Length	Precision	Nullable	Comment	
----	-------	-----	------	--------	-----------	----------	---------	--

# Original Function Parameters: Component tMSSqlConnection

and the same of th	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tJava_5	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMomConnection_1	

Properties	Values

tMSSqlConnection
tMSSqlConnection_1
tMSSqlConnection
0.102 (ALPHA)
Databases/DB Specifics/MS_SQL_Server ELT/Connections
false
true
true
true
true
false
false
org.talend.help.tMSSqlConnection
true
C:\Talend\7.0.1\studio\configuration\lib\java

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false

Shared DB Connection Name	
Specify a data source alias	false
Data source alias	11.11
Auto Commit	false
Share identity insert in multi table	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component tMSSqlInput

The second secon	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMap_6

Values
tMSSqlInput
tMSSqlInput_1
tMSSqlInput
0.102 (ALPHA)
Databases/DB Specifics/MS_SQL_Server
true
true
true
false
true
false
false
org.talend.help.tMSSqlInput
true

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	Built-In
Host	"TESTNAV10.corp.usbakery.com"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"[HFS_Master_DataAccess_DB]"
Username	"talend_hfs2"
Password	**********

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"[HFS_DSD_Order]"
Query Type	Built-In
Guess Schema	11.11
Query	"SELECT TOP 10 [Company ID] ,[Company Name] ,[RS Authorized Prod Group Code] ,[Item Type] ,[Item Reference No] ,[Start Date] ,[Unit of Measure Code] ,[End Date] ,[Status] FROM [HFS_Master_DataAccess_DB].[dbo].[NAV_DSD_Authoriz Products]"
Specify a data source alias	false
Data source alias	1111
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Company_ID, TRIM=false}, {SCHEMA_COLUMN=Company_Name, TRIM=false}, {SCHEMA_COLUMN=RS_Authorized_Prod_Group_Code, TRIM=false}, {SCHEMA_COLUMN=Item_Type, TRIM=false}, {SCHEMA_COLUMN=Item_Reference_No, TRIM=false}, {SCHEMA_COLUMN=Start_Date, TRIM=false}, {SCHEMA_COLUMN=Unit_of_Measure_CocTRIM=false}, {SCHEMA_COLUMN=End_Date, TRIM=false} {SCHEMA_COLUMN=Status, TRIM=false}]

Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput\_1:

Schema for twissquinput_1:						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	String			false	
Company_Name	false	String			false	
RS_Authorized_Prod_Group_Code	false	String			false	
Item_Type	false	int			false	
Item_Reference_No	false	String			false	
Start_Date	false	java.util.Date			false	
Unit_of_Measure_Code	false	String			false	
End_Date	false	java.util.Date			false	

Status	false	int		false	

# Original Function Parameters: Component tMSSqlInput

The second secon	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Parameters:				
Properties	Values			
Database	tMSSqlInput			
Unique Name	tMSSqlInput_2			
Component Name	tMSSqlInput			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/MS_SQL_Server			
Start	true			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			

false
org.talend.help.tMSSqlInput
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
false
Built-In
пп
JTDS
MSSQL
"1433"

Schema	ни
Database	пп
Username	пп
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	nn
Query Type	Built-In
Guess Schema	n n
Query	"select id, name from employee"
Specify a data source alias	false
Data source alias	n n
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	

Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput\_2:

Column Key Type Length Precision Nullable Comment
---

## Original Function Parameters: Component tMSSqlOutput

UNIQUE NAME	tMSSqlOutput_3	INPUT(S)	tMap_6
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Properties	Values			
Database	tMSSqlOutput			
Unique Name	tMSSqlOutput_3			
Component Name	tMSSqlOutput			

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	Built-In
Use an existing connection	true
Component List	tMSSqlConnection_1
JDBC Provider	JTDS
Host	пп
Port	"1433"
Schema	пп
Database	nn
Database Driver	MSSQL
Username	пп
Password	**
Table	"Nav_Delivery"
Action on table	NONE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Company_ID

Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	пп
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	пп
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false

Field options	[{SCHEMA_COLUMN=Company_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Company_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=RS_Authorized_Prod_Group_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Item_Type, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=Item_Reference_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Start_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=Unit_of_Measure_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=End_Date, UPDATE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=End_Date, UPDATE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=End_Date, UPDATE_KEY=false, UPDATE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=Status, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for output:

<u> </u>						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	String			false	
Company_Name	false	String			false	
RS_Authorized_Prod_Group_Code	false	String			false	
Item_Type	false	int			false	
Item_Reference_No	false	String			false	
Start_Date	false	java.util.Date			false	
Unit_of_Measure_Code	false	String			false	
End_Date	false	java.util.Date			false	
Status	false	int			false	

### Original Function Parameters: Component tMomCommit

L	UNIQUE NAME	tMomCommit_1	INPUT(S)	tJava_6
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlCommit_1

Component Parameters:			
Properties	Values		
Unique Name	tMomCommit_1		
Component Name	tMomCommit		
Version	0.102 (ALPHA)		
Family	Internet/MOM and JMS		
Start	false		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tMomCommit		
Update components	true		

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMomConnection_1
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	

#### Schema for tMomCommit\_1 :

Column Ke	у Туре	Length	Precision	Nullable	Comment
-----------	--------	--------	-----------	----------	---------

### Original Function Parameters: Component tMomConnection

UNIQUE NAME	tMomConnection_1	INPUT(S)	tMSSqlConnection_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tSetKeystore_1

Component Parameters:			
Properties	Values		
Unique Name	tMomConnection_1		
Component Name	tMomConnection		
Version	0.102 (ALPHA)		
Family	Internet/MOM and JMS		
Start	false		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	true		
Activate	true		

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMomInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
MQ server	ActiveMQ
Use SSL Transport	false
Failover	false
Static Discovery	false
URI parameters	"?randomize=false"

URI parameters	"?transport.maxReconnectDelay=5000&transport.useExponentialBackOff=fa
Host	context.mom_Host
Port	context.mom_Port
Username	context.mom_Username
Password	context.mom_Password
Channel	"DC.SVRCONN"
QueueManager	пп
Use Transacted	false
Use or register a shared Connection	false
Shared Connection Name	
Acknowledgment Mode	AUTO_ACKNOWLEDGE
Additional options	
Set CipherSpec	false
CipherSpec	SSL_RSA_WITH_NULL_MD5
Label format	UNIQUE_NAME

Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

## Original Function Parameters: Component tPostjob

	UNIQUE NAME	tPostjob_2	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_6

Properties	Values
Unique Name	tPostjob_2
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Original Function Parameters: Component tPrejob

UNIQUE NAME	tPrejob_2	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_5

Component i arameters.		
Properties	Values	
Unique Name	tPrejob_2	
Component Name	tPrejob	
Version	0.102 (ALPHA)	
Family	Orchestration	
Start	true	
Startable	true	

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

## Original Function Parameters: Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMomConnection_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component i diameters.		
Properties	Values	
Unique Name	tSetKeystore_1	
Component Name	tSetKeystore	
Version	0.102 (ALPHA)	
Family	Internet	
Start	false	
Startable	true	
SUBTREE_START	true	

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	"C:/ERP_DSD_Integration/Dependencies/keystore.jks"
TrustStore password	*****
Need Client authentication	false

KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component jlet\_CustomLogging

UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	tLogCatcher_2
LABEL	jlet_CustomLogging	OUTPUT(S)	none

Properties	Values
------------	--------

Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet\_CustomLogging\_1 :

Ochichia ioi	Jict_Castor	nLogging_i	•			
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	

|--|

#### Component tMap

UNIQUE NAME	tMap_6	INPUT(S)	tMSSqlInput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlOutput_3

**Component Parameters:** 

<b>Component Parameters:</b>	
Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

### Mapper table for tMap\_6 ( input ):

**Mapper table Properties (row14):** 

happer table i Toperties (Town + ).		
Properties	Values	
Name	row14	
Matching-mode	UNIQUE_MATCH	
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries( row14 ):

Name	Туре	Expression	isNullable
Company_ID	String		false
Company_Name	String		false
RS_Authorized_Prod_Group_Code	String		false
Item_Type	int		false
Item_Reference_No	String		false
Start_Date	java.util.Date		false
Unit_of_Measure_Code	String		false
End_Date	java.util.Date		false
Status	int		false

**Constraint Table Entries( row14 ):** 

Name Type Expression Isnullable		Name	Туре	Expression	isNullable	
---------------------------------	--	------	------	------------	------------	--

Mapper table for tMap\_6 ( output ): Mapper table Properties( output ):

Properties	Values
Name	output
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( output ):** 

Name	Туре	Expression	isNullable
Company_ID	String	row14.Company_ID	false
Company_Name	String	row14.Company_Name	false
RS_Authorized_Prod_Group_Code	String	row14.RS_Authorized_Prod_Group_Code	false
Item_Type	int	row14.ltem_Type	false
Item_Reference_No	String	row14.ltem_Reference_No	false
Start_Date	java.util.Date	row14.Start_Date	false
Unit_of_Measure_Code	String	row14.Unit_of_Measure_Code	false
End_Date	java.util.Date	row14.End_Date	false
Status	int	row14.Status	false

Constraint Table Entries( output ):

Name	Туре	Expression	isNullable	

#### Mapper table for tMap\_6 ( var ):

**Mapper table Properties (Var):** 

apper table i reporties ( vai ):	
Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( Var ):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

**Constraint Table Entries(Var):** 

Name	Туре	Expression	isNullable