

Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:41 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	

Description

Properties	Values
Name	j_NavExport_010_SalesDate
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Mar 4, 2019 8:05:59 AM
Modification	Nov 15, 2019 10:12:16 AM

Preview Picture

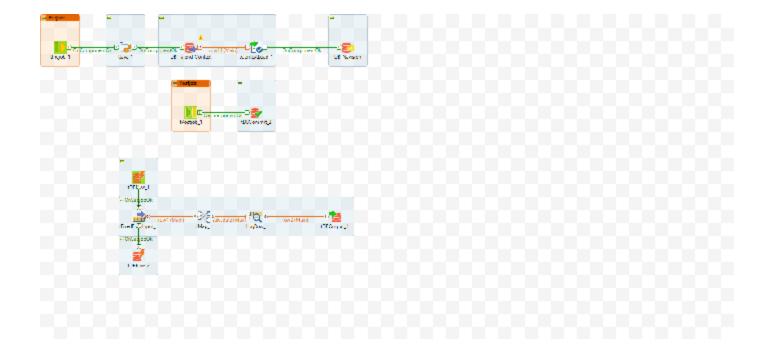

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
		

DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false

ContextQA

Name	Prompt	Need Prompt
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
		

DB_Talend_Context_Password	DB_Talend_Context_Password?	false	
DB_Talend_Context_Port	DB_Talend_Context_Port?	false	
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false	
DB_Talend_Context_Server	DB_Talend_Context_Server?	false	
mom_Host	mom_Host?	false	
mom_Password	mom_Password?	false	
mom_Port	mom_Port?	false	
mom_To	mom_To?	false	
mom_Username	mom_Username? fa		

ContextPREPROD

Name	Prompt	Need Prompt
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
		

DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	

ContextPROD

Name	Prompt	Need Prompt
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
		

DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

Component List

Component Name	Component Type
tContextLoad_1	tContextLoad
tDBCommit_3	tMSSqlCommit
tDBConnection_2	tMSSqlConnection
tDBInput_2	tMSSqlInput
tDBOutput_1	tMSSqlOutput
tDBRow_1	tMSSqlRow
tDBRow_2	tMSSqlRow
tFixedFlowInput_1	tFixedFlowInput
tJava_1	tJava
tLogRow_1	tLogRow

tMap_1	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob

Components Description

Component tContextLoad

UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBConnection_2

Properties	Values	
Unique Name	tContextLoad_1	
Component Name	tContextLoad	
Version	0.101 (ALPHA)	
Family	Misc	
Startable	false	
SUBTREE_START	false	
END_OF_FLOW	true	
Activate	true	

false
false
org.talend.help.tContextLoad
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
true
Built-In
Warning
Warning
false
true

Disable warnings	true
Disable info	true
Die on error	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1:

Column	Key	Туре	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlCommit

UNIQUE NAME	tDBCommit_3	INPUT(S)	tPostjob_1
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Parameters.	
Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_3
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java	
Subjob color		
Title color		
Enable parallel execution	false	
Number of parallel executions	2	
	false	
Component List	tDBConnection_2	
Close Connection	true	
Schema	Built-In	
Label format	UNIQUE_NAME	
Hint format	UNIQUE_NAME COMMENT	
Connection format	row	
Show Information	false	
Comment		
Use an existing validation rule	false	
Validation Rule Type		

Schema for tDBCommit_3:

Column Key Type Length Precision Nullal	ole Comment
---	-------------

Original Function Parameters: Component tMSSqlConnection

UNIQUE NAME	tDBConnection_2	INPUT(S)	tContextLoad_1
LABEL	DB_Navision	OUTPUT(S)	none

Component Parameters:			
Properties	Values		
Database	tMSSqlConnection		
Unique Name	tDBConnection_2		
Component Name	tMSSqlConnection		
Version	0.102 (ALPHA)		
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections		
Start	false		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database

Username	context.DB_Navision_Login	
Password	context.DB_Navision_Password	
Encoding	"ISO-8859-15"	
Additional JDBC Parameters	context.DB_Navision_AdditionalParams	
Use or register a shared DB Connection	false	
Shared DB Connection Name		
Specify a data source alias	false	
Data source alias	""	
Auto Commit	false	
Share identity insert in multi table	false	
Label format	DB_Navision	
Hint format	UNIQUE_NAME COMMENT	
Connection format	row	
Show Information	false	
Comment		

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	tJava_1	
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1	

Component i arameters.	
Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS

Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	пп
Query Type	Built-In
Guess Schema	пп
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_environme where instance='"+context.source+"_"+context.instance.substring
Specify a data source alias	false
Data source alias	пп
Mapping	id_MSSQL

Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[{SCHEMA_COLUMN=key, TRIM=false}, {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_2 :

Column	Key	Туре	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tLogRow_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:				
Properties	Values			
Database	tMSSqlOutput			
Unique Name	tDBOutput_1			
Component Name	tMSSqlOutput			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/MS_SQL_Server			
Startable	false			
SUBTREE_START	false			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tMSSqlOutput			
Update components	true			

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use an existing connection	true
Component List	tDBConnection_2
JDBC Provider	JTDS
Host	1111
Port	"1433"
Schema	111
Database	1111
Database Driver	MSSQL
Username	1111

Password	**
i dosword	
Table	"DSD_Sales_Download_Date"
Action on table	NONE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	DSD_SalesDate
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	1111
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	пп

Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false
Field options	[{SCHEMA_COLUMN=DSD_SalesDate, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tDBOutput_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
DSD_SalesDate	false	String			true	

Original Function Parameters: Component tMSSqlRow

UNIQUE NAME	tDBRow_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tFixedFlowInput_1

Component Farameters.		
Properties	Values	
Database	tMSSqlRow	
Unique Name	tDBRow_1	
Component Name	tMSSqlRow	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/MS_SQL_Server	
Start	true	
Startable	true	
SUBTREE_START	true	

true
true
false
false
org.talend.help.tMSSqlRow
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
true
tDBConnection_2
Built-In
JTDS

Host	пп
Port	"1433"
Schema	11 11
Database	нн
Database Driver	MSSQL
Username	нн
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Table Name	пп
Turn on identity insert	false
Query Type	Built-In
Query	"delete from DSD_Sales_Download_Date where DSD_SalesDate is not null"
Specify a data source alias	false
Data source alias	11 11
Die on error	false

Additional JDBC Parameters	пп
Propagate QUERY's recordset	false
use column	
Use PreparedStatement	false
Set PreparedStatement Parameters	
Encoding	"ISO-8859-15"
Commit every	10000
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBRow_1 :

Original Function Parameters: Component tMSSqlRow

	UNIQUE NAME	tDBRow_2	INPUT(S)	tFixedFlowInput_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:		
Properties	Values	
Database	tMSSqlRow	
Unique Name	tDBRow_2	
Component Name	tMSSqlRow	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/MS_SQL_Server	
Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tMSSqlRow	

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	Built-In
JDBC Provider	JTDS
Host	11.11
Port	"1433"
Schema	11.11
Database	1111
Database Driver	MSSQL

Username	пп
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Table Name	пп
Turn on identity insert	false
Query Type	Built-In
Query	"update DSD_Sales_Download_Date set Manual_SalesDate = null"
Specify a data source alias	false
Data source alias	RH
Die on error	false
Additional JDBC Parameters	пп
Propagate QUERY's recordset	false
use column	
Use PreparedStatement	false
Set PreparedStatement Parameters	

Encoding	"ISO-8859-15"
Commit every	10000
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBRow_2:

Original Function Parameters: Component tFixedFlowInput

a232	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tDBRow_1
	LABEL	UNIQUE_NAME		tMap_1 , tDBRow_2

Properties	Values
Unique Name	tFixedFlowInput_1

Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[{SCHEMA_COLUMN=DSD_SalesDate, VALUE=""}, {SCHEMA_COLUMN=Manual_SalesDate, VALUE=""}]
Use Inline Table	false
Inline Table	
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	"." ,
Content	
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_1:

Odinomia ioi ti ixod						
Column	Key	Туре	Length	Precision	Nullable	Comment
DSD_SalesDate	false	String			true	
Manual_SalesDate	false	String			true	

Original Function Parameters: Component tJava

 UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBInput_2

Component Farameter	13.
Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code

Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tJava	
Update components	true	
IREPORT_PATH		
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java	
Subjob color		
Title color		
Enable parallel execution	false	
Number of parallel executions	2	
	false	

Code	context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\nProcessTimestamp: "+context.ProcessTimeStamp+"\n\n");	
Import	//import java.util.List;	
Schema	Built-In	
Label format	UNIQUE_NAME	
Hint format	UNIQUE_NAME COMMENT	
Connection format	row	
Show Information	false	
Comment		
Use an existing validation rule	false	
Validation Rule Type		

Schema for tJava_1:

Column	Key	Туре	Length	Precision	Nullable	Comment

Original Function Parameters: Component tLogRow

Q	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_1
	LABEL	UNIQUE_NAME	OUTPUT(S)	tDBOutput_1

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	false
Table (print values in cells of a table)	true
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false

Lengths	[{SCHEMA_COLUMN=DSD_SalesDate, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for salesdate:

Column	Key	Туре	Length	Precision	Nullable	Comment
DSD_SalesDate	false	String			true	

Original Function Parameters: Component tPostjob

UNIQUE NAME	tPostjob_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tDBCommit_3

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180

Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_1

Properties	Values

Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0

Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMap

UNIQUE NAME	tMap_1	INPUT(S)	tFixedFlowInput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tLogRow_1

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	200000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row1):

mapper table i repetties	3(1011)
Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Туре	Expression	isNullable
DSD_SalesDate	String		true
Manual_SalesDate	String		true

Constraint Table Entries(row1):

	Name	Туре	Expression	isNullable
--	------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(salesdate):

Mapper table i Topertie	of salesdate).
Properties	Values
Name	salesdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(salesdate):

motorial rabio			
Name	Туре	Expression	isNullable
DSD_SalesDate	String	TalendDate.addDate(TalendDate.getDate("yyyy-MM-dd"), "yyyy-MM-dd", 1, "dd")	true

Constraint Table Entries(salesdate):

Name	Туре	Expression	isNullable

Mapper table for tMap_1 (var):

Mapper table Properties (Var):

mapper table i reperties (rai).		
Properties	Values	
Name	Var	
Matching-mode		
isMinimized	true	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(Var):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable