



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:15 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description

Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_OrderControl_
Author	
Version	0.1
Purpose	
Status	
Description	printing order table data with start, end time and number of rows in source and target files
Creation	Mar 10, 2019 1:12:51 AM
Modification	Dec 2, 2019 12:51:11 PM

Preview Picture

COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
filter1	filter1?	false
length	length?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false

RegionNumber	RegionNumber?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false

implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false

RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false

DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false

NAV_Vehicle	NAV_Vehicle?	false
responseXML	responseXML?	false

ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
filter1	filter1?	false
length	length?	false
database	database?	false
table_view	table_view?	false

key	key?	false
table	table?	false
viewname	viewname?	false
RegionNumber	RegionNumber?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false

ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false

ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false

DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false

DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false

NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
responseXML	responseXML?	false

ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
filter1	filter1?	false

length	length?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
RegionNumber	RegionNumber?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false

database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false

DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false

NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
responseXML	responseXML?	false

ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false

Pool	Pool?	false
group	group?	false
filter1	filter1?	false
length	length?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
RegionNumber	RegionNumber?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false

customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false

object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false

DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false

DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false

NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
responseXML	responseXML?	false

Component List


Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
jlet_NAV_ResponseLogging_1	jlet_NAV_ResponseLogging
tContextLoad_1	tContextLoad

tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tDBConnection_3	tMSSqlConnection
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBInput_3	tMSSqlInput
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJava_1	tJava
tJava_2	tJava
tJava_3	tJava
tLogCatcher_1	tLogCatcher
tMap_1	tMap

tMap_2	tMap
tMap_5	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSetKeystore_1	tSetKeystore

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning

Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tJava_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_2

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tContextLoad_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_3

Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false

Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_3	INPUT(S)	tDBConnection_1
	LABEL	DB_Navision	OUTPUT(S)	tJava_3

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_3
Component Name	tMSSqlConnection

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	Built-In
JDBC Provider	MSSQL_PROP
Host	"testnav10.corp.usbakery.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"TEST-USB-2013"
Username	"talend_hfs2"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""

Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In


Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_environment+"] "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[{SCHEMA_COLUMN=key, TRIM=false}, {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	none
	LABEL	View_NAV_OrderControl	OUTPUT(S)	tMap_2 , tFixedFlowInput_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_3
Property Type	repository: DB (MSSQL):DB_Navision

Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""

Query	"SELECT [Item No] ,[Group Code] ,[Avail_Day1] , [Avail_Day2] ,[Avail_Day3] ,[Avail_Day4] , [Avail_Day5] ,[Avail_Day6] ,[Avail_Day7] , [Avail_Day8] ,[Avail_Day9] ,[Avail_Day10] , [Avail_Day11] ,[Avail_Day12] ,[Avail_Day13] , [Avail_Day14] ,[Avail_Day15] ,[LeadOrder_Day1] , [LeadOrder_Day2] ,[LeadOrder_Day3] , [LeadOrder_Day4] ,[LeadOrder_Day5] , [LeadOrder_Day6] ,[LeadOrder_Day7] , [LeadOrder_Day8] ,[LeadOrder_Day9] , [LeadOrder_Day10] ,[LeadOrder_Day11] , [LeadOrder_Day12] ,[LeadOrder_Day13] , [LeadOrder_Day14] ,[LeadOrder_Day15] from Nav_DSD_Order_control_group where [Group Code] = 'ORE'"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column

```
[{SCHEMA_COLUMN=Item_No, TRIM=false},
{SCHEMA_COLUMN=Group_Code, TRIM=false},
{SCHEMA_COLUMN=Avail_Day1, TRIM=false},
{SCHEMA_COLUMN=Avail_Day2, TRIM=false},
{SCHEMA_COLUMN=Avail_Day3, TRIM=false},
{SCHEMA_COLUMN=Avail_Day4, TRIM=false},
{SCHEMA_COLUMN=Avail_Day5, TRIM=false},
{SCHEMA_COLUMN=Avail_Day6, TRIM=false},
{SCHEMA_COLUMN=Avail_Day7, TRIM=false},
{SCHEMA_COLUMN=Avail_Day8, TRIM=false},
{SCHEMA_COLUMN=Avail_Day9, TRIM=false},
{SCHEMA_COLUMN=Avail_Day10, TRIM=false},
{SCHEMA_COLUMN=Avail_Day11, TRIM=false},
{SCHEMA_COLUMN=Avail_Day12, TRIM=false},
{SCHEMA_COLUMN=Avail_Day13, TRIM=false},
{SCHEMA_COLUMN=Avail_Day14, TRIM=false},
{SCHEMA_COLUMN=Avail_Day15, TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day1,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day2,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day3,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day4,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day5,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day6,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day7,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day8,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day9,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day10,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day11,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day12,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day13,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day14,
TRIM=false},
{SCHEMA_COLUMN=LeadOrder_Day15,
TRIM=false}]
```

Label format	View_NAV_OrderControl
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tDBInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	20		true	
Group_Code	false	String	20		true	
Avail_Day1	false	String	250		true	
Avail_Day2	false	String	250		true	
Avail_Day3	false	String	250		true	
Avail_Day4	false	String	250		true	
Avail_Day5	false	String	250		true	
Avail_Day6	false	String	250		true	

Avail_Day7	false	String	250		true	
Avail_Day8	false	String	250		true	
Avail_Day9	false	String	250		true	
Avail_Day10	false	String	250		true	
Avail_Day11	false	String	250		true	
Avail_Day12	false	String	250		true	
Avail_Day13	false	String	250		true	
Avail_Day14	false	String	250		true	
Avail_Day15	false	String	250		true	
LeadOrder_Day1	false	String	250		true	
LeadOrder_Day2	false	String	250		true	
LeadOrder_Day3	false	String	250		true	
LeadOrder_Day4	false	String	250		true	
LeadOrder_Day5	false	String	250		true	
LeadOrder_Day6	false	String	250		true	
LeadOrder_Day7	false	String	250		true	
LeadOrder_Day8	false	String	250		true	

LeadOrder_Day9	false	String	250		true	
LeadOrder_Day10	false	String	250		true	
LeadOrder_Day11	false	String	250		true	
LeadOrder_Day12	false	String	250		true	
LeadOrder_Day13	false	String	250		true	
LeadOrder_Day14	false	String	250		true	
LeadOrder_Day15	false	String	250		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_3	INPUT(S)	none
	LABEL	Table_SalesDate	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true


Component List	tDBConnection_3
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [DSD_SalesDate] from ["+context.NAV_SalesDate+"]"
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=DSD_SalesDate, TRIM=false]]
Label format	Table_SalesDate
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
DSD_SalesDate	false	String	30		false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMap_1
	LABEL	MasterDataPool	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;
Main code	<pre> routines.Nav_OrderControl.createAllObjects(); if(b==1){ routines.Nav_OrderControl.populateMasterdataPoolUpdate else if(b==50) { //routines.r_HarvestRoutine_A.populateMasterdataPoolUpd b=0; } b++; </pre>
End code	<pre> // end of the component, outside/closing the loop routines.Nav_OrderControl.createAllObjects(); routines.Nav_OrderControl.populateMasterdataPoolUpdate </pre>
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	MasterDataPool
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_1		
	LABEL	MasterData	OUTPUT(S)	none		

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.Nav_OrderControl.populateMasterdataUpdate(Ma context.group = MasterdataUpdate.Group; context.key=MasterdataUpdate.Key; </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	MasterData
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_1
	LABEL	Data	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	<pre> routines.Nav_OrderControl.populateDataContainerEntryLo </pre>
End code	<pre> // end of the component, outside/closing the loop </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	<pre> //import java.util.List; </pre>
Label format	Data
Hint format	<pre> __UNIQUE_NAME__
__COMMENT__ </pre>
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_1
---	-------------	-------------	----------	--------

	LABEL	Send MasterData	OUTPUT(S)	tJavaFlex_NAV_ResponseLogging_1
--	-------	--------------------	-----------	---

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	row2.responseXML = ""; if(a==50 /*&& f==(a-50)*/){ row2.responseXML=routines.Nav_OrderControl.sendMasterData(context.movilizerVersion); //System.out.println(row3.responseXML); //System.out.println(f); } a++; routines.Nav_OrderControl.reset();
End code	// end of the component, outside/closing the loop context.responseXML=routines.Nav_OrderControl.sendMasterData(context.movilizerVersion); routines.Nav_OrderControl.reset();
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	Send MasterData
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_1
	LABEL	ControllInfo	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_OrderControl.populateDataContainerInnerEn routines.Nav_OrderControl.populateUpdateContainerEntry
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	ControllInfo
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n");</pre>
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_1

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)


Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Code	String foo = "bar";
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_3	INPUT(S)	tDBConnection_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSetKeystore_1

Component Parameters:

Properties	Values
------------	--------


Unique Name	tJava_3
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar"; System.out.println(context.NAV_OrderControl);
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogCatcher_CustomLogging_NAV_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:

Component tPostjob


	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2

Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob


	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1

Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tJava_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:


Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:

Component **jlet_CustomLogging_NAV**

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_NAV_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_NAV_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_1	INPUT(S)	tJavaFlex_4 , tDBInput_3
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
------------	--------

Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_NAV_ResponseLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_5
	LABEL	Send Data to Movlizer Containers	OUTPUT(S)	tJavaFlex_1, tJavaFlex_2, tJavaFlex_3, tJavaFlex_5, tJavaFlex_4

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	

Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row37):

Properties	Values
Name	row37
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row37):

Name	Type	Expression	isNullable
------	------	------------	------------

AVAIL1	String		false
AVAIL2	String		false
AVAIL3	String		false
AVAIL4	String		false
AVAIL5	String		false
AVAIL6	String		false
AVAIL7	String		false
AVAIL8	String		false
AVAIL9	String		false
AVAIL10	String		false
AVAIL11	String		false
AVAIL12	String		false
AVAIL13	String		false
AVAIL14	String		false
DOW_1	String		false
DOW_2	String		false
DOW_3	String		false

DOW_4	String		false
DOW_5	String		false
DOW_6	String		false
DOW_7	String		false
DOW_8	String		false
DOW_9	String		false
DOW_10	String		false
DOW_11	String		false
DOW_12	String		false
DOW_13	String		false
DOW_14	String		false
LPOTS_1	long		false
LPOTS_2	Long		true
LPOTS_3	long		false
LPOTS_4	long		false
LPOTS_5	long		false
LPOTS_6	long		false

LPOTS_7	long		false
LPOTS_8	long		false
LPOTS_9	long		false
LPOTS_10	long		false
LPOTS_11	long		false
LPOTS_12	long		false
LPOTS_13	long		false
LPOTS_14	long		false
LEADDAYS1	String		true
LEADDAYS2	String		true
LEADDAYS3	String		true
LEADDAYS4	String		true
LEADDAYS5	String		true
LEADDAYS6	String		true
LEADDAYS7	String		true
LEADDAYS8	String		true
LEADDAYS9	String		true

LEADDAYS10	String		true
LEADDAYS11	String		true
LEADDAYS12	String		true
LEADDAYS13	String		true
LEADDAYS14	String		true
FILEDATE_1	String		false
FILEDATE_2	String		false
FILEDATE_3	String		false
FILEDATE_4	String		false
FILEDATE_5	String		false
FILEDATE_6	String		false
FILEDATE_7	String		false
FILEDATE_8	String		false
FILEDATE_9	String		false
FILEDATE_10	String		false
FILEDATE_11	String		false
FILEDATE_12	String		false

FILEDATE_13	String		false
FILEDATE_14	String		false
PRODUCT_NO	String		true
LOCATIONCODE	String		true

Constraint Table Entries(row37):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Group	String	Var.Group	true
Key	String	Var.Key	true
Filter1	String	"0000000" + row37.PRODUCT_NO.substring(1)	true
Filter2	String	Var.Filter2	true
Description	String	context.description	true
mafAppSpace	String	context.mafAppSpace	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(FD1):

Properties	Values
Name	FD1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(FD1):

Name	Type	Expression	isNullable
FILEDATE_1	String	row37.FILEDATE_1	false
FILEDATE_2	String	row37.FILEDATE_2	false
FILEDATE_3	String	row37.FILEDATE_3	false
FILEDATE_4	String	row37.FILEDATE_4	false
FILEDATE_5	String	row37.FILEDATE_5	false
FILEDATE_6	String	row37.FILEDATE_6	false
FILEDATE_7	String	row37.FILEDATE_7	false

FILEDATE_8	String	row37.FILEDATE_8	false
FILEDATE_9	String	row37.FILEDATE_9	false
FILEDATE_10	String	row37.FILEDATE_10	false
FILEDATE_11	String	row37.FILEDATE_11	false
FILEDATE_12	String	row37.FILEDATE_12	false
FILEDATE_13	String	row37.FILEDATE_13	false
FILEDATE_14	String	row37.FILEDATE_14	false
AVAILABLE_1	String	row37.AVAIL1	false
AVAILABLE_2	String	row37.AVAIL2	false
AVAILABLE_3	String	row37.AVAIL3	false
AVAILABLE_4	String	row37.AVAIL4	false
AVAILABLE_5	String	row37.AVAIL5	false
AVAILABLE_6	String	row37.AVAIL6	false
AVAILABLE_7	String	row37.AVAIL7	false
AVAILABLE_8	String	row37.AVAIL8	false
AVAILABLE_9	String	row37.AVAIL9	false
AVAILABLE_10	String	row37.AVAIL10	false

AVAILABLE_11	String	row37.AVAIL11	false
AVAILABLE_12	String	row37.AVAIL12	false
AVAILABLE_13	String	row37.AVAIL13	false
AVAILABLE_14	String	row37.AVAIL14	false
WEEKDAY_1	String	row37.DOW_1	false
WEEKDAY_2	String	row37.DOW_2	false
WEEKDAY_3	String	row37.DOW_3	false
WEEKDAY_4	String	row37.DOW_4	false
WEEKDAY_5	String	row37.DOW_5	false
WEEKDAY_6	String	row37.DOW_6	false
WEEKDAY_7	String	row37.DOW_7	false
WEEKDAY_8	String	row37.DOW_8	false
WEEKDAY_9	String	row37.DOW_9	false
WEEKDAY_10	String	row37.DOW_10	false
WEEKDAY_11	String	row37.DOW_11	false
WEEKDAY_12	String	row37.DOW_12	false
WEEKDAY_13	String	row37.DOW_13	false

WEEKDAY_14	String	row37.DOW_14	false
LPOTS_1	long	row37.LPOTS_1	false
LPOTS_2	Long	row37.LPOTS_2	true
LPOTS_3	long	row37.LPOTS_3	false
LPOTS_4	long	row37.LPOTS_4	false
LPOTS_5	long	row37.LPOTS_5	false
LPOTS_6	long	row37.LPOTS_6	false
LPOTS_7	long	row37.LPOTS_7	false
LPOTS_8	long	row37.LPOTS_8	false
LPOTS_9	long	row37.LPOTS_9	false
LPOTS_10	long	row37.LPOTS_10	false
LPOTS_11	long	row37.LPOTS_11	false
LPOTS_12	long	row37.LPOTS_12	false
LPOTS_13	long	row37.LPOTS_13	false
LPOTS_14	long	row37.LPOTS_14	false
LEADDAYS_1	String	row37.LEADDAYS1	true
LEADDAYS_2	String	row37.LEADDAYS2	true

LEADDAYS_3	String	row37.LEADDAYS3	true
LEADDAYS_4	String	row37.LEADDAYS4	true
LEADDAYS_5	String	row37.LEADDAYS5	true
LEADDAYS_6	String	row37.LEADDAYS6	true
LEADDAYS_7	String	row37.LEADDAYS7	true
LEADDAYS_8	String	row37.LEADDAYS8	true
LEADDAYS_9	String	row37.LEADDAYS9	true
LEADDAYS_10	String	row37.LEADDAYS10	true
LEADDAYS_11	String	row37.LEADDAYS11	true
LEADDAYS_12	String	row37.LEADDAYS12	true
LEADDAYS_13	String	row37.LEADDAYS13	true
LEADDAYS_14	String	row37.LEADDAYS14	true

Constraint Table Entries(FD1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(ControllInfo):

Properties	Values
Name	ControllInfo
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(ControllInfo):

Name	Type	Expression	isNullable
HHCUTOFFTIME	String	Var.CUTOFFTIME	false
MATCONTROLGROUPCODE	String	row37.PRODUCT_NO	true
CUSTCONTROLGROUPCODE	String	Var.Group	true

Constraint Table Entries(ControllInfo):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression	isNullable
STARTDATE	long	<code> routines.DateParser.convertPSTToUTCToMillis_BeginTime (TalendDate.formatDate("yyyyMMdd",TalendDate.parseDate("yyyyMMdd",false row37.FILEDATE_1)))</code>	
ENDDATE	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime (TalendDate.formatDate("yyyyMMdd",TalendDate.parseDate("yyyyMMdd",false row37.FILEDATE_14)))</code>	
Group	String	<code>row37.LOCATIONCODE</code>	false
Key	String	<code>row37.LOCATIONCODE+ "_" + "0000000" + row37.PRODUCT_NO.substring(1)</code>	false
Filter2	String	<code>Var.Group</code>	false
CUTOFFTIME	String	<code>"23:59"</code>	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tJavaFlex_4 , tDBInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_5

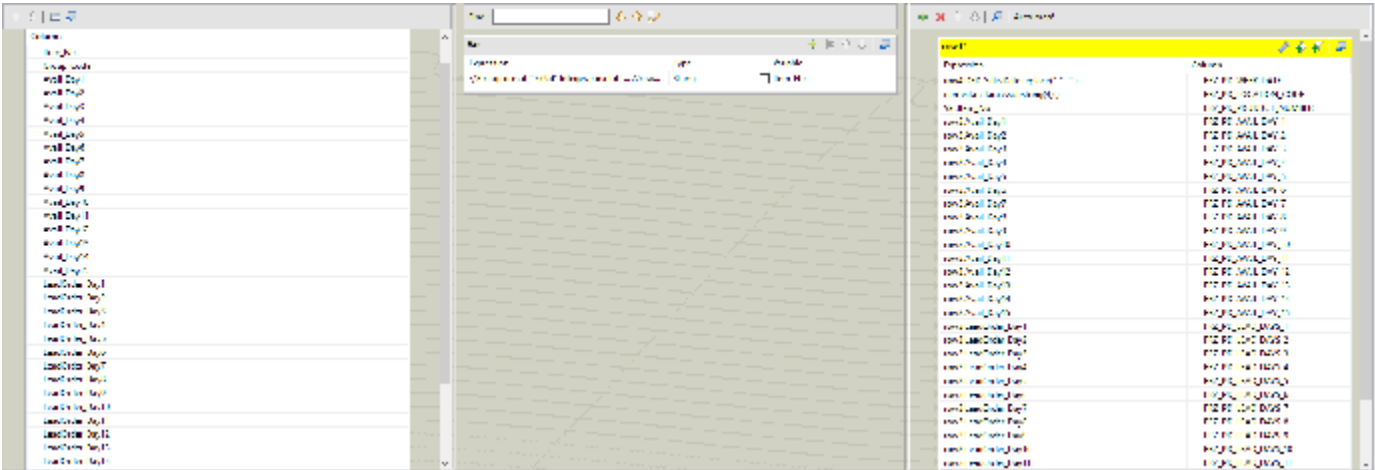

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000

Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
Item_No	String		true
Group_Code	String		true

Avail_Day1	String		true
Avail_Day2	String		true
Avail_Day3	String		true
Avail_Day4	String		true
Avail_Day5	String		true
Avail_Day6	String		true
Avail_Day7	String		true
Avail_Day8	String		true
Avail_Day9	String		true
Avail_Day10	String		true
Avail_Day11	String		true
Avail_Day12	String		true
Avail_Day13	String		true
Avail_Day14	String		true
Avail_Day15	String		true
LeadOrder_Day1	String		true
LeadOrder_Day2	String		true

LeadOrder_Day3	String		true
LeadOrder_Day4	String		true
LeadOrder_Day5	String		true
LeadOrder_Day6	String		true
LeadOrder_Day7	String		true
LeadOrder_Day8	String		true
LeadOrder_Day9	String		true
LeadOrder_Day10	String		true
LeadOrder_Day11	String		true
LeadOrder_Day12	String		true
LeadOrder_Day13	String		true
LeadOrder_Day14	String		true
LeadOrder_Day15	String		true

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
DSD_SalesDate	String		false

Constraint Table Entries(row4):

Name	Type	Expression	isNullable

Mapper table for tMap_2 (output):**Mapper table Properties(row14):**

Properties	Values
Name	row14
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row14):

Name	Type	Expression	isNullable
FRZ_PD_WEEK_DATE	String	row4.DSD_SalesDate.replace("-", "")	true
FRZ_PD_LOCATION_CODE	String	context.instance.substring(4,6)	true
FRZ_PD_PRODUCT_NUMBER	String	Var.Item_No	true
FRZ_PD_AVAIL_DAY_1	String	row3.Avail_Day1	true
FRZ_PD_AVAIL_DAY_2	String	row3.Avail_Day2	true
FRZ_PD_AVAIL_DAY_3	String	row3.Avail_Day3	true
FRZ_PD_AVAIL_DAY_4	String	row3.Avail_Day4	true

FRZ_PD_AVAIL_DAY_5	String	row3.Avail_Day5	true
FRZ_PD_AVAIL_DAY_6	String	row3.Avail_Day6	true
FRZ_PD_AVAIL_DAY_7	String	row3.Avail_Day7	true
FRZ_PD_AVAIL_DAY_8	String	row3.Avail_Day8	true
FRZ_PD_AVAIL_DAY_9	String	row3.Avail_Day9	true
FRZ_PD_AVAIL_DAY_10	String	row3.Avail_Day10	true
FRZ_PD_AVAIL_DAY_11	String	row3.Avail_Day11	true
FRZ_PD_AVAIL_DAY_12	String	row3.Avail_Day12	true
FRZ_PD_AVAIL_DAY_13	String	row3.Avail_Day13	true
FRZ_PD_AVAIL_DAY_14	String	row3.Avail_Day14	true
FRZ_PD_AVAIL_DAY_15	String	row3.Avail_Day15	true
FRZ_PD_LEAD_DAYS_1	String	row3.LeadOrder_Day1	true
FRZ_PD_LEAD_DAYS_2	String	row3.LeadOrder_Day2	true
FRZ_PD_LEAD_DAYS_3	String	row3.LeadOrder_Day3	true
FRZ_PD_LEAD_DAYS_4	String	row3.LeadOrder_Day4	true
FRZ_PD_LEAD_DAYS_5	String	row3.LeadOrder_Day5	true
FRZ_PD_LEAD_DAYS_6	String	row3.LeadOrder_Day6	true

FRZ_PD_LEAD_DAYS_7	String	row3.LeadOrder_Day7	true
FRZ_PD_LEAD_DAYS_8	String	row3.LeadOrder_Day8	true
FRZ_PD_LEAD_DAYS_9	String	row3.LeadOrder_Day9	true
FRZ_PD_LEAD_DAYS_10	String	row3.LeadOrder_Day10	true
FRZ_PD_LEAD_DAYS_11	String	row3.LeadOrder_Day11	true
FRZ_PD_LEAD_DAYS_12	String	row3.LeadOrder_Day12	true
FRZ_PD_LEAD_DAYS_13	String	row3.LeadOrder_Day13	true
FRZ_PD_LEAD_DAYS_14	String	row3.LeadOrder_Day14	true
FRZ_PD_LEAD_DAYS_15	String	row3.LeadOrder_Day15	true

Constraint Table Entries(row14):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
Item_No	String	//String.format("%09d",Integer.parseInt(//row3.Item_No.replace("F",""))) row3.Item_No	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_5	INPUT(S)	tMap_2
	LABEL	FILTER ONLY PROFIT CENTER 04	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_5 (input):**Mapper table Properties(row14):**

Properties	Values
Name	row14
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row14):

Name	Type	Expression	isNullable
FRZ_PD_WEEK_DATE	String		true
FRZ_PD_LOCATION_CODE	String		true
FRZ_PD_PRODUCT_NUMBER	String		true
FRZ_PD_AVAIL_DAY_1	String		true
FRZ_PD_AVAIL_DAY_2	String		true
FRZ_PD_AVAIL_DAY_3	String		true
FRZ_PD_AVAIL_DAY_4	String		true

FRZ_PD_AVAIL_DAY_5	String		true
FRZ_PD_AVAIL_DAY_6	String		true
FRZ_PD_AVAIL_DAY_7	String		true
FRZ_PD_AVAIL_DAY_8	String		true
FRZ_PD_AVAIL_DAY_9	String		true
FRZ_PD_AVAIL_DAY_10	String		true
FRZ_PD_AVAIL_DAY_11	String		true
FRZ_PD_AVAIL_DAY_12	String		true
FRZ_PD_AVAIL_DAY_13	String		true
FRZ_PD_AVAIL_DAY_14	String		true
FRZ_PD_AVAIL_DAY_15	String		true
FRZ_PD_LEAD_DAYS_1	String		true
FRZ_PD_LEAD_DAYS_2	String		true
FRZ_PD_LEAD_DAYS_3	String		true
FRZ_PD_LEAD_DAYS_4	String		true
FRZ_PD_LEAD_DAYS_5	String		true
FRZ_PD_LEAD_DAYS_6	String		true

FRZ_PD_LEAD_DAYS_7	String		true
FRZ_PD_LEAD_DAYS_8	String		true
FRZ_PD_LEAD_DAYS_9	String		true
FRZ_PD_LEAD_DAYS_10	String		true
FRZ_PD_LEAD_DAYS_11	String		true
FRZ_PD_LEAD_DAYS_12	String		true
FRZ_PD_LEAD_DAYS_13	String		true
FRZ_PD_LEAD_DAYS_14	String		true
FRZ_PD_LEAD_DAYS_15	String		true

Constraint Table Entries(row14):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_5 (output):

Mapper table Properties(row37):

Properties	Values
Name	row37
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row37):

Name	Type	Expression	isNullable
AVAIL1	String	Var.AVAIL1	false
AVAIL2	String	Var.AVAIL2	false
AVAIL3	String	Var.AVAIL3	false
AVAIL4	String	Var.AVAIL4	false
AVAIL5	String	Var.AVAIL5	false
AVAIL6	String	Var.AVAIL6	false
AVAIL7	String	Var.AVAIL7	false

AVAIL8	String	Var.AVAIL8	false
AVAIL9	String	Var.AVAIL9	false
AVAIL10	String	Var.AVAIL10	false
AVAIL11	String	Var.AVAIL11	false
AVAIL12	String	Var.AVAIL12	false
AVAIL13	String	Var.AVAIL13	false
AVAIL14	String	Var.AVAIL14	false
DOW_1	String	Var.DOW_1	false
DOW_2	String	Var.DOW_2	false
DOW_3	String	Var.DOW_3	false
DOW_4	String	Var.DOW_4	false
DOW_5	String	Var.DOW_5	false
DOW_6	String	Var.DOW_6	false
DOW_7	String	Var.DOW_7	false
DOW_8	String	Var.DOW_8	false
DOW_9	String	Var.DOW_9	false
DOW_10	String	Var.DOW_10	false

DOW_11	String	Var.DOW_11	false
DOW_12	String	Var.DOW_12	false
DOW_13	String	Var.DOW_13	false
DOW_14	String	Var.DOW_14	false
LPOTS_1	long	Var.LPOTS_1	false
LPOTS_2	Long	Var.LPOTS_2	true
LPOTS_3	long	Var.LPOTS_3	false
LPOTS_4	long	Var.LPOTS_4	false
LPOTS_5	long	Var.LPOTS_5	false
LPOTS_6	long	Var.LPOTS_6	false
LPOTS_7	long	Var.LPOTS_7	false
LPOTS_8	long	Var.LPOTS_8	false
LPOTS_9	long	Var.LPOTS_9	false
LPOTS_10	long	Var.LPOTS_10	false
LPOTS_11	long	Var.LPOTS_11	false
LPOTS_12	long	Var.LPOTS_12	false
LPOTS_13	long	Var.LPOTS_13	false

LPOTS_14	long	Var.LPOTS_14	false
LEADDAYS1	String	row14.FRZ_PD_LEAD_DAYS_1	true
LEADDAYS2	String	row14.FRZ_PD_LEAD_DAYS_2	true
LEADDAYS3	String	row14.FRZ_PD_LEAD_DAYS_3	true
LEADDAYS4	String	row14.FRZ_PD_LEAD_DAYS_4	true
LEADDAYS5	String	row14.FRZ_PD_LEAD_DAYS_5	true
LEADDAYS6	String	row14.FRZ_PD_LEAD_DAYS_6	true
LEADDAYS7	String	row14.FRZ_PD_LEAD_DAYS_7	true
LEADDAYS8	String	row14.FRZ_PD_LEAD_DAYS_8	true
LEADDAYS9	String	row14.FRZ_PD_LEAD_DAYS_9	true
LEADDAYS10	String	row14.FRZ_PD_LEAD_DAYS_10	true
LEADDAYS11	String	row14.FRZ_PD_LEAD_DAYS_11	true
LEADDAYS12	String	row14.FRZ_PD_LEAD_DAYS_12	true
LEADDAYS13	String	row14.FRZ_PD_LEAD_DAYS_13	true
LEADDAYS14	String	row14.FRZ_PD_LEAD_DAYS_14	true
FILEDATE_1	String	Var.FILEDATE_1	false
FILEDATE_2	String	Var.FILEDATE_2	false

FILEDATE_3	String	Var.FILEDATE_3	false
FILEDATE_4	String	Var.FILEDATE_4	false
FILEDATE_5	String	Var.FILEDATE_5	false
FILEDATE_6	String	Var.FILEDATE_6	false
FILEDATE_7	String	Var.FILEDATE_7	false
FILEDATE_8	String	Var.FILEDATE_8	false
FILEDATE_9	String	Var.FILEDATE_9	false
FILEDATE_10	String	Var.FILEDATE_10	false
FILEDATE_11	String	Var.FILEDATE_11	false
FILEDATE_12	String	Var.FILEDATE_12	false
FILEDATE_13	String	Var.FILEDATE_13	false
FILEDATE_14	String	Var.FILEDATE_14	false
PRODUCT_NO	String	row14.FRZ_PD_PRODUCT_NUMBER	true
LOCATIONCODE	String	row14.FRZ_PD_LOCATION_CODE	true

Constraint Table Entries(row37):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_5 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression
FILEDATE_1	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",row1
FILEDATE_2	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_3	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_4	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_5	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_6	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_7	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale

FILEDATE_8	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_9	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_10	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_11	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_12	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_13	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
FILEDATE_14	String	TalendDate.formatDate("yyyy-MM-dd",TalendDate.parseDate("yyyyMMdd",Tale
AVAIL1	String	row14.FRZ_PD_AVAIL_DAY_1.equalsIgnoreCase("Y"? "true" : "false"
AVAIL2	String	row14.FRZ_PD_AVAIL_DAY_2.equalsIgnoreCase("Y"? "true" : "false"
AVAIL3	String	row14.FRZ_PD_AVAIL_DAY_3.equalsIgnoreCase("Y"? "true" : "false"
AVAIL4	String	row14.FRZ_PD_AVAIL_DAY_4.equalsIgnoreCase("Y"? "true" : "false"
AVAIL5	String	row14.FRZ_PD_AVAIL_DAY_5.equalsIgnoreCase("Y"? "true" : "false"
AVAIL6	String	row14.FRZ_PD_AVAIL_DAY_6.equalsIgnoreCase("Y"? "true" : "false"
AVAIL7	String	row14.FRZ_PD_AVAIL_DAY_7.equalsIgnoreCase("Y"? "true" : "false"
AVAIL8	String	row14.FRZ_PD_AVAIL_DAY_8.equalsIgnoreCase("Y"? "true" : "false"
AVAIL9	String	row14.FRZ_PD_AVAIL_DAY_9.equalsIgnoreCase("Y"? "true" : "false"
AVAIL10	String	row14.FRZ_PD_AVAIL_DAY_10.equalsIgnoreCase("Y"? "true" : "false"

AVAIL11	String	row14.FRZ_PD_AVAIL_DAY_11.equalsIgnoreCase("Y")? "true" : "false"
AVAIL12	String	row14.FRZ_PD_AVAIL_DAY_12.equalsIgnoreCase("Y")? "true" : "false"
AVAIL13	String	row14.FRZ_PD_AVAIL_DAY_13.equalsIgnoreCase("Y")? "true" : "false"
AVAIL14	String	row14.FRZ_PD_AVAIL_DAY_14.equalsIgnoreCase("Y")? "true" : "false"
DOW_1	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF
DOW_2	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",1,"dd"))))
DOW_3	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",2,"dd"))))
DOW_4	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",3,"dd"))))
DOW_5	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",4,"dd"))))
DOW_6	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",5,"dd"))))
DOW_7	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",6,"dd"))))
DOW_8	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",7,"dd"))))
DOW_9	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",8,"dd"))))
DOW_10	String	routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",9,"dd"))))

DOW_11	String	<code>routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",10,"dd"))))</code>
DOW_12	String	<code>routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",11,"dd"))))</code>
DOW_13	String	<code>routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",12,"dd"))))</code>
DOW_14	String	<code>routines.Nav_OrderControl.GetDOWWord(TalendDate.getPartOfDate("DAY_OF TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyyMMdd",13,"dd"))))</code>
LPOTS_1	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate ,"yyyyMMdd",Integer.parseInt(row14.FRZ_PD_LEAD_DAYS_1)*-1 ,"dd"))</code>
LPOTS_2	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_3	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_4	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_5	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_6	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_7	long	<code>routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>

LPOTS_8	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_9	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_10	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_11	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_12	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_13	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>
LPOTS_14	long	<code> routines.DateParser.convertPSTToUTCToMillis_EndTime(TalendDate.addDate(TalendDate.addDate(row14.FRZ_PD_WEEK_DATE,"yyyy ,"dd"))</code>

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------