



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:05:08 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_Order_040_Bundler
Author	
Version	1.0
Purpose	
Status	
Description	Enhanced Bundling and modified job to track orders only sending new orders
Creation	Mar 5, 2019 12:40:49 AM
Modification	Nov 15, 2019 10:12:17 AM

Preview Picture

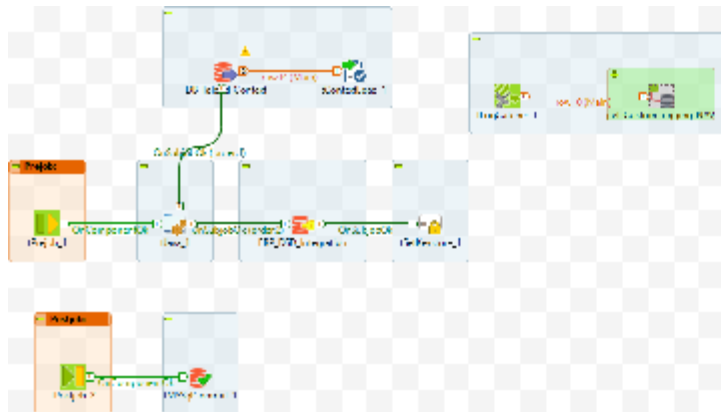

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	true
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false

Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false

group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false

mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false

DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false
item_row_counter	item_row_counter?	false
requestXML	requestXML?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
bundleCount	bundleCount?	false

bundledRequestXML	bundledRequestXML?	false
headerCountInTable	headerCountInTable?	false
headerCountInBundle	headerCountInBundle?	false
orderDeletionDays	orderDeletionDays?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
route_number	route_number?	true
setRequestTimeout	setRequestTimeout?	false
routeInterruptedFlag	routeInterruptedFlag?	false
requestStartNode	requestStartNode?	false
requestEndNode	requestEndNode?	false
responseXML	responseXML?	false

ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false

UseIndex	UseIndex?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false

object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false

DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order-Encoding	RM_Order-Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false
item_row_counter	item_row_counter?	false

requestXML	requestXML?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInTable	headerCountInTable?	false
headerCountInBundle	headerCountInBundle?	false
orderDeletionDays	orderDeletionDays?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
route_number	route_number?	true
setRequestTimeout	setRequestTimeout?	false
routeInterruptedFlag	routeInterruptedFlag?	false

requestStartNode	requestStartNode?	false
requestEndNode	requestEndNode?	false
responseXML	responseXML?	false

ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false

table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false

DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false
item_row_counter	item_row_counter?	false
requestXML	requestXML?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInTable	headerCountInTable?	false
headerCountInBundle	headerCountInBundle?	false
orderDeletionDays	orderDeletionDays?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false

updateNode	updateNode?	false
referencedate	referencedate?	false
route_number	route_number?	true
setRequestTimeout	setRequestTimeout?	false
routeInterruptedFlag	routeInterruptedFlag?	false
requestStartNode	requestStartNode?	false
requestEndNode	requestEndNode?	false
responseXML	responseXML?	false

ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false

mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false

CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false

type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false

RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false
item_row_counter	item_row_counter?	false
requestXML	requestXML?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInTable	headerCountInTable?	false
headerCountInBundle	headerCountInBundle?	false
orderDeletionDays	orderDeletionDays?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false

DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
route_number	route_number?	true
setRequestTimeout	setRequestTimeout?	false
routeInterruptedFlag	routeInterruptedFlag?	false
requestStartNode	requestStartNode?	false
requestEndNode	requestEndNode?	false
responseXML	responseXML?	false

Component List


Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV

jlet_NAV_Order_Response_1	jlet_NAV_Order_Response
tContextLoad_1	tContextLoad
tDBInput_1	tMSSqlInput
tDBOutput_1	tMSSqlOutput
tExtractXMLField_1	tExtractXMLField
tFixedFlowInput_1	tFixedFlowInput
tJavaFlex_1	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJava_1	tJava
tLogCatcher_1	tLogCatcher
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_2	tMSSqlInput
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap

tPostjob_2	tPostjob
tPrejob_1	tPrejob
tSetKeystore_1	tSetKeystore

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true

Disable warnings	true
Disable info	true
Die on error	false
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[{SCHEMA_COLUMN=key, TRIM=false}, {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tMap_2
	LABEL	tMSSqlOutput_4	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_1
Component Name	tMSSqlOutput

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tMSSqlConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Order_X"
Action on table	NONE
Turn on Identity insert	false
Action on data	UPDATE
Specify identity field	false
Identity field	Group

Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	1000
Additional columns	[]
Use field options	false


Field options	<pre>[{SCHEMA_COLUMN=Group, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Key, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=type, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=errorMessage, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=MovilizerResponseTimestamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=IsProcessed, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]</pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	1000
Label format	tMSSqlOutput_4
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for loginfo :

Column	Key	Type	Length	Precision	Nullable	Comment
Group	true	String	255		true	
Key	true	String	100		true	
type	false	String	255		true	
code	false	String	255		true	
errorMessage	false	String	255		true	
MovilizerResponseTimestamp	false	java.util.Date	255		true	
IsProcessed	false	String	1		true	

Original Function Parameters:
Component tExtractXMLField

	UNIQUE NAME	tExtractXMLField_1	INPUT(S)	tJavaFlex_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
Unique Name	tExtractXMLField_1

Component Name	tExtractXMLField
Version	0.102 (ALPHA)
Family	XML Processing/Fields
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputXML
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
XML field	requestXML
!!!USE_ITEMS.NAME!!!	false
!!!LOOP_QUERY_BASE.NAME!!!	""
Loop XPath query	"/MovilizerRequest/masterdataPoolUpdate/update"
Mapping	<pre> [{{SCHEMA_COLUMN=updateNode, QUERY=".", NODECHECK=true}, {SCHEMA_COLUMN=updateKey, QUERY="@key", NODECHECK=false}, {SCHEMA_COLUMN=filter1, QUERY="@filter1", NODECHECK=false}, {SCHEMA_COLUMN=referencedate, QUERY="data/entry/entry[@name='REFERENCEDATE']/v", NODECHECK=false}] </pre>
Limit	
Die on error	false
Schema	Built-In
Use static Field	false
XML Record	""
XPath Prefix	""

Min column number of optimize code	100
Ignore the namespaces	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
updateNode	false	String			true	
updateKey	false	String			true	
filter1	false	String			true	
referencedate	false	String			true	

Original Function Parameters:
Component tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tMSSqlInput_2

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_4
--	-------	-----------------	-----------	------------------------

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[{SCHEMA_COLUMN=bundledXML, VALUE=}]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	","
Content	

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
bundledXML	false	String			true	

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tExtractXMLField_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	context.updateNode=context.updateNode+row3.updateNo
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
updateNode	false	String			true	
updateKey	false	String			true	
filter1	false	String			true	
referencedate	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMSSqlInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tExtractXMLField_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false


Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	int i=1;
Main code	if (i==1) { context.requestStartNode=row1.requestXML.sub (0,row1.requestXML.indexOf("pool=\")+context.Pool.toUpp //System.out.println("context.requestStartNode:"+context.re context.requestEndNode="</masterdataPoolUpdate></Mo
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
requestXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_4
	LABEL	send_master_data	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code List<String> returnObject = n
Main code	returnObject=routines.Order_U6.sendMasterData(context.i context.movilizerVersion, row17.bundledXML); row20.bundledRequestXML=returnObject.get(0); //System.out.println("bundledRequestXML:"+row20.bundled row20.responseXML=returnObject.get(1); //System.out.println("responseXML:"+row20.responseXML); returnObject.clear();

End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	import java.util.List; import java.util.ArrayList;
Label format	send_master_data
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
bundledRequestXML	false	String			true	
responseXML	false	String			true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1 , tMSSqlConnection_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre> context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); //context.ProcessDate=TalendDate.formatDate("yyyy-MM-dd-HH-mm-ss", TalendDate.getCurrentDate()); context.ProcessDate=context.ProcessTimeStamp.replace(" ", "-").replace(":", ""); //System.out.println("\ncontext.route_number:"+context.route_number); context.requestStartNode=""; context.updateNode=""; context.requestEndNode=""; context.requestXML=""; context.responseXML=""; //context.route_number = 174; </pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:

Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_NAV_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true


Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	

job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server


Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1

Close Connection	false
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tJava_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection

Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	true
Shared DB Connection Name	"Order_Conn"

Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_3 , tFixedFlowInput_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT requestXML FROM NAV_ORDER_X where IsProcessed='N' and RTE_NUMBER= "+context.route_number +""
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=requestXML, TRIM=false}]
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
requestXML	false	String			true	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_2
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:


Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS

KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:

Component **jlet_CustomLogging_NAV**

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	LogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest

Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_NAV_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_NAV_Order_Response

	UNIQUE NAME	jlet_NAV_Order_Response_1	INPUT(S)	tMap_3
	LABEL	jlet_NAV_Order_Response	OUTPUT(S)	tMap_2


Component Parameters:

Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Schema	OUTPUT_1:moment pid root_pid father_pid project job context priority type origin errorMessage code Environment Source Filepath Instance Table_View Database Object_Id Object_Name Object_Type Pool Group Key ResponseTimestamp ProcessTimeStamp
Show Information	false
Comment	

Schema for jlet_NAV_Order_Response_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	jlet_NAV_Order_Response_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):**Mapper table Properties(row18):**

Properties	Values
Name	row18
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row18):

Name	Type	Expression	isNullable
moment	java.util.Date		true
pid	String		true
root_pid	String		true
father_pid	String		true
project	String		true
job	String		true
context	String		true

priority	Integer		true
type	String		true
origin	String		true
errorMessage	String		true
code	String		true
Environment	String		true
Source	String		true
Filepath	String		true
Instance	String		true
Table_View	String		true
Database	String		true
Object_Id	String		true
Object_Name	String		true
Object_Type	String		true
Pool	String		true
Group	String		true
Key	String		true

ResponseTimestamp	java.util.Date		true
ProcessTimeStamp	java.util.Date		true

Constraint Table Entries(row18):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):

Mapper table Properties(row37):

Properties	Values
Name	row37
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row37):

Name	Type	Expression	isNullable
Group	String	row18.Group	true
Key	String	row18.Key	true
type	String	row18.type	true
code	String	row18.code	true
errorMessage	String	row18.errorMessage	true
MovilizerResponseTimestamp	java.util.Date	row18.ResponseTimestamp	true
IsProcessed	String	"Y"	true

Constraint Table Entries(row37):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tJavaFlex_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	ilet_NAV_Order_Response_1

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(row20):

Properties	Values
Name	row20
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row20):

Name	Type	Expression	isNullable
bundledRequestXML	String		true
responseXML	String		true

Constraint Table Entries(row20):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(row15):

Properties	Values
Name	row15
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	!(row20.responseXML == null row20.responseXML.isEmpty())

Metadata Table Entries(row15):

Name	Type	Expression	isNullable
responseXML	String	row20.responseXML	true

Constraint Table Entries(row15):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tFixedFlowInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_4

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row5):

Properties	Values
Name	row5
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row5):

Name	Type	Expression	isNullable
bundledXML	String		true

Constraint Table Entries(row5):

Name	Type	Expression	isNullable

Mapper table for tMap_4 (output):

Mapper table Properties(row17):

Properties	Values
Name	row17
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	!(context.updateNode==null context.updateNode.isEmpty())

Metadata Table Entries(row17):

Name	Type	Expression	isNullable
bundledXML	String	context.requestStartNode+context.updateNode+context.requestEndNode	true

Constraint Table Entries(row17):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------