



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:31 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_Price
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Jul 20, 2016 12:17:43 PM
Modification	Nov 15, 2019 10:12:15 AM

Preview Picture

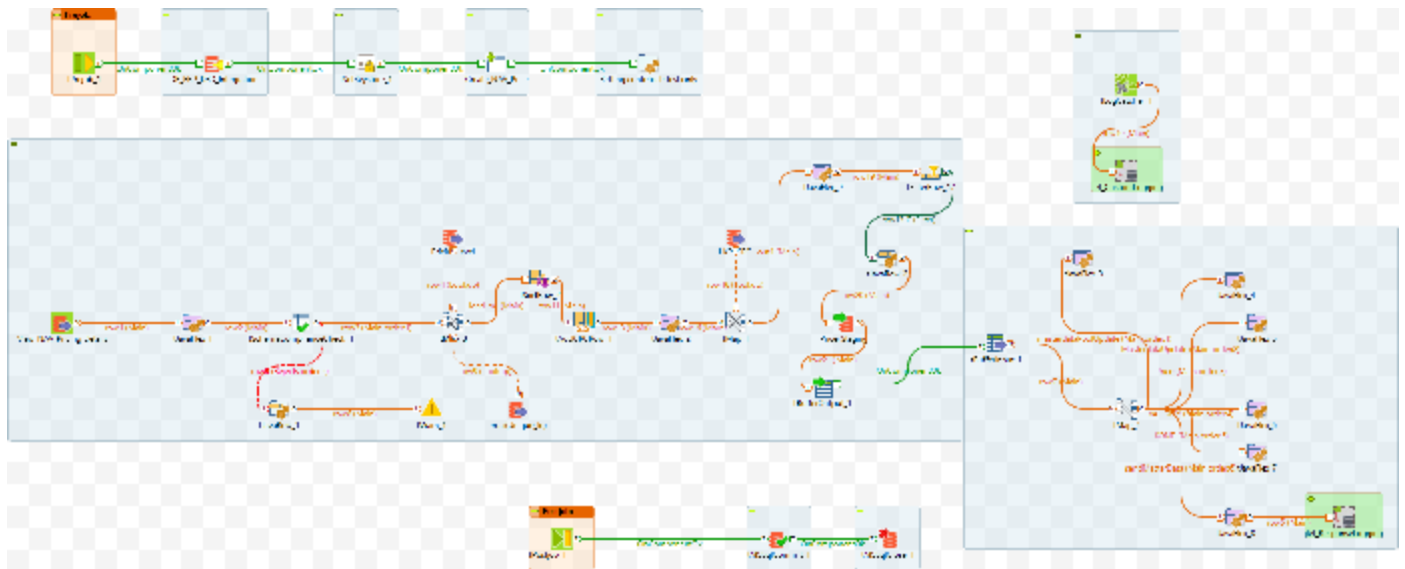

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
key	key?	false

group	group?	false
description	description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
ProcessTimeStamp	ProcessTimeStamp?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false

environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false

DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Price	NAV_Price?	false

ContextQA

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false

source	source?	false
Pool	Pool?	false
key	key?	false
group	group?	false
description	description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
ProcessTimeStamp	ProcessTimeStamp?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false

batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
SystemId	SystemId?	false

SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Price	NAV_Price?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

ContextPREPROD

Name	Prompt	Need Prompt
------	--------	-------------

objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
key	key?	false
group	group?	false
description	description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
ProcessTimeStamp	ProcessTimeStamp?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false

mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false

objectName	objectName?	false
partition	partition?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Price	NAV_Price?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

Component List


Component Name	Component Type
jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging
tAddCRCRow_1	tAddCRCRow
tBufferInput_1	tBufferInput
tBufferOutput_1	tBufferOutput
tCreateTable_1	tCreateTable
tFilterRow_17	tFilterRow
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex

tJavaFlex_8	tJavaFlex
tJavaFlex_9	tJavaFlex
tJavaRow_1	tJavaRow
tJavaRow_2	tJavaRow
tJava_1	tJava
tLogCatcher_1	tLogCatcher
tMSSqlClose_1	tMSSqlClose
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_2	tMSSqlInput
tMSSqlInput_3	tMSSqlInput
tMSSqlInput_4	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMap_1	tMap
tMap_3	tMap
tMap_4	tMap

tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tSortRow_2	tSortRow
tWarn_1	tWarn

Components Description

Component tAddCRCRow

	UNIQUE NAME	tAddCRCRow_1	INPUT(S)	tSortRow_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_2

Component Parameters:

Properties	Values
Unique Name	tAddCRCRow_1
Component Name	tAddCRCRow
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false

SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAddCRCRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Implication	<pre> {{SCHEMA_COLUMN=Item_No, USE_IN_CRC=true}, {SCHEMA_COLUMN=Starting_Date, USE_IN_CRC=false}, {SCHEMA_COLUMN=Ending_Date, USE_IN_CRC=false}, {SCHEMA_COLUMN=Sales_Type, USE_IN_CRC=false}, {SCHEMA_COLUMN=Sales_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=Ship_To_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=Unit_Price, USE_IN_CRC=true}, {SCHEMA_COLUMN=ERP_Price_Matrix, USE_IN_CRC=false}, {SCHEMA_COLUMN=Movilizer_Matrix, USE_IN_CRC=false}, {SCHEMA_COLUMN=Talend_Matrix, USE_IN_CRC=false}, {SCHEMA_COLUMN=Variant_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=Unit_of_Measure_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=Currency_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=PRICELEVEL_NO, USE_IN_CRC=true}, {SCHEMA_COLUMN=Unique_Id, USE_IN_CRC=false}, {SCHEMA_COLUMN=ProcessTimeStamp, USE_IN_CRC=false}, {SCHEMA_COLUMN=CRC, USE_IN_CRC=true}} </pre>
CRC Type	crc32
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for load_rm :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	

Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tBufferInput

	UNIQUE NAME	tBufferInput_1	INPUT(S)	tBufferOutput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_4

Component Parameters:

Properties	Values
Unique Name	tBufferInput_1
Component Name	tBufferInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tBufferInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Advanced separator (for numbers)	false
Thousands separator	" , "

Decimal separator	"."
Encoding	"ISO-8859-15"
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tBufferInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	

Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tBufferOutput

	UNIQUE NAME	tBufferOutput_1	INPUT(S)	tMSSqlOutput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tBufferInput_1

Component Parameters:

Properties	Values
Unique Name	tBufferOutput_1

Component Name	tBufferOutput
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tBufferOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tBufferOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	

Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	tSetKeystore_1
	LABEL	Create_NAV_Price	OUTPUT(S)	tJava_1

Component Parameters:

Properties	Values
------------	--------

Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	true
Host	context.DB_ERP_DSD_Integration_Server
Database Name	context.DB_ERP_DSD_Integration_Database
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Access File	""

DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	""
Running Mode	HSQldb_IN_MEMORY
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	context.DB_ERP_DSD_Integration_Database
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database
DB Root Path	""
	tMSSqlConnection_1
JDBC Provider	JTDS
Temporary Table	false
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar

Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
SQLite File	""
DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database
Use "drop cascade"	true
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Table Name	"NAV_Price"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true


Label format	Create_NAV_Price
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tCreateTable_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	

Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tFilterRow

	UNIQUE NAME	tFilterRow_17	INPUT(S)	tJavaFlex_9
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaRow_2

Component Parameters:

Properties	Values
Unique Name	tFilterRow_17
Component Name	tFilterRow
Version	0.102 (ALPHA)

Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	&&
Conditions	[[INPUT_COLUMN=Pass, FUNCTION=, OPERATOR==, RVALUE=true]]
Use advanced mode	false
Advanced	// code sample : use input_row to define the condition. // input_row.columnName1.equals("foo") !(input_row.columnName2.equals("bar")) // replace the following expression by your own filter condition input_row.columnName1.equals(input_row.columnName2)
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFilterRow_17 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	

CRC	false	Long	255		true	
Pass	false	Boolean	255		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int i = 0;
Main code	context.objectId=row1.Item_No+" - "+row1.Ship_To_Code; context.objectName=""; if(i%5000 == 0 && i!=0) { System.out.println(i+"----5000 Records Processed"); } i++; //context.objectId=Integer.parseInt(row1.DB_WP_PROD_N //context.objectName=row3.DB_CUST_SHIP_NAME;


End code	i--; System.out.println(i+" Records Processed and end of records");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String			true	
Starting_Date	false	java.util.Date			true	
Ending_Date	false	java.util.Date			true	

Sales_Type	false	String			true	
Sales_Code	false	String			true	
Ship_To_Code	false	String			true	
Unit_Price	false	String			true	
ERP_Price_Matrix	false	String			true	
Movilizer_Matrix	false	String			true	
Talend_Matrix	false	String			true	
Variant_Code	false	String			true	
Unit_of_Measure_Code	false	String			true	
Currency_Code	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tAddCRCRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code executed in the row // loop context.CRC=row13.CRC;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	


Use an existing validation rule	false
Validation Rule Type	

Schema for load_rm :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	

PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=0,a=0;

Main code	// here is the main part of the component, // a piece of code routines.r_HarvestRoutineLoop.createAllObjects(); b++;a+ routines.r_HarvestRoutineLoop.populateMasterdataPoolUp context.Pool=masterdataPoolUpdate.Pool; }else if(b==50){
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUp
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateMasterdataUpdate context.group=MasterdataUpdate.Group; context.key=Mas
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop if(a==routines.r_HarvestRoutineLoop.getHMcountValue(Pr //System.out.println("next a =" +a); a=0;b=0; } routines.r_HarvestRoutineLoop.populateDataContainerEnt
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	// here is the main part of the component, // a piece of code loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_8	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	Servlet_ResponseLogging_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_8
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code row5.responseXML=routines.r_HarvestRoutineLoop.sendM routines.r_HarvestRoutineLoop.resetObjects();
End code	// end of the component, outside/closing the loop //routines.r_HarvestRoutineLoop.sendMasterData(context.i //routines.r_HarvestRoutineLoop.resetObjects();
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFilterRow_17

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_9
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code String previousPrice=""; Strin


Main code	<pre>// here is the main part of the component, // a piece of code row19.Pass=false; //System.out.println(out1.CRC+" is Sam routines.r_HarvestRoutineLoop.getHMcount(out1.PRICELE exCRC=out1.CRC; /* if(Key.equals(row17.PRICELEVEL_NO+"_"+row17.DB_WF)){ if(previousPrice.equals(row17.Price)){ row9.Pass=false; routines.r_HarvestRoutineLoop.getHMcount(row17.PRICE routines.r_HarvestRoutineLoop.getHMcount(row17.PRICE Key=row17.PRICELEVEL_NO+"_"+row17.DB_WP_TABLE previousPrice=row17.Price; */</pre>
End code	<pre>// end of the component, outside/closing the loop</pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	<pre>//import java.util.List;</pre>
Label format	<pre>__UNIQUE_NAME__</pre>
Hint format	<pre>__UNIQUE_NAME__
__COMMENT__</pre>
Connection format	<pre>row</pre>
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	

CRC	false	Long	255		true	
Pass	false	Boolean	255		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_1	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_1

Component Parameters:

Properties	Values
Unique Name	tJavaRow_1
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	//Code generated according to input schema and output schema context.ErrorMessage = input_row.errorMessage;
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_WP_PROD_NO	false	String	9		true	
DB_WP_TABLE_NO	false	String	4		true	
DB_WP_DAY1_PRICE	false	String	9		true	
DB_WP_DAY2_PRICE	false	String	9		true	
DB_WP_DAY3_PRICE	false	String	9		true	
DB_WP_DAY4_PRICE	false	String	9		true	
DB_WP_DAY5_PRICE	false	String	9		true	
DB_WP_DAY6_PRICE	false	String	9		true	
DB_WP_DAY7_PRICE	false	String	9		true	
DB_WP_DAY1_BASE	false	String	2		true	
DB_WP_DAY2_BASE	false	String	2		true	

DB_WP_DAY3_BASE	false	String	2		true	
DB_WP_DAY4_BASE	false	String	2		true	
DB_WP_DAY5_BASE	false	String	2		true	
DB_WP_DAY6_BASE	false	String	2		true	
DB_WP_DAY7_BASE	false	String	2		true	
DB_WP_AUX_PRICE_TYPE_1	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_2	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_3	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_4	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_5	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_6	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_7	false	String	1		true	
DB_WP_END_OF_RECORD	false	String	1		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_2	INPUT(S)	tFilterRow_17
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutput_1

Component Parameters:

Properties	Values
Unique Name	tJavaRow_2
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Code	<pre>//Code generated according to input schema and output schema output_row.Item_No = input_row.Item_No; output_row.Starting_Date = input_row.Starting_Date; output_row.Ending_Date = input_row.Ending_Date; output_row.Sales_Type = input_row.Sales_Type; output_row.Sales_Code = input_row.Sales_Code; output_row.Ship_To_Code = input_row.Ship_To_Code; output_row.Unit_Price = input_row.Unit_Price; output_row.ERP_Price_Matrix = input_row.ERP_Price_Matrix; output_row.Movilizer_Matrix = input_row.Movilizer_Matrix; output_row.Talend_Matrix = input_row.Talend_Matrix; output_row.Variant_Code = input_row.Variant_Code; output_row.Unit_of_Measure_Code = input_row.Unit_of_Measure_Code; output_row.Currency_Code = input_row.Currency_Code; output_row.PRICELEVEL_NO = input_row.PRICELEVEL_NO; output_row.Unique_Id = input_row.Unique_Id; output_row.ProcessTimeStamp = input_row.ProcessTimeStamp; output_row.CRC = input_row.CRC;</pre>
Import	<pre>//import java.util.List;</pre>
Label format	<pre>__UNIQUE_NAME__</pre>
Hint format	<pre>__UNIQUE_NAME__
__COMMENT__</pre>
Connection format	<pre>row</pre>
Show Information	<pre>false</pre>
Comment	
Use an existing validation rule	<pre>false</pre>


Validation Rule Type	
----------------------	--

Schema for tJavaRow_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	

Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tCreateTable_1
	LABEL	Setting contetxs fr test only	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar"; context.DB_Navision_Database = "HFS_Master_DataAccess_DB"; //context.DB_Navision_Schema = "dbo";
Import	//import java.util.List;
Schema	Built-In
Label format	Setting contetxs fr test only

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors

Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	

father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tMSSqlClose

	UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Database	tMSSqlClose
Unique Name	tMSSqlClose_1
Component Name	tMSSqlClose

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Component List	tMSSqlConnection_1
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlClose_1

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1


Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_1

	LABEL	DB_ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1
--	-------	------------------------	-----------	--------------------------------


Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"

Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	View_NAV_Pricing Details	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema

Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_Price
Query Type	Built-In
Guess Schema	""

Query	<pre> "SELECT \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Item No_\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Starting Date\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Ending Date\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Sales Type\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Sales Code\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Ship-To Code\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Unit Price\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"ERP Price Matrix\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Movilizer Matrix\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Talend Matrix\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Variant Code\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Unit of Measure Code\", \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\".\"Currency Code\"\" +\" FROM \""+context.DB_Navision_Schema+"\".\"NAV_DSD_Pricing Detail\" </pre>
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false


Trim column	{[SCHEMA_COLUMN=Item_No, TRIM=false}, {SCHEMA_COLUMN=Starting_Date, TRIM=false}, {SCHEMA_COLUMN=Ending_Date, TRIM=false}, {SCHEMA_COLUMN=Sales_Type, TRIM=false}, {SCHEMA_COLUMN=Sales_Code, TRIM=false}, {SCHEMA_COLUMN=Ship_To_Code, TRIM=false}, {SCHEMA_COLUMN=Unit_Price, TRIM=false}, {SCHEMA_COLUMN=ERP_Price_Matrix, TRIM=false}, {SCHEMA_COLUMN=Movilizer_Matrix, TRIM=false}, {SCHEMA_COLUMN=Talend_Matrix, TRIM=false}, {SCHEMA_COLUMN=Variant_Code, TRIM=false}, {SCHEMA_COLUMN=Unit_of_Measure_Code, TRIM=false}, {SCHEMA_COLUMN=Currency_Code, TRIM=false}]
Label format	View_NAV_Pricing Details
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String			true	
Starting_Date	false	java.util.Date			true	
Ending_Date	false	java.util.Date			true	

Sales_Type	false	String			true	
Sales_Code	false	String			true	
Ship_To_Code	false	String			true	
Unit_Price	false	String			true	
ERP_Price_Matrix	false	String			true	
Movilizer_Matrix	false	String			true	
Talend_Matrix	false	String			true	
Variant_Code	false	String			true	
Unit_of_Measure_Code	false	String			true	
Currency_Code	false	String			true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	PricingLevel	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"PricingLevel"
Query Type	Built-In

Guess Schema	""
Query	"SELECT [PRICELEVEL_NO],[LEVEL_NO] FROM [PricingLevel] group by [PRICELEVEL_NO],[LEVEL_NO]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	{[SCHEMA_COLUMN=PRICELEVEL_NO, TRIM=false], [SCHEMA_COLUMN=LEVEL_NO, TRIM=false]}
Label format	PricingLevel
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
PRICELEVEL_NO	false	String	4		true	
LEVEL_NO	false	String			true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_3	INPUT(S)	none
	LABEL	LKP_CRC	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	""


JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"NAV_Price"
Query Type	Built-In
Guess Schema	""
Query	"SELECT \""+context.DB_ERP_DSD_Integration_Schema+"\".NAV_F +" FROM \""+context.DB_ERP_DSD_Integration_Schema+"\".NAV_F where CRC = '"+context.CRC+'""
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL

Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=CRC, TRIM=false]]
Label format	LKP_CRC
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
CRC	false	Long	255		true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_4	INPUT(S)	none
	LABEL	max(Unique_Id)	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"NAV_Price"
Query Type	Built-In
Guess Schema	""
Query	"SELECT max(Unique_Id) as maxD FROM \""+context.DB_ERP_DSD_Integration_Schema+"\".[NAV_
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Unique_Id, TRIM=false}]
Label format	max(Unique_Id)
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
Unique_Id	false	Integer	10		true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tJavaRow_2
	LABEL	Price_Staging	OUTPUT(S)	tBufferOutput_1

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false

SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	false
Component List	tMSSqlConnection_1

JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Price"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Item_No
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
	<pre>[{SCHEMA_COLUMN=Item_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Starting_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Ending_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Sales_Type, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Sales_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Ship_To_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},</pre>

Field options

```
{SCHEMA_COLUMN=Unit_Price,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=ERP_Price_Matrix,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Movilizer_Matrix,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Talend_Matrix,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Variant_Code,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Unit_of_Measure_Code,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Currency_Code,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=PRICELEVEL_NO,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Unique_Id,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=ProcessTimeStamp,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},
```


	{SCHEMA_COLUMN=CRC, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}}
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	Price_Staging
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	

Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tPostjob


	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1

Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob


	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlConnection_1

Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_3 , tJavaRow_1

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	<pre> {{SCHEMA_COLUMN=Item_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Starting_Date, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Ending_Date, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Sales_Type, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Sales_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Ship_To_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Unit_Price, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=ERP_Price_Matrix, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Movilizer_Matrix, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Talend_Matrix, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Variant_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Unit_of_Measure_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Currency_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}} </pre>
Use another schema for compliance check	false
Schema To Test	Built-In

Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true
Choose Column(s)	<pre>[{SCHEMA_COLUMN=Item_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Starting_Date, EMPTY_NULL=false}, {SCHEMA_COLUMN=Ending_Date, EMPTY_NULL=false}, {SCHEMA_COLUMN=Sales_Type, EMPTY_NULL=false}, {SCHEMA_COLUMN=Sales_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Ship_To_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Unit_Price, EMPTY_NULL=false}, {SCHEMA_COLUMN=ERP_Price_Matrix, EMPTY_NULL=false}, {SCHEMA_COLUMN=Movilizer_Matrix, EMPTY_NULL=false}, {SCHEMA_COLUMN=Talend_Matrix, EMPTY_NULL=false}, {SCHEMA_COLUMN=Variant_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Unit_of_Measure_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Currency_Code, EMPTY_NULL=false}]</pre>
Label format	__UNIQUE_NAME__


Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String			true	
Starting_Date	false	java.util.Date			true	
Ending_Date	false	java.util.Date			true	
Sales_Type	false	String			true	
Sales_Code	false	String			true	
Ship_To_Code	false	String			true	
Unit_Price	false	String			true	
ERP_Price_Matrix	false	String			true	
Movilizer_Matrix	false	String			true	

Talend_Matrix	false	String			true	
Variant_Code	false	String			true	
Unit_of_Measure_Code	false	String			true	
Currency_Code	false	String			true	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tCreateTable_1


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	*****
Need Client authentication	false
KeyStore type	JKS

KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSortRow

	UNIQUE NAME	tSortRow_2	INPUT(S)	tMap_3 , tMSSqlInput_2, tMSSqlInput_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tAddCRCRow_1

Component Parameters:

Properties	Values
Unique Name	tSortRow_2


Component Name	tSortRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSortRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Criteria	[[COLNAME=Item_No, SORT=alpha, ORDER=asc], {COLNAME=Starting_Date, SORT=date, ORDER=asc}]
Sort on disk	false
Temp data directory path	"C:/Talend/6.2.1/studio/workspace_Dev/temp"
Create temp data directory if does not exist	true
Buffer size of external sort	1000000
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for load_rm :

Column	Key	Type	Length	Precision	Nullable	Comment
Item_No	false	String	255		true	
Starting_Date	false	java.util.Date	255		true	
Ending_Date	false	java.util.Date	255		true	
Sales_Type	false	String	255		true	
Sales_Code	false	String	255		true	
Ship_To_Code	false	String	255		true	
Unit_Price	false	String	255		true	
ERP_Price_Matrix	false	String	255		true	
Movilizer_Matrix	false	String	255		true	
Talend_Matrix	false	String	255		true	
Variant_Code	false	String	255		true	
Unit_of_Measure_Code	false	String	255		true	
Currency_Code	false	String	255		true	
PRICELEVEL_NO	false	String	4		true	
Unique_Id	false	Integer	10		true	
ProcessTimeStamp	false	String	30		true	

Original Function Parameters:
Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tWarn_1
Component Name	tWarn
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	


Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_WP_PROD_NO	false	String	9		true	
DB_WP_TABLE_NO	false	String	4		true	
DB_WP_DAY1_PRICE	false	String	9		true	
DB_WP_DAY2_PRICE	false	String	9		true	
DB_WP_DAY3_PRICE	false	String	9		true	
DB_WP_DAY4_PRICE	false	String	9		true	
DB_WP_DAY5_PRICE	false	String	9		true	
DB_WP_DAY6_PRICE	false	String	9		true	
DB_WP_DAY7_PRICE	false	String	9		true	
DB_WP_DAY1_BASE	false	String	2		true	
DB_WP_DAY2_BASE	false	String	2		true	
DB_WP_DAY3_BASE	false	String	2		true	
DB_WP_DAY4_BASE	false	String	2		true	

DB_WP_DAY5_BASE	false	String	2		true	
DB_WP_DAY6_BASE	false	String	2		true	
DB_WP_DAY7_BASE	false	String	2		true	
DB_WP_AUX_PRICE_TYPE_1	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_2	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_3	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_4	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_5	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_6	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_7	false	String	1		true	
DB_WP_END_OF_RECORD	false	String	1		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component jlet_CustomLogging

	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	

message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_ResponseLogging

	UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_8
	LABEL	jlet_ResponseLogging	OUTPUT(S)	none


Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_ResponseLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tJavaFlex_2 , tMSSqlInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_9

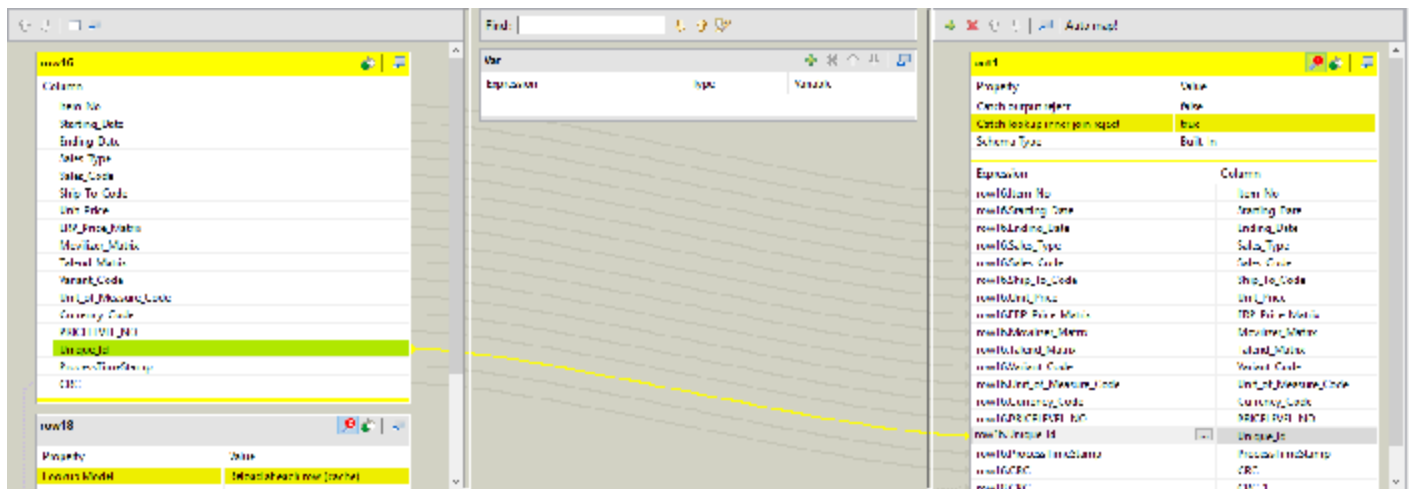

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row16):

Properties	Values
Name	row16
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row16):

Name	Type	Expression	isNullable
Item_No	String		true
Starting_Date	java.util.Date		true
Ending_Date	java.util.Date		true
Sales_Type	String		true
Sales_Code	String		true
Ship_To_Code	String		true
Unit_Price	String		true

ERP_Price_Matrix	String		true
Movilizer_Matrix	String		true
Talend_Matrix	String		true
Variant_Code	String		true
Unit_of_Measure_Code	String		true
Currency_Code	String		true
PRICELEVEL_NO	String		true
Unique_Id	Integer		true
ProcessTimeStamp	String		true
CRC	Long		true

Constraint Table Entries(row16):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row18):

Properties	Values
Name	row18
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row18):

Name	Type	Expression	isNullable
CRC	Long	row16.CRC	true

Constraint Table Entries(row18):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):**Mapper table Properties(out1):**

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	true
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Type	Expression	isNullable
Item_No	String	row16.Item_No	true
Starting_Date	java.util.Date	row16.Starting_Date	true
Ending_Date	java.util.Date	row16.Ending_Date	true
Sales_Type	String	row16.Sales_Type	true
Sales_Code	String	row16.Sales_Code	true
Ship_To_Code	String	row16.Ship_To_Code	true
Unit_Price	String	row16.Unit_Price	true

ERP_Price_Matrix	String	row16.ERP_Price_Matrix	true
Movilizer_Matrix	String	row16.Movilizer_Matrix	true
Talend_Matrix	String	row16.Talend_Matrix	true
Variant_Code	String	row16.Variant_Code	true
Unit_of_Measure_Code	String	row16.Unit_of_Measure_Code	true
Currency_Code	String	row16.Currency_Code	true
PRICELEVEL_NO	String	row16.PRICELEVEL_NO	true
Unique_Id	Integer	row16.Unique_Id	true
ProcessTimeStamp	String	row16.ProcessTimeStamp	true
CRC	Long	row16.CRC	true
CRC_1	Long	row18.CRC	true

Constraint Table Entries(out1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_3 , tMSSqlInput_2, tMSSqlInput_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSortRow_2

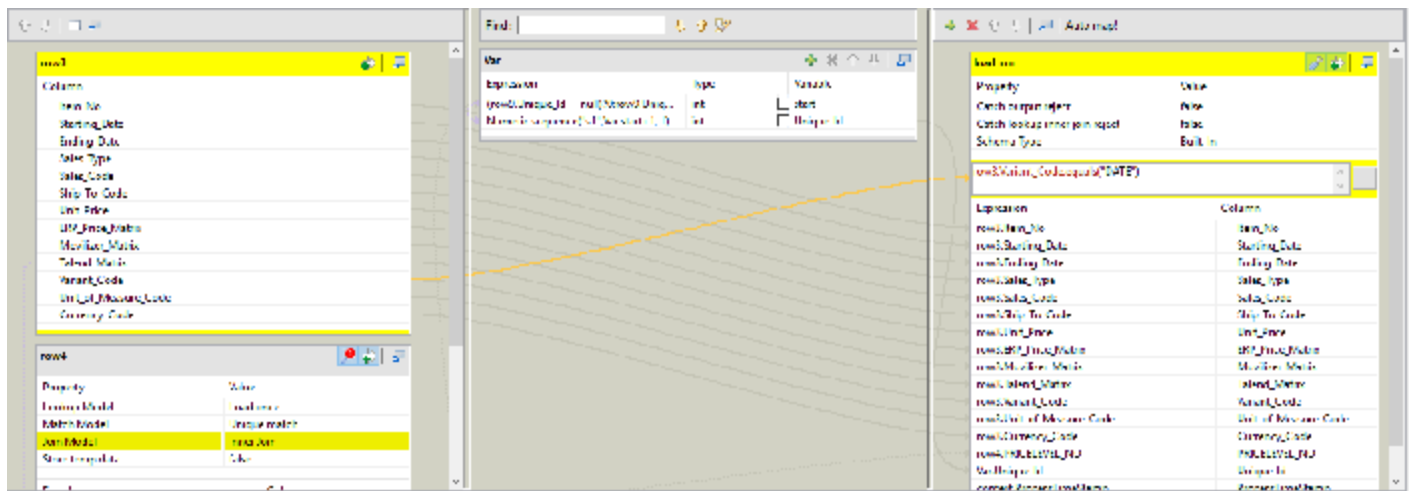

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
Item_No	String		true
Starting_Date	java.util.Date		true
Ending_Date	java.util.Date		true
Sales_Type	String		true
Sales_Code	String		true
Ship_To_Code	String		true
Unit_Price	String		true
ERP_Price_Matrix	String		true
Movilizer_Matrix	String		true
Talend_Matrix	String		true
Variant_Code	String		true
Unit_of_Measure_Code	String		true
Currency_Code	String		true

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
PRICELEVEL_NO	String		true
LEVEL_NO	String	row3.Talend_Matrix	true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row9):

Properties	Values
Name	row9
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row9):

Name	Type	Expression	isNullable
Unique_Id	Integer		true

Constraint Table Entries(row9):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (output):**Mapper table Properties(load_rm):**

Properties	Values
Name	load_rm
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	row3.Variant_Code.equals("DATE")

Metadata Table Entries(load_rm):

Name	Type	Expression	isNullable
Item_No	String	row3.Item_No	true
Starting_Date	java.util.Date	row3.Starting_Date	true
Ending_Date	java.util.Date	row3.Ending_Date	true
Sales_Type	String	row3.Sales_Type	true
Sales_Code	String	row3.Sales_Code	true
Ship_To_Code	String	row3.Ship_To_Code	true
Unit_Price	String	row3.Unit_Price	true
ERP_Price_Matrix	String	row3.ERP_Price_Matrix	true
Movilizer_Matrix	String	row3.Movilizer_Matrix	true
Talend_Matrix	String	row3.Talend_Matrix	true
Variant_Code	String	row3.Variant_Code	true
Unit_of_Measure_Code	String	row3.Unit_of_Measure_Code	true
Currency_Code	String	row3.Currency_Code	true
PRICELEVEL_NO	String	row4.PRICELEVEL_NO	true
Unique_Id	Integer	Var.Unique_Id	true
ProcessTimeStamp	String	context.ProcessTimeStamp	true

Constraint Table Entries(load_rm):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):**Mapper table Properties(Var):**

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
start	int	(row9.Unique_Id==null)?0:row9.Unique_Id	false
Unique_Id	int	Numeric.sequence("s1",Var.start+1, 1)	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
Item_No	String		true
Starting_Date	java.util.Date		true
Ending_Date	java.util.Date		true

Sales_Type	String		true
Sales_Code	String		true
Ship_To_Code	String		true
Unit_Price	String		true
ERP_Price_Matrix	String		true
Movilizer_Matrix	String		true
Talend_Matrix	String		true
Variant_Code	String		true
Unit_of_Measure_Code	String		true
Currency_Code	String		true
PRICELEVEL_NO	String		true
Unique_Id	Integer		true
ProcessTimeStamp	String		true
CRC	Long		true

Constraint Table Entries(row7):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	Var.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Group	String	"DEFAULT"	true
Key	String	Var.Key	true
Description	String	context.description	true
mafAppSpace	String	"MD_GEN"	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Price):

Properties	Values
Name	Price
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Price):

Name	Type	Expression	isNullable
COUNT	String	"1"	true
KNUMH	String	Var.Unique_Id	true
KOTABNR	String	row7.PRICELEVEL_NO	true

Constraint Table Entries(Price):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(VALIDITY):

Properties	Values
Name	VALIDITY
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(VALIDITY):

Name	Type	Expression	isNullable
VALIDITY	String	"1"	true
DATAB	String	Var.StartDate	true
DATBI	String	Var.EndDate	true

Constraint Table Entries(VALIDITY):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(KONP):

Properties	Values
Name	KONP
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(KONP):

Name	Type	Expression	isNullable
KONP	String	"01"	true
KBETR	String	Var.KBETR	true
KFRST	String		true
KMEIN	String	"EA"	true
KNUMH	String	Var.Unique_Id	true
KONMS	String		true
KONWA	String	"USD"	true
KOPOS	String		true
KPEIN	String		true
KRECH	String	"11"	true
KZBZG	String		true
STFKZ	String		true

Constraint Table Entries(KONP):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression
Item_No	String	(row7.Item_No==null && row7.Item_No.isEmpty())?row7.Item_No:String.format("%012d",Integer.parseInt(row7.Item_No))
StartDate	String	TalendDate.formatDate("yyyy-MM-dd",row7.Starting_Date)
Key	String	row7.PRICELEVEL_NO+"_"+Var.Item_No
EndDate	String	"9999-01-01"
KBETR	String	Float.parseFloat(row7.Unit_Price)+"
Pool	String	"PRICEBASEP"+row7.PRICELEVEL_NO.substring(3)
Unique_Id	String	String.format("%010d", row7.Unique_Id)

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------