



# Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:47 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

## Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

## Project Description

Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

## Description

Properties	Values
Name	j_NavExport_010_Tax
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Jul 11, 2016 10:49:30 PM
Modification	Nov 15, 2019 10:12:16 AM

## Preview Picture



On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## Context List

### ContextDefault

Name	Prompt	Need Prompt
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
directory	directory?	false
filepath	filepath?	false
source	source?	false

CRC	CRC?	false
Pool	Pool?	false
group	group?	false
mafAppSpace	mafAppSpace?	false
description	description?	false
ErrorMsg	ErrorMsg?	false
Week_No	Week_No?	false
database	database?	false
table_view	table_view?	false
year	year?	false
key	key?	false
instance	instance?	false
DB_Navision_Database	DB_Navision_Database?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false

mom_Username	mom_Username?	false
batch	batch?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false



NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false

## ContextQA

Name	Prompt	Need Prompt
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
directory	directory?	false

filepath	filepath?	false
source	source?	false
CRC	CRC?	false
Pool	Pool?	false
group	group?	false
mafAppSpace	mafAppSpace?	false
description	description?	false
ErrorMsg	ErrorMsg?	false
Week_No	Week_No?	false
database	database?	false
table_view	table_view?	false
year	year?	false
key	key?	false
instance	instance?	false
DB_Navision_Database	DB_Navision_Database?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false

mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false

type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false

DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false

NAV_Vehicle	NAV_Vehicle?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

## ContextPREPROD

Name	Prompt	Need Prompt
objectId	objectId?	false
objectName	objectName?	false

objectType	objectType?	false
directory	directory?	false
filepath	filepath?	false
source	source?	false
CRC	CRC?	false
Pool	Pool?	false
group	group?	false
mafAppSpace	mafAppSpace?	false
description	description?	false
ErrorMsg	ErrorMsg?	false
Week_No	Week_No?	false
database	database?	false
table_view	table_view?	false
year	year?	false
key	key?	false
instance	instance?	false
DB_Navision_Database	DB_Navision_Database?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom Username	mom Username?	false
batch	batch?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false



SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false

NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

## Component List


Component Name	Component Type
----------------	----------------

jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging
tCreateTable_1	tCreateTable
tJavaFlex_1	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaFlex_9	tJavaFlex
tJavaRow_1	tJavaRow
tLogCatcher_1	tLogCatcher
tMSSqlClose_1	tMSSqlClose
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_2	tMSSqlInput

tMSSqlInput_3	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMap_2	tMap
tMap_5	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tWarn_1	tWarn

## Components Description

### Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	tMSSqlConnection_1
	LABEL	Create_RM_Tax	OUTPUT(S)	tSetKeystore_1

### Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable

Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	false
Host	context.DB_ERP_DSD_Integration_Server
Database Name	context.DB_ERP_DSD_Integration_Database
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Access File	""
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	""

Running Mode	HSQLDB_IN_MEMORY
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	context.DB_ERP_DSD_Integration_Database
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database
DB Root Path	""
	tMSSqlConnection_1
JDBC Provider	JTDS
Temporary Table	false
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server




DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
SQLite File	""
DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database
Use "drop cascade"	true
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
Table Name	"NAV_Tax"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	Create_RM_Tax
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tCreateTable\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_No	false	String	20		true	
Tax_Below_Maximum	false	Float	20		true	
Effective_Date	false	java.util.Date	20		true	
Unique_Id	false	Integer	10		true	
ProcessTimestamp	false	String	20		true	
PRICELEVEL_NO	false	String	4		true	

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int i = 0;
Main code	<pre> if( i%5000 == 0 &amp;&amp; i!=0) { System.out.println(i+"-----5000 Records Processed"); } i++; context.objectId=row1.Customer_No+" - "+row1.Tax_Group_Code+" - "+row1.Item_No; context.objectName=""; </pre>
End code	<pre> i--; System.out.println(i+" Records Processed and end of records"); </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__


Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for metadata :**

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_No	false	String	20		true	
Name	false	String	20		true	
Tax_Group_Code	false	String	20		true	
Item_No	false	String	20		true	
Description	false	String	20		true	
Tax_Liable	false	String	20		true	
Tax_Area_Code	false	String	20		true	
Tax_Jurisdiction_Code	false	String	20		true	
Calculation_Order	false	String	20		true	

Maximum_Amount_Qty	false	Float	20		true	
Tax_Below_Maximum	false	Float	20		true	
Tax_Above_Maximum	false	Float	20		true	
Calculate_Tax_on_Tax	false	String	20		true	
Effective_Date	false	java.util.Date	20		true	
Tax_Type	false	String	20		true	

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true

SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true


Start code	// start part of your Java code int b=0;
Main code	// here is the main part of the component, // a piece of code routines.r_HarvestRoutineLoop.createAllObjects(); b++; if(! routines.r_HarvestRoutineLoop.populateMasterdataPoolUp context.Pool=masterdataPoolUpdate.Pool; } else if(b==50){
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUp
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------



Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateMasterdataUpdate context.group=MasterdataUpdate.Group; context.key=Mas
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int previousKNUMH=0;
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateDataContainerEnt if(previousKNUMH!=0 && Integer.parseInt(Price.KNUMH.substring(0,Price.KNUMH.l !=previousKNUMH)){ globalMap.remove(Price.KNUMH.substring(0,Price.KNUMH previousKNUMH= Integer.parseInt(Price.KNUMH.substring(0,Price.KNUMH.l
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


**Schema for tJavaFlex\_6 :**

---



Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	ilet_ResponseLogging_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code if(b==0){ row15.responseXML=routines.r_HarvestRoutineLoop.send context.movilizerVersion); System.gc(); } routines.r_Harves
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.sendMasterData(context.m context.movilizerVersion); routines.r_HarvestRoutineLoop.i

TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

#### Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Unique Name	tJavaFlex_9
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java


Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__

Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaRow

	UNIQUE NAME	tJavaRow_1	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_1

Component Parameters:

Properties	Values
Unique Name	tJavaRow_1
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code

Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Code	//Code generated according to input schema and output schema context.ErrorMessage = input_row.errorMessage;
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for metadata :


Column	Key	Type	Length	Precision	Nullable	Comment
DB_WP_PROD_NO	false	String	9		true	
DB_WP_TABLE_NO	false	String	4		true	
DB_WP_DAY1_PRICE	false	String	9		true	
DB_WP_DAY2_PRICE	false	String	9		true	
DB_WP_DAY3_PRICE	false	String	9		true	
DB_WP_DAY4_PRICE	false	String	9		true	



DB_WP_DAY5_PRICE	false	String	9		true	
DB_WP_DAY6_PRICE	false	String	9		true	
DB_WP_DAY7_PRICE	false	String	9		true	
DB_WP_DAY1_BASE	false	String	2		true	
DB_WP_DAY2_BASE	false	String	2		true	
DB_WP_DAY3_BASE	false	String	2		true	
DB_WP_DAY4_BASE	false	String	2		true	
DB_WP_DAY5_BASE	false	String	2		true	
DB_WP_DAY6_BASE	false	String	2		true	
DB_WP_DAY7_BASE	false	String	2		true	
DB_WP_AUX_PRICE_TYPE_1	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_2	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_3	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_4	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_5	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_6	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_7	false	String	1		true	

DB_WP_END_OF_RECORD	false	String	1		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

**Original Function Parameters:**  
**Component tLogCatcher**

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">jlet_CustomLogging_1</a>

**Component Parameters:**

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true


Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tLogCatcher\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	

type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:  
Component tMSSqlClose

	UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Database	tMSSqlClose
Unique Name	tMSSqlClose_1
Component Name	tMSSqlClose
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlClose_1

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In




Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tCreateTable_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""

Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	View_NAV_Tax	OUTPUT(S)	<a href="#">tJavaFlex_1</a>

**Component Parameters:**

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"NAV_DSD_Tax"
Query Type	Built-In

Guess Schema	""
Query	"SELECT [Customer No] ,[Name] ,[Tax Group Code] , [Item No] ,[Description] ,[Tax Liable] ,[Tax Area Code] , [Tax Jurisdiction Code] ,[Calculation Order] ,[Maximum Amount Qty] ,[Tax Below Maximum] ,[Tax Above Maximum] ,[Calculate Tax on Tax] ,[Effective Date] , [Tax Type] FROM [HFS_Master_DataAccess_DB].[dbo].[NAV_DSD_Tax]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column	{SCHEMA_COLUMN=Customer_No, TRIM=false}, {SCHEMA_COLUMN=Name, TRIM=false}, {SCHEMA_COLUMN=Tax_Group_Code, TRIM=false}, {SCHEMA_COLUMN=Item_No, TRIM=false}, {SCHEMA_COLUMN=Description, TRIM=false}, {SCHEMA_COLUMN=Tax_Liable, TRIM=false}, {SCHEMA_COLUMN=Tax_Area_Code, TRIM=false}, {SCHEMA_COLUMN=Tax_Jurisdiction_Code, TRIM=false}, {SCHEMA_COLUMN=Calculation_Order, TRIM=false}, {SCHEMA_COLUMN=Maximum_Amount_Qty, TRIM=false}, {SCHEMA_COLUMN=Tax_Below_Maximum, TRIM=false}, {SCHEMA_COLUMN=Tax_Above_Maximum, TRIM=false}, {SCHEMA_COLUMN=Calculate_Tax_on_Tax, TRIM=false}, {SCHEMA_COLUMN=Effective_Date, TRIM=false}, {SCHEMA_COLUMN=Tax_Type, TRIM=false}]
Label format	View_NAV_Tax
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_No	false	String	20		true	



Name	false	String	20		true	
Tax_Group_Code	false	String	20		true	
Item_No	false	String	20		true	
Description	false	String	20		true	
Tax_Liable	false	String	20		true	
Tax_Area_Code	false	String	20		true	
Tax_Jurisdiction_Code	false	String	20		true	
Calculation_Order	false	String	20		true	
Maximum_Amount_Qty	false	Float	20		true	
Tax_Below_Maximum	false	Float	20		true	
Tax_Above_Maximum	false	Float	20		true	
Calculate_Tax_on_Tax	false	String	20		true	
Effective_Date	false	java.util.Date	20		true	
Tax_Type	false	String	20		true	

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none

	LABEL	Lkp Tax Type	OUTPUT(S)	<a href="#">tMap_5</a>
--	-------	--------------	-----------	------------------------

### Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Host	context.DB_ERP_DSD_Integration_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login


Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"TaxType"
Query Type	Built-In
Guess Schema	""
Query	"SELECT \""+context.DB_ERP_DSD_Integration_Schema+"\".TaxTy \""+context.DB_ERP_DSD_Integration_Schema+"\".TaxTy +" FROM \""+context.DB_ERP_DSD_Integration_Schema+""
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=TaxCode, TRIM=false}, {SCHEMA_COLUMN=TaxDescription, TRIM=false}]
Label format	Lkp Tax Type
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
TaxCode	false	String	50		true	
TaxDescription	false	String	50		true	

Original Function Parameters:  
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_3	INPUT(S)	none
	LABEL	Lkp_NAV_Tax	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_3
Component Name	tMSSqlInput

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Use an existing connection	true
Component List	tMSSqlConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"NAV_Tax"
Query Type	Built-In
Guess Schema	""

Query	"SELECT max(NAV_Tax.Unique_Id) as maxD FROM \""+context.DB_ERP_DSD_Integration_Schema+"\".NAV_
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Unique_Id, TRIM=false}]
Label format	Lkp_NAV_Tax
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tMSSqlInput\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------



Unique_Id	false	Integer	10		true	
-----------	-------	---------	----	--	------	--

**Original Function Parameters:**  
**Component tMSSqlOutput**

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_2 , tMSSqlInput_3
	LABEL	NAV_Tax	OUTPUT(S)	tMap_5

**Component Parameters:**

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tMSSqlConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database

Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Tax"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Unique_Id
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false

Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
Field options	<pre>[{SCHEMA_COLUMN=Customer_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Tax_Below_Maximum, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Effective_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Unique_Id, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimestamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRICELEVEL_NO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]</pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true


Batch Size	10000
Label format	NAV_Tax
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for load\_rm :

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_No	false	String	20		true	
Tax_Below_Maximum	false	Float	20		true	
Effective_Date	false	java.util.Date	20		true	
Unique_Id	false	Integer	10		true	
ProcessTimestamp	false	String	20		true	
PRICELEVEL_NO	false	String	4		true	

**Original Function Parameters:**  
**Component tPostjob**

---

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1


### Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component** tPrejob

---

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tMSSqlConnection_1</a>

### Component Parameters:


Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true



IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component** tSchemaComplianceCheck

---

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2 , tJavaRow_1

### Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	<pre> {{SCHEMA_COLUMN=Customer_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Group_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Item_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Description, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Liable, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Area_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Jurisdiction_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Calculation_Order, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Maximum_Amount_Qty, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Below_Maximum, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Above_Maximum, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Calculate_Tax_on_Tax, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Effective_Date, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Tax_Type, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}} </pre>
Use another schema for compliance check	false

Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true

Choose Column(s)	<pre> {{SCHEMA_COLUMN=Customer_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Group_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Item_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Description, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Liable, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Area_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Jurisdiction_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Calculation_Order, EMPTY_NULL=false}, {SCHEMA_COLUMN=Maximum_Amount_Qty, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Below_Maximum, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Above_Maximum, EMPTY_NULL=false}, {SCHEMA_COLUMN=Calculate_Tax_on_Tax, EMPTY_NULL=false}, {SCHEMA_COLUMN=Effective_Date, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Type, EMPTY_NULL=false}} </pre>
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false


Validation Rule Type	
----------------------	--

**Schema for metadata :**

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_No	false	String	20		true	
Name	false	String	20		true	
Tax_Group_Code	false	String	20		true	
Item_No	false	String	20		true	
Description	false	String	20		true	
Tax_Liable	false	String	20		true	
Tax_Area_Code	false	String	20		true	
Tax_Jurisdiction_Code	false	String	20		true	
Calculation_Order	false	String	20		true	
Maximum_Amount_Qty	false	Float	20		true	
Tax_Below_Maximum	false	Float	20		true	
Tax_Above_Maximum	false	Float	20		true	
Calculate_Tax_on_Tax	false	String	20		true	
Effective_Date	false	java.util.Date	20		true	

Tax_Type	false	String	20		true	
----------	-------	--------	----	--	------	--

Original Function Parameters:  
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:


Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false



Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	*****
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true

Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tWarn_1
Component Name	tWarn
Version	0.101 (ALPHA)
Family	Logs_Errors

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg

Code	599
Priority	5
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_WP_PROD_NO	false	String	9		true	
DB_WP_TABLE_NO	false	String	4		true	
DB_WP_DAY1_PRICE	false	String	9		true	
DB_WP_DAY2_PRICE	false	String	9		true	
DB_WP_DAY3_PRICE	false	String	9		true	

DB_WP_DAY4_PRICE	false	String	9		true	
DB_WP_DAY5_PRICE	false	String	9		true	
DB_WP_DAY6_PRICE	false	String	9		true	
DB_WP_DAY7_PRICE	false	String	9		true	
DB_WP_DAY1_BASE	false	String	2		true	
DB_WP_DAY2_BASE	false	String	2		true	
DB_WP_DAY3_BASE	false	String	2		true	
DB_WP_DAY4_BASE	false	String	2		true	
DB_WP_DAY5_BASE	false	String	2		true	
DB_WP_DAY6_BASE	false	String	2		true	
DB_WP_DAY7_BASE	false	String	2		true	
DB_WP_AUX_PRICE_TYPE_1	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_2	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_3	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_4	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_5	false	String	1		true	
DB_WP_AUX_PRICE_TYPE_6	false	String	1		true	

DB_WP_AUX_PRICE_TYPE_7	false	String	1		true	
DB_WP_END_OF_RECORD	false	String	1		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

**Original Function Parameters:**  
**Component jlet\_CustomLogging**

	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	LogCatcher_1
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

**Component Parameters:**


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

**Schema for jlet\_CustomLogging\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	

root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

**Component   jlet\_ResponseLogging**

	UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_7 , tMSSqlInput_2
	LABEL	jlet_ResponseLogging	OUTPUT(S)	none

**Component Parameters:**


Properties	Values
Version	Latest
Schema	INPUT_1:responseXML

Show Information	false
Comment	

#### Schema for jlet\_ResponseLogging\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

#### Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tMSSqlInput_3
	LABEL	Lookup Existing Max record	OUTPUT(S)	tMSSqlOutput_1

#### Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000



Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

**Mapper table for tMap\_2 ( input ):**

**Mapper table Properties( row11 ):**

Properties	Values
Name	row11
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row11 ):**

Name	Type	Expression	isNullable
Customer_No	String		true
Name	String		true
Tax_Group_Code	String		true
Item_No	String		true
Description	String		true
Tax_Liable	String		true
Tax_Area_Code	String		true
Tax_Jurisdiction_Code	String		true
Calculation_Order	String		true
Maximum_Amount_Qty	Float		true
Tax_Below_Maximum	Float		true
Tax_Above_Maximum	Float		true
Calculate_Tax_on_Tax	String		true
Effective_Date	java.util.Date		true
Tax_Type	String		true

**Constraint Table Entries( row11 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

#### Mapper table Properties( row16 ):

Properties	Values
Name	row16
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

#### Metadata Table Entries( row16 ):

Name	Type	Expression	isNullable
Unique_Id	Integer		true

#### Constraint Table Entries( row16 ):

Name	Type	Expression	isNullable
------	------	------------	------------

#### Mapper table for tMap\_2 ( output ):

**Mapper table Properties( load\_rm ):**

Properties	Values
Name	load_rm
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( load\_rm ):**

Name	Type	Expression	isNullable
Customer_No	String	row11.Customer_No	true
Tax_Below_Maximum	Float	row11.Tax_Below_Maximum	true
Effective_Date	java.util.Date	row11.Effective_Date	true
Unique_Id	Integer	Var.Unique_Id	true
ProcessTimestamp	String	context.ProcessTimeStamp	true
PRICELEVEL_NO	String	"A300"	true

**Constraint Table Entries( load\_rm ):**

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap\_2 ( var ):  
Mapper table Properties( Var ):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries( Var ):

Name	Type	Expression	isNullable
start	int	(row16.Unique_Id==null)?0:row16.Unique_Id	false
Unique_Id	int	Numeric.sequence("s1",Var.start+1, 1)	false


Constraint Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_5	INPUT(S)	tJavaFlex_7 , tMSSqlInput_2

	LABEL	UNIQUE_NAME	OUTPUT(S)	tJavaFlex_3  tJavaFlex_4, tJavaFlex_5, tJavaFlex_6, tJavaFlex_9, tJavaFlex_7
--	-------	-------------	-----------	--

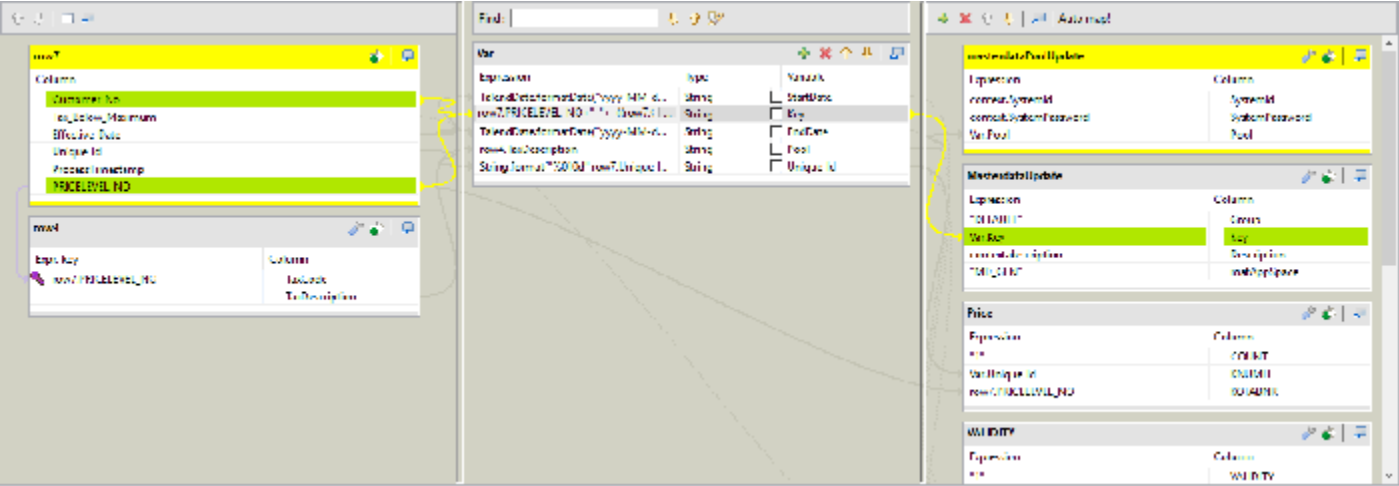

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false

Comment	
Use an existing validation rule	false

**Mapper table for tMap\_5 ( input ):**

**Mapper table Properties( row7 ):**

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row7 ):**

Name	Type	Expression	isNullable
Customer_No	String		true
Tax_Below_Maximum	Float		true
Effective_Date	java.util.Date		true
Unique_Id	Integer		true
ProcessTimestamp	String		true
PRICELEVEL_NO	String		true

**Constraint Table Entries( row7 ):**

Name	Type	Expression	isNullable
------	------	------------	------------



**Mapper table Properties( row4 ):**

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row4 ):**

Name	Type	Expression	isNullable
TaxCode	String	row7.PRICELEVEL_NO	true
TaxDescription	String		true

**Constraint Table Entries( row4 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_5 ( output ):**

**Mapper table Properties( masterdataPoolUpdate ):**

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( masterdataPoolUpdate ):**

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	Var.Pool	true

**Constraint Table Entries( masterdataPoolUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( MasterdataUpdate ):**

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MasterdataUpdate ):**

Name	Type	Expression	isNullable
Group	String	"DEFAULT"	true
Key	String	Var.Key	true
Description	String	context.description	true
mafAppSpace	String	"MD_GEN"	true

**Constraint Table Entries( MasterdataUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( Price ):**

Properties	Values
Name	Price
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( Price ):**

Name	Type	Expression	isNullable
COUNT	String	"1"	true
KNUMH	String	Var.Unique_Id	true
KOTABNR	String	row7.PRICELEVEL_NO	true

**Constraint Table Entries( Price ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( VALIDITY ):**

Properties	Values
Name	VALIDITY
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( VALIDITY ):**

Name	Type	Expression	isNullable
VALIDITY	String	"1"	true
DATAB	String	Var.StartDate	true
DATBI	String	Var.EndDate	true

**Constraint Table Entries( VALIDITY ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( KONP ):**

Properties	Values
Name	KONP
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( KONP ):**

Name	Type	Expression	isNullable
KONP	String	"01"	true
KBETR	String	row7.Tax_Below_Maximum +""	true
KFRST	String		true
KMEIN	String	"%"	true
KNUMH	String	Var.Unique_Id	true
KONMS	String		true
KONWA	String	"USD"	true
KOPOS	String		true
KPEIN	String		true
KRECH	String		true
KZBZG	String		true
STFKZ	String		true

**Constraint Table Entries( KONP ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( sendMasterData ):**

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( sendMasterData ):**

Name	Type	Expression	isNullable
newColumn	String		true

**Constraint Table Entries( sendMasterData ):**

Name	Type	Expression	isNullable

**Mapper table for tMap\_5 ( var ):**



**Mapper table Properties( Var ):**

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( Var ):**

Name	Type	Expression
StartDate	String	TalendDate.formatDate("yyyy-MM-dd",row7.Effective_Date)
Key	String	row7.PRICELEVEL_NO+"_"+ ((row7.Customer_No == null  row7.Customer_No.isEmpty())?"":String.format("%010d",Integer.parseInt(row7.Unique_Id)))) )
EndDate	String	TalendDate.formatDate("yyyy-MM-dd",row7.Effective_Date)
Pool	String	row4.TaxDescription
Unique_Id	String	String.format("%010d",row7.Unique_Id)

**Constraint Table Entries( Var ):**

Name	Type	Expression	isNull
------	------	------------	--------

