

## Jobs

# Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:16:32 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

### **Summary**

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

### **Project Description**


Properties	Values
Name	NAV_MOV
Language	java

Description	

## **Description**

Properties	Values
Name	j_NavExport_010_Employee
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Jul 20, 2016 12:17:43 PM
Modification	Nov 15, 2019 10:12:13 AM

## **Preview Picture**

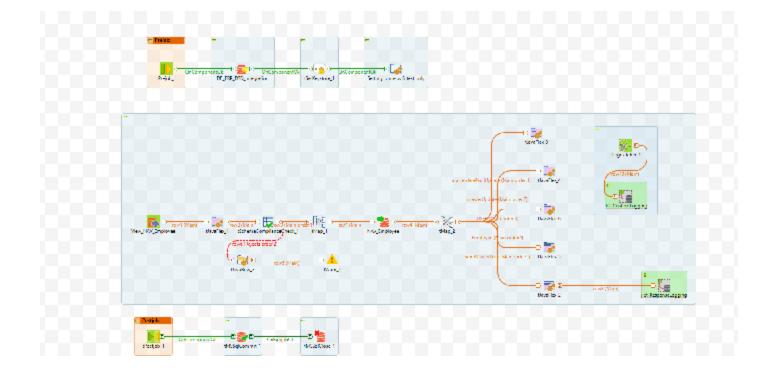

## **Settings**

### Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

### Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

### **Context List**

#### ContextDefault

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false

group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false

ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false

DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false

DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_User	NAV_User?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false

NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false

#### ContextQA

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false

table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false

movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_User	NAV_User?	false

NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

### ContextPREPROD

Name	Promot	Need Prompt
objectType	objectType?	false
filepath	filepath?	false

directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false

CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false

DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_User	NAV_User?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

## **Component List**

Component Name	Component Type
jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaRow_3	tJavaRow

tJava_1	tJava
tLogCatcher_1	tLogCatcher
tMSSqlClose_1	tMSSqlClose
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_1	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMap_1	tMap
tMap_2	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tWarn_1	tWarn

## **Components Description**

### Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_1
--	----------------	-------------	----------	---------------

LABEL	UNIQUE_NA	AMEOUTPUT(S)	tSchemaComplianceCheck_1
-------	-----------	--------------	--------------------------

Component Parameters:	
Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	int i =1;
Main code	context.objectId=row1.User_ID+" - "+row1.Employee_No; context.objectName=""; if( i%5000 == 0) { System.out.println("5000 Records Have Processed"); } i++;
End code	// end of the component, outside/closing the loop i; System.out.println(i+" Records Processed");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;

Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_1 :

ochema for toavar le	<u>^_ ' ' '                               </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	true	int	100		false	
Company_Name	false	String	250		false	
User_ID	false	String	250		false	
Employee_Name	false	String	250		false	
Employee_No	false	String	250		false	
Cost_Center_Code	false	String	250		false	
Labor_Location_Code	false	String	250		false	
Depot_Code	false	String	250		false	

Driver	false	short	100	false	
Picture	false	Object	250	true	

# Original Function Parameters: Component tJavaFlex

 UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_2
LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_ResponseLogging_1

Component Parameters:			
Properties	Values		
Unique Name	tJavaFlex_2		
Component Name	tJavaFlex		
Version	0.101 (ALPHA)		
Family	Custom_Code		
Start	false		
Startable	true		
SUBTREE_START	false		
END_OF_FLOW	false		
Activate	true		
DUMMY	false		

tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code in the row // loop routines.r_HarvestRoutineLoop.resetObje if(b==50) { row8.responseXML= routines.r_HarvestRoutineLoop.sendMasterData(context.m context.movilizerVersion); }

End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.sendMasterData(context.m context.movilizerVersion); routines.r_HarvestRoutineLoop.resetObjects();
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_2:

Column	Key	Туре	Length	Precision	Nullable	Comment
responseXML	false	String			true	

## Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:		
Properties	Values	
Unique Name	tJavaFlex_3	
Component Name	tJavaFlex	
Version	0.101 (ALPHA)	
Family	Custom_Code	
Start	false	
Startable	true	
SUBTREE_START	false	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tJavaFlex	
Update components	true	

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=0;
Main code	// here is the main part of the component, // a piece of code routines.r_HarvestRoutineLoop.createAllObjects(); b++; if(k routines.r_HarvestRoutineLoop.populateMasterdataPoolUx } else if(b==50) { b=0; }
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUt
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_3:

Column Key Type	Length	Precision	Nullable	Comment	
-----------------	--------	-----------	----------	---------	--

# Original Function Parameters: Component tJavaFlex

 UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_2
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Properties	Values
Unique Name	tJavaFlex_4

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code row // loop routines.r_HarvestRoutineLoop.populateMasterdataUpdate
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_4 :

olumn Key Type	Length	Precision	Nullable	Comment
----------------	--------	-----------	----------	---------

# Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

oomponent i diameters.	
Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	// here is the main part of the component, // a piece of code loop routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJavaFlex\_5 :

# Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:			
Properties	Values		
Unique Name	tJavaFlex_6		
Component Name	tJavaFlex		
Version	0.101 (ALPHA)		
Family	Custom_Code		
Start	false		
Startable	true		
SUBTREE_START	false		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tJavaFlex		
Update components	true		

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJavaFlex\_6 :

С	olumn	Key	Туре	Length	Precision	Nullable	Comment	
---	-------	-----	------	--------	-----------	----------	---------	--

# Original Function Parameters: Component tJavaRow

	UNIQUE NAME	tJavaRow_3	INPUT(S)	tSchemaComplianceCheck_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tWarn_1	

Component Farameters.	
Properties	Values
Unique Name	tJavaRow_3
Component Name	tJavaRow

Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.ErrorMsg = input_row.errorMessage;
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaRow 3:

Schema for tjavakow_5.						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	true	int	100		false	
Company_Name	false	String	250		false	
User_ID	false	String	250		false	
Employee_Name	false	String	250		false	

Employee_No	false	String	250	false	
Cost_Center_Code	false	String	250	false	
Labor_Location_Code	false	String	250	false	
Depot_Code	false	String	250	false	
Driver	false	short	100	false	
Picture	false	Object	250	true	
errorCode	false	String	255	true	
errorMessage	false	String	255	true	

## Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tSetKeystore_1
	LABEL	Setting contetxs fr test only	OUTPUT(S)	none

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)

Family	Custom_Code	
Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tJava	
Update components	true	
IREPORT_PATH		
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java	
Subjob color		
Title color		
Enable parallel execution	false	
Number of parallel executions	2	
	false	

Code	String foo = "bar"; context.DB_Navision_Database = "HFS_Master_DataAccess_DB"; //context.DB_Navision_Schema = "dbo";
Import	//import java.util.List;
Schema	Built-In
Label format	Setting contetxs fr test only
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava\_1:

n Key Type Length Precision Nullable	Comment

#### Original Function Parameters: Component tLogCatcher

UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_CustomLogging_1

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher\_1:

Schema io	LLogoal	Cilei_i.				
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

#### Original Function Parameters: Component tMSSqlClose

UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Properties	Values
Database	tMSSqlClose
Unique Name	tMSSqlClose_1
Component Name	tMSSqlClose
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component tMSSqlCommit

UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1

LABELUNIQUE_NAMEOUTPUT(S) tMSSqlClose_1
---

<b>Component Parameters:</b>	
Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

/alidation Rule Type
----------------------

Schema for tMSSqlCommit\_1 :

Column Key Type Length Precision Nullable Comment	Column Key	Туре	Length	Precision	Nullable	Comment	
---	------------	------	--------	-----------	----------	---------	--

#### Original Function Parameters: Component tMSSqlConnection

UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_1
LABEL	DB_ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Component Parameters:	
Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port

Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	11.11
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_ERP_DSD_Integration
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

## Original Function Parameters: Component tMSSqlInput

UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
LABEL	View_NAV_Employee	OUTPUT(S)	tJavaFlex_1

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true

Property Type	repository: DB (MSSQL):DB_Navision
Component List	
Use an existing connection	false
	false
Number of parallel executions	2
Enable parallel execution	false
Title color	
Subjob color	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
IREPORT_PATH	
Update components	true
Help	org.talend.help.tMSSqlInput
tStatCatcher Statistics	false
DUMMY	false
Activate	true
END_OF_FLOW	false
SUBTREE_START	true

Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_User
Query Type	Built-In
Guess Schema	
Ouess Scheilia	

Query	"SELECT \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( ID\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( Name\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( Name\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( No\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( Center Code\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( Location Code\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( Code\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( FROM \""+context.DB_Navision_Schema+"\".\""+context.NAV_Us( \""+context.DB_Navision_Schema+"\".\""+c
Specify a data source alias	false
Data source alias	пп
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Company_ID, TRIM=false}, {SCHEMA_COLUMN=Company_Name, TRIM=false}, {SCHEMA_COLUMN=User_ID, TRIM=false}, {SCHEMA_COLUMN=Employee_Name, TRIM=false}, {SCHEMA_COLUMN=Employee_No, TRIM=false}, {SCHEMA_COLUMN=Cost_Center_Code, TRIM=false}, {SCHEMA_COLUMN=Labor_Location_Code, TRIM=false} {SCHEMA_COLUMN=Depot_Code, TRIM=false}, {SCHEMA_COLUMN=Driver, TRIM=false}, {SCHEMA_COLUMN=Driver, TRIM=false}, {SCHEMA_COTRIM=false}]

Label format	View_NAV_Employee
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput\_1 :

Johnson and and dimesory						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	true	Integer	100		true	
Company_Name	false	String	250		true	
User_ID	false	String	250		true	
Employee_Name	false	String	250		true	
Employee_No	false	String	250		true	
Cost_Center_Code	false	String	250		true	
Labor_Location_Code	false	String	250		true	
Depot_Code	false	String	250		true	

Driver		false	Short	100	true	
Picture	)	false	Object	250	true	

## Original Function Parameters: Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_1	
	LABEL	NAV_Employee	OUTPUT(S)	tMap_2	

Component Parameters:			
Properties	Values		
Database	tMSSqlOutput		
Unique Name	tMSSqlOutput_1		
Component Name	tMSSqlOutput		
Version	0.102 (ALPHA)		
Family	Databases/DB Specifics/MS_SQL_Server		
Startable	false		
SUBTREE_START	false		
END_OF_FLOW	false		
Activate	true		
DUMMY	false		

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	false
Component List	
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema

Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Employee"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Company_ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	пп

Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false

Field options	[{SCHEMA_COLUMN=Company_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Company_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=User_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Employee_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Employee_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Cost_Center_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Labor_Location_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Depot_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Driver, UPDATE_KEY=false, UPDATABLE=true, INSERTABLE=true, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000

Label format	NAV_Employee
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlOutput\_1:

Schema for twissqiOutput_1:						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	int	100		false	
Company_Name	false	String	250		false	
User_ID	false	String	250		false	
Employee_Name	false	String	250		false	
Employee_No	false	String	250		false	
Cost_Center_Code	false	String	250		false	
Labor_Location_Code	false	String	250		false	
Depot_Code	false	String	250		false	

Driver	false	short	10	false	
Picture	false	Object	250	true	
ProcessTimeStamp	false	String	30	true	

## Original Function Parameters: Component tPostjob

UNIQUE NAME	tPostjob_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlCommit_1

Component Parameters:		
Properties	Values	
Unique Name	tPostjob_1	
Component Name	tPostjob	
Version	0.102 (ALPHA)	
Family	Orchestration	
Start	true	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	true	
Activate	true	

DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

## Original Function Parameters: Component tPrejob

UNIQUE NAME	tPrejob_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlConnection_1

Component Parameters:				
Properties	Values			
Unique Name	tPrejob_1			
Component Name	tPrejob			
Version	0.102 (ALPHA)			
Family	Orchestration			
Start	true			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

## Original Function Parameters: Component tSchemaComplianceCheck

UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tMap_1 , tJavaRow_3

Component Parameters:				
Properties	Values			
Unique Name	tSchemaComplianceCheck_1			
Component Name	tSchemaComplianceCheck			
Version	0.101 (ALPHA)			
Family	Data_Quality			
Startable	false			
SUBTREE_START	false			
END_OF_FLOW	false			
Activate	true			
DUMMY	false			

tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	[{SCHEMA_COLUMN=Company_ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Company_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=User_ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Employee_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Employee_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Cost_Center_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Labor_Location_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Depot_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Driver, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Driver, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Picture, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}]
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false

false
false
true
[{SCHEMA_COLUMN=Company_ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=Company_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=User_ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=Employee_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Employee_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Cost_Center_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Labor_Location_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Depot_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Driver, EMPTY_NULL=false}, {SCHEMA_COLUMN=Driver, EMPTY_NULL=false}, {SCHEMA_COLUMN=Picture, EMPTY_NULL=false}]
UNIQUE_NAME
<b>UNIQUE_NAME</b> COMMENT
row
false
false

Schema for tSchemaComplianceCheck\_1:

Schema for tSchemaComplianceCheck_1 :						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	true	int	100		false	
Company_Name	false	String	250		false	
User_ID	false	String	250		false	
Employee_Name	false	String	250		false	
Employee_No	false	String	250		false	
Cost_Center_Code	false	String	250		false	
Labor_Location_Code	false	String	250		false	
Depot_Code	false	String	250		false	
Driver	false	short	100		false	
Picture	false	Object	250		true	

#### Original Function Parameters: Component tSetKeystore

UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_1

Properties	Values

Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	*****
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_3	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:	omperiorit i diametere.				
Properties	Values				
Unique Name	tWarn_1				
Component Name	tWarn				
Version	0.101 (ALPHA)				
Family	Logs_Errors				
Start	false				
Startable	true				
SUBTREE_START	false				
END_OF_FLOW	true				
Activate	true				

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tWarn\_1:

Schema for tWarn_1	Schema for tWarn_1 :						
Column	Key	Туре	Length	Precision	Nullable	Comment	
Company_ID	true	int	100		false		
Company_Name	false	String	250		false		
User_ID	false	String	250		false		
Employee_Name	false	String	250		false		
Employee_No	false	String	250		false		
Cost_Center_Code	false	String	250		false		
Labor_Location_Code	false	String	250		false		
Depot_Code	false	String	250		false		
Driver	false	short	100		false		
Picture	false	Object	250		true		

errorCode	false	String	255	true	
errorMessage	false	String	255	true	

# Original Function Parameters: Component jlet\_CustomLogging

The second second	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

**Component Parameters:** 

omponent alamotero.						
Properties	Values					
Version	Latest					
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code					
Show Information	false					
Comment						

Schema for jlet\_CustomLogging\_1:

<del>Comonia roi</del>	J.ot_Cacto.	<u>iiLoggiiig_i</u>	<u> </u>			
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	

project	false	String	50	true	
job	false	String	255	true	
context	false	String	50	true	
priority	false	Integer	3	true	
type	false	String	255	true	
origin	false	String	255	true	
message	false	String	255	true	
code	false	Integer	3	true	

## Component jlet\_ResponseLogging

The second second	UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_2
	LABEL	jlet_ResponseLogging	OUTPUT(S)	none

component Farameters.			
Properties	Values		
Version	Latest		
Schema	INPUT_1:responseXML		
Show Information	false		
Comment			

Schema for jlet\_ResponseLogging\_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
responseXML	false	String			true	

#### Component tMap

UNIQUE NAME	tMap_1	INPUT(S)	tSchemaComplianceCheck_1	
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlOutput_1	

<b>Component Parameters:</b>	
Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	

Use an existing validation rule	false
---------------------------------	-------

Mapper table for tMap\_1 (input):
Mapper table Properties(row3):

Mapper table Properties( row3 ):			
Values			
row3			
UNIQUE_MATCH			
false			
null			

Metadata Table Entries( row3 ):

Name	Туре	Expression	isNullable
Company_ID	int		false
Company_Name	String		false
User_ID	String		false
Employee_Name	String		false
Employee_No	String		false
Cost_Center_Code	String		false
Labor_Location_Code	String		false
Depot_Code	String		false
Driver	short		false
Picture	Object		true

Constraint Table Entries( row3 ):

Name	Туре	Expression	isNullable	

Mapper table for tMap\_1 ( output ): Mapper table Properties( out1 ):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( out1 ):

Name	Туре	Expression	isNullable
Company_ID	int	row3.Company_ID	false
Company_Name	String	StringHandling.TRIM(row3.Company_Name)	false
User_ID	String	StringHandling.TRIM(row3.User_ID)	false
Employee_Name	String	StringHandling.TRIM(row3.Employee_Name)	false
Employee_No	String	StringHandling.TRIM(row3.Employee_No)	false
Cost_Center_Code	String	StringHandling.TRIM(row3.Cost_Center_Code)	false
Labor_Location_Code	String	StringHandling.TRIM(row3.Labor_Location_Code)	false
Depot_Code	String	StringHandling.TRIM(row3.Depot_Code)	false
Driver	short	row3.Driver	false
Picture	Object	row3.Picture	true
ProcessTimeStamp	String	context.ProcessTimeStamp	true

**Constraint Table Entries( out1 ):** 

	,		
Name	Туре	Expression	isNullable
		•	

### Mapper table for tMap\_1 ( var ):

**Mapper table Properties(Var):** 

mapper takes repense	mapper table i repetites val j.		
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries( Var ):

Name	Туре	Expression	isNullable
------	------	------------	------------

**Constraint Table Entries(Var):** 

Name	Туре	Expression	isNullable

#### Component tMap

UNIQUE NAME	tMap_2	INPUT(S)	tMSSqlOutput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tJavaFlex_3 , tJavaFlex_4, tJavaFlex_6, tJavaFlex_5, tJavaFlex_2

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap\_2 ( input ):
Mapper table Properties( row4 ):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( row4 ):

Name	Туре	Expression	isNullable
Company_ID	int		false
Company_Name	String		false
User_ID	String		false
Employee_Name	String		false
Employee_No	String		false
Cost_Center_Code	String		false
Labor_Location_Code	String		false
Depot_Code	String		false
Driver	short		false
Picture	Object		true
ProcessTimeStamp	String		true

**Constraint Table Entries( row4 ):** 

Name	Туре	Expression	isNullable

### Mapper table for tMap\_2 ( output ):

Mapper table Properties( masterdataPoolUpdate ):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( masterdataPoolUpdate ):

Name	Туре	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

**Constraint Table Entries( masterdataPoolUpdate ):** 

			010 00000 /-	
Na	ame	Туре	Expression	isNullable

Mapper table Properties( masterUpdate ):

Properties	Values
Name	masterUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( masterUpdate ):

Name	Туре	Expression	isNullable
Key	String	row4.Employee_No	true
Group	String	context.group	true
Description	String	context.Description	true
mafAppSpace	String	context.mafAppSpace	true
filter1	String	"DRIVER"	true

**Constraint Table Entries( masterUpdate ):** 

Name	Туре		Expression	isNullable
	71		•	

Mapper table Properties (USER):

поррег такет герегие	100=:1
Properties	Values
Name	USER
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( USER ):

Name	Туре	Expression	isNullable
USER	String	"USER"	true
ID	String	row4.User_ID	true
NAME	String	row4.Employee_Name	true
PASSWORD	String		true
EMPLOYEENUM	String	row4.Employee_No	true
DEVICEADDRESS	String		true

Constraint Table Entries( USER ):

Name Ty	уре	Expression	isNullable
---------	-----	------------	------------

Mapper table Properties (Employee):

mapper table i roperties Employee j.		
Properties	Values	
Name	Employee	
Matching-mode		
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

**Metadata Table Entries( Employee ):** 

Name	Туре	Expression	isNullable
ROUTE	String		true
ROLE	String		true
GROUP	String		true
LOCATIONCOUNTRY	String		true
LOCATIONSTATE	String		true
LOCATIONPOSTAL	String		true
PLANT	String	row4.Cost_Center_Code	true
COMPANYCODE	String	row4.Labor_Location_Code	true
SALESORG	String	row4.Depot_Code	true

Constraint Table Entries( Employee ):

Name	Туре	Expression	isNullable	

Mapper table Properties( sendMasterData ):

mapper table i roperties seriumasterbata j.		
Properties	Values	
Name	sendMasterData	
Matching-mode		
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries( sendMasterData ):

Name	Туре	Expression	isNullable
newColumn	String		true

**Constraint Table Entries( sendMasterData ):** 

Name	Туре	Expression	isNullable
------	------	------------	------------

Mapper table for tMap\_2 ( var ):

**Mapper table Properties(Var):** 

mapper takes reperties	mapper table i reperties var j.		
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries( Var ):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

**Constraint Table Entries(Var):** 

Name	Туре	Expression	isNullable