



# Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:15:37 PM
AUTHOR	Shah, Kashyap	Talend Data Management Platform VERSION	7.0.1.20180411_1414

## Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

## Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	TestUser
Author	Shah, Kashyap
Version	0.1
Purpose	
Status	
Description	
Creation	Mar 1, 2019 1:27:31 AM
Modification	Nov 15, 2019 10:12:17 AM

Preview Picture

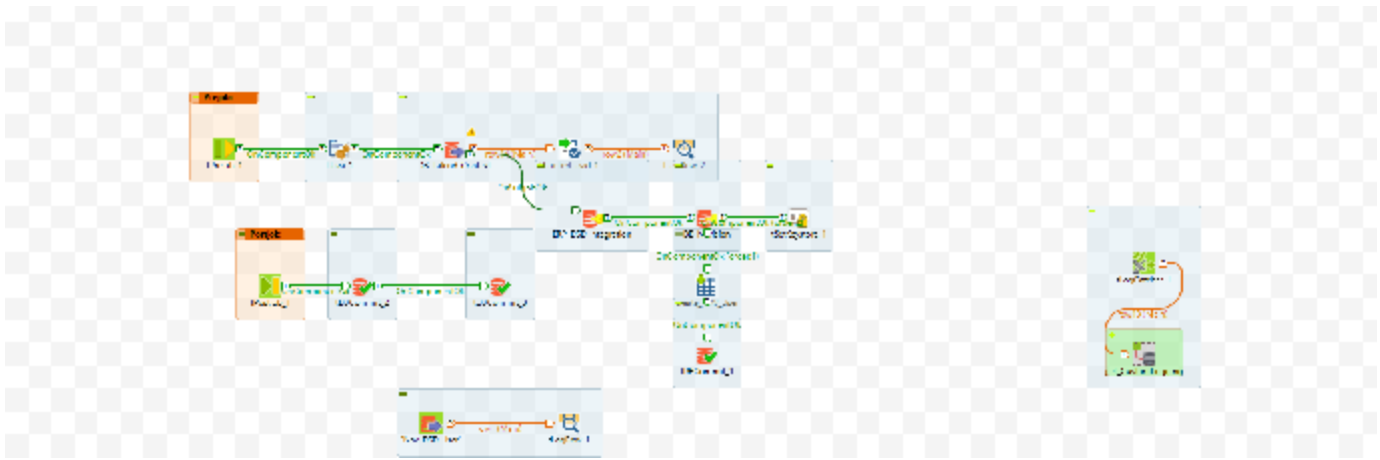

# Settings

## Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

## Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false

On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## Context List

### ContextDefault

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false

Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false

instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false

DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false



NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false

## ContextQA

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false

source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false

Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false

DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false

NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false

**ContextPREPROD**

---

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false

mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false



objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false

DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false

DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false

NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false

## ContextPROD

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
source	source?	false
Pool	Pool?	false
group	group?	false
Description	Description?	false
Filter1	Filter1?	false
mafAppSpace	mafAppSpace?	false
table	table?	false
viewname	viewname?	false
database	database?	false

table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false

movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false

DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false



NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false


## Component List

Component Name	Component Type
ijlet_CustomLogging_1	ijlet_CustomLogging
tContextLoad_1	tContextLoad
tCreateTable_1	tCreateTable
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBCommit_3	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tDBConnection_2	tMSSqlConnection

tDBInput_2	tMSSqlInput
tDBInput_3	tMSSqlInput
tJava_1	tJava
tLogCatcher_1	tLogCatcher
tLogRow_1	tLogRow
tLogRow_2	tLogRow
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSetKeystore_1	tSetKeystore

## Components Description

### Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_2

### Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad

Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for tContextLoad\_1 :**

---

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:  
Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	tDBConnection_2
	LABEL	create_NAV_User	OUTPUT(S)	tDBCommit_1

Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	true
Host	""

Database Name	""
Local Service Name	""
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	""
Password	**
Port	""
Schema	""
Access File	"C:/Talend/6.2.1/studio/workspace_Dev/in.mdb"
DB Version	jt400_V6R1.jar
Firebird File	"C:/Talend/6.2.1/studio/workspace_Dev/in.FDB"
Running Mode	HSQldb_SERVER
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	"C:/Talend/6.2.1/studio/workspace_Dev/in.gdb"

Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	""
DB Root Path	""
	tDBConnection_1
JDBC Provider	JTDS
Temporary Table	false
DB Version	MYSQL_5
Connection Type	ORACLE_SID
URL	""
DB Version	ORACLE_11-6
DB Version	PRIOR_TO_V9
SQLite File	"C:/Talend/6.2.1/studio/workspace_Dev/talend.db"
DB Version	SYBSEIQ_16
ODBC Name	""
Use "drop cascade"	true
DB Version	vertica_3.0_jdk_5.jar



Table Name	"NAV_User"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	"prompt=false"
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	create_NAV_User
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tCreateTable\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

DB_ROUTE_FILE_KEY	false	Integer	9		true	
DB_ROUTE_DEPOT_NUMBER	false	String	4		true	
DB_ROUTE_DIVISION_NUMBER	false	String	2		true	
DB_ROUTE_SALESMAN_L_NAME	false	String	17		true	
DB_ROUTE_SALESMAN_F_NAME	false	String	12		true	
DB_ROUTE_SALESMAN_M_INITL	false	String	1		true	
DB_ROUTE_SUPERVISOR_NUM	false	String	3		true	
DB_ROUTE_TYPE_AREA	false	String	2		true	
DB_ROUTE_BASE_PRICE_TABLE	false	String	4		true	
DB_ROUTE_MARKET_PRICE_TABLE	false	String	4		true	
DB_ROUTE_DISCOUNT_PRICE_TABLE	false	String	4		true	
DB_ROUTE_RECAP_NUMBER_01	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_02	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_03	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_04	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_05	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_06	false	String	3		true	

DB_ROUTE_RECAP_NUMBER_07	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_08	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_09	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_10	false	String	3		true	
DB_ROUTE_RECAP_NUMBER_11	false	String	3		true	
DB_ROUTE_PRIMARY_SALES_CAT	false	String	2		true	
DB_ROUTE_CUST_ORDERING_SWTCH	false	Character	1		true	
DB_ROUTE_DROP_SHIP_SWITCH	false	Character	1		true	
DB_ROUTE_PARENT_ROUTE_NUM	false	String	9		true	
DB_ROUTE_LOAD_SEQUENCE	false	String	2		true	
DB_ROUTE_TYPE_LOCATION	false	String	2		true	
DB_ROUTE_RETURN_STORE_NUM	false	Integer	2		true	
DB_ROUTE_USE	false	Integer	1		true	
DB_ROUTE_UNIT_HISTORY	false	Character	1		true	
DB_ROUTE_DISC_METHOD	false	Integer	2		true	
DB_ROUTE_RECOVER_NEG_PA	false	Character	1		true	
DB_ROUTE_APPLY_CUST_PA	false	Character	1		true	


DB_ROUTE_ACCT_ADJUST	false	Float	9	3	true	
DB_ROUTE_BAL_CORRECTION	false	Float	11	3	true	
DB_ROUTE_RIDER_NO	false	Integer	6		true	
DB_ROUTE_TRUCK_NO	false	Integer	4		true	
DB_ROUTE_SERIAL_NO	false	Integer	7		true	
DB_ROUTE_LOAD_ADJ_SEC_CODE	false	Integer	6		true	
DB_ROUTE_UNLOAD_SEC_CODE	false	Integer	6		true	
DB_ROUTE_IDENT_SEC_CODE	false	Integer	6		true	
DB_ROUTE_IDENT_SYS_SEC_CODE	false	Integer	6		true	
DB_ROUTE_EXIT_APPL_SEC_CODE	false	Integer	6		true	
DB_ROUTE_ODOMETER_SWITCH	false	Integer	1		true	
DB_ROUTE_CUST_PROD_ADD_SWTCH	false	Integer	1		true	
DB_ROUTE_TRUCK_STOCK_SWITCH	false	Integer	1		true	
DB_ROUTE_REDIST_SWITCH	false	Integer	1		true	
DB_ROUTE_MEMORY_BLOCKS	false	Integer	2		true	
DB_ROUTE_PREPOST_DAY_OF_MNTH	false	String	2		true	
DB_ROUTE_PREPOST_SWITCH	false	Integer	1		true	

DB_ROUTE_PRINTER_TYPE	false	Integer	1		true	
DB_ROUTE_PROTOCOL_SWITCH	false	Integer	1		true	
DB_ROUTE_BAUD_RATE	false	Integer	1		true	
DB_ROUTE_DIAGS_SWITCH	false	Integer	1		true	
DB_ROUTE_UPLOAD_DNL_DATA	false	Integer	1		true	
DB_ROUTE_PREPOST_HIST_ARRAY	false	String	4		true	
DB_ROUTE_INVOICE_NO_METHOD	false	String	1		true	
DB_ROUTE_TRANSFER_CLAIMS	false	Integer	1		true	
DB_ROUTE_ODOMETER_TRAY_FLAG	false	Integer	1		true	
DB_ROUTE_DAMAGE_STALE_FRESH	false	Integer	1		true	
DB_ROUTE_RETURN_AUDIT_REPORT	false	Character	1		true	
DB_ROUTE_AUTOSELL_FLAG	false	Character	1		true	
DB_ROUTE_PLUG_QTY_FLAG	false	Integer	1		true	
DB_ROUTE_AUTO_PREORDER_FLAG	false	Character	1		true	
DB_ROUTE_NEXT_INVOICE_NO	false	Integer	12		true	
DB_ROUTE_BANK_CHARGES	false	Float	10	3	true	
DB_ROUTE_PRIOR_DAYS_CLAIMS	false	Float	10	3	true	

DB_ROUTE_PRIOR_DAY_ADD_CUT	false	Integer	1		true	
DB_ROUTE_PRIOR_OVER_SHORT	false	Float	10	3	true	
DB_ROUTE_OVER_SHORT_TYPE	false	Character	1		true	
DB_ROUTE_DEX_ROUTE_FLAG	false	Character	1		true	
DB_ROUTE_SHIPPING_DNL	false	Character	1		true	
DB_ROUTE_LA_PASSWORD	false	Integer	1		true	
DB_ROUTE_PRINT_DELIVERY_RPT	false	Character	1		true	
DB_ROUTE_TCOM_SCHEDULE	false	String	7		true	
DB_ROUTE_SLEEP_MINUTES	false	Integer	4		true	
DB_COMPANY_ID	false	Integer	2		true	
DB_ROUTE_DB_CUST_NUMBER	false	String	9		true	
DB_SOFTWARE_TYPE	false	Character	1		true	
DB_TCOM_GROUP	false	String	2		true	
DB_TCOM_RINGS	false	Integer	1		true	
DB_PREDOM_ORD_FLAG	false	Character	1		true	
DB_PRIMARY_LANGUAGE	false	String	1		true	
DB_PRINT_PRICES	false	Character	1		true	

DB_SHIP_DAYS	false	Integer	7		true	
DB_SERVICING_WAREHOUSE	false	String	4		true	
DB_MILEAGE_RATE	false	Float	6	5	true	
DB_TIME_ZONE_DIFF	false	Integer	3		true	
DB_ZONE_RETAIL_PRICE_TABLE	false	String	4		true	
DB_ROUTE_AUTH_PROD_TABLE	false	String	4		true	
Extra_Column	false	String	1		true	
Extra_Date_Column	false	String	8		true	
DB_ROUTE_END_OF_RECORD	false	String	1		true	
ProcessTimeStamp	false	String	255		true	
ProfitCenter	false	String	100		false	

Original Function Parameters:  
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit

Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	




Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	false
Schema	Built-In
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBCommit\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

**Original Function Parameters:**  
**Component tMSSqlCommit**

---

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_3

### Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_3	INPUT(S)	tDBCommit_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_3
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__

Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tDBInput_2
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_2

Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)


Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false



Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlConnection**

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tDBConnection_1
	LABEL	DB_Navision	OUTPUT(S)	tCreateTable_1 , tSetKeystore_1

**Component Parameters:**


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_2

Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	

Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tDBInput_2	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1 , tDBConnection_1

**Component Parameters:**

---

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance=""+context.source+"_" +context.instance.substring
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	{[SCHEMA_COLUMN=key, TRIM=false}, {[SCHEMA_COLUMN=value, TRIM=false]}
Label format	DB_Talend_Context
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBInput\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

#### Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_3	INPUT(S)	none
	LABEL	__TABLE__	OUTPUT(S)	<a href="#">tLogRow_1</a>

#### Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)



Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DB (MSSQL):DB_Navision - Nav_DSD_User
Table Name	"Nav_DSD_User"
Query Type	Built-In
Guess Schema	""
Query	"SELECT * [" + context.NAV_User + "]"


Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=ID, TRIM=false}, {SCHEMA_COLUMN=NAME, TRIM=false}, {SCHEMA_COLUMN=EMPLOYEEENUM, TRIM=false}, {SCHEMA_COLUMN=ROLE, TRIM=false}, {SCHEMA_COLUMN=FACILITY, TRIM=false}, {SCHEMA_COLUMN=LOCATION, TRIM=false}, {SCHEMA_COLUMN=ROUTEGROUP, TRIM=false}]
Label format	__TABLE__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for Nav\_DSD\_User :**

---

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	
ROLE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

Original Function Parameters:  
Component   tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_2

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code

Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


Code	context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate());
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJava\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters:

##### Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">jlet_CustomLogging_1</a>

#### Component Parameters:

Properties	Values
------------	--------

Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


**Schema for tLogCatcher\_1 :**

---



Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:  
Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tDBInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false


Lengths	{SCHEMA_COLUMN=ID, LENGTH=10}, {SCHEMA_COLUMN=NAME, LENGTH=10}, {SCHEMA_COLUMN=EMPLOYEEENUM, LENGTH=10}, {SCHEMA_COLUMN=ROLE, LENGTH=10}, {SCHEMA_COLUMN=FACILITY, LENGTH=10}, {SCHEMA_COLUMN=LOCATION, LENGTH=10}, {SCHEMA_COLUMN=ROUTEGROUP, LENGTH=10}}
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for Nav\_DSD\_User :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	String	255		false	
NAME	false	String	255		false	
EMPLOYEEENUM	false	String	255		false	

ROLE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

**Original Function Parameters:**  
**Component tLogRow**

	UNIQUE NAME	tLogRow_2	INPUT(S)	tContextLoad_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Unique Name	tLogRow_2
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true


Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[[{SCHEMA_COLUMN=key, LENGTH=10}, {SCHEMA_COLUMN=value, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tLogRow\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:  
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tDBCommit_2</a>

Component Parameters:


Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true



END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component   tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tDBConnection_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"

KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component jlet\_CustomLogging**

	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	LogCatcher_1
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code

Show Information	false
Comment	

**Schema for jlet\_CustomLogging\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	