



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:06:16 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_Delivery_REF201905029
Author	
Version	0.1
Purpose	
Status	
Description	printing order table data with start, end time and number of rows in source and target files
Creation	May 29, 2019 3:25:54 PM
Modification	Nov 15, 2019 10:12:13 AM

Preview Picture

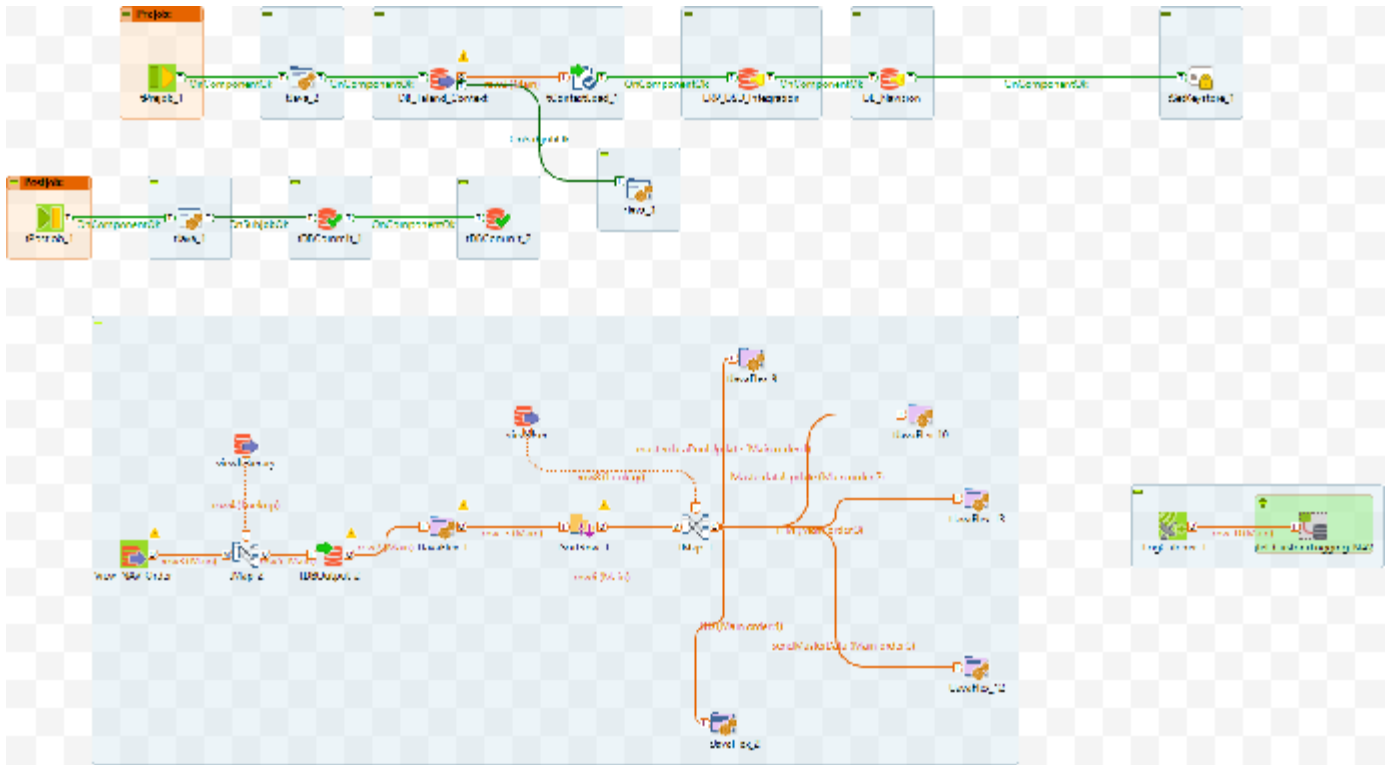

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false

Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
source	source?	false

JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
table	table?	false
viewname	viewname?	false
length	length?	false
count	count?	false
value	value?	false
database	database?	false
table_view	table_view?	false
environment	environment?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false

mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false

DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_Order	NAV_Order?	false
NAV_Shipment	NAV_Shipment?	false
RM_Order-Encoding	RM_Order-Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextQA

Name	Prompt	Need Prompt
------	--------	-------------

filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
table	table?	false
viewname	viewname?	false
length	length?	false
count	count?	false
value	value?	false
database	database?	false
table_view	table_view?	false
environment	environment?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false

DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false

DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_Order	NAV_Order?	false
NAV_Shipment	NAV_Shipment?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false

RM_Order_RowSeparator	RM_Order_RowSeparator?	false
-----------------------	------------------------	-------

ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
table	table?	false
viewname	viewname?	false
length	length?	false
count	count?	false

value	value?	false
database	database?	false
table_view	table_view?	false
environment	environment?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false

message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false

DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false

DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_Order	NAV_Order?	false

NAV_Shipment	NAV_Shipment?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
source	source?	false
JobName	JobName?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false

table	table?	false
viewname	viewname?	false
length	length?	false
count	count?	false
value	value?	false
database	database?	false
table_view	table_view?	false
environment	environment?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
ErrorMsg	ErrorMsg?	false

implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false

DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false

DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false

DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_Order	NAV_Order?	false
NAV_Shipment	NAV_Shipment?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

Component List


Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
tContextLoad_1	tContextLoad
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBConnection_1	tMSSqlConnection

tDBConnection_2	tMSSqlConnection
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBInput_3	tMSSqlInput
tDBOutput_2	tMSSqlOutput
tJavaFlex_1	tJavaFlex
tJavaFlex_10	tJavaFlex
tJavaFlex_12	tJavaFlex
tJavaFlex_13	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_9	tJavaFlex
tJava_1	tJava
tJava_2	tJava
tJava_3	tJava
tLogCatcher_1	tLogCatcher
tMSSqlInput_1	tMSSqlInput
tMap_1	tMap

tMap_2	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSetKeystore_1	tSetKeystore
tSortRow_1	tSortRow

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning

Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tJava_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_2

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tContextLoad_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_2

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false

Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tDBConnection_1
	LABEL	DB_Navision	OUTPUT(S)	tSetKeystore_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_2
Component Name	tMSSqlConnection

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""

Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_2
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1 , tJava_3

Component Parameters:

Properties	Values
Database	tMSSqlInput

Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""

Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	{[SCHEMA_COLUMN=key, TRIM=false], {[SCHEMA_COLUMN=value, TRIM=false]}
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	


Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:

Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	none
	LABEL	viewItinerary	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2


Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	
Query Type	Built-In
Guess Schema	""
Query	"select [key] as routeNumber,ShipTo from [dbo].[Nav_DSD_Itinerary]"
Specify a data source alias	false
Data source alias	""

Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	{[SCHEMA_COLUMN=routeNumber, TRIM=false], [SCHEMA_COLUMN=ShipTo, TRIM=false]}
Label format	viewItinerary
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
routeNumber	false	String	10		false	
ShipTo	false	String	20		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_3	INPUT(S)	none
	LABEL	viewUser	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""


Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"select ID as routeNo,facility,location,routeGroup from nav_dsd_user"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=routeNo, TRIM=false}, {SCHEMA_COLUMN=facility, TRIM=false}, {SCHEMA_COLUMN=location, TRIM=false}, {SCHEMA_COLUMN=routeGroup, TRIM=false}]
Label format	viewUser

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
routeNo	false	String	10		false	
facility	false	String	10		false	
location	false	String	10		false	
routeGroup	false	String	20		false	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_2	INPUT(S)	tMap_2 , tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
------------	--------

Database	tMSSqlOutput
Unique Name	tDBOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	""
Port	"1433"
Schema	""
Database	""
Database Driver	MSSQL
Username	""
Password	**
Table	"NAV_DELIVERY"
Action on table	TRUNCATE
Turn on Identity insert	false

Action on data	INSERT
Specify identity field	false
Identity field	REFERENCEDATE
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	<pre> {{SCHEMA_COLUMN=REFERENCEDATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=SHIPTO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Item_No_, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYTEMP, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYPERM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYORDER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=UOM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=routeNumber, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=SHIPTO_Original, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Item_No_Original, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=routeNumber_Original, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}} </pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000


Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
REFERENCEDATE	false	java.util.Date	23	3	false	
SHIPTO	false	String	10		false	
Item_No_	false	String	20		false	
QTYTEMP	false	BigDecimal	38	20	false	
QTYPERM	false	BigDecimal	38	20	false	
QTYORDER	false	BigDecimal	38	20	false	
UOM	false	String	10		false	
routeNumber	false	String	10		false	

SHIPTO_Original	false	String	10		false	
Item_No_Original	false	String	20		false	
routeNumber_Original	false	String	10		false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tDBOutput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSortRow_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int rowCount=0;


Main code	// here is the main part of the component, // a piece of code executed in the row // loop rowCount++; int a=routines.Nav_Delivery.getDriver_ShipNocount("00000" + row7.routeNumber + row7.SHIPTO + routines.DateParser.convertPSTToUTC_atNoon(TalendDate.formatDate("yyyy-MM-dd",row7.REFERENCEI)); int b=routines.Nav_Delivery.getDrivercount("00000" + row7.routeNumber);
End code	// end of the component, outside/closing the loocontext.cou context.count=rowCount;
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

REFERENCEDATE	false	java.util.Date	23	3	false	
SHIPTO	false	String	10		false	
Item_No_	false	String	20		false	
QTYTEMP	false	BigDecimal	38	20	false	
QTYPERM	false	BigDecimal	38	20	false	
QTYORDER	false	BigDecimal	38	20	false	
UOM	false	String	10		false	
routeNumber	false	String	10		false	
SHIPTO_Original	false	String	10		false	
Item_No_Original	false	String	20		false	
routeNumber_Original	false	String	10		false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_10	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_10

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.Nav_Delivery.populateMasterdataUpdate(Masterd context.group = MasterdataUpdate.Group; context.key=MasterdataUpdate.Key; //System.out.println("f MasterdataUpdate.Key); </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_10 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_12	INPUT(S)	tMap_1 , tDBInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_12
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;


Main code	<pre>//if(a==50 /*&& f==(a-50)*/){ //routines.Copy_of_r_HarvestRoutineLoop_a.sendMasterD //System.out.println(f); //} a++; String responseXML = ""; if(responseXML = routines.Nav_Delivery.sendMasterData(context.movilizerU //System.out.println("inside"); } routines.Nav_Delivery.reset</pre>
End code	<pre>// end of the component, outside/closing the loop //routines.r_HarvestRoutineLoop_Delivery.sendMasterData //routines.r_HarvestRoutineLoop_Delivery.resetObjects();</pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_12 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

responseXML	false	String			true	
-------------	-------	--------	--	--	------	--

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_13	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_13
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	//routines.Nav_Delivery.populateDataContainerEntryChildN //routines.Copy_of_r_HarvestRoutineLoop_a.populateUpd //routines.r_HarvestRoutineLoop.populateDataContainerEr //routines.r_HarvestRoutineLoop.populateDataContainerEr routines.Nav_Delivery.populateDataContainerEntryChildNc
End code	// end of the component, outside/closing the loop
TOS2.0	false


TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_13 :

Column	Key	Type	Length	Precision	Nullable	Comment
ITM	false	String			true	
MATNO	false	Integer			true	
QTYORDER	false	String			true	
QTYPLAN	false	String			true	
UOM	false	String			true	

REASON	false	String			true	
LOCKED	false	String			true	
TYPE	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code String previous_DRIVER=""; row_count=0; int row_count1=0; Object previous_Object =

Main code	<pre> row_count++; row_count1++; //System.out.println("Driver = HD.REFDATE); int chk=Integer.parseInt(routines.Nav_Delivery.hmDriver_Ship //System.out.println("CHK"); int chk1=Integer.parseInt(rout //System.out.println("CHK 1"); if(chk==row_count){ //HD.RI routines.Nav_Delivery.populateDataContainerEntry(HD); r row_count=0; routines.Nav_Delivery.clearhmITM(); routine Driver Upcoming"); } if(chk1==row_count1){ context.value = "+previous_DRIVER); previous_Object = HD; previous_DR //previous_REFDATE=HD.REFDATE; /* if(!routines.Copy_ routines.Copy_of_r_HarvestRoutineLoop_a.populateDataC routines.Copy_of_r_HarvestRoutineLoop_a.populateUpdat routines.Copy_of_r_HarvestRoutineLoop_a.coDate.add(HI </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
DRIVER	false	String			true	
REGION	false	String			true	
REFNO	false	String			true	
REFDATE	false	String			true	
SHIPTO	false	String	9		true	
DELNO	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_9
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false


Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	// start part of your Java code int b=1; context.value= true; //routines.Copy_of_r_HarvestRoutineLoop_a.createAllObjec
Main code	routines.Nav_Delivery.createAllObjects(); if(context.value){ routines.Nav_Delivery.populateMasterdataPoolUpdate(ma: context.value =false; } //else if(b==50) //{ //routines.r_HarvestRoutine_A.populateMasterdataPoolUpd //b=0; //} b++;
End code	// end of the component, outside/closing the loop routines.Nav_Delivery.createAllObjects(); routines.Nav_Delivery.populateMasterdataPoolUpdate(ma:
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:**Component tJava**

	UNIQUE NAME	tJava_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar";
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n");</pre>
Import	//import java.util.List;


Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:

Component tJava

	UNIQUE NAME	tJava_3	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJava_3
Component Name	tJava


Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Code	String foo = "bar"; System.out.println("URL = " + context.movilizerURL); System.out.println("SystemID = " + context.SystemId); System.out.println("Password = " + context.SystemPassword); System.out.println("Pool = " + context.Pool);
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jilet_CustomLogging_NAV_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:

Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	View_NAV_Order	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema

Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	
Query Type	Built-In
Guess Schema	""
Query	"Select * from [dbo].[Nav_DSD_Order] where REFERENCEDATE = (Select isnull(Manual_SalesDate,DSD_SalesDate) as salesDate from [dbo].[DSD_Sales_Download_Date])"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false


Trim column	{[SCHEMA_COLUMN=REFERENCEDATE, TRIM=false}, {SCHEMA_COLUMN=SHIPTO, TRIM=false}, {SCHEMA_COLUMN=Item_No_, TRIM=false}, {SCHEMA_COLUMN=QTYTEMP, TRIM=false}, {SCHEMA_COLUMN=QTYPERM, TRIM=false}, {SCHEMA_COLUMN=QTYORDER, TRIM=false}, {SCHEMA_COLUMN=UOM, TRIM=false}]
Label format	View_NAV_Order
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
REFERENCEDATE	false	java.util.Date	23	3	false	
SHIPTO	false	String	10		false	
Item_No_	false	String	20		false	
QTYTEMP	false	BigDecimal	38	20	false	
QTYPERM	false	BigDecimal	38	20	false	

QTYORDER	false	BigDecimal	38	20	false	
UOM	false	String	10		false	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tDBConnection_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****

Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSortRow

	UNIQUE NAME	tSortRow_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tSortRow_1
Component Name	tSortRow
Version	0.102 (ALPHA)

Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSortRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Criteria	[[COLNAME=routeNumber, SORT=alpha, ORDER=asc], {COLNAME=SHIPTO, SORT=alpha, ORDER=asc}, {COLNAME=Item_No_, SORT=alpha, ORDER=asc}]
Sort on disk	false
Temp data directory path	"C:/Talend/6.2.1/studio/workspace/temp"
Create temp data directory if does not exist	true
Buffer size of external sort	1000000
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSortRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
REFERENCEDATE	false	java.util.Date	23	3	false	

SHIPTO	false	String	10		false	
Item_No_	false	String	20		false	
QTYTEMP	false	BigDecimal	38	20	false	
QTYPERM	false	BigDecimal	38	20	false	
QTYORDER	false	BigDecimal	38	20	false	
UOM	false	String	10		false	
routeNumber	false	String	10		false	
SHIPTO_Original	false	String	10		false	
Item_No_Original	false	String	20		false	
routeNumber_Original	false	String	10		false	

Original Function Parameters:
Component jlet_CustomLogging_NAV

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest

Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_NAV_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_1 , tDBInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_9 , tJavaFlex_10, tJavaFlex_13 , tJavaFlex_2, tJavaFlex_12

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000

Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row6):

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row6):

Name	Type	Expression	isNullable
REFERENCEDATE	java.util.Date		false
SHIPTO	String		false
Item_No_	String		false
QTYTEMP	BigDecimal		false
QTYPERM	BigDecimal		false
QTYORDER	BigDecimal		false
UOM	String		false
routeNumber	String		false
SHIPTO_Original	String		false
Item_No_Original	String		false
routeNumber_Original	String		false

Constraint Table Entries(row6):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row8):

Properties	Values
Name	row8
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row8):

Name	Type	Expression	isNullable
routeNo	String	row6.routeNumber_Original	false
facility	String		false
location	String		false
routeGroup	String		false

Constraint Table Entries(row8):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Group	String	Var.RTE_NUMBER	true
Key	String	Var.KEY	true
Description	String	Var.DESCRPTION	true
validTillDate	java.util.Date	Var.validTillDate	true
Filter1	String	Var.CUSTOMER_NUMBER	true
Filter2	String	Var.ORDER_DATE	true
mafAppSpace	String	context.mafAppSpace	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(ITM):

Properties	Values
Name	ITM
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(ITM):

Name	Type	Expression	isNullable
ITM	String	Var.ITM1	true
MATNO	String	"0000000" + row6.Item_No_	true
QTYORDER	String	Var.QTYPLAN	true
QTYPLAN	String	Var.QTYPLAN	true
UOM	String	"0"	true
REASON	String	""	true
LOCKED	String	"false"	true
TYPE	String	"00"	true

Constraint Table Entries(ITM):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(HD):

Properties	Values
Name	HD
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(HD):

Name	Type	Expression	isNullable
DRIVER	String	Var.RTE_NUMBER	true
REGION	String	Var.Region	true
ROUTE	String	Var.RTE_NUMBER	true
REFNO	String		true
REFDATE	String	Var.ORDER_DATE	true
SHIPTO	String	Var.CUSTOMER_NUMBER	true
DELNO	String	Var.KEY	true

Constraint Table Entries(HD):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):


Name	Type	Expression
SHIPTO	String	row6.SHIPTO
ORDER_DATE	String	routines.DateParser.convertPSTToUTC_atNoon(TalendDate.fo)
ORDER_DATE_STR	String	TalendDate.formatDate("yyyy-MM-dd",row6.REFERENCEDATI
intQtyTemp	int	row6.QTYTEMP.intValueExact()
intQtyPerm	int	row6.QTYPERM.intValueExact()
intQtyOrder	int	row6.QTYORDER.intValueExact()
QTYPLAN	String	String.valueOf(Var.intQtyTemp + Var.intQtyPerm)


RTE_NUMBER	String	"00000" + row6.routeNumber
CUSTOMER_NUMBER	String	Var.SHIPTO
ITM1	String	"00_" + "0000000" + row6.Item_No_ + "_0"
P1	String	"04"
F1	String	Relational.ISNULL(row8.facility)? "I" :row8.facility
L1	String	Relational.ISNULL(row8.location)? "dont" :row8.location
RG1	String	Relational.ISNULL(row8.routeGroup)? "know":row8.routeGroup
Region	String	Var.P1+"_" +Var.F1+"_" +Var.L1+"_" +Var.RG1
validTillDate	java.util.Date	TalendDate.addDate(row6.REFERENCEDATE ,10,"dd")
KEY	String	context.instance.substring(4, 6) + "_" + Var.RTE_NUMBER + "_
DESCRIPTION	String	"DEL_" + Var.KEY

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_2

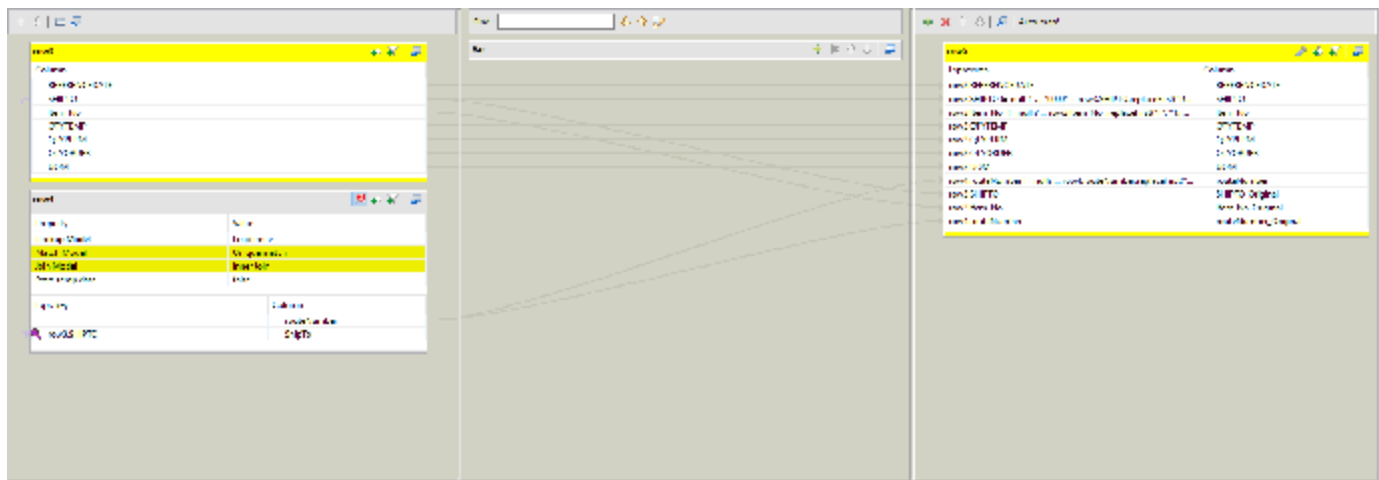

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
REFERENCEDATE	java.util.Date		false
SHIPTO	String		false
Item_No_	String		false
QTYTEMP	BigDecimal		false
QTYPERM	BigDecimal		false
QTYORDER	BigDecimal		false
UOM	String		false

Constraint Table Entries(row3):

Name	Type	Expression	isNullable

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
routeNumber	String		false
ShipTo	String	row3.SHIPTO	false

Constraint Table Entries(row4):

Name	Type	Expression	isNullable

Mapper table for tMap_2 (output):**Mapper table Properties(row5):**

Properties	Values
Name	row5
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row5):

Name	Type	Expression	isNullable
REFERENCEDATE	java.util.Date	row3.REFERENCEDATE	false
SHIPTO	String	row3.SHIPTO != null ? "0000" + row3.SHIPTO.replaceFirst("D",""):row3.SHIPTO	false
Item_No_	String	row3.Item_No_ != null ? row3.Item_No_.replaceFirst("F",""):row3.Item_No_	false
QTYTEMP	BigDecimal	row3.QTYTEMP	false
QTYPERM	BigDecimal	row3.QTYPERM	false
QTYORDER	BigDecimal	row3.QTYORDER	false
UOM	String	row3.UOM	false
routeNumber	String	row4.routeNumber != null? row4.routeNumber.replaceFirst("R",""): row4.routeNumber	false
SHIPTO_Original	String	row3.SHIPTO	false
Item_No_Original	String	row3.Item_No_	false
routeNumber_Original	String	row4.routeNumber	false

Constraint Table Entries(row5):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------