



# Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:15:30 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

## Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

## Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

## Description

Properties	Values
Name	TestProductPrice
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Apr 8, 2019 4:43:20 AM
Modification	Nov 15, 2019 10:12:17 AM

## Preview Picture

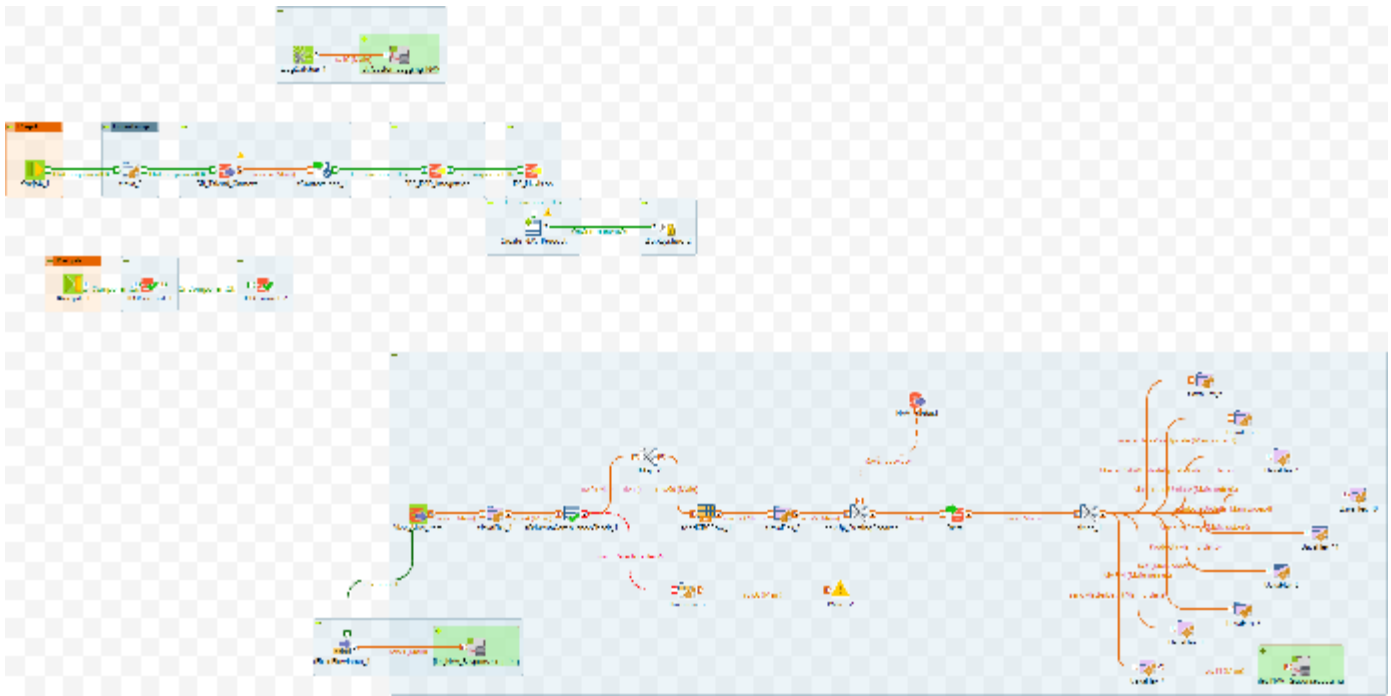

# Settings

## Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

## Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## Context List

### ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false

Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false

mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false



DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

## ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false
Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false

table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false

batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false

DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false

DB_Talend_Context_Server	DB_Talend_Context_Server?	false
--------------------------	---------------------------	-------

## ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false
Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false

Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false

environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false



SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false

DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

## ContextPREPROD

Name	Prompt	Need Prompt
------	--------	-------------

filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false
Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false

ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false

keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false

DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

## Component List

Component Name	Component Type
<a href="#">jlet_CustomLogging_NAV_1</a>	jlet_CustomLogging_NAV
<a href="#">jlet_NAV_ResponseLogging_1</a>	jlet_NAV_ResponseLogging
<a href="#">jlet_NAV_ResponseLogging_2</a>	jlet_NAV_ResponseLogging
<a href="#">tAddCRCRow_1</a>	tAddCRCRow


tContextLoad_1	tContextLoad
tCreateTable_1	tCreateTable
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tDBInput_1	tMSSqlInput
tFixedFlowInput_1	tFixedFlowInput
tJavaFlex_1	tJavaFlex
tJavaFlex_10	tJavaFlex
tJavaFlex_11	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaFlex_8	tJavaFlex



tJavaFlex_9	tJavaFlex
tJavaRow_5	tJavaRow
tJava_2	tJava
tLogCatcher_1	tLogCatcher
tMSSqlConnection_2	tMSSqlConnection
tMSSqlInput_2	tMSSqlInput
tMSSqlInput_4	tMSSqlInput
tMSSqlOutput_2	tMSSqlOutput
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_2	tSetKeystore
tWarn_2	tWarn

## Components Description

## Component tAddCRCRow

	UNIQUE NAME	tAddCRCRow_1	INPUT(S)	<a href="#">tMap_2</a>
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tJavaFlex_2</a>

### Component Parameters:

Properties	Values
Unique Name	tAddCRCRow_1
Component Name	tAddCRCRow
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAddCRCRow
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Implication	[{SCHEMA_COLUMN=MATNO, USE_IN_CRC=true}, {SCHEMA_COLUMN=DESCRIPTION, USE_IN_CRC=true}, {SCHEMA_COLUMN=SHORTDESCRIPTION, USE_IN_CRC=true}, {SCHEMA_COLUMN=LONGDESCRIPTION, USE_IN_CRC=true}, {SCHEMA_COLUMN=UPC, USE_IN_CRC=true}, {SCHEMA_COLUMN=UOMBASE, USE_IN_CRC=true}, {SCHEMA_COLUMN=ProfitCenter, USE_IN_CRC=true}, {SCHEMA_COLUMN=CRC, USE_IN_CRC=true}]
CRC Type	crc32
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	false	Long	255		true	

Original Function Parameters:  
Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tMSSqlInput_4

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tMSSqlConnection_2</a>
--	-------	-----------------	-----------	------------------------------------

### Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java


Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tContextLoad\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

#### Original Function Parameters: Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	<a href="#">tDBConnection_1</a>
	LABEL	Create_NAV_Product	OUTPUT(S)	<a href="#">tSetKeystore_2</a>

#### Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases

Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration



Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	false
Host	context.DB_ERP_DSD_Integration_Server
Database Name	context.DB_ERP_DSD_Integration_Database
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci://@db10g_test"
UserName	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Access File	""
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	""
Running Mode	HSQldb_IN_MEMORY
Use TLS/SSL Sockets	false

DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	context.DB_ERP_DSD_Integration_Database
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database
DB Root Path	""
JDBC Provider	JTDS
Temporary Table	false
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
SQLite File	""

DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database
Use "drop cascade"	true
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Table Name	"NAV_Product"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	Create_NAV_Product
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	




Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBCommit\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	




Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tMSSqlConnection_2
	LABEL	DB_Navision	OUTPUT(S)	tCreateTable_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL

Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tDBInput_1	INPUT(S)	none
	LABEL	View_NAV_Item	OUTPUT(S)	<a href="#">tJavaFlex_1</a> , <a href="#">tFixedFlowInput_1</a>

**Component Parameters:**

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1

Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_Item
Query Type	Built-In
Guess Schema	""
Query	"SELECT [MATNO] ,[DESCRIPTION] ,[SHORTDESCRIPTION] ,[LONGDESCRIPTION] ,[isnull([UPC],'') as UPC ,[UOMBASE] FROM "+context.NAV_Item
Specify a data source alias	false


Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[{SCHEMA_COLUMN=MATNO, TRIM=false}, {SCHEMA_COLUMN=DESCRIPTION, TRIM=false}, {SCHEMA_COLUMN=SHORTDESCRIPTION, TRIM=false}, {SCHEMA_COLUMN=LONGDESCRIPTION, TRIM=false}, {SCHEMA_COLUMN=UPC, TRIM=false}, {SCHEMA_COLUMN=UOMBASE, TRIM=false}]
Label format	View_NAV_Item
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBInput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	

Original Function Parameters:  
Component tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_NAV_ResponseLogging_2

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true



SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1

Use Single Table	true
Values	[[SCHEMA_COLUMN=responseXML, VALUE=context.responseXML]]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	","
Content	
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tFixedFlowInput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

---

responseXML	false	String			true	
-------------	-------	--------	--	--	------	--

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int i =1;


Main code	<pre> if( i%5000 == 0) { System.out.println(i+" Records Processe Product Object"); } i++; context.objectId = row1.MATNO; context.DB_PROD_UPC_CODE = row1.UPC; //System.out.println("context.DB_PROD_UPC_CODE "+context.DB_PROD_UPC_CODE); /*String code = row1.UPC.substring(0); int val=0; for(int x=0;x&lt;code.length();x++){ val+=((int)Integer.parseInt(code.charAt(x)+""))*((x%2==0)? } int checksum_digit = 10 - (val % 10); if (checksum_digit = 10) checksum_digit = 0; //System.out.println(row1.DB_PROD_UPC_CODE.substrin + String.valueOf(checksum_digit)); row4.ckdigit = String.valueOf(checksum_digit);*/ </pre>
End code	<pre> // end of the component, outside/closing the loop i--; System.out.println(i+" Records Processed and end of recor Product Object"); </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaFlex\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_10	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_10
Component Name	tJavaFlex
Version	0.101 (ALPHA)

Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateAttributeUpdate(attributeUp
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	



Schema for tJavaFlex\_10 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_11	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_11
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateAttributeDataContainerEntr routines.NAV_Product.populateAttributeDataContainerEntr
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_11 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tAddCRCRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code // row5.CRC
Main code	// here is the main part of the component, // a piece of code executed in the row // loop context.CRC=row17.CRC;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	false	Long	255		true	

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateDataContainerEntryChildN routines.NAV_Product.populateDataContainerEntryParentI routines.NAV_Product.populateUpdateContainerEntry();
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__




Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false


Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.NAV_Product.populateMasterdataUpdate(Masterc context.group = MasterdataUpdate.Group; context.key=MasterdataUpdate.Key; </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;
Main code	//routines.r_HarvestRoutineLoop.createAllObjects(); routines.NAV_Product.createAllObjects(); if(b==1){ routines.NAV_Product.populateMasterdataPoolUpdate(ma if(b==50) { //routines.r_HarvestRoutine_A.populateMasterdataPoolUpd b=0; } b++;
End code	// end of the component, outside/closing the loop routines.NAV_Product.createAllObjects(); routines.NAV_Product.populateMasterdataPoolUpdate(ma
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME__
Hint format	<b>__ UNIQUE_NAME__</b> __ COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_1
	LABEL	__ UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
------------	--------

Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateDataContainerEntry_No_H
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false




Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_1 , tMSSqlInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_NAV_ResponseLogging_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;


Main code	<pre>row11.responseXML = ""; if(a==50 /*&amp;&amp; f==(a-50)*/){ row11.responseXML=routines.NAV_Product.sendMasterData( context.movilizerVersion); //f = a; a=0; //System.out.println( routines.NAV_Product.resetObjects());</pre>
End code	<pre>// end of the component, outside/closing the loop if(((Integer)globalMap.get("tMSSqlOutput_2_NB_LINE")) != = routines.NAV_Product.sendMasterData(context.movilizerVersion); routines.NAV_Product.resetObjects());</pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

responseXML	false	String			true	
-------------	-------	--------	--	--	------	--

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_8	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_8
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateDataContainerEntryChildN routines.NAV_Product.populateDataContainerEntryParentN
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_9

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateMasterdataAttributeUpdate
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	




Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaRow

	UNIQUE NAME	tJavaRow_5	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_2

Component Parameters:

Properties	Values
Unique Name	tJavaRow_5
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.ErrorMsg = input_row.errorMessage;
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __


Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for metadata :**

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	Integer	255		true	
Company_Name	false	String	255		true	
User_ID	false	String	40		true	
First_Name	false	String	60		true	
Middel_Name	false	Character	60		true	
Last_Name	false	String	60		true	
No_	false	String	255		true	
Password	false	String	255		true	
Device_Address	false	String	255		true	
Cost_Center_Code	false	String	40		true	

Company_Code	false	String	40		true	
Depot_code	false	String	40		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

**Original Function Parameters:**  
**Component tJava**

	UNIQUE NAME	tJava_2	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlInput_4

**Component Parameters:**

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n"); context.ProfitCenter = "04";</pre>
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJava\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters: Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">jlet_CustomLogging_NAV_1</a>

#### Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)

Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tLogCatcher\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	



root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

**Original Function Parameters:**  
**Component tMSSqlConnection**

	UNIQUE NAME	tMSSqlConnection_2	INPUT(S)	<a href="#">tContextLoad_1</a>
	LABEL	ERP_DSD_Integration	OUTPUT(S)	<a href="#">tDBConnection_1</a>

**Component Parameters:**


Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_2

Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	

Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	NAV_Product	OUTPUT(S)	tMap_3

**Component Parameters:**

---

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_2
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Table Name	"NAV_Product"
Query Type	Built-In
Guess Schema	""
Query	"SELECT \""+context.DB_ERP_DSD_Integration_Schema+"\".[NAV_ +" FROM \""+context.DB_ERP_DSD_Integration_Schema+"\".[NAV_
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=CRC, TRIM=false}]
Label format	NAV_Product
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tMSSqlInput\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
CRC	false	long			false	

#### Original Function Parameters:

##### Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_4	INPUT(S)	<a href="#">tJava_2</a>
	LABEL	DB_Talend_Context	OUTPUT(S)	<a href="#">tContextLoad_1</a>

#### Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false



Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	

Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring


Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[[SCHEMA_COLUMN=key, TRIM=false], {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tMSSqlInput\_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	

value	false	String	255		true	
-------	-------	--------	-----	--	------	--

Original Function Parameters:  
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_2	INPUT(S)	tMap_3
	LABEL	Delta	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tMSSqlConnection_2
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database

Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Product"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	MATNO
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false

Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	true
Field options	<pre> [   {SCHEMA_COLUMN=MATNO,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true},   {SCHEMA_COLUMN=DESCRIPTION,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true},   {SCHEMA_COLUMN=SHORTDESCRIPTION,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true},   {SCHEMA_COLUMN=LONGDESCRIPTION,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true},   {SCHEMA_COLUMN=UPC, UPDATE_KEY=false,    DELETE_KEY=false, UPDATABLE=true,    INSERTABLE=true},   {SCHEMA_COLUMN=UOMBASE,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true},   {SCHEMA_COLUMN=ProfitCenter,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true},   {SCHEMA_COLUMN=CRC, UPDATE_KEY=false,    DELETE_KEY=false, UPDATABLE=true,    INSERTABLE=true},   {SCHEMA_COLUMN=ProcessTimestamp,    UPDATE_KEY=false, DELETE_KEY=false,    UPDATABLE=true, INSERTABLE=true}] </pre>
Ignore date out of range	false

Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	Delta
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	true	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	



UPC	false	String	255		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	true	Long	255		true	
ProcessTimestamp	false	String	30		true	

Original Function Parameters:  
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tDBCommit_1</a>


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tJava_2</a>


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2 , tJavaRow_5

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	<pre> {{SCHEMA_COLUMN=MATNO, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=DESCRIPTION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=SHORTDESCRIPTION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=LONGDESCRIPTION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=UPC, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=UOMBASE, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}} </pre>
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true

Choose Column(s)	[{SCHEMA_COLUMN=MATNO, EMPTY_NULL=false}, {SCHEMA_COLUMN=DESCRIPTION, EMPTY_NULL=false}, {SCHEMA_COLUMN=SHORTDESCRIPTION, EMPTY_NULL=false}, {SCHEMA_COLUMN=LONGDESCRIPTION, EMPTY_NULL=false}, {SCHEMA_COLUMN=UPC, EMPTY_NULL=false}, {SCHEMA_COLUMN=UOMBASE, EMPTY_NULL=false}]
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tSchemaComplianceCheck\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	



UPC	false	String	255		true	
UOMBASE	false	String	255		false	

Original Function Parameters:  
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_2	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_2
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****

Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tWarn**

	UNIQUE NAME	tWarn_2	INPUT(S)	tJavaRow_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Unique Name	tWarn_2
Component Name	tWarn
Version	0.101 (ALPHA)

Family	Logs_Errors
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	Integer	255		true	
Company_Name	false	String	255		true	
User_ID	false	String	40		true	
First_Name	false	String	60		true	

Middel_Name	false	Character	60		true	
Last_Name	false	String	60		true	
No_	false	String	255		true	
Password	false	String	255		true	
Device_Address	false	String	255		true	
Cost_Center_Code	false	String	40		true	
Company_Code	false	String	40		true	
Depot_code	false	String	40		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

**Original Function Parameters:**  
**Component jlet\_CustomLogging\_NAV**

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	<a href="#">tLogCatcher_1</a>
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Version	Latest

Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

**Schema for jlet\_CustomLogging\_NAV\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

## Component jlet\_NAV\_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_1	INPUT(S)	<a href="#">tJavaFlex_7</a>
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none


### Component Parameters:

Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

### Schema for jlet\_NAV\_ResponseLogging\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

## Component jlet\_NAV\_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_2	INPUT(S)	<a href="#">tFixedFlowInput_1</a>
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none

### Component Parameters:

Properties	Values
Version	Latest

---




Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet\_NAV\_ResponseLogging\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMSSqlOutput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_5  tJavaFlex_9, tJavaFlex_4, tJavaFlex_10, tJavaFlex_11, tJavaFlex_6, tJavaFlex_8, tJavaFlex_3, tJavaFlex_7

Columns

MATNO

LONGDESCRIPTION

SHORTDESCRIPTION

LONGDESCRIPTION

UPC

LOMBASE

ProfitCenter

UPC

ProcessTimeStamp

Info

Var

Expression

Type

Variable

"100X0000" = row/MATNOComp...

String

☐ MATNO

"100X0000UP" = row/MATNOComp...

String

☐ Key

row/UPC

String

☐ UPC

Auto map

row/DESCRIPTION

DESCRIPTION

row/ProfitCenter

PROFICENTER

row/SHORTDESCRIPTION

SHORTDESCRIPTION

row/LONGDESCRIPTION

LONGDESCRIPTION

ValUPC

UPC

INVENTORYCOUN...

BASEPRICE

LOMBASE

TYPE

INVOICETYPE

ITEMWT

INWGTGROUP

ITEMWEIGHT

ITEMCATGP

BRFLYIND

COUNTRYORIGIN

OPERATIONCOUN...

ITEMSTATUS

PROTCATGP

UPANDCOUNL

SEMENTCODE

ORBITCONTROL CL...

Component Parameters:

Properties	Values

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

**Mapper table for tMap\_1 ( input ):**  
**Mapper table Properties( row7 ):**

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row7 ):**

Name	Type	Expression	isNullable
MATNO	String		false
DESCRIPTION	String		false
SHORTDESCRIPTION	String		false
LONGDESCRIPTION	String		false
UPC	String		true
UOMBASE	String		false
ProfitCenter	String		true
CRC	Long		true
ProcessTimestamp	String		true

**Constraint Table Entries( row7 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_1 ( output ):**

**Mapper table Properties( masterdataPoolUpdate ):**

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( masterdataPoolUpdate ):**

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

**Constraint Table Entries( masterdataPoolUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( MasterDataAttributeUpdate ):**

Properties	Values
Name	MasterDataAttributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MasterDataAttributeUpdate ):**

Name	Type	Expression	isNullable
Pool	String	context.Pool	true
Key	String	Var.Key	true

**Constraint Table Entries( MasterDataAttributeUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( MasterdataUpdate ):**

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MasterdataUpdate ):**

Name	Type	Expression	isNullable
Group	String	"DEFAULT"	true
Key	String	Var.Key	true
Filter1	String	Var.UPC	true
Description	String	row7.DESCRPTION	true

**Constraint Table Entries( MasterdataUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( attributeUpdate ):**

Properties	Values
Name	attributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( attributeUpdate ):**

Name	Type	Expression	isNullable
Name	String	context.AttName	true
UseIndex	Boolean	context.UseIndex	true

**Constraint Table Entries( attributeUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------



**Mapper table Properties( AttributeEntry ):**

Properties	Values
Name	AttributeEntry
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( AttributeEntry ):**

Name	Type	Expression	isNullable
PROFITCENTER	String	context.ProfitCenter	true

**Constraint Table Entries( AttributeEntry ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( Product ):**

Properties	Values
Name	Product
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( Product ):**

Name	Type	Expression	isNullable
MATNO	String	Var.Key	true
DESCRIPTION	String	row7.DESCRPTION	true
PROFITCENTER	String	row7.ProfitCenter	true
SHORTDESCRIPTION	String	row7.SHORTDESCRIPTION	true
LONGDESCRIPTION	String	row7.LONGDESCRIPTION	true
UPC	String	Var.UPC	true
INVENTORYCOUNTINGFREQUENCY	String		true

BASEPRICE	String	"3.47"	true
UOMBASE	String	"EA"	true
TYPE	String		true
INVOICETYPE	String		true
ITEMTYPE	String		true
INVPOSTGROUP	String		true
ITEMWEIGHT	String		true
ITMCATGRP	String		true
EMPTYIND	String	"false"	true
COUNTRYORIGIN	String	"US"	true
EXPIRATIONCALC	Integer		true
ITEMSTATUS	Integer		true
PRICEGROUP	String		true
BRANDCODE	String		true
SEGMENTCODE	Integer		true
ORDERCONTROLGROUP	String	Var.MATNO	true

**Constraint Table Entries( Product ):**

Name	Type	Expression	isNullable
------	------	------------	------------

#### Mapper table Properties( TAX ):

Properties	Values
Name	TAX
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

#### Metadata Table Entries( TAX ):

Name	Type	Expression	isNullable
TAX	String	"TAX"	true
TAX1	String	"1"	true
TAXCLASSIFICATION	String	"1"	true
TAXGROUPCODE	String	"00000"	true

#### Constraint Table Entries( TAX ):

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( MARM ):**

Properties	Values
Name	MARM
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MARM ):**

Name	Type	Expression	isNullable
MARM	String	"MARM"	true
MARM1	String	""	true
DENOMINATOR	String		true
NOMINATOR	String		true

**Constraint Table Entries( MARM ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( sendMasterData ):**

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( sendMasterData ):**

Name	Type	Expression	isNullable
newColumn	String		true

**Constraint Table Entries( sendMasterData ):**

Name	Type	Expression	isNullable

**Mapper table for tMap\_1 ( var ):**

**Mapper table Properties( Var ):**

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( Var ):**


Name	Type	Expression	isNullable
MATNO	String	"0000000" + row7.MATNO.replace("F","")	false
Key	String	"0000000" + row7.MATNO.replace("F","")	false
Type	String		false
UPC	String	row7.UPC	false

**Constraint Table Entries( Var ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Component tMap**

---

	UNIQUE NAME	tMap_2	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tAddCRCRow_1

### Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

### Mapper table for tMap\_2 ( input ):



**Mapper table Properties( row6 ):**

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row6 ):**

Name	Type	Expression	isNullable
MATNO	String		false
DESCRIPTION	String		false
SHORTDESCRIPTION	String		false
LONGDESCRIPTION	String		false
UPC	String		true
UOMBASE	String		false

**Constraint Table Entries( row6 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_2 ( output ):**

**Mapper table Properties( row90 ):**

Properties	Values
Name	row90
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row90 ):**

Name	Type	Expression	isNullable
MATNO	String	row6.MATNO	false
DESCRIPTION	String	row6.DESCRPTION	false
SHORTDESCRIPTION	String	row6.SHORTDESCRIPTION	false
LONGDESCRIPTION	String	row6.LONGDESCRIPTION	false
UPC	String	row6.UPC	true
UOMBASE	String	row6.UOMBASE	false
ProfitCenter	String	context.ProfitCenter	true

**Constraint Table Entries( row90 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_2 ( var ):**

Mapper table Properties( Var ):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_1 , tMSSqlInput_2
	LABEL	LookUp_ExistingRecords	OUTPUT(S)	tMSSqlOutput_2

Component Parameters:

Properties	Values
------------	--------

---

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

**Mapper table for tMap\_3 ( input ):**  
**Mapper table Properties( row5 ):**

Properties	Values
Name	row5
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row5 ):**

Name	Type	Expression	isNullable
MATNO	String		false
DESCRIPTION	String		false
SHORTDESCRIPTION	String		false
LONGDESCRIPTION	String		false
UPC	String		true
UOMBASE	String		false
ProfitCenter	String		true
CRC	Long		true

**Constraint Table Entries( row5 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( row2 ):**

Properties	Values
Name	row2
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

**Metadata Table Entries( row2 ):**

Name	Type	Expression	isNullable
CRC	long	row5.CRC	false

**Constraint Table Entries( row2 ):**

Name	Type	Expression	isNullable

**Mapper table for tMap\_3 ( output ):**

**Mapper table Properties( out ):**



Properties	Values
Name	out
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	true
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( out ):**

Name	Type	Expression	isNullable
MATNO	String	row5.MATNO	false
DESCRIPTION	String	row5.DESRIPTION	false
SHORTDESCRIPTION	String	row5.SHORTDESCRIPTION	false
LONGDESCRIPTION	String	row5.LONGDESCRIPTION	false
UPC	String	row5.UPC	true
UOMBASE	String	row5.UOMBASE	false
ProfitCenter	String	row5.ProfitCenter	true
CRC	Long	row5.CRC	true
ProcessTimestamp	String	context.ProcessTimeStamp	true

**Constraint Table Entries( out ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_3 ( var ):**

**Mapper table Properties( Var ):**

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( Var ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Constraint Table Entries( Var ):**

Name	Type	Expression	isNullable
------	------	------------	------------