



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:15:52 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_Contact
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Jul 20, 2016 5:36:46 PM
Modification	Nov 15, 2019 10:12:12 AM

Preview Picture

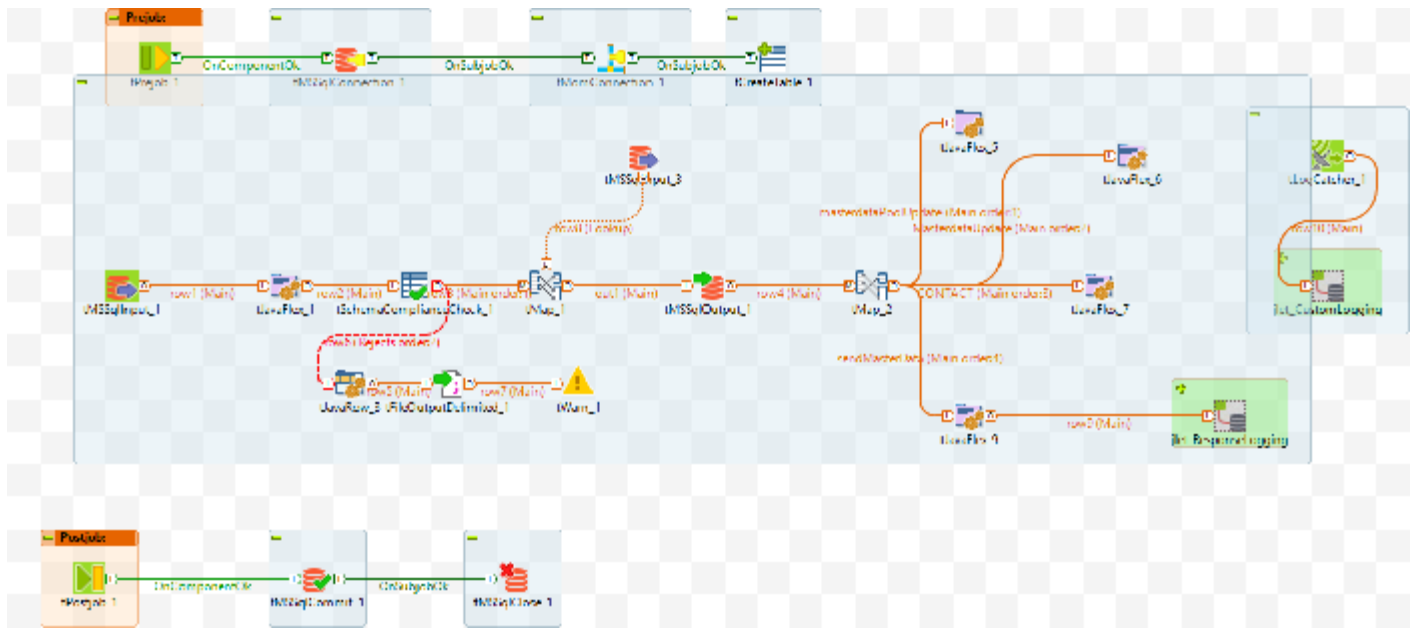

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
source	source?	false
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
discription	discription?	false
mafAppSpace	mafAppSpace?	false

Pool	Pool?	false
group	group?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true

key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false

DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false

NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false

ContextQA

Name	Prompt	Need Prompt
source	source?	false
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
discription	discription?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false

group	group?	false
table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false

keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false

DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false

DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false

DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

ContextPREPROD

Name	Prompt	Need Prompt
source	source?	false
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
discription	discription?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false

table	table?	false
viewname	viewname?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom Username	mom Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false

message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false

DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false


Component List

Component Name	Component Type
jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging
tCreateTable_1	tCreateTable
tFileOutputDelimited_1	tFileOutputDelimited
tJavaFlex_1	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaFlex_9	tJavaFlex

tJavaRow_3	tJavaRow
tLogCatcher_1	tLogCatcher
tMSSqlClose_1	tMSSqlClose
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_3	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMap_1	tMap
tMap_2	tMap
tMomConnection_1	tMomConnection
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tWarn_1	tWarn

Components Description

Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	tMomConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	false
Host	context.DB_ERP_DSD_Integration_Server
Database Name	context.DB_ERP_DSD_Integration_Database
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	context.DB_ERP_DSD_Integration_Login

Password	context.DB_ERP_DSD_Integration_Password
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Access File	""
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	""
Running Mode	HSQldb_IN_MEMORY
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	context.DB_ERP_DSD_Integration_Database
Framework Type	EMBEDDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database
DB Root Path	""

JDBC Provider	JTDS
Temporary Table	false
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
SQLite File	""
DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database
Use "drop cascade"	true
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Table Name	"nav_contact"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET

Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tCreateTable_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	

Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E_Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	

Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	

Original Function Parameters:
Component tFileOutputDelimited

	UNIQUE NAME	tFileOutputDelimited_1	INPUT(S)	tJavaRow_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_1

Component Parameters:

Properties	Values
Unique Name	tFileOutputDelimited_1
Component Name	tFileOutputDelimited
Version	0.101 (ALPHA)
Family	File/Output
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileOutputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use Output Stream	false
Output Stream	outputStream
File Name	"C:/Talend/6.1.1/studio/workspace/out.txt"
Row Separator	"\n"

Use OS line separator as row separator when CSV Row Separator is set to CR,LF or CRLF.	true
CSV Row Separator	"\n"
Field Separator	","
Append	false
Include Header	true
Compress as zip file	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Advanced separator (for numbers)	false
Thousands separator	" "
Decimal separator	"."
CSV options	false
Escape char	""
Text enclosure	""
Create directory if does not exist	true
Split output in several files	false

Rows in each output file	1000
Custom the flush buffer size	false
Row number	1
Output in row mode	false
Encoding	"ISO-8859-15"
Don't generate empty file	false
Throw an error if the file already exist	false
Min column number of optimize code	90
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tFileOutputDelimited_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E-Mail	false	String	225		false	

Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	int i =1;
Main code	context.objectId=row1.Company_ID+""; context.objectName=row1.Company_Name; if(i%5000 == 0) { System.out.println("5000 Records Have Processed"); } i++;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	

Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E_Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_2

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none
--	-------	-----------------	-----------	------

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=0;
Main code	//routines.ShippingRouteLoad.createAllObjects(); routines.r_HarvestRoutineLoop.createAllObjects(); b++; if(! //routines.ShippingRouteLoad.populateMasterdataPoolUpc routines.r_HarvestRoutineLoop.populateMasterdataPoolUp } else if(b==50){ b=0; }
End code	// end of the component, outside/closing the loop //routines.ShippingRouteLoad.createAllObjects(); //routines.ShippingRouteLoad.populateMasterdataPoolUpc routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUp
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	//routines.ShippingRouteLoad.populateMasterdataUpdate(routines.r_HarvestRoutineLoop.populateMasterdataUpdate
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	//routines.ShippingRouteLoad.populateDataContainerEntry routines.r_HarvestRoutineLoop.populateDataContainerEnt

End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	ilet_ResponseLogging_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_9
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java


Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	<pre> a++; // routines.ShippingRouteLoad.populateDataContainerEnt routines.ShippingRouteLoad.populateUpdateContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE //routines.ShippingRouteLoad.sendMasterData(); row9.responseXML=routines.r_HarvestRoutineLoop.sendM } //routines.ShippingRouteLoad.resetObjects(); routines.r_f </pre>
End code	<pre> // end of the component, outside/closing the loop // routines routines.ShippingRouteLoad.resetObjects(); routines.r_HarvestRoutineLoop.sendMasterData(context.m routines.r_HarvestRoutineLoop.resetObjects(); </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_3	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileOutputDelimited_1

Component Parameters:

Properties	Values
Unique Name	tJavaRow_3

Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.ErrorMessage = input_row.errorMessage;
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tJavaRow_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	

Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E-Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	

Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors

Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	

father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tMSSqlClose

	UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Database	tMSSqlClose
Unique Name	tMSSqlClose_1
Component Name	tMSSqlClose

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Component List	tMSSqlConnection_1
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlClose_1

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1


Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMomConnection_1
--	-------	-----------------	-----------	----------------------------------


Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"

Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database

Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"[HFS_Master_DataAccess_DB].[dbo].[HFS_DSD_Contact
Query Type	Built-In
Guess Schema	""
Query	"SELECT [Company ID] ,[Company Name] ,[Contact No] , [Name] ,[Address] ,[Address 2] ,[City] ,[Phone No] ,[Territo Code] ,[Salesperson Code] ,[Country] ,[Last Date Modified] ,[Fax No] ,[Picture] ,[Post Code] ,[State] ,[E-Mail] ,[Type] ,[Company No] ,[Job Title] ,[Initials] ,[Extension No] ,[Mobile Phone No] ,[Pager] ,[Customer No] ,[Business Relation Code] FROM [HFS_Master_DataAccess_DB].[dbo].[NAV_DSD_Contact
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false


Trim column	{SCHEMA_COLUMN=Company_ID, TRIM=false}, {SCHEMA_COLUMN=Company_Name, TRIM=false}, {SCHEMA_COLUMN=Contact_No, TRIM=false}, {SCHEMA_COLUMN=Name, TRIM=false}, {SCHEMA_COLUMN=Address, TRIM=false}, {SCHEMA_COLUMN=Address_2, TRIM=false}, {SCHEMA_COLUMN=City, TRIM=false}, {SCHEMA_COLUMN=Phone_No, TRIM=false}, {SCHEMA_COLUMN=Territory_Code, TRIM=false}, {SCHEMA_COLUMN=Salesperson_Code, TRIM=false}, {SCHEMA_COLUMN=Country_Code, TRIM=false}, {SCHEMA_COLUMN=Last_Date_Modified, TRIM=false}, {SCHEMA_COLUMN=Fax_No, TRIM=false}, {SCHEMA_COLUMN=Picture, TRIM=false}, {SCHEMA_COLUMN=Post_Code, TRIM=false}, {SCHEMA_COLUMN=County, TRIM=false}, {SCHEMA_COLUMN=E_Mail, TRIM=false}, {SCHEMA_COLUMN=Type, TRIM=false}, {SCHEMA_COLUMN=Company_No, TRIM=false}, {SCHEMA_COLUMN=Job_Title, TRIM=false}, {SCHEMA_COLUMN=Initials, TRIM=false}, {SCHEMA_COLUMN=Extension_No, TRIM=false}, {SCHEMA_COLUMN=Mobile_Phone_No, TRIM=false}, {SCHEMA_COLUMN=Pager, TRIM=false}, {SCHEMA_COLUMN=Customer_No, TRIM=false}, {SCHEMA_COLUMN=Business_Relation_Code, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	

E_Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_3	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_3

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"[HFS_Master_DataAccess_DB].[dbo].[NAV_DSD_Customr
Query Type	Built-In

Guess Schema	""
Query	"select [Customer No] FROM [HFS_Master_DataAccess_DB].[dbo].[NAV_DSD_Customers]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Customer_No, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_No	false	String	20		true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	false
Component List	
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema

Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"nav_contact"
Action on table	CLEAR
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Company_ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""

Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
	<pre> [{{SCHEMA_COLUMN=Company_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Company_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Contact_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Address, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Address_2, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=City, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Phone_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Territory_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Salesperson_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, </pre>

Field options

```
{SCHEMA_COLUMN=Country_Code,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Last_Date_Modified,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Fax_No, UPDATE_KEY=false,  
DELETE_KEY=false, UPDATABLE=true,  
INSERTABLE=true}, {SCHEMA_COLUMN=Picture,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Post_Code,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=County, UPDATE_KEY=false,  
DELETE_KEY=false, UPDATABLE=true,  
INSERTABLE=true}, {SCHEMA_COLUMN=E_Mail,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Type, UPDATE_KEY=false,  
DELETE_KEY=false, UPDATABLE=true,  
INSERTABLE=true},  
{SCHEMA_COLUMN=Company_No,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Job_Title,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Initials, UPDATE_KEY=false,  
DELETE_KEY=false, UPDATABLE=true,  
INSERTABLE=true},  
{SCHEMA_COLUMN=Extension_No,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Mobile_Phone_No,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},  
{SCHEMA_COLUMN=Pager, UPDATE_KEY=false,  
DELETE_KEY=false, UPDATABLE=true,  
INSERTABLE=true},  
{SCHEMA_COLUMN=Customer_No,  
UPDATE_KEY=false, DELETE_KEY=false,  
UPDATABLE=true, INSERTABLE=true},
```

	{SCHEMA_COLUMN=Business_Relation_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}}
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tMSSqlOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	

Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E-Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	

Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	

Original Function Parameters:
Component tMomConnection

	UNIQUE NAME	tMomConnection_1	INPUT(S)	tMSSqlConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tCreateTable_1

Component Parameters:


Properties	Values
Unique Name	tMomConnection_1
Component Name	tMomConnection
Version	0.102 (ALPHA)
Family	Internet/MOM and JMS
Start	false

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMomInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
MQ server	ActiveMQ

Use SSL Transport	false
Failover	false
Static Discovery	false
URI parameters	"?randomize=false"
URI parameters	"?transport.maxReconnectDelay=5000&transport.useExponentialBackOff=fa
	[]
Host	context.mom_Host
Port	context.mom_Port
Username	context.mom_Username
Password	context.mom_Password
Channel	"DC.SVRCONN"
QueueManager	""
Use Transacted	false
Use or register a shared Connection	false
Shared Connection Name	
Acknowledgment Mode	AUTO_ACKNOWLEDGE

Additional options	[]
Set CipherSpec	false
CipherSpec	SSL_RSA_WITH_NULL_MD5
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1

Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false

Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlConnection_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob

Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2

	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1 , tJavaRow_3

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)

Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true

Base Schema	Built-In
Check all columns from schema	false
Custom defined	true
	<pre> {{SCHEMA_COLUMN=Company_ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Company_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Contact_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Address, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Address_2, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=City, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Phone_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Territory_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Salesperson_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Country_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Last_Date_Modified, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Fax_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Picture, SELECTED_TYPE=String, DATEPATTERN=, </pre>

Checked Columns

NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Post_Code,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=County,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=E_Mail,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Type,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Company_No,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Job_Title,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Initials,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Extension_No,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Mobile_Phone_No,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Pager,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},
{SCHEMA_COLUMN=Customer_No,
SELECTED_TYPE=String, DATEPATTERN=,
NULLABLE=true, MAX_LENGTH=false},

	{SCHEMA_COLUMN=Business_Relation_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}}
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true
	[{SCHEMA_COLUMN=Company_ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=Company_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Contact_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Address, EMPTY_NULL=false}, {SCHEMA_COLUMN=Address_2, EMPTY_NULL=false}, {SCHEMA_COLUMN=City, EMPTY_NULL=false}, {SCHEMA_COLUMN=Phone_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Territory_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Salesperson_Code, EMPTY_NULL=false},]

Choose Column(s)

```
{SCHEMA_COLUMN=Country_Code,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Last_Date_Modified,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Fax_No,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Picture,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Post_Code,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=County,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=E_Mail,  
EMPTY_NULL=false}, {SCHEMA_COLUMN=Type,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Company_No,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Job_Title,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Initials,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Extension_No,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Mobile_Phone_No,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Pager,  
EMPTY_NULL=false},  
{SCHEMA_COLUMN=Customer_No,
```

	EMPTY_NULL=false}, {SCHEMA_COLUMN=Business_Relation_Code, EMPTY_NULL=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tSchemaComplianceCheck_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	

Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	
Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E_Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	

Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	

Original Function Parameters:
Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tFileOutputDelimited_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tWarn_1
Component Name	tWarn
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tWarn_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	int	225		false	
Company_Name	false	String	225		false	
Contact_No	false	String	225		false	
Name	false	String	225		false	
Address	false	String	225		false	
Address_2	false	String	225		false	
City	false	String	225		false	
Phone_No	false	String	225		false	
Territory_Code	false	String	225		false	
Salesperson_Code	false	String	225		false	
Country_Code	false	String	225		false	

Last_Date_Modified	false	java.util.Date	23	3	false	
Fax_No	false	String	225		false	
Picture	false	Object	7999		true	
Post_Code	false	String	225		false	
County	false	String	225		false	
E_Mail	false	String	225		false	
Type	false	int	10		false	
Company_No	false	String	225		false	
Job_Title	false	String	225		false	
Initials	false	String	225		false	
Extension_No	false	String	225		false	
Mobile_Phone_No	false	String	225		false	
Pager	false	String	225		false	
Customer_No	false	String	225		true	
Business_Relation_Code	false	String	225		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component jlet_CustomLogging

	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	LogCatcher_1
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	

context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_ResponseLogging

	UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_9 , tMSSqlInput_3
	LABEL	jlet_ResponseLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_ResponseLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

responseXML	false	String			true	
-------------	-------	--------	--	--	------	--

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tJavaFlex_9 , tMSSqlInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutput_1

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
Company_ID	int		false
Company_Name	String		false
Contact_No	String		false
Name	String		false
Address	String		false
Address_2	String		false
City	String		false

Phone_No	String		false
Territory_Code	String		false
Salesperson_Code	String		false
Country_Code	String		false
Last_Date_Modified	java.util.Date		false
Fax_No	String		false
Picture	Object		true
Post_Code	String		false
County	String		false
E_Mail	String		false
Type	int		false
Company_No	String		false
Job_Title	String		false
Initials	String		false
Extension_No	String		false
Mobile_Phone_No	String		false
Pager	String		false

Customer_No	String		true
Business_Relation_Code	String		true

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row8):

Properties	Values
Name	row8
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row8):

Name	Type	Expression	isNullable
Customer_No	String	row3.Customer_No	true

Constraint Table Entries(row8):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Type	Expression	isNullable
Company_ID	int	row3.Company_ID	false
Company_Name	String	row3.Company_Name	false
Contact_No	String	row3.Contact_No	false
Name	String	row3.Name	false
Address	String	row3.Address	false
Address_2	String	row3.Address_2	false
City	String	row3.City	false

Phone_No	String	row3.Phone_No	false
Territory_Code	String	row3.Territory_Code	false
Salesperson_Code	String	row3.Salesperson_Code	false
Country_Code	String	row3.Country_Code	false
Last_Date_Modified	java.util.Date	row3.Last_Date_Modified	false
Fax_No	String	row3.Fax_No	false
Picture	Object	row3.Picture	true
Post_Code	String	row3.Post_Code	false
County	String	row3.County	false
E_Mail	String	row3.E_Mail	false
Type	int	row3.Type	false
Company_No	String	row3.Company_No	false
Job_Title	String	row3.Job_Title	false
Initials	String	row3.Initials	false
Extension_No	String	row3.Extension_No	false
Mobile_Phone_No	String	row3.Mobile_Phone_No	false
Pager	String	row3.Pager	false

Customer_No	String	row3.Customer_No	true
Business_Relation_Code	String	row3.Business_Relation_Code	true

Constraint Table Entries(out1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
Company_ID	int		false
Company_Name	String		false
Contact_No	String		false

Name	String		false
Address	String		false
Address_2	String		false
City	String		false
Phone_No	String		false
Territory_Code	String		false
Salesperson_Code	String		false
Country_Code	String		false
Last_Date_Modified	java.util.Date		false
Fax_No	String		false
Picture	Object		true
Post_Code	String		false
County	String		false
E_Mail	String		false
Type	int		false
Company_No	String		false
Job_Title	String		false

Initials	String		false
Extension_No	String		false
Mobile_Phone_No	String		false
Pager	String		false
Customer_No	String		true
Business_Relation_Code	String		true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Key	String	Var.Contact_No	true
Group	String	context.group	true
Description	String	context.discription	true
mafAppSpace	String	context.mafAppSpace	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(CONTACT):

Properties	Values
Name	CONTACT
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(CONTACT):

Name	Type	Expression	isNullable
CONTACT	String	Var.Contact_No	true
FIRSTNAME	String	row4.Name	true
LASTNAME	String	row4.Name	true
JOBTITLE	String	row4.Job_Title	true
PHONENR	String	row4.Phone_No	true
MOBILEPHONENR	String	row4.Mobile_Phone_No	true
COMPANYNAME	String	row4.Company_Name	true

COMPANYNR	String	Var.Company_No	true
ADDRESS	String	row4.Address	true
ADDRESS2	String	row4.Address_2	true
POSTCODE	String	row4.Post_Code	true
COUNTY	String	row4.County	true
CITY	String	row4.City	true
COUNTRYREGIONCODE	String	row4.Country_Code	true
FAXNO	String	row4.Fax_No	true
MAIL	String	row4.E_Mail	true
EXTENSION	String	row4.Extension_No	true
BUSINESSRELATIONCODE	String	row4.Business_Relation_Code	true

Constraint Table Entries(CONTACT):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression
Contact_No	String	String.format("%010d",Integer.parseInt(row4.Contact_No.replaceAll("\\D+","")))
Company_No	String	(row4.Company_No==null row4.Company_No.isEmpty())?row4.Company_No:String.format("%010d",Intege

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------