



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:25 PM
AUTHOR	Phillips, Cody	Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description

Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_Order_SQL
Author	Phillips, Cody
Version	0.1
Purpose	
Status	
Description	
Creation	Dec 3, 2019 7:49:18 AM
Modification	Dec 4, 2019 12:02:29 PM

Preview Picture

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
ProcessDate	ProcessDate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false

mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false

directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false

object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
Pool	Pool?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false

type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false

NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextQA

Name	Prompt	Need Prompt
RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
ProcessDate	ProcessDate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false

mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false

database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false

movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
Pool	Pool?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false

table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false

DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false

NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextPROD

Name	Prompt	Need Prompt
RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
ProcessDate	ProcessDate?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false

Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
Location	Location?	false
message1	message1?	false

message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
Pool	Pool?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false

NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextPREPROD

Name	Prompt	Need Prompt
------	--------	-------------

RM_Price_FieldSeparator	RM_Price_FieldSeparator?	false
ProcessDate	ProcessDate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
batch	batch?	false

CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false

Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
Pool	Pool?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false

RouteGroup	RouteGroup?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false

DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false

NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false


Component List

Component Name	Component Type
tAddCRCRow_1	tAddCRCRow
tAggregateRow_1	tAggregateRow
tContextLoad_1	tContextLoad
tDBCommit_1	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tDBConnection_3	tMSSqlConnection
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBInput_3	tMSSqlInput
tDBInput_4	tMSSqlInput
tDBInput_5	tMSSqlInput
tDBOutput_1	tMSSqlOutput
tJavaFlex_1	tJavaFlex
tJava_1	tJava
tJava_2	tJava

tMap_1	tMap
tMap_2	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSortRow_1	tSortRow

Components Description

Component tAddCRCRow

	UNIQUE NAME	tAddCRCRow_1	INPUT(S)	tAggregateRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tAddCRCRow_1
Component Name	tAddCRCRow
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAddCRCRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Implication	{[SCHEMA_COLUMN=key, USE_IN_CRC=true}, {SCHEMA_COLUMN=orderDate, USE_IN_CRC=false}, {SCHEMA_COLUMN=routeNo, USE_IN_CRC=false}, {SCHEMA_COLUMN=customerNo, USE_IN_CRC=false}, {SCHEMA_COLUMN=order, USE_IN_CRC=true}, {SCHEMA_COLUMN=CRC, USE_IN_CRC=false}]}
CRC Type	crc32
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tAddCRCRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String			false	
orderDate	false	String			false	
routeNo	false	String	4		true	
customerNo	false	String	9		true	

order	false	String			true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tAggregateRow

	UNIQUE NAME	tAggregateRow_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tAddCRCRow_1

Component Parameters:

Properties	Values
Unique Name	tAggregateRow_1
Component Name	tAggregateRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tAggregateRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Group by	[[OUTPUT_COLUMN=key, INPUT_COLUMN=key}, {OUTPUT_COLUMN=orderDate, INPUT_COLUMN=orderDate}, {OUTPUT_COLUMN=routeNo, INPUT_COLUMN=routeNo}, {OUTPUT_COLUMN=customerNo, INPUT_COLUMN=customerNo}]]
Operations	[[OUTPUT_COLUMN=order, FUNCTION=last, INPUT_COLUMN=order, IGNORE_NULL=false]]
Delimiter (only for list operation)	" , "


Use financial precision, this is the max precision for "sum" and "avg" operations, checked option heaps more memory and slower than unchecked.	true
Check type overflow (slower)	false
Check ULP (Unit in the Last Place), ensure that a value will be incremented or decremented correctly, only for float and double types. (slower)	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tAggregateRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String			false	
orderDate	false	String			false	
routeNo	false	String	4		true	

customerNo	false	String	9		true	
order	false	String			true	

Original Function Parameters:
Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true

Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
------------	--------


Database	tMSSqlCommit
Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tDBInput_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tJava_2


Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****

Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	true
Shared DB Connection Name	"Order_Conn"
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_3	INPUT(S)	tJava_2
	LABEL	DB_Navision	OUTPUT(S)	none

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_3
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
JDBC Provider	MSSQL_PROP
Host	"testnav10.corp.usbakery.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"TEST-USB-2013"
Username	"talend_hfs2"

Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1 , tDBConnection_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL


Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_environment+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"

Trim all the String/Char columns	true
Trim column	[[SCHEMA_COLUMN=key, TRIM=false], {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"Select orderkey,crc from MD_ORDER"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=orderkey, TRIM=false], [SCHEMA_COLUMN=crc, TRIM=false]]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	


Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
orderkey	false	String	50		true	
crc	false	Long	19		true	

Original Function Parameters:

Component tMSSqlInput

	UNIQUE NAME	tDBInput_3	INPUT(S)	none
	LABEL	Nav_DSD_Order	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_3

Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [REFERENCEDATE] ,[SHIPTO] ,[Item No_] ,[QTYTEMP] , [QTYPERM] ,[QTYORDER] ,[UOM] FROM ["+context.NAV_Order+"]"
Specify a data source alias	false


Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[{SCHEMA_COLUMN=REFERENCEDATE, TRIM=false}, {SCHEMA_COLUMN=SHIPTO, TRIM=false}, {SCHEMA_COLUMN=Item_No_, TRIM=false}, {SCHEMA_COLUMN=QTYTEMP, TRIM=false}, {SCHEMA_COLUMN=QTYPERM, TRIM=false}, {SCHEMA_COLUMN=QTYORDER, TRIM=false}, {SCHEMA_COLUMN=UOM, TRIM=false}]]
Label format	Nav_DSD_Order
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

REFERENCEDATE	false	String	50		false	
SHIPTO	false	String	255		false	
Item_No_	false	String	30		false	
QTYTEMP	false	BigDecimal	38	6	false	
QTYPERM	false	BigDecimal	38	6	false	
QTYORDER	false	BigDecimal	38	6	false	
UOM	false	String	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_4	INPUT(S)	none
	LABEL	NAV_SalesDate	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true


Component List	tDBConnection_3
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [DSD_SalesDate] FROM ["+context.NAV_SalesDate+"]"
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[{SCHEMA_COLUMN=SalesDate, TRIM=false}]]
Label format	NAV_SalesDate
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for Nav_DSD_Order :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesDate	false	String			true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_5	INPUT(S)	none
	LABEL	NAV_DSD_Customer	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_5
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_3
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database


Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	" select cust.Customer# CustomerNo,cust.Name,iter.[Key] ROUTE,usr.FACILITY,usr.LOCATION,usr.ROUTEGROUP from [dbo].[Nav_DSD_Customer Download_Details] cust join Nav_DSD_Itinerary iter on cust.SHIPPING# = iter.shipto join Nav_DSD_User usr on iter.[Key] = usr.[ID] "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column	[{SCHEMA_COLUMN=CustomerNo, TRIM=false}, {SCHEMA_COLUMN=Name, TRIM=false}, {SCHEMA_COLUMN=ROUTE, TRIM=false}, {SCHEMA_COLUMN=FACILITY, TRIM=false}, {SCHEMA_COLUMN=LOCATION, TRIM=false}, {SCHEMA_COLUMN=ROUTEGROUP, TRIM=false}]
Label format	NAV_DSD_Customer
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
CustomerNo	false	String	255		false	
Name	false	String	255		false	
ROUTE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tMap_2, tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	""
Port	"1433"
Schema	""
Database	""
Database Driver	MSSQL

Username	""
Password	**
Table	"MD_ORDER"
Action on table	NONE
Turn on Identity insert	false
Action on data	UPDATE_OR_INSERT
Specify identity field	false
Identity field	key
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL


Additional JDBC Parameters	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
Field options	[{SCHEMA_COLUMN=key, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=orderDate, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=routeNo, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=customerNo, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=order, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CRC, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=sendYN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	true	String			false	
orderDate	false	String			false	
routeNo	false	String	4		true	
customerNo	false	String	9		true	
order	false	String			true	
CRC	false	Long	255		true	
sendYN	false	String			false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tSortRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tAggregateRow_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code String oldKey = "XXX"; String tempOrder = "";
Main code	if(oldKey.equals(row3.key)) { tempOrder = tempOrder + row3.prodNo + "_" + row3.perm + "_" + row3.qty + " "; } else { tempOrder = row3.prodNo + "_" + row3.perm + "_" + row3.qty + " "; } oldKey = row3.key; row5.order = tempOrder;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String			false	
orderDate	false	String			false	
routeNo	false	String	4		true	
customerNo	false	String	9		true	
order	false	String			true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); //context.ProcessDate=TalendDate.formatDate("yyyy-MM-dd-HH-mm-ss", TalendDate.getCurrentDate()); context.ProcessDate=context.ProcessTimeStamp.replace(" ", "-").replace(":", "");</pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tDBConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_3

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	System.out.println(context.directory);
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSortRow

	UNIQUE NAME	tSortRow_1	INPUT(S)	tMap_1 , tDBInput_4 , tDBInput_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
Unique Name	tSortRow_1
Component Name	tSortRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSortRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Criteria	[[COLNAME=key, SORT=alpha, ORDER=asc], {COLNAME=prodNo, SORT=alpha, ORDER=asc}]
Sort on disk	false
Temp data directory path	"C:/Talend/7.0.1/studio/Workspace_GIT/temp"


Create temp data directory if does not exist	true
Buffer size of external sort	1000000
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String			false	
routeNo	false	String	4		true	
customerNo	false	String	9		true	
prodNo	false	String	9		true	
orderDate	false	String			false	
perm	false	Integer			true	

qty	false	Integer		true	
-----	-------	---------	--	------	--

Original Function Parameters:
Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_1 , tDBInput_4, tDBInput_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSortRow_1

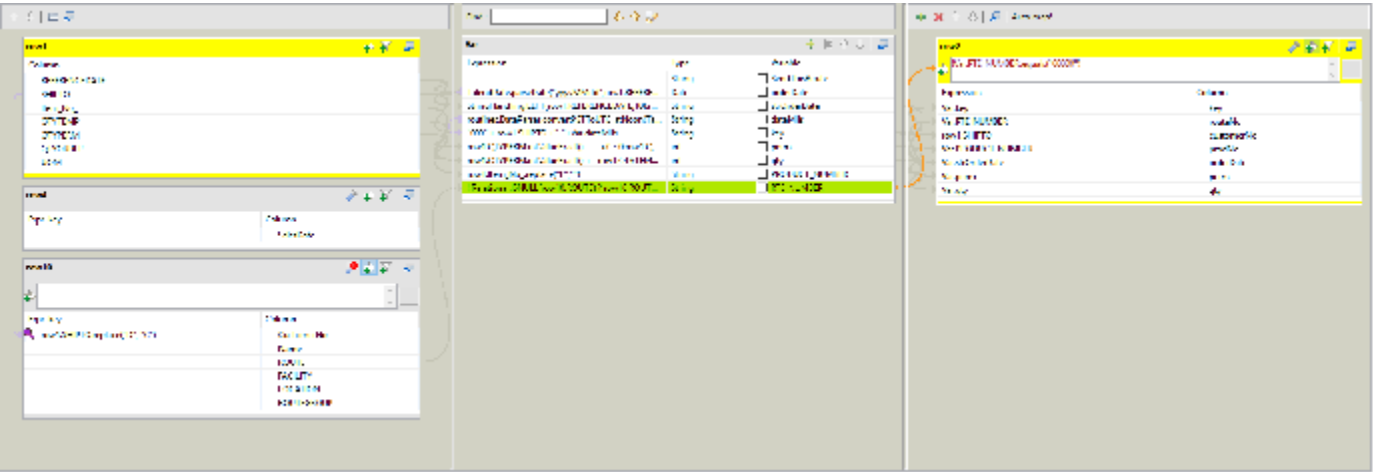

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000

Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
REFERENCEDATE	String		false
SHIPTO	String		false
Item_No_	String		false
QTYTEMP	BigDecimal		false
QTYPERM	BigDecimal		false
QTYORDER	BigDecimal		false
UOM	String		false

Constraint Table Entries(row1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
SalesDate	String		true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable

Mapper table Properties(row10):

Properties	Values
Name	row10
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row10):

Name	Type	Expression	isNullable
CustomerNo	String	row1.SHIPTO.replace("D","C")	false
Name	String		false
ROUTE	String		false
FACILITY	String		false
LOCATION	String		false
ROUTEGROUP	String		false

Constraint Table Entries(row10):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	!Var.RTE_NUMBER.equals("00000")

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
key	String	Var.key	false
routeNo	String	Var.RTE_NUMBER	true
customerNo	String	row1.SHIPTO	true
prodNo	String	Var.PRODUCT_NUMBER	true
orderDate	String	Var.strOrderDate	false
perm	Integer	Var.perm	true
qty	Integer	Var.qty	true

Constraint Table Entries(row2):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression
SendThisRoute	String	
orderDate	java.util.Date	TalendDate.parseDate("yyyyMMdd",row1.REFERENCEDATE)
strOrderDate	String	StringHandling.LEFT(row1.REFERENCEDATE,10).replace("-", "")
dateMils	String	routines.DateParser.convertPSTToUTC_atNoon(TalendDate.for
key	String	"000" + row1.SHIPTO + "_" + Var.dateMils
perm	int	row1.QTYPERM.intValueExact() < 0 ? 0 : row1.QTYPERM.intValueExact()
qty	int	row1.QTYPERM.intValueExact() + row1.QTYTEMP.intValueExact() 0 : row1.QTYPERM.intValueExact() + row1.QTYTEMP.intValueExact()
PRODUCT_NUMBER	String	row1.Item_No_.replace("F", "")
RTE_NUMBER	String	! Relational.ISNULL(row10.ROUTE) ? row10.ROUTE.replace("R", "")

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_1

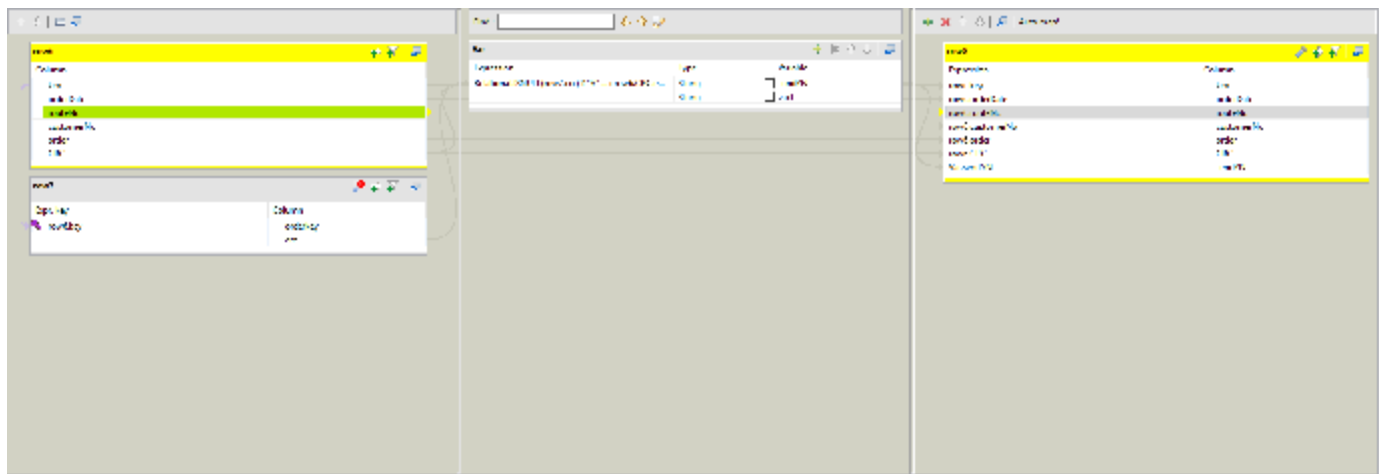

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row6):

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row6):

Name	Type	Expression	isNullable
key	String		false
orderDate	String		false
routeNo	String		true
customerNo	String		true
order	String		true
CRC	Long		true

Constraint Table Entries(row6):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
orderkey	String	row6.key	true
crc	Long		true

Constraint Table Entries(row7):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):
Mapper table Properties(row8):

Properties	Values
Name	row8
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row8):

Name	Type	Expression	isNullable
key	String	row6.key	false
orderDate	String	row6.orderDate	false
routeNo	String	row6.routeNo	true
customerNo	String	row6.customerNo	true
order	String	row6.order	true
CRC	Long	row6.CRC	true
sendYN	String	Var.sendYN	false

Constraint Table Entries(row8):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
sendYN	String	Relational.ISNULL(row7.crc) ? "Y" : row6.CRC.equals(row7.crc) ? "N" : "Y"	false
var1	String		false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------