



# Jobs

Generated by Talend Data Management Platform

|              |         |   |                         |
|--------------|---------|---|-------------------------|
| Project Name | NAV_MOV | GENERATION DATE                         | Dec 17, 2019 1:16:23 PM |
| AUTHOR       |         | Talend Data Management Platform VERSION | 7.0.1.20180411_1414     |

## Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

## Project Description


| Properties | Values  |
|------------|---------|
| Name       | NAV_MOV |
| Language   | java    |

|             |  |
|-------------|--|
| Description |  |
|-------------|--|

## Description

| Properties   | Values   |
|--------------|--|
| Name         | j_NavExport_010_Delivery   |
| Author       |  |
| Version      | 0.1  |
| Purpose      |  |
| Status       |  |
| Description  | printing order table data with start, end time and number of rows in source and target files |
| Creation     | Jun 16, 2016 4:15:57 PM  |
| Modification | Dec 11, 2019 3:32:52 AM  |

## Preview Picture

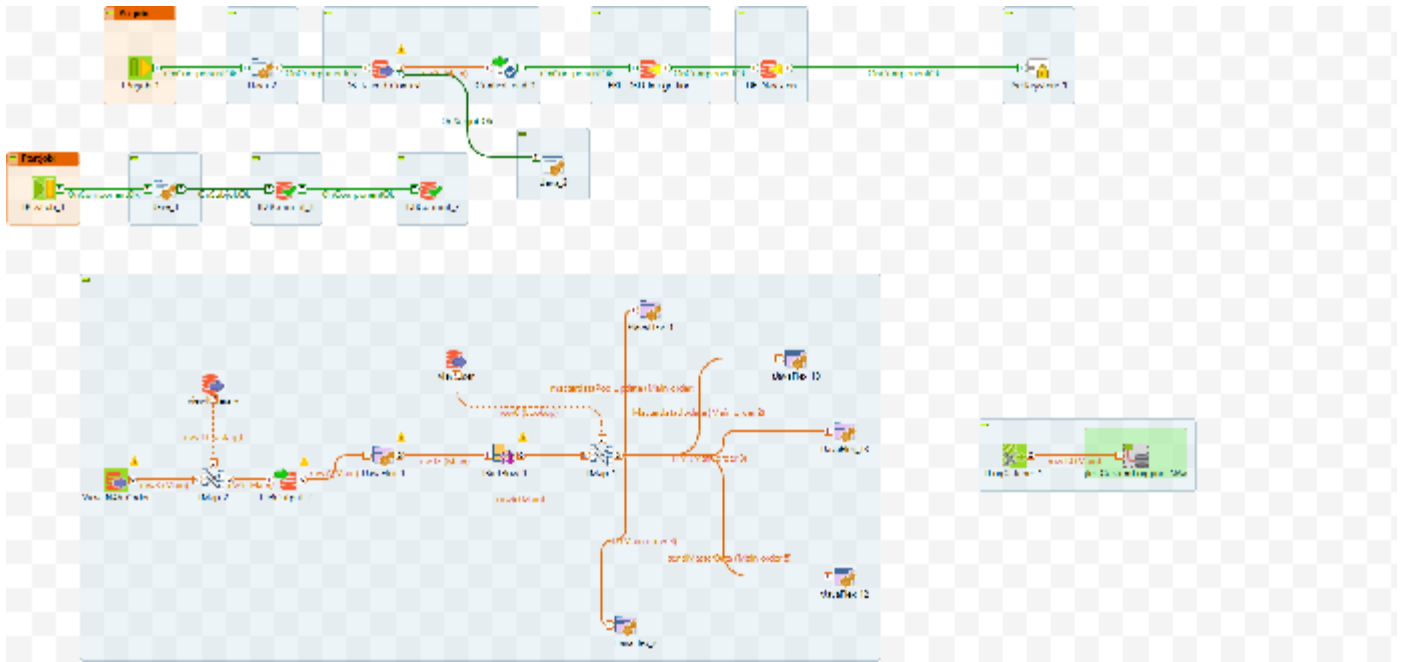

# Settings

## Extra settings

| Name                   | Value |
|------------------------|-------|
| COMP_DEFAULT_FILE_DIR  |       |
| Multi thread execution | false |
| Implicit tContextLoad  | false |

## Status & Logs

| Name                          | Value |
|-------------------------------|-------|
| Use statistics (tStatCatcher) | false |
| Use logs (tLogCatcher)        | false |

|                                     |       |
|-------------------------------------|-------|
| Use volumetrics (tFlowMeterCatcher) | false |
| On Console                          | false |
| On Files                            | false |
| On Databases                        | false |
| Catch components statistics         | false |
| Catch runtime errors                | true  |
| Catch user errors                   | true  |
| Catch user warnings                 | true  |

## Context List

### ContextDefault

| Name       | Prompt      | Need Prompt |
|------------|-------------|-------------|
| filepath   | filepath?   | false       |
| objectType | objectType? | false       |
| directory  | directory?  | false       |
| source     | source?     | false       |
| JobName    | JobName?    | false       |

|              |               |       |
|--------------|---------------|-------|
| description  | description?  | false |
| mafAppSpace  | mafAppSpace?  | false |
| Pool         | Pool?         | false |
| group        | group?        | false |
| table        | table?        | false |
| viewname     | viewname?     | false |
| length       | length?       | false |
| count        | count?        | false |
| value        | value?        | false |
| database     | database?     | false |
| table_view   | table_view?   | false |
| environment  | environment?  | false |
| mom_Host     | mom_Host?     | false |
| mom_Password | mom_Password? | false |
| mom_Port     | mom_Port?     | false |
| mom_To       | mom_To?       | false |
| mom_Username | mom_Username? | false |

|                         |                          |       |
|-------------------------|--------------------------|-------|
| batch                   | batch?                   | false |
| CRC                     | CRC?                     | false |
| Customer_Process_Queue  | Customer_Process_Queue?  | false |
| ErrorMsg                | ErrorMsg?                | false |
| implicit_db_environment | implicit_db_environment? | false |
| instance                | instance?                | false |
| key                     | key?                     | false |
| keystore                | keystore?                | false |
| message1                | message1?                | false |
| message2                | message2?                | false |
| movilizerURL            | movilizerURL?            | false |
| movilizerVersion        | movilizerVersion?        | false |
| Nested_Context          | Nested_Context?          | false |
| object                  | object?                  | false |
| objectId                | objectId?                | false |
| objectName              | objectName?              | false |
| partition               | partition?               | false |

|                                  |                                   |       |
|----------------------------------|-----------------------------------|-------|
| ProcessTimeStamp                 | ProcessTimeStamp?                 | false |
| SystemId                         | SystemId?                         | false |
| SystemPassword                   | SystemPassword?                   | false |
| type                             | type?                             | false |
| DB_AMC_AdditionalParams          | DB_AMC_AdditionalParams?          | false |
| DB_AMC_Database                  | DB_AMC_Database?                  | false |
| DB_AMC_Login                     | DB_AMC_Login?                     | false |
| DB_AMC_Password                  | DB_AMC_Password?                  | false |
| DB_AMC_Port                      | DB_AMC_Port?                      | false |
| DB_AMC_Schema                    | DB_AMC_Schema?                    | false |
| DB_AMC_Server                    | DB_AMC_Server?                    | false |
| DB_DSD_Navision_AdditionalParams | DB_DSD_Navision_AdditionalParams? | false |
| DB_DSD_Navision_Database         | DB_DSD_Navision_Database?         | false |
| DB_DSD_Navision_Login            | DB_DSD_Navision_Login?            | false |
| DB_DSD_Navision_Password         | DB_DSD_Navision_Password?         | false |
| DB_DSD_Navision_Port             | DB_DSD_Navision_Port?             | false |
| DB_DSD_Navision_Schema           | DB_DSD_Navision_Schema?           | false |

|   |  |       |
|---|--|-------|
| DB_DSD_Navision_Server                  | DB_DSD_Navision_Server?                  | false |
| DB_ERP_DSD_Integration_AdditionalParams | DB_ERP_DSD_Integration_AdditionalParams? | false |
| DB_ERP_DSD_Integration_Database         | DB_ERP_DSD_Integration_Database?         | false |
| DB_ERP_DSD_Integration_Login            | DB_ERP_DSD_Integration_Login?            | false |
| DB_ERP_DSD_Integration_Password         | DB_ERP_DSD_Integration_Password?         | false |
| DB_ERP_DSD_Integration_Port             | DB_ERP_DSD_Integration_Port?             | false |
| DB_ERP_DSD_Integration_Schema           | DB_ERP_DSD_Integration_Schema?           | false |
| DB_ERP_DSD_Integration_Server           | DB_ERP_DSD_Integration_Server?           | false |
| DB_Navision_AdditionalParams            | DB_Navision_AdditionalParams?            | false |
| DB_Navision_Database                    | DB_Navision_Database?                    | false |
| DB_Navision_Login                       | DB_Navision_Login?                       | false |
| DB_Navision_Password                    | DB_Navision_Password?                    | false |
| DB_Navision_Port                        | DB_Navision_Port?                        | false |
| DB_Navision_Schema                      | DB_Navision_Schema?                      | false |
| DB_Navision_Server                      | DB_Navision_Server?                      | false |
| DB_Talend_Context_AdditionalParams      | DB_Talend_Context_AdditionalParams?      | false |
| DB_Talend_Context_Database              | DB_Talend_Context_Database?              | false |



|                            |                             |       |
|----------------------------|-----------------------------|-------|
| DB_Talend_Context_Login    | DB_Talend_Context_Login?    | false |
| DB_Talend_Context_Password | DB_Talend_Context_Password? | false |
| DB_Talend_Context_Port     | DB_Talend_Context_Port?     | false |
| DB_Talend_Context_Schema   | DB_Talend_Context_Schema?   | false |
| DB_Talend_Context_Server   | DB_Talend_Context_Server?   | false |
| NAV_Contact                | NAV_Contact?                | false |
| NAV_Customer               | NAV_Customer?               | false |
| NAV_Order                  | NAV_Order?                  | false |
| NAV_Shipment               | NAV_Shipment?               | false |
| RM_Order-Encoding          | RM_Order-Encoding?          | false |
| RM_Order_FieldSeparator    | RM_Order_FieldSeparator?    | false |
| RM_Order_File              | RM_Order_File?              | false |
| RM_Order_RowSeparator      | RM_Order_RowSeparator?      | false |

## ContextQA

| Name     | Prompt    | Need Prompt |
|----------|-----------|-------------|
| filepath | filepath? | false       |

|             |              |       |
|-------------|--------------|-------|
| objectType  | objectType?  | false |
| directory   | directory?   | false |
| source      | source?      | false |
| JobName     | JobName?     | false |
| description | description? | false |
| mafAppSpace | mafAppSpace? | false |
| Pool        | Pool?        | false |
| group       | group?       | false |
| table       | table?       | false |
| viewname    | viewname?    | false |
| length      | length?      | false |
| count       | count?       | false |
| value       | value?       | false |
| database    | database?    | false |
| table_view  | table_view?  | false |
| environment | environment? | false |
| mom_Host    | mom_Host?    | false |

|                         |                          |       |
|-------------------------|--------------------------|-------|
| mom_Password            | mom_Password?            | false |
| mom_Port                | mom_Port?                | false |
| mom_To                  | mom_To?                  | false |
| mom_Username            | mom_Username?            | false |
| batch                   | batch?                   | false |
| CRC                     | CRC?                     | false |
| Customer_Process_Queue  | Customer_Process_Queue?  | false |
| ErrorMsg                | ErrorMsg?                | false |
| implicit_db_environment | implicit_db_environment? | false |
| instance                | instance?                | false |
| key                     | key?                     | false |
| keystore                | keystore?                | false |
| message1                | message1?                | false |
| message2                | message2?                | false |
| movilizerURL            | movilizerURL?            | false |
| movilizerVersion        | movilizerVersion?        | false |
| Nested_Context          | Nested_Context?          | false |

|                                  |                                   |       |
|----------------------------------|-----------------------------------|-------|
| object                           | object?                           | false |
| objectId                         | objectId?                         | false |
| objectName                       | objectName?                       | false |
| partition                        | partition?                        | false |
| ProcessTimeStamp                 | ProcessTimeStamp?                 | false |
| SystemId                         | SystemId?                         | false |
| SystemPassword                   | SystemPassword?                   | false |
| type                             | type?                             | false |
| DB_AMC_AdditionalParams          | DB_AMC_AdditionalParams?          | false |
| DB_AMC_Database                  | DB_AMC_Database?                  | false |
| DB_AMC_Login                     | DB_AMC_Login?                     | false |
| DB_AMC_Password                  | DB_AMC_Password?                  | false |
| DB_AMC_Port                      | DB_AMC_Port?                      | false |
| DB_AMC_Schema                    | DB_AMC_Schema?                    | false |
| DB_AMC_Server                    | DB_AMC_Server?                    | false |
| DB_DSD_Navision_AdditionalParams | DB_DSD_Navision_AdditionalParams? | false |
| DB_DSD_Navision_Database         | DB_DSD_Navision_Database?         | false |

|   |  |       |
|---|--|-------|
| DB_DSD_Navision_Login                   | DB_DSD_Navision_Login?                   | false |
| DB_DSD_Navision_Password                | DB_DSD_Navision_Password?                | false |
| DB_DSD_Navision_Port                    | DB_DSD_Navision_Port?                    | false |
| DB_DSD_Navision_Schema                  | DB_DSD_Navision_Schema?                  | false |
| DB_DSD_Navision_Server                  | DB_DSD_Navision_Server?                  | false |
| DB_ERP_DSD_Integration_AdditionalParams | DB_ERP_DSD_Integration_AdditionalParams? | false |
| DB_ERP_DSD_Integration_Database         | DB_ERP_DSD_Integration_Database?         | false |
| DB_ERP_DSD_Integration_Login            | DB_ERP_DSD_Integration_Login?            | false |
| DB_ERP_DSD_Integration_Password         | DB_ERP_DSD_Integration_Password?         | false |
| DB_ERP_DSD_Integration_Port             | DB_ERP_DSD_Integration_Port?             | false |
| DB_ERP_DSD_Integration_Schema           | DB_ERP_DSD_Integration_Schema?           | false |
| DB_ERP_DSD_Integration_Server           | DB_ERP_DSD_Integration_Server?           | false |
| DB_Navision_AdditionalParams            | DB_Navision_AdditionalParams?            | false |
| DB_Navision_Database                    | DB_Navision_Database?                    | false |
| DB_Navision_Login                       | DB_Navision_Login?                       | false |
| DB_Navision_Password                    | DB_Navision_Password?                    | false |
| DB_Navision_Port                        | DB_Navision_Port?                        | false |

|                                    |                                     |       |
|------------------------------------|-------------------------------------|-------|
| DB_Navision_Schema                 | DB_Navision_Schema?                 | false |
| DB_Navision_Server                 | DB_Navision_Server?                 | false |
| DB_Talend_Context_AdditionalParams | DB_Talend_Context_AdditionalParams? | false |
| DB_Talend_Context_Database         | DB_Talend_Context_Database?         | false |
| DB_Talend_Context_Login            | DB_Talend_Context_Login?            | false |
| DB_Talend_Context_Password         | DB_Talend_Context_Password?         | false |
| DB_Talend_Context_Port             | DB_Talend_Context_Port?             | false |
| DB_Talend_Context_Schema           | DB_Talend_Context_Schema?           | false |
| DB_Talend_Context_Server           | DB_Talend_Context_Server?           | false |
| NAV_Contact                        | NAV_Contact?                        | false |
| NAV_Customer                       | NAV_Customer?                       | false |
| NAV_Order                          | NAV_Order?                          | false |
| NAV_Shipment                       | NAV_Shipment?                       | false |
| RM_Order_Encoding                  | RM_Order_Encoding?                  | false |
| RM_Order_FieldSeparator            | RM_Order_FieldSeparator?            | false |
| RM_Order_File                      | RM_Order_File?                      | false |
| RM_Order_RowSeparator              | RM_Order_RowSeparator?              | false |

**ContextPREPROD**

| Name        | Prompt       | Need Prompt |
|-------------|--------------|-------------|
| filepath    | filepath?    | false       |
| objectType  | objectType?  | false       |
| directory   | directory?   | false       |
| source      | source?      | false       |
| JobName     | JobName?     | false       |
| description | description? | false       |
| mafAppSpace | mafAppSpace? | false       |
| Pool        | Pool?        | false       |
| group       | group?       | false       |
| table       | table?       | false       |
| viewname    | viewname?    | false       |
| length      | length?      | false       |
| count       | count?       | false       |
| value       | value?       | false       |
| database    | database?    | false       |

|                         |                          |       |
|-------------------------|--------------------------|-------|
| table_view              | table_view?              | false |
| environment             | environment?             | false |
| mom_Host                | mom_Host?                | false |
| mom_Password            | mom_Password?            | false |
| mom_Port                | mom_Port?                | false |
| mom_To                  | mom_To?                  | false |
| mom_Username            | mom_Username?            | false |
| batch                   | batch?                   | false |
| CRC                     | CRC?                     | false |
| Customer_Process_Queue  | Customer_Process_Queue?  | false |
| ErrorMsg                | ErrorMsg?                | false |
| implicit_db_environment | implicit_db_environment? | false |
| instance                | instance?                | false |
| key                     | key?                     | false |
| keystore                | keystore?                | false |
| message1                | message1?                | false |
| message2                | message2?                | false |



|                         |                          |       |
|-------------------------|--------------------------|-------|
| movilizerURL            | movilizerURL?            | false |
| movilizerVersion        | movilizerVersion?        | false |
| Nested_Context          | Nested_Context?          | false |
| object                  | object?                  | false |
| objectId                | objectId?                | false |
| objectName              | objectName?              | false |
| partition               | partition?               | false |
| ProcessTimeStamp        | ProcessTimeStamp?        | false |
| SystemId                | SystemId?                | false |
| SystemPassword          | SystemPassword?          | false |
| type                    | type?                    | false |
| DB_AMC_AdditionalParams | DB_AMC_AdditionalParams? | false |
| DB_AMC_Database         | DB_AMC_Database?         | false |
| DB_AMC_Login            | DB_AMC_Login?            | false |
| DB_AMC_Password         | DB_AMC_Password?         | false |
| DB_AMC_Port             | DB_AMC_Port?             | false |
| DB_AMC_Schema           | DB_AMC_Schema?           | false |

|   |  |       |
|---|--|-------|
| DB_AMC_Server                           | DB_AMC_Server?                           | false |
| DB_DSD_Navision_AdditionalParams        | DB_DSD_Navision_AdditionalParams?        | false |
| DB_DSD_Navision_Database                | DB_DSD_Navision_Database?                | false |
| DB_DSD_Navision_Login                   | DB_DSD_Navision_Login?                   | false |
| DB_DSD_Navision_Password                | DB_DSD_Navision_Password?                | false |
| DB_DSD_Navision_Port                    | DB_DSD_Navision_Port?                    | false |
| DB_DSD_Navision_Schema                  | DB_DSD_Navision_Schema?                  | false |
| DB_DSD_Navision_Server                  | DB_DSD_Navision_Server?                  | false |
| DB_ERP_DSD_Integration_AdditionalParams | DB_ERP_DSD_Integration_AdditionalParams? | false |
| DB_ERP_DSD_Integration_Database         | DB_ERP_DSD_Integration_Database?         | false |
| DB_ERP_DSD_Integration_Login            | DB_ERP_DSD_Integration_Login?            | false |
| DB_ERP_DSD_Integration_Password         | DB_ERP_DSD_Integration_Password?         | false |
| DB_ERP_DSD_Integration_Port             | DB_ERP_DSD_Integration_Port?             | false |
| DB_ERP_DSD_Integration_Schema           | DB_ERP_DSD_Integration_Schema?           | false |
| DB_ERP_DSD_Integration_Server           | DB_ERP_DSD_Integration_Server?           | false |
| DB_Navision_AdditionalParams            | DB_Navision_AdditionalParams?            | false |
| DB_Navision_Database                    | DB_Navision_Database?                    | false |

|                                    |                                     |       |
|------------------------------------|-------------------------------------|-------|
| DB_Navision_Login                  | DB_Navision_Login?                  | false |
| DB_Navision_Password               | DB_Navision_Password?               | false |
| DB_Navision_Port                   | DB_Navision_Port?                   | false |
| DB_Navision_Schema                 | DB_Navision_Schema?                 | false |
| DB_Navision_Server                 | DB_Navision_Server?                 | false |
| DB_Talend_Context_AdditionalParams | DB_Talend_Context_AdditionalParams? | false |
| DB_Talend_Context_Database         | DB_Talend_Context_Database?         | false |
| DB_Talend_Context_Login            | DB_Talend_Context_Login?            | false |
| DB_Talend_Context_Password         | DB_Talend_Context_Password?         | false |
| DB_Talend_Context_Port             | DB_Talend_Context_Port?             | false |
| DB_Talend_Context_Schema           | DB_Talend_Context_Schema?           | false |
| DB_Talend_Context_Server           | DB_Talend_Context_Server?           | false |
| NAV_Contact                        | NAV_Contact?                        | false |
| NAV_Customer                       | NAV_Customer?                       | false |
| NAV_Order                          | NAV_Order?                          | false |
| NAV_Shipment                       | NAV_Shipment?                       | false |
| RM_Order_Encoding                  | RM_Order_Encoding?                  | false |

|                         |                          |       |
|-------------------------|--------------------------|-------|
| RM_Order_FieldSeparator | RM_Order_FieldSeparator? | false |
| RM_Order_File           | RM_Order_File?           | false |
| RM_Order_RowSeparator   | RM_Order_RowSeparator?   | false |

## ContextPROD

| Name        | Prompt       | Need Prompt |
|-------------|--------------|-------------|
| filepath    | filepath?    | false       |
| objectType  | objectType?  | false       |
| directory   | directory?   | false       |
| source      | source?      | false       |
| JobName     | JobName?     | false       |
| description | description? | false       |
| mafAppSpace | mafAppSpace? | false       |
| Pool        | Pool?        | false       |
| group       | group?       | false       |
| table       | table?       | false       |
| viewname    | viewname?    | false       |

|                         |                          |       |
|-------------------------|--------------------------|-------|
| length                  | length?                  | false |
| count                   | count?                   | false |
| value                   | value?                   | false |
| database                | database?                | false |
| table_view              | table_view?              | false |
| environment             | environment?             | false |
| mom_Host                | mom_Host?                | false |
| mom_Password            | mom_Password?            | false |
| mom_Port                | mom_Port?                | false |
| mom_To                  | mom_To?                  | false |
| mom_Username            | mom_Username?            | false |
| batch                   | batch?                   | false |
| CRC                     | CRC?                     | false |
| Customer_Process_Queue  | Customer_Process_Queue?  | false |
| ErrorMsg                | ErrorMsg?                | false |
| implicit_db_environment | implicit_db_environment? | false |
| instance                | instance?                | false |

|                         |                          |       |
|-------------------------|--------------------------|-------|
| key                     | key?                     | false |
| keystore                | keystore?                | false |
| message1                | message1?                | false |
| message2                | message2?                | false |
| movilizerURL            | movilizerURL?            | false |
| movilizerVersion        | movilizerVersion?        | false |
| Nested_Context          | Nested_Context?          | false |
| object                  | object?                  | false |
| objectId                | objectId?                | false |
| objectName              | objectName?              | false |
| partition               | partition?               | false |
| ProcessTimeStamp        | ProcessTimeStamp?        | false |
| SystemId                | SystemId?                | false |
| SystemPassword          | SystemPassword?          | false |
| type                    | type?                    | false |
| DB_AMC_AdditionalParams | DB_AMC_AdditionalParams? | false |
| DB_AMC_Database         | DB_AMC_Database?         | false |

|   |  |       |
|---|--|-------|
| DB_AMC_Login                            | DB_AMC_Login?                            | false |
| DB_AMC_Password                         | DB_AMC_Password?                         | false |
| DB_AMC_Port                             | DB_AMC_Port?                             | false |
| DB_AMC_Schema                           | DB_AMC_Schema?                           | false |
| DB_AMC_Server                           | DB_AMC_Server?                           | false |
| DB_DSD_Navision_AdditionalParams        | DB_DSD_Navision_AdditionalParams?        | false |
| DB_DSD_Navision_Database                | DB_DSD_Navision_Database?                | false |
| DB_DSD_Navision_Login                   | DB_DSD_Navision_Login?                   | false |
| DB_DSD_Navision_Password                | DB_DSD_Navision_Password?                | false |
| DB_DSD_Navision_Port                    | DB_DSD_Navision_Port?                    | false |
| DB_DSD_Navision_Schema                  | DB_DSD_Navision_Schema?                  | false |
| DB_DSD_Navision_Server                  | DB_DSD_Navision_Server?                  | false |
| DB_ERP_DSD_Integration_AdditionalParams | DB_ERP_DSD_Integration_AdditionalParams? | false |
| DB_ERP_DSD_Integration_Database         | DB_ERP_DSD_Integration_Database?         | false |
| DB_ERP_DSD_Integration_Login            | DB_ERP_DSD_Integration_Login?            | false |
| DB_ERP_DSD_Integration_Password         | DB_ERP_DSD_Integration_Password?         | false |
| DB_ERP_DSD_Integration_Port             | DB_ERP_DSD_Integration_Port?             | false |

|                                    |                                     |       |
|------------------------------------|-------------------------------------|-------|
| DB_ERP_DSD_Integration_Schema      | DB_ERP_DSD_Integration_Schema?      | false |
| DB_ERP_DSD_Integration_Server      | DB_ERP_DSD_Integration_Server?      | false |
| DB_Navision_AdditionalParams       | DB_Navision_AdditionalParams?       | false |
| DB_Navision_Database               | DB_Navision_Database?               | false |
| DB_Navision_Login                  | DB_Navision_Login?                  | false |
| DB_Navision_Password               | DB_Navision_Password?               | false |
| DB_Navision_Port                   | DB_Navision_Port?                   | false |
| DB_Navision_Schema                 | DB_Navision_Schema?                 | false |
| DB_Navision_Server                 | DB_Navision_Server?                 | false |
| DB_Talend_Context_AdditionalParams | DB_Talend_Context_AdditionalParams? | false |
| DB_Talend_Context_Database         | DB_Talend_Context_Database?         | false |
| DB_Talend_Context_Login            | DB_Talend_Context_Login?            | false |
| DB_Talend_Context_Password         | DB_Talend_Context_Password?         | false |
| DB_Talend_Context_Port             | DB_Talend_Context_Port?             | false |
| DB_Talend_Context_Schema           | DB_Talend_Context_Schema?           | false |
| DB_Talend_Context_Server           | DB_Talend_Context_Server?           | false |
| NAV_Contact                        | NAV_Contact?                        | false |



|                         |                          |       |
|-------------------------|--------------------------|-------|
| NAV_Customer            | NAV_Customer?            | false |
| NAV_Order               | NAV_Order?               | false |
| NAV_Shipment            | NAV_Shipment?            | false |
| RM_Order_Encoding       | RM_Order_Encoding?       | false |
| RM_Order_FieldSeparator | RM_Order_FieldSeparator? | false |
| RM_Order_File           | RM_Order_File?           | false |
| RM_Order_RowSeparator   | RM_Order_RowSeparator?   | false |

## Component List


| Component Name                           | Component Type         |
|--|------------------------|
| <a href="#">jlet_CustomLogging_NAV_1</a> | jlet_CustomLogging_NAV |
| <a href="#">tContextLoad_1</a>           | tContextLoad           |
| <a href="#">tDBCommit_1</a>              | tMSSqlCommit           |
| <a href="#">tDBCommit_2</a>              | tMSSqlCommit           |
| <a href="#">tDBConnection_1</a>          | tMSSqlConnection       |
| <a href="#">tDBConnection_2</a>          | tMSSqlConnection       |
| <a href="#">tDBInput_1</a>               | tMSSqlInput            |

|               |              |
|---------------|--------------|
| tDBInput_2    | tMSSqlInput  |
| tDBInput_3    | tMSSqlInput  |
| tDBOutput_2   | tMSSqlOutput |
| tJavaFlex_1   | tJavaFlex    |
| tJavaFlex_10  | tJavaFlex    |
| tJavaFlex_12  | tJavaFlex    |
| tJavaFlex_13  | tJavaFlex    |
| tJavaFlex_2   | tJavaFlex    |
| tJavaFlex_9   | tJavaFlex    |
| tJava_1       | tJava        |
| tJava_2       | tJava        |
| tJava_3       | tJava        |
| tLogCatcher_1 | tLogCatcher  |
| tMSSqlInput_1 | tMSSqlInput  |
| tMap_1        | tMap         |
| tMap_2        | tMap         |
| tPostjob_1    | tPostjob     |

|                |              |
|----------------|--------------|
| tPrejob_1      | tPrejob      |
| tSetKeystore_1 | tSetKeystore |
| tSortRow_1     | tSortRow     |

## Components Description

### Component tContextLoad

|   |             |                 |           |                 |
|---|-------------|-----------------|-----------|-----------------|
|  | UNIQUE NAME | tContextLoad_1  | INPUT(S)  | tDBInput_1      |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tDBConnection_1 |

### Component Parameters:

| Properties     | Values         |
|----------------|----------------|
| Unique Name    | tContextLoad_1 |
| Component Name | tContextLoad   |
| Version        | 0.101 (ALPHA)  |
| Family         | Misc           |
| Startable      | false          |
| SUBTREE_START  | false          |
| END_OF_FLOW    | true           |
| Activate       | true           |


|  |   |
|--|---|
| DUMMY  | false   |
| tStatCatcher Statistics                      | false   |
| Help   | org.talend.help.tContextLoad                  |
| Update components                            | true  |
| IREPORT_PATH                                 |   |
| JAVA_LIBRARY_PATH                            | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                                 |   |
| Title color                                  |   |
| Enable parallel execution                    | false   |
| Number of parallel executions                | 2   |
|  | false   |
| REPOSITORY_ALLOW_AUTO_SWITCH                 | true  |
| Schema                                       | Built-In                                      |
| If a variable loaded, but not in the context | Warning                                       |
| If a variable in the context, but not loaded | Warning                                       |
| Print operations                             | false   |
| Disable errors                               | true  |

|                                 |   |
|---------------------------------|---|
| Disable warnings                | true                                      |
| Disable info                    | true                                      |
| Die on error                    | false                                     |
| Label format                    | __ UNIQUE_NAME __                         |
| Hint format                     | <b>__ UNIQUE_NAME __</b><br>__ COMMENT __ |
| Connection format               | row                                       |
| Show Information                | false                                     |
| Comment                         |   |
| Use an existing validation rule | false                                     |
| Validation Rule Type            |   |

**Schema for tContextLoad\_1 :**

| Column | Key   | Type   | Length | Precision | Nullable | Comment |
|--------|-------|--------|--------|-----------|----------|---------|
| key    | false | String | 255    |           | true     |         |
| value  | false | String | 255    |           | true     |         |

**Original Function Parameters:**  
**Component tMSSqlCommit**

|   |             |                   |           |             |
|---|-------------|-------------------|-----------|-------------|
|  | UNIQUE NAME | tDBCommit_1       | INPUT(S)  | tJava_1     |
|   | LABEL       | __ UNIQUE_NAME __ | OUTPUT(S) | tDBCommit_2 |

**Component Parameters:**


| Properties              | Values                               |
|-------------------------|--------------------------------------|
| Database                | tMSSqlCommit                         |
| Unique Name             | tDBCommit_1                          |
| Component Name          | tMSSqlCommit                         |
| Version                 | 0.102 (ALPHA)                        |
| Family                  | Databases/DB Specifics/MS_SQL_Server |
| Start                   | false                                |
| Startable               | true                                 |
| SUBTREE_START           | true                                 |
| END_OF_FLOW             | true                                 |
| Activate                | true                                 |
| DUMMY                   | false                                |
| tStatCatcher Statistics | false                                |
| Help                    | org.talend.help.tMSSqlCommit         |
| Update components       | true                                 |
| IREPORT_PATH            |                                      |

|                                 |   |
|---------------------------------|---|
| JAVA_LIBRARY_PATH               | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                    |   |
| Title color                     |   |
| Enable parallel execution       | false   |
| Number of parallel executions   | 2   |
|                                 | false   |
| Component List                  | tDBConnection_1                               |
| Close Connection                | true  |
| Schema                          | Built-In                                      |
| Label format                    | __UNIQUE_NAME__                               |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__         |
| Connection format               | row   |
| Show Information                | false   |
| Comment                         |   |
| Use an existing validation rule | false   |
| Validation Rule Type            |   |

**Schema for tDBCommit\_1 :**

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

Original Function Parameters:  
Component tMSSqlCommit

|   |             |                 |           |             |
|---|-------------|-----------------|-----------|-------------|
|  | UNIQUE NAME | tDBCommit_2     | INPUT(S)  | tDBCommit_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none        |

Component Parameters:

| Properties     | Values                               |
|----------------|--------------------------------------|
| Database       | tMSSqlCommit                         |
| Unique Name    | tDBCommit_2                          |
| Component Name | tMSSqlCommit                         |
| Version        | 0.102 (ALPHA)                        |
| Family         | Databases/DB Specifics/MS_SQL_Server |
| Start          | false                                |
| Startable      | true                                 |
| SUBTREE_START  | true                                 |
| END_OF_FLOW    | true                                 |
| Activate       | true                                 |
| DUMMY          | false                                |




|                               |   |
|-------------------------------|---|
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tMSSqlCommit                  |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Component List                | tDBConnection_2                               |
| Close Connection              | true  |
| Schema                        | Built-In                                      |
| Label format                  | __UNIQUE_NAME__                               |
| Hint format                   | <b>__UNIQUE_NAME__</b><br>__COMMENT__         |
| Connection format             | row   |
| Show Information              | false   |

|                                 |       |
|---------------------------------|-------|
| Comment                         |       |
| Use an existing validation rule | false |
| Validation Rule Type            |       |

Schema for tDBCommit\_2 :

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

Original Function Parameters:  
Component tMSSqlConnection

|   |             |                     |           |                 |
|---|-------------|---------------------|-----------|-----------------|
|  | UNIQUE NAME | tDBConnection_1     | INPUT(S)  | tContextLoad_1  |
|   | LABEL       | ERP_DSD_Integration | OUTPUT(S) | tDBConnection_2 |

Component Parameters:


| Properties     | Values   |
|----------------|--|
| Database       | tMSSqlConnection                                     |
| Unique Name    | tDBConnection_1                                      |
| Component Name | tMSSqlConnection                                     |
| Version        | 0.102 (ALPHA)  |
| Family         | Databases/DB Specifics/MS_SQL_Server ELT/Connections |
| Start          | false  |
| Startable      | true   |

|                               |   |
|-------------------------------|---|
| SUBTREE_START                 | true  |
| END_OF_FLOW                   | true  |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tMSSqlConnection              |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Property Type                 | repository: DB (MSSQL):DB_ERP_DSD_Integration |
| JDBC Provider                 | JTDS  |
| Host                          | "srvrsql200.harvestfoodsolutions.com"         |

|  |                               |
|--|-------------------------------|
| Database Driver                        | MSSQL                         |
| Port                                   | "1433"                        |
| Schema                                 | "dbo"                         |
| Database                               | "ERP_DSD_Integration_PREPROD" |
| Username                               | "talend"                      |
| Password                               | *****                         |
| Encoding                               | "ISO-8859-15"                 |
| Additional JDBC Parameters             | ""                            |
| Use or register a shared DB Connection | false                         |
| Shared DB Connection Name              |                               |
| Specify a data source alias            | false                         |
| Data source alias                      | ""                            |
| Auto Commit                            | false                         |
| Share identity insert in multi table   | false                         |
| Label format                           | ERP_DSD_Integration           |

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format               | row                                   |
| Show Information                | false                                 |
| Comment                         |                                       |
| Use an existing validation rule | false                                 |
| Validation Rule Type            |                                       |

**Original Function Parameters:**  
**Component tMSSqlConnection**

|   |             |                 |           |                 |
|---|-------------|-----------------|-----------|-----------------|
|  | UNIQUE NAME | tDBConnection_2 | INPUT(S)  | tDBConnection_1 |
|   | LABEL       | DB_Navision     | OUTPUT(S) | tSetKeystore_1  |

**Component Parameters:**


| Properties     | Values   |
|----------------|--|
| Database       | tMSSqlConnection                                     |
| Unique Name    | tDBConnection_2                                      |
| Component Name | tMSSqlConnection                                     |
| Version        | 0.102 (ALPHA)  |
| Family         | Databases/DB Specifics/MS_SQL_Server ELT/Connections |

|                               |   |
|-------------------------------|---|
| Start                         | false   |
| Startable                     | true  |
| SUBTREE_START                 | true  |
| END_OF_FLOW                   | true  |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tMSSqlConnection              |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Property Type                 | Built-In                                      |

|  |                               |
|--|-------------------------------|
| JDBC Provider                          | MSSQL_PROP                    |
| Host                                   | "testnav10.corp.usbakery.com" |
| Database Driver                        | MSSQL                         |
| Port                                   | "1433"                        |
| Schema                                 | "dbo"                         |
| Database                               | "TEST-USB-2013"               |
| Username                               | "talend_hfs2"                 |
| Password                               | *****                         |
| Encoding                               | "ISO-8859-15"                 |
| Additional JDBC Parameters             | ""                            |
| Use or register a shared DB Connection | false                         |
| Shared DB Connection Name              |                               |
| Specify a data source alias            | false                         |
| Data source alias                      | ""                            |
| Auto Commit                            | false                         |

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| Share identity insert in multi table | false                                 |
| Label format                         | DB_Navision                           |
| Hint format                          | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format                    | row                                   |
| Show Information                     | false                                 |
| Comment                              |                                       |
| Use an existing validation rule      | false                                 |
| Validation Rule Type                 |                                       |

**Original Function Parameters:**  
**Component tMSSqlInput**

|   |             |                   |           |                             |
|---|-------------|-------------------|-----------|-----------------------------|
|  | UNIQUE NAME | tDBInput_1        | INPUT(S)  | tJava_2                     |
|   | LABEL       | DB_Talend_Context | OUTPUT(S) | tContextLoad_1<br>, tJava_3 |

**Component Parameters:**

| Properties  | Values      |
|-------------|-------------|
| Database    | tMSSqlInput |
| Unique Name | tDBInput_1  |



|                           |   |
|---------------------------|---|
| Component Name            | tMSSqlInput                                   |
| Version                   | 0.102 (ALPHA)                                 |
| Family                    | Databases/DB Specifics/MS_SQL_Server          |
| Start                     | false   |
| Startable                 | true  |
| SUBTREE_START             | true  |
| END_OF_FLOW               | false   |
| Activate                  | true  |
| DUMMY                     | false   |
| tStatCatcher Statistics   | false   |
| Help                      | org.talend.help.tMSSqlInput                   |
| Update components         | true  |
| IREPORT_PATH              |   |
| JAVA_LIBRARY_PATH         | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color              |   |
| Title color               |   |
| Enable parallel execution | false   |

|                               |  |
|-------------------------------|--|
| Number of parallel executions | 2  |
|                               | false                                    |
| Use an existing connection    | false                                    |
| Component List                |  |
| Property Type                 | repository: DB (MSSQL):DB_Talend_Context |
| Host                          | context.DB_Talend_Context_Server         |
| JDBC Provider                 | JTDS                                     |
| Database Driver               | MSSQL                                    |
| Port                          | context.DB_Talend_Context_Port           |
| Schema                        | context.DB_Talend_Context_Schema         |
| Database                      | context.DB_Talend_Context_Database       |
| Username                      | context.DB_Talend_Context_Login          |
| Password                      | context.DB_Talend_Context_Password       |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true                                     |
| Schema                        | Built-In                                 |
| Table Name                    | ""                                       |
| Query Type                    | Built-In                                 |


|                                  |  |
|----------------------------------|--|
| Guess Schema                     | ""   |
| Query                            | "SELECT [key] ,[value] FROM ["<br>+context.DB_Talend_Context_Database+ "].["<br>+context.DB_Talend_Context_Schema+<br>"].[IMPLICIT_CONTEXT_"<br>+context.implicit_db_environment + "]" |
| Specify a data source alias      | false  |
| Data source alias                | ""   |
| Mapping                          | id_MSSQL   |
| Additional JDBC Parameters       | context.DB_Talend_Context_AdditionalParams   |
| Encoding                         | "ISO-8859-15"  |
| Trim all the String/Char columns | true   |
| Trim column                      | [{SCHEMA_COLUMN=key, TRIM=false},<br>{SCHEMA_COLUMN=value, TRIM=false}]  |
| Label format                     | DB_Talend_Context  |
| Hint format                      | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format                | row  |
| Show Information                 | false  |
| Comment                          |  |
| Use an existing validation rule  | false  |

|                      |  |
|----------------------|--|
| Validation Rule Type |  |
|----------------------|--|

Schema for tDBInput\_1 :

| Column | Key   | Type   | Length | Precision | Nullable | Comment |
|--------|-------|--------|--------|-----------|----------|---------|
| key    | false | String | 255    |           | true     |         |
| value  | false | String | 255    |           | true     |         |

Original Function Parameters:  
Component tMSSqlInput

|   |             |               |           |                        |
|---|-------------|---------------|-----------|------------------------|
|  | UNIQUE NAME | tDBInput_2    | INPUT(S)  | none                   |
|   | LABEL       | viewItinerary | OUTPUT(S) | <a href="#">tMap_2</a> |

Component Parameters:

| Properties     | Values                               |
|----------------|--------------------------------------|
| Database       | tMSSqlInput                          |
| Unique Name    | tDBInput_2                           |
| Component Name | tMSSqlInput                          |
| Version        | 0.102 (ALPHA)                        |
| Family         | Databases/DB Specifics/MS_SQL_Server |
| Start          | false                                |
| Startable      | true                                 |

|                               |   |
|-------------------------------|---|
| SUBTREE_START                 | false   |
| END_OF_FLOW                   | false   |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tMSSqlInput                   |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Use an existing connection    | true  |
| Component List                | tDBConnection_2                               |
| Property Type                 | repository: DB (MSSQL):DB_Navision            |

|                              |   |
|------------------------------|---|
| Host                         | context.DB_Navision_Server  |
| JDBC Provider                | MSSQL_PROP  |
| Database Driver              | MSSQL   |
| Port                         | context.DB_Navision_Port  |
| Schema                       | context.DB_Navision_Schema  |
| Database                     | context.DB_Navision_Database  |
| Username                     | context.DB_Navision_Login   |
| Password                     | context.DB_Navision_Password  |
| REPOSITORY_ALLOW_AUTO_SWITCH | true  |
| Schema                       | Built-In  |
| Table Name                   |   |
| Query Type                   | Built-In  |
| Guess Schema                 | ""  |
| Query                        | "select [key] as routeNumber,ShipTo from [dbo].[Nav_DSD_Itinerary]" |
| Specify a data source alias  | false   |
| Data source alias            | ""  |
| Mapping                      | id_MSSQL  |


|                                  |  |
|----------------------------------|--|
| Additional JDBC Parameters       | context.DB_Navision_AdditionalParams   |
| Encoding                         | "ISO-8859-15"  |
| Trim all the String/Char columns | false  |
| Trim column                      | [[SCHEMA_COLUMN=routeNumber, TRIM=false],<br>{SCHEMA_COLUMN=ShipTo, TRIM=false}] |
| Label format                     | viewItinerary  |
| Hint format                      | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format                | row  |
| Show Information                 | false  |
| Comment                          |  |
| Use an existing validation rule  | false  |
| Validation Rule Type             |  |

#### Schema for tDBInput\_2 :

| Column      | Key   | Type   | Length | Precision | Nullable | Comment |
|-------------|-------|--------|--------|-----------|----------|---------|
| routeNumber | false | String | 10     |           | false    |         |
| ShipTo      | false | String | 20     |           | false    |         |

**Original Function Parameters:**  
**Component tMSSqlInput**

---

|   |             |            |           |        |
|---|-------------|------------|-----------|--------|
|  | UNIQUE NAME | tDBInput_3 | INPUT(S)  | none   |
|   | LABEL       | viewUser   | OUTPUT(S) | tMap_1 |

### Component Parameters:

| Properties              | Values                               |
|-------------------------|--------------------------------------|
| Database                | tMSSqlInput                          |
| Unique Name             | tDBInput_3                           |
| Component Name          | tMSSqlInput                          |
| Version                 | 0.102 (ALPHA)                        |
| Family                  | Databases/DB Specifics/MS_SQL_Server |
| Start                   | false                                |
| Startable               | true                                 |
| SUBTREE_START           | false                                |
| END_OF_FLOW             | false                                |
| Activate                | true                                 |
| DUMMY                   | false                                |
| tStatCatcher Statistics | false                                |
| Help                    | org.talend.help.tMSSqlInput          |



|                               |   |
|-------------------------------|---|
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Use an existing connection    | true  |
| Component List                | tDBConnection_2                               |
| Property Type                 | Built-In                                      |
| Host                          | ""  |
| JDBC Provider                 | JTDS  |
| Database Driver               | MSSQL   |
| Port                          | "1433"  |
| Schema                        | ""  |
| Database                      | ""  |


|                                  |  |
|----------------------------------|--|
| Username                         | ""   |
| Password                         | **   |
| REPOSITORY_ALLOW_AUTO_SWITCH     | true   |
| Schema                           | Built-In   |
| Table Name                       | ""   |
| Query Type                       | Built-In   |
| Guess Schema                     | ""   |
| Query                            | "select ID as routeNo,facility,location,routeGroup<br>from nav_dsd_user"   |
| Specify a data source alias      | false  |
| Data source alias                | ""   |
| Mapping                          | id_MSSQL   |
| Additional JDBC Parameters       | "noDatetimeStringSync=true"  |
| Encoding                         | "ISO-8859-15"  |
| Trim all the String/Char columns | false  |
| Trim column                      | [{SCHEMA_COLUMN=routeNo, TRIM=false},<br>{SCHEMA_COLUMN=facility, TRIM=false},<br>{SCHEMA_COLUMN=location, TRIM=false},<br>{SCHEMA_COLUMN=routeGroup, TRIM=false}] |
| Label format                     | viewUser   |

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format               | row                                   |
| Show Information                | false                                 |
| Comment                         |                                       |
| Use an existing validation rule | false                                 |
| Validation Rule Type            |                                       |

**Schema for tDBInput\_3 :**

| Column     | Key   | Type   | Length | Precision | Nullable | Comment |
|------------|-------|--------|--------|-----------|----------|---------|
| routeNo    | false | String | 10     |           | false    |         |
| facility   | false | String | 10     |           | false    |         |
| location   | false | String | 10     |           | false    |         |
| routeGroup | false | String | 20     |           | false    |         |

**Original Function Parameters:**  
**Component tMSSqlOutput**

|   |             |                 |           |                        |
|---|-------------|-----------------|-----------|------------------------|
|  | UNIQUE NAME | tDBOutput_2     | INPUT(S)  | tMap_2<br>, tDBInput_2 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tJavaFlex_1            |

**Component Parameters:**

| Properties | Values |
|------------|--------|
|------------|--------|

|                         |   |
|-------------------------|---|
| Database                | tMSSqlOutput                                  |
| Unique Name             | tDBOutput_2                                   |
| Component Name          | tMSSqlOutput                                  |
| Version                 | 0.102 (ALPHA)                                 |
| Family                  | Databases/DB Specifics/MS_SQL_Server          |
| Startable               | false   |
| SUBTREE_START           | false   |
| END_OF_FLOW             | false   |
| Activate                | true  |
| DUMMY                   | false   |
| tStatCatcher Statistics | false   |
| Help                    | org.talend.help.tMSSqlOutput                  |
| Update components       | true  |
| IREPORT_PATH            |   |
| JAVA_LIBRARY_PATH       | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color            |   |
| Title color             |   |

|                               |                 |
|-------------------------------|-----------------|
| Enable parallel execution     | false           |
| Number of parallel executions | 2               |
|                               | false           |
| Property Type                 | Built-In        |
| Use an existing connection    | true            |
| Component List                | tDBConnection_1 |
| JDBC Provider                 | JTDS            |
| Host                          | ""              |
| Port                          | "1433"          |
| Schema                        | ""              |
| Database                      | ""              |
| Database Driver               | MSSQL           |
| Username                      | ""              |
| Password                      | **              |
| Table                         | "NAV_DELIVERY"  |
| Action on table               | TRUNCATE        |
| Turn on Identity insert       | false           |

|                              |               |
|------------------------------|---------------|
| Action on data               | INSERT        |
| Specify identity field       | false         |
| Identity field               | REFERENCEDATE |
| Start value                  | 1             |
| Step                         | 1             |
| REPOSITORY_ALLOW_AUTO_SWITCH | true          |
| Schema                       | Built-In      |
| Reject Schema                | Built-In      |
| Specify a data source alias  | false         |
| Data source alias            | ""            |
| Die on error                 | false         |
| Mapping                      | id_MSSQL      |
| Additional JDBC Parameters   | ""            |
| Encoding                     | "ISO-8859-15" |
| Commit every                 | 10000         |
| Additional columns           | []            |
| Use field options            | false         |

|                                       |  |
|---------------------------------------|--|
| Field options                         | <pre> {{SCHEMA_COLUMN=REFERENCEDATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=SHIPTO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Item_No_, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYTEMP, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYPERM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYORDER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=UOM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=routeNumber, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=SHIPTO_Original, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Item_No_Original, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=routeNumber_Original, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}} </pre> |
| Ignore date out of range              | false  |
| Enable debug mode                     | false  |
| Support null in "SQL WHERE" statement | false  |
| Use Batch Size                        | true   |
| Batch Size                            | 10000  |

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Label format                    | __UNIQUE_NAME__                       |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format               | row                                   |
| Show Information                | false                                 |
| Comment                         |                                       |
| Use an existing validation rule | false                                 |
| Validation Rule Type            |                                       |


#### Schema for tDBOutput\_2 :

| Column        | Key   | Type           | Length | Precision | Nullable | Comment |
|---------------|-------|----------------|--------|-----------|----------|---------|
| REFERENCEDATE | false | java.util.Date | 23     | 3         | false    |         |
| SHIPTO        | false | String         | 10     |           | false    |         |
| Item_No_      | false | String         | 20     |           | false    |         |
| QTYTEMP       | false | BigDecimal     | 38     | 20        | false    |         |
| QTYPERM       | false | BigDecimal     | 38     | 20        | false    |         |
| QTYORDER      | false | BigDecimal     | 38     | 20        | false    |         |
| UOM           | false | String         | 10     |           | false    |         |
| routeNumber   | false | String         | 10     |           | false    |         |



|                      |       |        |    |  |       |  |
|----------------------|-------|--------|----|--|-------|--|
| SHIPTO_Original      | false | String | 10 |  | false |  |
| Item_No_Original     | false | String | 20 |  | false |  |
| routeNumber_Original | false | String | 10 |  | false |  |

**Original Function Parameters:**  
**Component tJavaFlex**

|   |             |                 |           |             |
|---|-------------|-----------------|-----------|-------------|
|  | UNIQUE NAME | tJavaFlex_1     | INPUT(S)  | tDBOutput_2 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tSortRow_1  |

**Component Parameters:**

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tJavaFlex_1   |
| Component Name | tJavaFlex     |
| Version        | 0.101 (ALPHA) |
| Family         | Custom_Code   |
| Start          | false         |
| Startable      | true          |
| SUBTREE_START  | false         |
| END_OF_FLOW    | false         |
| Activate       | true          |

|                               |  |
|-------------------------------|--|
| DUMMY                         | false  |
| tStatCatcher Statistics       | false  |
| Help                          | org.talend.help.tJavaFlex                          |
| Update components             | true   |
| IREPORT_PATH                  |  |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java      |
| Subjob color                  |  |
| Title color                   |  |
| Enable parallel execution     | false  |
| Number of parallel executions | 2  |
|                               | false  |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true   |
| Schema                        | Built-In   |
| Data Auto Propagate           | true   |
| Start code                    | // start part of your Java code<br>int rowCount=0; |


|                                 |   |
|---------------------------------|---|
| Main code                       | // here is the main part of the component, // a piece of code executed in the row // loop rowCount++; int a=routines.Nav_Delivery.getDriver_ShipNocount("00000" + row7.routeNumber + row7.SHIPTO + routines.DateParser.convertPSTToUTC_atNoon(TalendDate.formatDate("yyyy-MM-dd",row7.REFERENCEI)); int b=routines.Nav_Delivery.getDrivercount("00000" + row7.routeNumber); |
| End code                        | // end of the component, outside/closing the loocontext.cou<br>context.count=rowCount;  |
| TOS2.0                          | false   |
| TOS3.2                          | false   |
| TOS4.0                          | true  |
| Import                          | //import java.util.List;  |
| Label format                    | __UNIQUE_NAME__   |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__   |
| Connection format               | row   |
| Show Information                | false   |
| Comment                         |   |
| Use an existing validation rule | false   |
| Validation Rule Type            |   |

#### Schema for tJavaFlex\_1 :

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

|                      |       |                |    |    |       |  |
|----------------------|-------|----------------|----|----|-------|--|
| REFERENCEDATE        | false | java.util.Date | 23 | 3  | false |  |
| SHIPTO               | false | String         | 10 |    | false |  |
| Item_No_             | false | String         | 20 |    | false |  |
| QTYTEMP              | false | BigDecimal     | 38 | 20 | false |  |
| QTYPERM              | false | BigDecimal     | 38 | 20 | false |  |
| QTYORDER             | false | BigDecimal     | 38 | 20 | false |  |
| UOM                  | false | String         | 10 |    | false |  |
| routeNumber          | false | String         | 10 |    | false |  |
| SHIPTO_Original      | false | String         | 10 |    | false |  |
| Item_No_Original     | false | String         | 20 |    | false |  |
| routeNumber_Original | false | String         | 10 |    | false |  |

Original Function Parameters:  
Component tJavaFlex

|   |             |                 |           |        |
|---|-------------|-----------------|-----------|--------|
|  | UNIQUE NAME | tJavaFlex_10    | INPUT(S)  | tMap_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none   |

Component Parameters:

| Properties  | Values       |
|-------------|--------------|
| Unique Name | tJavaFlex_10 |

|                           |   |
|---------------------------|---|
| Component Name            | tJavaFlex                                     |
| Version                   | 0.101 (ALPHA)                                 |
| Family                    | Custom_Code                                   |
| Start                     | false   |
| Startable                 | true  |
| SUBTREE_START             | false   |
| END_OF_FLOW               | true  |
| Activate                  | true  |
| DUMMY                     | false   |
| tStatCatcher Statistics   | false   |
| Help                      | org.talend.help.tJavaFlex                     |
| Update components         | true  |
| IREPORT_PATH              |   |
| JAVA_LIBRARY_PATH         | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color              |   |
| Title color               |   |
| Enable parallel execution | false   |


|                               |   |
|-------------------------------|---|
| Number of parallel executions | 2   |
|                               | false   |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true  |
| Schema                        | Built-In  |
| Data Auto Propagate           | true  |
| Start code                    | // start part of your Java code   |
| Main code                     | <pre> routines.Nav_Delivery.populateMasterdataUpdate(Masterd context.group = MasterdataUpdate.Group; context.key=MasterdataUpdate.Key; //System.out.println("f MasterdataUpdate.Key ); </pre> |
| End code                      | // end of the component, outside/closing the loop   |
| TOS2.0                        | false   |
| TOS3.2                        | false   |
| TOS4.0                        | true  |
| Import                        | //import java.util.List;  |
| Label format                  | __UNIQUE_NAME__   |
| Hint format                   | <b>__UNIQUE_NAME__</b><br>__COMMENT__   |
| Connection format             | row   |
| Show Information              | false   |

|                                 |       |
|---------------------------------|-------|
| Comment                         |       |
| Use an existing validation rule | false |
| Validation Rule Type            |       |

Schema for tJavaFlex\_10 :

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

Original Function Parameters:  
Component tJavaFlex

|   |             |                 |           |                        |
|---|-------------|-----------------|-----------|------------------------|
|  | UNIQUE NAME | tJavaFlex_12    | INPUT(S)  | tMap_1<br>, tDBInput_3 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none                   |

Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tJavaFlex_12  |
| Component Name | tJavaFlex     |
| Version        | 0.101 (ALPHA) |
| Family         | Custom_Code   |
| Start          | false         |
| Startable      | true          |
| SUBTREE_START  | false         |

|                               |   |
|-------------------------------|---|
| END_OF_FLOW                   | true  |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tJavaFlex                     |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true  |
| Schema                        | Built-In                                      |
| Data Auto Propagate           | true  |
| Start code                    | // start part of your Java code<br>int a=1;   |




|                                 |   |
|---------------------------------|---|
| Main code                       | <pre>//if(a==50 /*&amp;&amp; f==(a-50)*/){ //routines.Copy_of_r_HarvestRoutineLoop_a.sendMasterD //System.out.println(f); //} a++; String responseXML = ""; if( responseXML = routines.Nav_Delivery.sendMasterData(context.movilizerU //System.out.println("inside"); } routines.Nav_Delivery.reset</pre> |
| End code                        | <pre>// end of the component, outside/closing the loop //routines.r_HarvestRoutineLoop_Delivery.sendMasterData //routines.r_HarvestRoutineLoop_Delivery.resetObjects();</pre>   |
| TOS2.0                          | false   |
| TOS3.2                          | false   |
| TOS4.0                          | true  |
| Import                          | //import java.util.List;  |
| Label format                    | __ UNIQUE_NAME __   |
| Hint format                     | <b>__ UNIQUE_NAME __</b><br>__ COMMENT __   |
| Connection format               | row   |
| Show Information                | false   |
| Comment                         |   |
| Use an existing validation rule | false   |
| Validation Rule Type            |   |

#### Schema for tJavaFlex\_12 :

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

|             |       |        |  |  |      |  |
|-------------|-------|--------|--|--|------|--|
| responseXML | false | String |  |  | true |  |
|-------------|-------|--------|--|--|------|--|

Original Function Parameters:  
Component tJavaFlex

|   |             |                 |           |        |
|---|-------------|-----------------|-----------|--------|
|  | UNIQUE NAME | tJavaFlex_13    | INPUT(S)  | tMap_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none   |

Component Parameters:

| Properties              | Values        |
|-------------------------|---------------|
| Unique Name             | tJavaFlex_13  |
| Component Name          | tJavaFlex     |
| Version                 | 0.101 (ALPHA) |
| Family                  | Custom_Code   |
| Start                   | false         |
| Startable               | true          |
| SUBTREE_START           | false         |
| END_OF_FLOW             | true          |
| Activate                | true          |
| DUMMY                   | false         |
| tStatCatcher Statistics | false         |

|                               |  |
|-------------------------------|--|
| Help                          | org.talend.help.tJavaFlex  |
| Update components             | true   |
| IREPORT_PATH                  |  |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java  |
| Subjob color                  |  |
| Title color                   |  |
| Enable parallel execution     | false  |
| Number of parallel executions | 2  |
|                               | false  |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true   |
| Schema                        | Built-In   |
| Data Auto Propagate           | true   |
| Start code                    | // start part of your Java code  |
| Main code                     | //routines.Nav_Delivery.populateDataContainerEntryChildN<br>//routines.Copy_of_r_HarvestRoutineLoop_a.populateUpd<br>//routines.r_HarvestRoutineLoop.populateDataContainerEr<br>//routines.r_HarvestRoutineLoop.populateDataContainerEr<br>routines.Nav_Delivery.populateDataContainerEntryChildNc |
| End code                      | // end of the component, outside/closing the loop  |
| TOS2.0                        | false  |


|                                 |                                       |
|---------------------------------|---------------------------------------|
| TOS3.2                          | false                                 |
| TOS4.0                          | true                                  |
| Import                          | //import java.util.List;              |
| Label format                    | __UNIQUE_NAME__                       |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format               | row                                   |
| Show Information                | false                                 |
| Comment                         |                                       |
| Use an existing validation rule | false                                 |
| Validation Rule Type            |                                       |

#### Schema for tJavaFlex\_13 :

| Column   | Key   | Type    | Length | Precision | Nullable | Comment |
|----------|-------|---------|--------|-----------|----------|---------|
| ITM      | false | String  |        |           | true     |         |
| MATNO    | false | Integer |        |           | true     |         |
| QTYORDER | false | String  |        |           | true     |         |
| QTYPLAN  | false | String  |        |           | true     |         |
| UOM      | false | String  |        |           | true     |         |

|        |       |        |  |  |      |  |
|--------|-------|--------|--|--|------|--|
| REASON | false | String |  |  | true |  |
| LOCKED | false | String |  |  | true |  |
| TYPE   | false | String |  |  | true |  |

Original Function Parameters:  
Component tJavaFlex

|   |             |                 |           |        |
|---|-------------|-----------------|-----------|--------|
|  | UNIQUE NAME | tJavaFlex_2     | INPUT(S)  | tMap_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none   |

Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tJavaFlex_2   |
| Component Name | tJavaFlex     |
| Version        | 0.101 (ALPHA) |
| Family         | Custom_Code   |
| Start          | false         |
| Startable      | true          |
| SUBTREE_START  | false         |
| END_OF_FLOW    | true          |
| Activate       | true          |


|                               |  |
|-------------------------------|--|
| DUMMY                         | false  |
| tStatCatcher Statistics       | false  |
| Help                          | org.talend.help.tJavaFlex  |
| Update components             | true   |
| IREPORT_PATH                  |  |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java  |
| Subjob color                  |  |
| Title color                   |  |
| Enable parallel execution     | false  |
| Number of parallel executions | 2  |
|                               | false  |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true   |
| Schema                        | Built-In   |
| Data Auto Propagate           | true   |
| Start code                    | // start part of your Java code<br>String previous_DRIVER="";<br>row_count=0; int row_count1=0; Object previous_Object = |

|                                 |  |
|---------------------------------|--|
| Main code                       | <pre> row_count++; row_count1++; //System.out.println("Driver = HD.REFDATE); int chk=Integer.parseInt(routines.Nav_Delivery.hmDriver_Ship //System.out.println("CHK" ); int chk1=Integer.parseInt(rout //System.out.println("CHK 1" ); if(chk==row_count){ //HD.RI routines.Nav_Delivery.populateDataContainerEntry(HD); r row_count=0; routines.Nav_Delivery.clearhmITM(); routine Driver Upcoming"); } if(chk1==row_count1){ context.value = "+previous_DRIVER); previous_Object = HD; previous_DR //previous_REFDATE=HD.REFDATE; /* if(!routines.Copy_ routines.Copy_of_r_HarvestRoutineLoop_a.populateDataC routines.Copy_of_r_HarvestRoutineLoop_a.populateUpdat routines.Copy_of_r_HarvestRoutineLoop_a.coDate.add(HI </pre> |
| End code                        | // end of the component, outside/closing the loop  |
| TOS2.0                          | false  |
| TOS3.2                          | false  |
| TOS4.0                          | true   |
| Import                          | //import java.util.List;   |
| Label format                    | __UNIQUE_NAME__  |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format               | row  |
| Show Information                | false  |
| Comment                         |  |
| Use an existing validation rule | false  |
| Validation Rule Type            |  |

Schema for out1 :

| Column  | Key   | Type   | Length | Precision | Nullable | Comment |
|---------|-------|--------|--------|-----------|----------|---------|
| DRIVER  | false | String |        |           | true     |         |
| REGION  | false | String |        |           | true     |         |
| REFNO   | false | String |        |           | true     |         |
| REFDATE | false | String |        |           | true     |         |
| SHIPTO  | false | String | 9      |           | true     |         |
| DELNO   | false | String |        |           | true     |         |

Original Function Parameters:  
Component tJavaFlex

|   |             |                 |           |        |
|---|-------------|-----------------|-----------|--------|
|  | UNIQUE NAME | tJavaFlex_9     | INPUT(S)  | tMap_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none   |

Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tJavaFlex_9   |
| Component Name | tJavaFlex     |
| Version        | 0.101 (ALPHA) |
| Family         | Custom_Code   |
| Start          | false         |




|                               |   |
|-------------------------------|---|
| Startable                     | true  |
| SUBTREE_START                 | false   |
| END_OF_FLOW                   | true  |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tJavaFlex                     |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true  |
| Schema                        | Built-In                                      |

|                                 |  |
|---------------------------------|--|
| Data Auto Propagate             | true   |
| Start code                      | // start part of your Java code<br>int b=1; context.value= true;<br>//routines.Copy_of_r_HarvestRoutineLoop_a.createAllObjec   |
| Main code                       | routines.Nav_Delivery.createAllObjects(); if(context.value){<br>routines.Nav_Delivery.populateMasterdataPoolUpdate(ma:<br>context.value =false; } //else if(b==50) //{<br>//routines.r_HarvestRoutine_A.populateMasterdataPoolUpd<br>//b=0; //} b++; |
| End code                        | // end of the component, outside/closing the loop<br>routines.Nav_Delivery.createAllObjects();<br>routines.Nav_Delivery.populateMasterdataPoolUpdate(ma:   |
| TOS2.0                          | false  |
| TOS3.2                          | false  |
| TOS4.0                          | true   |
| Import                          | //import java.util.List;   |
| Label format                    | __UNIQUE_NAME__  |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format               | row  |
| Show Information                | false  |
| Comment                         |  |
| Use an existing validation rule | false  |
| Validation Rule Type            |  |

**Schema for tJavaFlex\_9 :**

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

**Original Function Parameters:****Component tJava**

|   |             |                 |           |             |
|---|-------------|-----------------|-----------|-------------|
|  | UNIQUE NAME | tJava_1         | INPUT(S)  | tPostjob_1  |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tDBCommit_1 |

**Component Parameters:**

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tJava_1       |
| Component Name | tJava         |
| Version        | 0.101 (ALPHA) |
| Family         | Custom_Code   |
| Start          | false         |
| Startable      | true          |
| SUBTREE_START  | true          |
| END_OF_FLOW    | true          |
| Activate       | true          |
| DUMMY          | false         |


|                               |   |
|-------------------------------|---|
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tJava                         |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Code                          | String foo = "bar";                           |
| Import                        | //import java.util.List;                      |
| Schema                        | Built-In                                      |
| Label format                  | __UNIQUE_NAME__                               |
| Hint format                   | <b>__UNIQUE_NAME__</b><br>__COMMENT__         |
| Connection format             | row   |
| Show Information              | false   |

|                                 |       |
|---------------------------------|-------|
| Comment                         |       |
| Use an existing validation rule | false |
| Validation Rule Type            |       |

Schema for tJava\_1 :

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

Original Function Parameters:  
Component tJava

|   |             |                 |           |            |
|---|-------------|-----------------|-----------|------------|
|  | UNIQUE NAME | tJava_2         | INPUT(S)  | tPrejob_1  |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tDBInput_1 |

Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tJava_2       |
| Component Name | tJava         |
| Version        | 0.101 (ALPHA) |
| Family         | Custom_Code   |
| Start          | false         |
| Startable      | true          |
| SUBTREE_START  | true          |

|                               |  |
|-------------------------------|--|
| END_OF_FLOW                   | true   |
| Activate                      | true   |
| DUMMY                         | false  |
| tStatCatcher Statistics       | false  |
| Help                          | org.talend.help.tJava  |
| Update components             | true   |
| IREPORT_PATH                  |  |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java  |
| Subjob color                  |  |
| Title color                   |  |
| Enable parallel execution     | false  |
| Number of parallel executions | 2  |
|                               | false  |
| Code                          | <pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n");</pre> |
| Import                        | //import java.util.List;   |


|                                 |                                       |
|---------------------------------|---------------------------------------|
| Schema                          | Built-In                              |
| Label format                    | __UNIQUE_NAME__                       |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format               | row                                   |
| Show Information                | false                                 |
| Comment                         |                                       |
| Use an existing validation rule | false                                 |
| Validation Rule Type            |                                       |

#### Schema for tJava\_2 :

| Column | Key | Type | Length | Precision | Nullable | Comment |
|--------|-----|------|--------|-----------|----------|---------|
|--------|-----|------|--------|-----------|----------|---------|

#### Original Function Parameters:

##### Component tJava

|   |             |                 |           |            |
|---|-------------|-----------------|-----------|------------|
|  | UNIQUE NAME | tJava_3         | INPUT(S)  | tDBInput_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none       |

#### Component Parameters:

| Properties     | Values  |
|----------------|---------|
| Unique Name    | tJava_3 |
| Component Name | tJava   |

|                               |   |
|-------------------------------|---|
| Version                       | 0.101 (ALPHA)                                 |
| Family                        | Custom_Code                                   |
| Start                         | false   |
| Startable                     | true  |
| SUBTREE_START                 | true  |
| END_OF_FLOW                   | true  |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tJava                         |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |




|                                 |  |
|---------------------------------|--|
|                                 | false  |
| Code                            | String foo = "bar"; System.out.println("URL = " + context.movilizerURL); System.out.println("SystemID = " + context.SystemId); System.out.println("Password = " + context.SystemPassword); System.out.println("Pool = " + context.Pool); |
| Import                          | //import java.util.List;   |
| Schema                          | Built-In   |
| Label format                    | __UNIQUE_NAME__  |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format               | row  |
| Show Information                | false  |
| Comment                         |  |
| Use an existing validation rule | false  |
| Validation Rule Type            |  |

#### Schema for tJava\_3 :

| Column | Key   | Type   | Length | Precision | Nullable | Comment |
|--------|-------|--------|--------|-----------|----------|---------|
| key    | false | String | 255    |           | true     |         |
| value  | false | String | 255    |           | true     |         |

**Original Function Parameters:**  
**Component** tLogCatcher

|   |             |                 |           |   |
|---|-------------|-----------------|-----------|---|
|  | UNIQUE NAME | tLogCatcher_1   | INPUT(S)  | none                                      |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | <a href="#">jilet_CustomLogging_NAV_1</a> |

### Component Parameters:

| Properties              | Values                      |
|-------------------------|-----------------------------|
| Unique Name             | tLogCatcher_1               |
| Component Name          | tLogCatcher                 |
| Version                 | 0.101 (ALPHA)               |
| Family                  | Logs_Errors                 |
| Start                   | true                        |
| Startable               | true                        |
| SUBTREE_START           | true                        |
| END_OF_FLOW             | false                       |
| Activate                | true                        |
| DUMMY                   | false                       |
| tStatCatcher Statistics | false                       |
| Help                    | org.talend.help.tLogCatcher |
| Update components       | true                        |

|                               |   |
|-------------------------------|---|
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true  |
| Schema                        | Built-In                                      |
| Catch Java Exception          | true  |
| Catch tDie                    | true  |
| Catch tWarn                   | true  |
| Catch tJobFailure             | true  |
| Label format                  | __UNIQUE_NAME__                               |
| Hint format                   | <b>__UNIQUE_NAME__</b><br>__COMMENT__         |
| Connection format             | row   |
| Show Information              | false   |


|                                 |       |
|---------------------------------|-------|
| Comment                         |       |
| Use an existing validation rule | false |
| Validation Rule Type            |       |

#### Schema for tLogCatcher\_1 :

| Column     | Key   | Type           | Length | Precision | Nullable | Comment |
|------------|-------|----------------|--------|-----------|----------|---------|
| moment     | false | java.util.Date |        |           | true     |         |
| pid        | false | String         | 20     |           | true     |         |
| root_pid   | false | String         | 20     |           | true     |         |
| father_pid | false | String         | 20     |           | true     |         |
| project    | false | String         | 50     |           | true     |         |
| job        | false | String         | 255    |           | true     |         |
| context    | false | String         | 50     |           | true     |         |
| priority   | false | Integer        | 3      |           | true     |         |
| type       | false | String         | 255    |           | true     |         |
| origin     | false | String         | 255    |           | true     |         |
| message    | false | String         | 255    |           | true     |         |
| code       | false | Integer        | 3      |           | true     |         |

#### Original Function Parameters:

**Component tMSSqlInput**

|   |             |                |           |                        |
|---|-------------|----------------|-----------|------------------------|
|  | UNIQUE NAME | tMSSqlInput_1  | INPUT(S)  | none                   |
|   | LABEL       | View_NAV_Order | OUTPUT(S) | <a href="#">tMap_2</a> |

**Component Parameters:**

| Properties              | Values                               |
|-------------------------|--------------------------------------|
| Database                | tMSSqlInput                          |
| Unique Name             | tMSSqlInput_1                        |
| Component Name          | tMSSqlInput                          |
| Version                 | 0.102 (ALPHA)                        |
| Family                  | Databases/DB Specifics/MS_SQL_Server |
| Start                   | true                                 |
| Startable               | true                                 |
| SUBTREE_START           | true                                 |
| END_OF_FLOW             | false                                |
| Activate                | true                                 |
| DUMMY                   | false                                |
| tStatCatcher Statistics | false                                |

|                               |   |
|-------------------------------|---|
| Help                          | org.talend.help.tMSSqlInput                   |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| Use an existing connection    | true  |
| Component List                | tDBConnection_2                               |
| Property Type                 | repository: DB (MSSQL):DB_Navision            |
| Host                          | context.DB_Navision_Server                    |
| JDBC Provider                 | MSSQL_PROP                                    |
| Database Driver               | MSSQL   |
| Port                          | context.DB_Navision_Port                      |
| Schema                        | context.DB_Navision_Schema                    |

|                                  |   |
|----------------------------------|---|
| Database                         | context.DB_Navision_Database  |
| Username                         | context.DB_Navision_Login   |
| Password                         | context.DB_Navision_Password  |
| REPOSITORY_ALLOW_AUTO_SWITCH     | true  |
| Schema                           | Built-In  |
| Table Name                       |   |
| Query Type                       | Built-In  |
| Guess Schema                     | ""  |
| Query                            | "Select * from [dbo].[Nav_DSD_Order] where REFERENCEDATE = (Select isnull(Manual_SalesDate,DSD_SalesDate) as salesDate from [dbo].[DSD_Sales_Download_Date])" |
| Specify a data source alias      | false   |
| Data source alias                | ""  |
| Mapping                          | id_MSSQL  |
| Additional JDBC Parameters       | context.DB_Navision_AdditionalParams  |
| Encoding                         | "ISO-8859-15"   |
| Trim all the String/Char columns | false   |

|                                 |  |
|---------------------------------|--|
| Trim column                     | [[{SCHEMA_COLUMN=REFERENCEDATE, TRIM=false}, {SCHEMA_COLUMN=SHIPTO, TRIM=false}, {SCHEMA_COLUMN=Item_No_, TRIM=false}, {SCHEMA_COLUMN=QTYTEMP, TRIM=false}, {SCHEMA_COLUMN=QTYPERM, TRIM=false}, {SCHEMA_COLUMN=QTYORDER, TRIM=false}, {SCHEMA_COLUMN=UOM, TRIM=false}]] |
| Label format                    | View_NAV_Order   |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format               | row  |
| Show Information                | false  |
| Comment                         |  |
| Use an existing validation rule | false  |
| Validation Rule Type            |  |


#### Schema for tMSSqlInput\_1 :

| Column        | Key   | Type           | Length | Precision | Nullable | Comment |
|---------------|-------|----------------|--------|-----------|----------|---------|
| REFERENCEDATE | false | java.util.Date | 23     | 3         | false    |         |
| SHIPTO        | false | String         | 10     |           | false    |         |
| Item_No_      | false | String         | 20     |           | false    |         |
| QTYTEMP       | false | BigDecimal     | 38     | 20        | false    |         |
| QTYPERM       | false | BigDecimal     | 38     | 20        | false    |         |



|          |       |            |    |    |       |  |
|----------|-------|------------|----|----|-------|--|
| QTYORDER | false | BigDecimal | 38 | 20 | false |  |
| UOM      | false | String     | 10 |    | false |  |

Original Function Parameters:  
Component tPostjob

|   |             |                 |           |                         |
|---|-------------|-----------------|-----------|-------------------------|
|  | UNIQUE NAME | tPostjob_1      | INPUT(S)  | none                    |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | <a href="#">tJava_1</a> |


Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tPostjob_1    |
| Component Name | tPostjob      |
| Version        | 0.102 (ALPHA) |
| Family         | Orchestration |
| Start          | true          |
| Startable      | true          |
| SUBTREE_START  | true          |
| END_OF_FLOW    | true          |
| Activate       | true          |
| DUMMY          | false         |

|                                 |   |
|---------------------------------|---|
| tStatCatcher Statistics         | false   |
| Help                            | !!!HELP!!!                                    |
| Update components               | true  |
| IREPORT_PATH                    |   |
| JAVA_LIBRARY_PATH               | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                    | 255;220;180                                   |
| Title color                     | 230;100;0                                     |
| Enable parallel execution       | false   |
| Number of parallel executions   | 2   |
|                                 | false   |
| Label format                    | __UNIQUE_NAME__                               |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__         |
| Connection format               | row   |
| Show Information                | false   |
| Comment                         |   |
| Use an existing validation rule | false   |

|                      |  |
|----------------------|--|
| Validation Rule Type |  |
|----------------------|--|

Original Function Parameters:  
Component tPrejob

|   |             |                 |           |                         |
|---|-------------|-----------------|-----------|-------------------------|
|  | UNIQUE NAME | tPrejob_1       | INPUT(S)  | none                    |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | <a href="#">tJava_2</a> |


Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tPrejob_1     |
| Component Name | tPrejob       |
| Version        | 0.102 (ALPHA) |
| Family         | Orchestration |
| Start          | true          |
| Startable      | true          |
| SUBTREE_START  | true          |
| END_OF_FLOW    | true          |
| Activate       | true          |
| DUMMY          | false         |

|                                 |   |
|---------------------------------|---|
| tStatCatcher Statistics         | false   |
| Help                            | org.talend.help.tPrejob                       |
| Update components               | true  |
| IREPORT_PATH                    |   |
| JAVA_LIBRARY_PATH               | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                    | 255;220;180                                   |
| Title color                     | 230;100;0                                     |
| Enable parallel execution       | false   |
| Number of parallel executions   | 2   |
|                                 | false   |
| Label format                    | __UNIQUE_NAME__                               |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__         |
| Connection format               | row   |
| Show Information                | false   |
| Comment                         |   |
| Use an existing validation rule | false   |

|                      |  |
|----------------------|--|
| Validation Rule Type |  |
|----------------------|--|

Original Function Parameters:  
Component tSetKeystore

|   |             |                 |           |                 |
|---|-------------|-----------------|-----------|-----------------|
|  | UNIQUE NAME | tSetKeystore_1  | INPUT(S)  | tDBConnection_2 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | none            |


Component Parameters:

| Properties     | Values         |
|----------------|----------------|
| Unique Name    | tSetKeystore_1 |
| Component Name | tSetKeystore   |
| Version        | 0.102 (ALPHA)  |
| Family         | Internet       |
| Start          | false          |
| Startable      | true           |
| SUBTREE_START  | true           |
| END_OF_FLOW    | true           |
| Activate       | true           |
| DUMMY          | false          |

|                               |   |
|-------------------------------|---|
| tStatCatcher Statistics       | false   |
| Help                          | !!!HELP!!!                                    |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| TrustStore type               | JKS   |
| TrustStore file               | context.keystore                              |
| TrustStore password           | **  |
| Need Client authentication    | false   |
| KeyStore type                 | JKS   |
| KeyStore file                 | "C:/client.keystore"                          |
| KeyStore password             | *****   |

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Check server identity           | true                                  |
| Label format                    | __UNIQUE_NAME__                       |
| Hint format                     | <b>__UNIQUE_NAME__</b><br>__COMMENT__ |
| Connection format               | row                                   |
| Show Information                | false                                 |
| Comment                         |                                       |
| Use an existing validation rule | false                                 |
| Validation Rule Type            |                                       |

Original Function Parameters:  
Component tSortRow

|   |             |                 |           |             |
|---|-------------|-----------------|-----------|-------------|
|  | UNIQUE NAME | tSortRow_1      | INPUT(S)  | tJavaFlex_1 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tMap_1      |

Component Parameters:

| Properties     | Values        |
|----------------|---------------|
| Unique Name    | tSortRow_1    |
| Component Name | tSortRow      |
| Version        | 0.102 (ALPHA) |

|                               |   |
|-------------------------------|---|
| Family                        | Processing                                    |
| Startable                     | false   |
| SUBTREE_START                 | false   |
| END_OF_FLOW                   | false   |
| Activate                      | true  |
| DUMMY                         | false   |
| tStatCatcher Statistics       | false   |
| Help                          | org.talend.help.tSortRow                      |
| Update components             | true  |
| IREPORT_PATH                  |   |
| JAVA_LIBRARY_PATH             | C:\Talend\7.0.1\studio\configuration\lib\java |
| Subjob color                  |   |
| Title color                   |   |
| Enable parallel execution     | false   |
| Number of parallel executions | 2   |
|                               | false   |
| REPOSITORY_ALLOW_AUTO_SWITCH  | true  |




|  |  |
|--|--|
| Schema                                       | Built-In   |
| Criteria                                     | [[COLNAME=routeNumber, SORT=alpha, ORDER=asc], {COLNAME=SHIPTO, SORT=alpha, ORDER=asc}, {COLNAME=Item_No_, SORT=alpha, ORDER=asc}] |
| Sort on disk                                 | false  |
| Temp data directory path                     | "C:/Talend/6.2.1/studio/workspace/temp"  |
| Create temp data directory if does not exist | true   |
| Buffer size of external sort                 | 1000000  |
| Label format                                 | __UNIQUE_NAME__  |
| Hint format                                  | <b>__UNIQUE_NAME__</b><br>__COMMENT__  |
| Connection format                            | row  |
| Show Information                             | false  |
| Comment                                      |  |
| Use an existing validation rule              | false  |
| Validation Rule Type                         |  |

#### Schema for tSortRow\_1 :

| Column        | Key   | Type           | Length | Precision | Nullable | Comment |
|---------------|-------|----------------|--------|-----------|----------|---------|
| REFERENCEDATE | false | java.util.Date | 23     | 3         | false    |         |

|                      |       |            |    |    |       |  |
|----------------------|-------|------------|----|----|-------|--|
| SHIPTO               | false | String     | 10 |    | false |  |
| Item_No_             | false | String     | 20 |    | false |  |
| QTYTEMP              | false | BigDecimal | 38 | 20 | false |  |
| QTYPERM              | false | BigDecimal | 38 | 20 | false |  |
| QTYORDER             | false | BigDecimal | 38 | 20 | false |  |
| UOM                  | false | String     | 10 |    | false |  |
| routeNumber          | false | String     | 10 |    | false |  |
| SHIPTO_Original      | false | String     | 10 |    | false |  |
| Item_No_Original     | false | String     | 20 |    | false |  |
| routeNumber_Original | false | String     | 10 |    | false |  |

**Original Function Parameters:**  
**Component jlet\_CustomLogging\_NAV**

|   |             |                          |           |                               |
|---|-------------|--------------------------|-----------|-------------------------------|
|  | UNIQUE NAME | jlet_CustomLogging_NAV_1 | INPUT(S)  | <a href="#">tLogCatcher_1</a> |
|   | LABEL       | jlet_CustomLogging_NAV   | OUTPUT(S) | none                          |

**Component Parameters:**


| Properties | Values |
|------------|--------|
| Version    | Latest |

|                  |   |
|------------------|---|
| Schema           | INPUT_1:moment pid root_pid father_pid project job<br>context priority type origin message code |
| Show Information | false   |
| Comment          |   |

**Schema for jlet\_CustomLogging\_NAV\_1 :**

| Column     | Key   | Type           | Length | Precision | Nullable | Comment |
|------------|-------|----------------|--------|-----------|----------|---------|
| moment     | false | java.util.Date |        |           | true     |         |
| pid        | false | String         | 20     |           | true     |         |
| root_pid   | false | String         | 20     |           | true     |         |
| father_pid | false | String         | 20     |           | true     |         |
| project    | false | String         | 50     |           | true     |         |
| job        | false | String         | 255    |           | true     |         |
| context    | false | String         | 50     |           | true     |         |
| priority   | false | Integer        | 3      |           | true     |         |
| type       | false | String         | 255    |           | true     |         |
| origin     | false | String         | 255    |           | true     |         |
| message    | false | String         | 255    |           | true     |         |
| code       | false | Integer        | 3      |           | true     |         |

Component tMap

|   |             |                 |           |  |
|---|-------------|-----------------|-----------|--|
|  | UNIQUE NAME | tMap_1          | INPUT(S)  | tMap_1<br>, tDBInput_3   |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tJavaFlex_9<br>, tJavaFlex_10, tJavaFlex_13<br>, tJavaFlex_2, tJavaFlex_12 |

Component Parameters:

| Properties                           | Values  |
|--------------------------------------|---------|
| tStatCatcher Statistics              | false   |
| Enable parallel execution            | false   |
| Mapping links display as:            | AUTO    |
| Temp data directory path:            |         |
| Max buffer size (nb of rows):        | 2000000 |
| Ignore trailing zeros for BigDecimal | false   |
| Show Information                     | false   |
| Comment                              |         |
| Use an existing validation rule      | false   |

Mapper table for tMap\_1 ( input ):  
Mapper table Properties( row6 ):

| Properties        | Values       |
|-------------------|--------------|
| Name              | row6         |
| Matching-mode     | UNIQUE_MATCH |
| isMinimized       | false        |
| isReject          | false        |
| isRejectInnerJoin | false        |
| isInnerJoin       | false        |
| expressionFilter  | null         |

**Metadata Table Entries( row6 ):**

| Name                 | Type           | Expression | isNullable |
|----------------------|----------------|------------|------------|
| REFERENCEDATE        | java.util.Date |            | false      |
| SHIPTO               | String         |            | false      |
| Item_No_             | String         |            | false      |
| QTYTEMP              | BigDecimal     |            | false      |
| QTYPERM              | BigDecimal     |            | false      |
| QTYORDER             | BigDecimal     |            | false      |
| UOM                  | String         |            | false      |
| routeNumber          | String         |            | false      |
| SHIPTO_Original      | String         |            | false      |
| Item_No_Original     | String         |            | false      |
| routeNumber_Original | String         |            | false      |

**Constraint Table Entries( row6 ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table Properties( row8 ):**

| Properties        | Values       |
|-------------------|--------------|
| Name              | row8         |
| Matching-mode     | UNIQUE_MATCH |
| isMinimized       | false        |
| isReject          | false        |
| isRejectInnerJoin | false        |
| isInnerJoin       | false        |
| expressionFilter  | null         |

**Metadata Table Entries( row8 ):**

| Name       | Type   | Expression                | isNullable |
|------------|--------|---------------------------|------------|
| routeNo    | String | row6.routeNumber_Original | false      |
| facility   | String |                           | false      |
| location   | String |                           | false      |
| routeGroup | String |                           | false      |

**Constraint Table Entries( row8 ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table for tMap\_1 ( output ):**

**Mapper table Properties( masterdataPoolUpdate ):**

| Properties        | Values               |
|-------------------|----------------------|
| Name              | masterdataPoolUpdate |
| Matching-mode     |                      |
| isMinimized       | false                |
| isReject          | false                |
| isRejectInnerJoin | false                |
| isInnerJoin       | false                |
| expressionFilter  | null                 |

**Metadata Table Entries( masterdataPoolUpdate ):**

| Name           | Type   | Expression             | isNullable |
|----------------|--------|------------------------|------------|
| SystemId       | String | context.SystemId       | true       |
| SystemPassword | String | context.SystemPassword | true       |
| Pool           | String | context.Pool           | true       |

**Constraint Table Entries( masterdataPoolUpdate ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table Properties( MasterdataUpdate ):**



| Properties        | Values           |
|-------------------|------------------|
| Name              | MasterdataUpdate |
| Matching-mode     |                  |
| isMinimized       | false            |
| isReject          | false            |
| isRejectInnerJoin | false            |
| isInnerJoin       | false            |
| expressionFilter  | null             |

**Metadata Table Entries( MasterdataUpdate ):**

| Name          | Type           | Expression          | isNullable |
|---------------|----------------|---------------------|------------|
| Group         | String         | Var.RTE_NUMBER      | true       |
| Key           | String         | Var.KEY             | true       |
| Description   | String         | Var.DESCRPTION      | true       |
| validTillDate | java.util.Date | Var.validTillDate   | true       |
| Filter1       | String         | Var.CUSTOMER_NUMBER | true       |
| Filter2       | String         | Var.ORDER_DATE      | true       |
| mafAppSpace   | String         | context.mafAppSpace | true       |

**Constraint Table Entries( MasterdataUpdate ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

#### Mapper table Properties( ITM ):

| Properties        | Values |
|-------------------|--------|
| Name              | ITM    |
| Matching-mode     |        |
| isMinimized       | false  |
| isReject          | false  |
| isRejectInnerJoin | false  |
| isInnerJoin       | false  |
| expressionFilter  | null   |

#### Metadata Table Entries( ITM ):

| Name     | Type   | Expression                   | isNullable |
|----------|--------|------------------------------|------------|
| ITM      | String | Var.ITM1                     | true       |
| MATNO    | String | "0000000" +<br>row6.Item_No_ | true       |
| QTYORDER | String | Var.QTYPLAN                  | true       |
| QTYPLAN  | String | Var.QTYPLAN                  | true       |
| UOM      | String | "0"                          | true       |
| REASON   | String | ""                           | true       |
| LOCKED   | String | "false"                      | true       |
| TYPE     | String | "00"                         | true       |

**Constraint Table Entries( ITM ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table Properties( HD ):**

| Properties        | Values |
|-------------------|--------|
| Name              | HD     |
| Matching-mode     |        |
| isMinimized       | false  |
| isReject          | false  |
| isRejectInnerJoin | false  |
| isInnerJoin       | false  |
| expressionFilter  | null   |

**Metadata Table Entries( HD ):**

| Name    | Type   | Expression          | isNullable |
|---------|--------|---------------------|------------|
| DRIVER  | String | Var.RTE_NUMBER      | true       |
| REGION  | String | Var.Region          | true       |
| ROUTE   | String | Var.RTE_NUMBER      | true       |
| REFNO   | String |                     | true       |
| REFDATE | String | Var.ORDER_DATE      | true       |
| SHIPTO  | String | Var.CUSTOMER_NUMBER | true       |
| DELNO   | String | Var.KEY             | true       |

**Constraint Table Entries( HD ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

#### Mapper table Properties( sendMasterData ):

| Properties        | Values         |
|-------------------|----------------|
| Name              | sendMasterData |
| Matching-mode     |                |
| isMinimized       | false          |
| isReject          | false          |
| isRejectInnerJoin | false          |
| isInnerJoin       | false          |
| expressionFilter  | null           |

#### Metadata Table Entries( sendMasterData ):

| Name      | Type   | Expression | isNullable |
|-----------|--------|------------|------------|
| newColumn | String |            | true       |

#### Constraint Table Entries( sendMasterData ):

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

#### Mapper table for tMap\_1 ( var ):

#### Mapper table Properties( Var ):

| Properties        | Values |
|-------------------|--------|
| Name              | Var    |
| Matching-mode     |        |
| isMinimized       | false  |
| isReject          | false  |
| isRejectInnerJoin | false  |
| isInnerJoin       | false  |
| expressionFilter  | null   |

#### Metadata Table Entries( Var ):


| Name           | Type   | Expression  |
|----------------|--------|---|
| SHIPTO         | String | row6.SHIPTO   |
| ORDER_DATE     | String | routines.DateParser.convertPSTToUTC_atNoon(TalendDate.fo<br>) |
| ORDER_DATE_STR | String | TalendDate.formatDate("yyyy-MM-dd",row6.REFERENCEDATI         |
| intQtyTemp     | int    | row6.QTYTEMP.intValueExact()                                  |
| intQtyPerm     | int    | row6.QTYPERM.intValueExact()                                  |
| intQtyOrder    | int    | row6.QTYORDER.intValueExact()                                 |
| QTYPLAN        | String | String.valueOf(Var.intQtyTemp + Var.intQtyPerm )              |

|                 |                |  |
|-----------------|----------------|--|
| RTE_NUMBER      | String         | "00000" + row6.routeNumber                                   |
| CUSTOMER_NUMBER | String         | Var.SHIPTO   |
| ITM1            | String         | "00_" + "0000000" + row6.Item_No_ + "_0"                     |
| P1              | String         | "04"   |
| F1              | String         | Relational.ISNULL(row8.facility)? "I" :row8.facility         |
| L1              | String         | Relational.ISNULL(row8.location)? "dont" :row8.location      |
| RG1             | String         | Relational.ISNULL(row8.routeGroup)? "know":row8.routeGroup   |
| Region          | String         | Var.P1+"_" +Var.F1+"_" +Var.L1+"_" +Var.RG1                  |
| validTillDate   | java.util.Date | TalendDate.addDate(row6.REFERENCEDATE ,10,"dd")              |
| KEY             | String         | context.instance.substring(4, 6) + "_" + Var.RTE_NUMBER + "_ |
| DESCRIPTION     | String         | "DEL_" + Var.KEY   |

**Constraint Table Entries( Var ):**

| Name | Type | Expression |
|------|------|------------|
|------|------|------------|

**Component tMap**

|   |             |                 |           |                        |
|---|-------------|-----------------|-----------|------------------------|
|  | UNIQUE NAME | tMap_2          | INPUT(S)  | tMap_2<br>, tDBInput_2 |
|   | LABEL       | __UNIQUE_NAME__ | OUTPUT(S) | tDBOutput_2            |

**Component Parameters:**

---

| Properties                           | Values  |
|--------------------------------------|---------|
| tStatCatcher Statistics              | false   |
| Enable parallel execution            | false   |
| Mapping links display as:            | AUTO    |
| Temp data directory path:            |         |
| Max buffer size (nb of rows):        | 2000000 |
| Ignore trailing zeros for BigDecimal | true    |
| Show Information                     | false   |
| Comment                              |         |
| Use an existing validation rule      | false   |

**Mapper table for tMap\_2 ( input ):**  
**Mapper table Properties( row3 ):**



| Properties        | Values       |
|-------------------|--------------|
| Name              | row3         |
| Matching-mode     | UNIQUE_MATCH |
| isMinimized       | false        |
| isReject          | false        |
| isRejectInnerJoin | false        |
| isInnerJoin       | false        |
| expressionFilter  | null         |

**Metadata Table Entries( row3 ):**

| Name          | Type           | Expression | isNullable |
|---------------|----------------|------------|------------|
| REFERENCEDATE | java.util.Date |            | false      |
| SHIPTO        | String         |            | false      |
| Item_No_      | String         |            | false      |
| QTYTEMP       | BigDecimal     |            | false      |
| QTYPERM       | BigDecimal     |            | false      |
| QTYORDER      | BigDecimal     |            | false      |
| UOM           | String         |            | false      |

**Constraint Table Entries( row3 ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table Properties( row4 ):**

| Properties        | Values       |
|-------------------|--------------|
| Name              | row4         |
| Matching-mode     | UNIQUE_MATCH |
| isMinimized       | false        |
| isReject          | false        |
| isRejectInnerJoin | false        |
| isInnerJoin       | true         |
| expressionFilter  | null         |

**Metadata Table Entries( row4 ):**

| Name        | Type   | Expression  | isNullable |
|-------------|--------|-------------|------------|
| routeNumber | String |             | false      |
| ShipTo      | String | row3.SHIPTO | false      |

**Constraint Table Entries( row4 ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table for tMap\_2 ( output ):**

**Mapper table Properties( row5 ):**

| Properties        | Values |
|-------------------|--------|
| Name              | row5   |
| Matching-mode     |        |
| isMinimized       | false  |
| isReject          | false  |
| isRejectInnerJoin | false  |
| isInnerJoin       | false  |
| expressionFilter  | null   |

**Metadata Table Entries( row5 ):**

| Name                 | Type           | Expression  | isNullable |
|----------------------|----------------|---|------------|
| REFERENCEDATE        | java.util.Date | row3.REFERENCEDATE  | false      |
| SHIPTO               | String         | row3.SHIPTO != null ? "000" +<br>row3.SHIPTO:row3.SHIPTO                                | false      |
| Item_No_             | String         | row3.Item_No_ != null ?<br>row3.Item_No_.replaceFirst("F",""):row3.Item_No_             | false      |
| QTYTEMP              | BigDecimal     | row3.QTYTEMP  | false      |
| QTYPERM              | BigDecimal     | row3.QTYPERM  | false      |
| QTYORDER             | BigDecimal     | row3.QTYORDER   | false      |
| UOM                  | String         | row3.UOM  | false      |
| routeNumber          | String         | row4.routeNumber != null?<br>row4.routeNumber.replaceFirst("R",""):<br>row4.routeNumber | false      |
| SHIPTO_Original      | String         | row3.SHIPTO   | false      |
| Item_No_Original     | String         | row3.Item_No_   | false      |
| routeNumber_Original | String         | row4.routeNumber  | false      |

**Constraint Table Entries( row5 ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Mapper table for tMap\_2 ( var ):**

**Mapper table Properties( Var ):**

| Properties        | Values |
|-------------------|--------|
| Name              | Var    |
| Matching-mode     |        |
| isMinimized       | true   |
| isReject          | false  |
| isRejectInnerJoin | false  |
| isInnerJoin       | false  |
| expressionFilter  | null   |

**Metadata Table Entries( Var ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|

**Constraint Table Entries( Var ):**

| Name | Type | Expression | isNullable |
|------|------|------------|------------|
|------|------|------------|------------|