



# Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:05:05 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

## Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

## Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

## Description

Properties	Values
Name	j_NavExport_Order_030_TimeOut
Author	
Version	1.0
Purpose	
Status	
Description	Enhanced Bundling and modified job to track orders only sending new orders
Creation	Mar 5, 2019 12:40:19 AM
Modification	Nov 15, 2019 10:12:17 AM

## Preview Picture

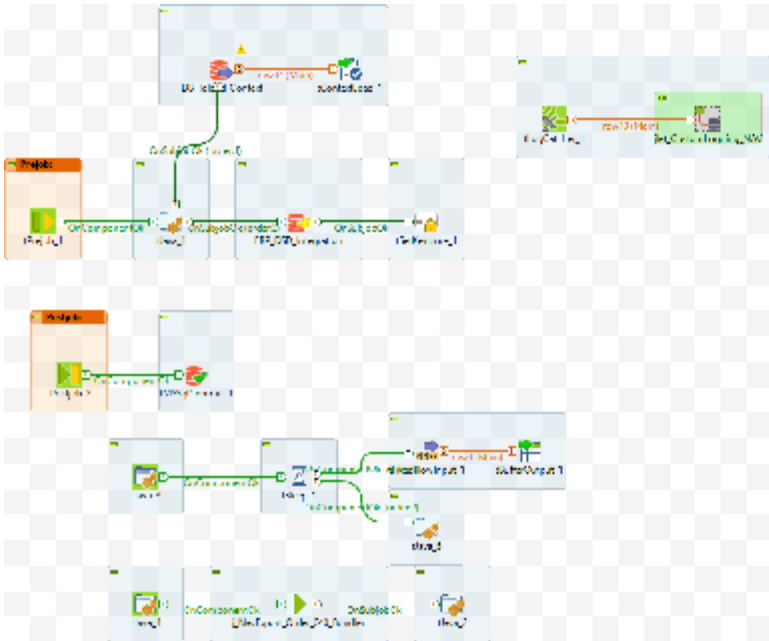

# Settings

## Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	true
Implicit tContextLoad	false

## Status & Logs

Name	Value
Use statistics (tStatCatcher)	false

Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## Context List

### ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false

group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false

referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false

CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true

routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false



DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order-Encoding	RM_Order-Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

## ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false

objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false

updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false

orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false

DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order-Encoding	RM_Order-Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false

UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false



movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false

objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false

RM_Order_RowSeparator	RM_Order_RowSeparator?	false
-----------------------	------------------------	-------

## ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false

table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false

headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false

movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false

DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false



RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false


## Component List

Component Name	Component Type
<a href="#">jlet_CustomLogging_NAV_1</a>	jlet_CustomLogging_NAV
<a href="#">tBufferOutput_1</a>	tBufferOutput
<a href="#">tContextLoad_1</a>	tContextLoad
<a href="#">tDBInput_1</a>	tMSSqlInput
<a href="#">tFixedFlowInput_1</a>	tFixedFlowInput
<a href="#">tJava_1</a>	tJava
<a href="#">tJava_2</a>	tJava
<a href="#">tJava_3</a>	tJava
<a href="#">tJava_4</a>	tJava
<a href="#">tJava_5</a>	tJava

tLogCatcher_1	tLogCatcher
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tPostjob_2	tPostjob
tPrejob_1	tPrejob
tRunJob_1	tRunJob
tSetKeystore_1	tSetKeystore
tSleep_1	tSleep

## Components Description

### Component tBufferOutput

	UNIQUE NAME	tBufferOutput_1	INPUT(S)	tFixedFlowInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

### Component Parameters:

Properties	Values
Unique Name	tBufferOutput_1
Component Name	tBufferOutput
Version	0.101 (ALPHA)


Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tBufferOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tBufferOutput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
interruptedRoutesList	false	String			true	

#### Original Function Parameters: Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

#### Component Parameters:

Properties	Values
Unique Name	tContextLoad_1


Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for tContextLoad\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

**Original Function Parameters:****Component tMSSqlInput**

	UNIQUE NAME	tDBInput_1	INPUT(S)	<a href="#">tJava_1</a>
	LABEL	DB_Talend_Context	OUTPUT(S)	<a href="#">tContextLoad_1</a>

**Component Parameters:**

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS



Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL


Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[[SCHEMA_COLUMN=key, TRIM=false], {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBInput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

**Original Function Parameters:**  
**Component tFixedFlowInput**

---

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tSleep_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tBufferOutput_1

### Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[[SCHEMA_COLUMN=interruptedRoutesList, VALUE=context.interruptedRoutesList+", "+context.route_number]]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"

Field Separator	"."
Content	
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for tFixedFlowInput\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
interruptedRoutesList	false	String			true	

**Original Function Parameters:**  
**Component tJava**

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1 , tMSSqlConnection_1

**Component Parameters:**

Properties	Values
------------	--------

Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	


Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); //context.ProcessDate=TalendDate.formatDate("yyyy-MM-dd-HH-mm-ss", TalendDate.getCurrentDate()); context.ProcessDate=context.ProcessTimeStamp.replace(" ", "-").replace(":", ""); context.routeInterruptedFlag=false; //context.setRequestTimeout=1; //System.out.println("\ncontext.route_number:"+context.route_number);</pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for tJava\_1 :**

---

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tRunJob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false




Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	System.out.println("\nRoute "+context.route_number+" completed successfully"); Thread thread = (Thread)globalMap.get("thread2"); thread.stop();
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJava

	UNIQUE NAME	tJava_3	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSleep_1

Component Parameters:

Properties	Values
Unique Name	tJava_3
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	true
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	globalMap.put("thread2", Thread.currentThread()); //System.out.println("Thread2:"+(Thread)globalMap.get("thread2"));
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJava\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_4	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tRunJob_1</a>

#### Component Parameters:

Properties	Values
Unique Name	tJava_4
Component Name	tJava
Version	0.101 (ALPHA)


Family	Custom_Code
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Code	<pre>globalMap.put("thread1", Thread.currentThread()); //System.out.println("Thread1:"+(Thread)globalMap.get("thread1"));</pre>
Import	<pre>//import java.util.List;</pre>
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJava\_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_5	INPUT(S)	tSleep_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Unique Name	tJava_5
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	


Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	context.routeInterruptedFlag=true; System.out.println("\nRoute "+context.route_number+" interrupted.\nPlease resend data for this route."); Thread thread = (Thread)globalMap.get("thread1"); thread.stop();
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJava\_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------



**Original Function Parameters:**  
**Component tLogCatcher**

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">jilet_CustomLogging_NAV_1</a>

**Component Parameters:**

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tLogCatcher\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	

code	false	Integer	3		true	
------	-------	---------	---	--	------	--

Original Function Parameters:  
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	false
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tJava_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true


SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server

Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	true
Shared DB Connection Name	"Order_Conn"
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration



Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tPostjob

	UNIQUE NAME	tPostjob_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tMSSqlCommit_1</a>


Component Parameters:

Properties	Values
Unique Name	tPostjob_2
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component   tPrejob**

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tJava_1</a>


**Component Parameters:**

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tRunJob

	UNIQUE NAME	tRunJob_1	INPUT(S)	<a href="#">tJava_4</a>
	LABEL	__PROCESS__	OUTPUT(S)	<a href="#">tJava_2</a>

Component Parameters:

Properties	Values
Unique Name	tRunJob_1
Component Name	tRunJob
Version	0.101 (ALPHA)
Family	System Orchestration
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRunJob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Use dynamic job	false
Context job	

Job	j_NavExport_Order_040_Bundler
Context	Default
Use an independent process to run subjob	false
Die on child error	false
Transmit whole context	true
Context Param	[]
Propagate the child result to the output schema	false
Print Parameters	false
Transmit original context value(if unchecked, there will convert context value to string type before transmitting.)	true
Label format	__PROCESS__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRunJob\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	<a href="#">tMSSqlConnection_1</a>
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:


Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false



tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****

Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tSleep**

	UNIQUE NAME	tSleep_1	INPUT(S)	tJava_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFixedFlowInput_1 , tJava_5

**Component Parameters:**

Properties	Values
Unique Name	tSleep_1
Component Name	tSleep
Version	0.102 (ALPHA)

Family	Orchestration
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSleep
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


Pause (in seconds)	context.setRequestTimeout
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tSleep\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters:

Component **jlet\_CustomLogging\_NAV**

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	<a href="#">tLogCatcher_1</a>
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

#### Component Parameters:

Properties	Values
Version	Latest

Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

**Schema for jlet\_CustomLogging\_NAV\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	