



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:36 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_Product
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Feb 27, 2019 8:07:57 AM
Modification	Dec 2, 2019 12:23:50 PM

Preview Picture

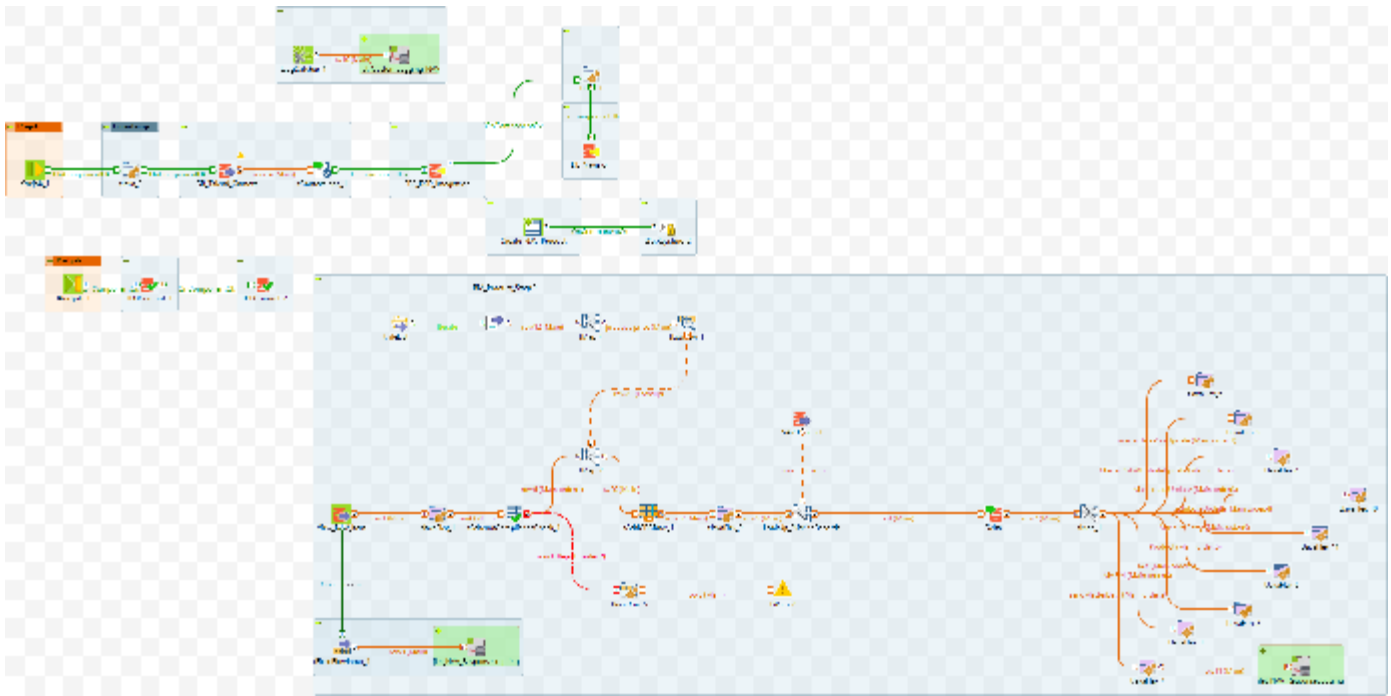

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false

Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
directory	directory?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom Username	mom Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Product-Encoding	RM_Product-Encoding?	false
RM_Product_FieldSeparator	RM_Product_FieldSeparator?	false
RM_Product_File	RM_Product_File?	false
RM_Product_RowSeparator	RM_Product_RowSeparator?	false

ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false

Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
directory	directory?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom Username	mom Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Product_Encoding	RM_Product_Encoding?	false
RM_Product_FieldSeparator	RM_Product_FieldSeparator?	false
RM_Product_File	RM_Product_File?	false
RM_Product_RowSeparator	RM_Product_RowSeparator?	false

ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false

Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
directory	directory?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Product_Encoding	RM_Product_Encoding?	false
RM_Product_FieldSeparator	RM_Product_FieldSeparator?	false
RM_Product_File	RM_Product_File?	false
RM_Product_RowSeparator	RM_Product_RowSeparator?	false

ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
JobName	JobName?	false
objectType	objectType?	false
source	source?	false
Pool	Pool?	false

Filter1	Filter1?	false
Description	Description?	false
mafAppSpace	mafAppSpace?	false
database	database?	false
table_view	table_view?	false
table	table?	false
viewname	viewname?	false
group	group?	false
Sales_Category	Sales_Category?	false
RegionNumber	RegionNumber?	false
AttName	AttName?	false
UseIndex	UseIndex?	false
ProfitCenter	ProfitCenter?	false
implicit_db_environment	implicit_db_environment?	false
DB_PROD_UPC_CODE	DB_PROD_UPC_CODE?	false
NAV_Item	NAV_Item?	false
directory	directory?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom Username	mom Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false

Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
responseXML	responseXML?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Product_Encoding	RM_Product_Encoding?	false
RM_Product_FieldSeparator	RM_Product_FieldSeparator?	false
RM_Product_File	RM_Product_File?	false
RM_Product_RowSeparator	RM_Product_RowSeparator?	false

Component List

Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
jlet_NAV_ResponseLogging_1	jlet_NAV_ResponseLogging
jlet_NAV_ResponseLogging_2	jlet_NAV_ResponseLogging
tAddCRCRow_1	tAddCRCRow
tContextLoad_1	tContextLoad


tCreateTable_1	tCreateTable
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBConnection_2	tMSSqlConnection
tDBInput_1	tMSSqlInput
tFileInputPositional_1	tFileInputPositional
tFileList_1	tFileList
tFixedFlowInput_1	tFixedFlowInput
tJavaFlex_1	tJavaFlex
tJavaFlex_10	tJavaFlex
tJavaFlex_11	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex

tJavaFlex_8	tJavaFlex
tJavaFlex_9	tJavaFlex
tJavaRow_5	tJavaRow
tJava_1	tJava
tJava_2	tJava
tLogCatcher_1	tLogCatcher
tLogRow_1	tLogRow
tMSSqlConnection_2	tMSSqlConnection
tMSSqlInput_2	tMSSqlInput
tMSSqlInput_4	tMSSqlInput
tMSSqlOutput_2	tMSSqlOutput
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob

tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_2	tSetKeystore
tWarn_2	tWarn

Components Description

Component tAddCRCRow

	UNIQUE NAME	tAddCRCRow_1	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_2

Component Parameters:

Properties	Values
Unique Name	tAddCRCRow_1
Component Name	tAddCRCRow
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAddCRCRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Implication	{[SCHEMA_COLUMN=MATNO, USE_IN_CRC=true}, {SCHEMA_COLUMN=DESCRIPTION, USE_IN_CRC=true}, {SCHEMA_COLUMN=SHORTDESCRIPTION, USE_IN_CRC=true}, {SCHEMA_COLUMN=LONGDESCRIPTION, USE_IN_CRC=true}, {SCHEMA_COLUMN=UPC, USE_IN_CRC=true}, {SCHEMA_COLUMN=UOMBASE, USE_IN_CRC=true}, {SCHEMA_COLUMN=ProfitCenter, USE_IN_CRC=true}, {SCHEMA_COLUMN=DB_PROD_PRICE_AMOUNT_1, USE_IN_CRC=true}, {SCHEMA_COLUMN=CRC, USE_IN_CRC=true}]}
CRC Type	crc32
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	

SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
DB_PROD_PRICE_AMOUNT_1	false	Float	50		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tMSSqlInput_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlConnection_2

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false

SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning


If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:

Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	none
	LABEL	Create_NAV_Product	OUTPUT(S)	tSetKeystore_2

Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)
Family	Databases
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Database Type	MSSQL
Table Action	CREATE_IF_NOT_EXIST
Case Sensitive	false
Use an existing connection	false
Host	"srvrsql200.harvestfoodsolutions.com"
Database Name	"ERP_DSD_Integration_PREPROD"
Local Service Name	context.DB_ERP_DSD_Integration_Database
URL	"jdbc:oracle:oci://@db10g_test"

UserName	"talend"
Password	*****
Port	"1433"
Schema	"dbo"
Access File	""
DB Version	jtds-1.3.1-patch.jar;jtds-1.3.1-patch.jar
Firebird File	""
Running Mode	HSQldb_IN_MEMORY
Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	context.DB_ERP_DSD_Integration_Database
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	context.DB_ERP_DSD_Integration_Database

DB Root Path	""
JDBC Provider	JTDS
Temporary Table	false
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
Connection Type	ORACLE_SID
URL	context.DB_ERP_DSD_Integration_Server
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
SQLite File	""
DB Version	SYBSEIQ_16
ODBC Name	context.DB_ERP_DSD_Integration_Database
Use "drop cascade"	true
DB Version	jtids-1.3.1-patch.jar;jtids-1.3.1-patch.jar
Table Name	"NAV_Product"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL


Create	SET
Additional JDBC Parameters	""
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	Create_NAV_Product
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tCreateTable_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	

UPC	false	String	255		true	
DB_PROD_PRICE_AMOUNT_1	false	Float	50		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	true	Long	255		true	
ProcessTimestamp	false	String	30		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_2

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false


Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_2
Close Connection	true

Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2


Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tJava_1

	LABEL	DB_Navision	OUTPUT(S)	none
--	-------	-------------	-----------	------


Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_2
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
JDBC Provider	MSSQL_PROP
Host	"testnav10.corp.usbakery.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"TEST-USB-2013"
Username	"talend_hfs2"
Password	*****
Encoding	"ISO-8859-15"

Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	none
	LABEL	View_NAV_Item	OUTPUT(S)	tJavaFlex_1 , tFixedFlowInput_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema

Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_Item
Query Type	Built-In
Guess Schema	""
Query	"SELECT [MATNO] ,[DESCRIPTION] ,[SHORTDESCRIPTION] ,[LONGDESCRIPTION] ,isnull([UPC],") as UPC ,[UOMBASE] FROM "+context.NAV_Item
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true


Trim column	{[SCHEMA_COLUMN=MATNO, TRIM=false}, {SCHEMA_COLUMN=DESCRIPTION, TRIM=false}, {SCHEMA_COLUMN=SHORTDESCRIPTION, TRIM=false}, {SCHEMA_COLUMN=LONGDESCRIPTION, TRIM=false}, {SCHEMA_COLUMN=UPC, TRIM=false}, {SCHEMA_COLUMN=UOMBASE, TRIM=false}]
Label format	View_NAV_Item
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	

UOMBASE	false	String	255		false	
---------	-------	--------	-----	--	-------	--

Original Function Parameters:
Component tFileInputPositional

	UNIQUE NAME	tFileInputPositional_1	INPUT(S)	tFileList_1
	LABEL	RM_Product_Stage2	OUTPUT(S)	tMap_4

Component Parameters:

Properties	Values
Unique Name	tFileInputPositional_1
Component Name	tFileInputPositional
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tFileInputPositional
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use existing dynamic	false
Component List	
File name/Stream	((String)globalMap.get("tFileList_1_CURRENT_FILEPATH
Row Separator	"\n"
Customize	false
Pattern	context.RM_Product_FieldSeparator
Pattern units	SYMBOLS

```

{{SCHEMA_COLUMN=DB_PROD_NUMBER, SIZE=9,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_DESC, SIZE=18,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_UPC_CODE, SIZE=12,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_CLASS_CODE, SIZE=4
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_CLASS_SUB_CAT, SIZ
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_SALES_CATEGORY,
SIZE=2, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_SALES_SUB_CATEGO
SIZE=2, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_SCALING_WEIGHT, SI
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_SCALING_SIGN, SIZE=
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_SCALING_AMOUNT, S
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_POUNDS_SOLD_WEIG
SIZE=, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_POUNDS_SOLD_SIGN
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_POUNDS_SOLD_AMO
SIZE=8, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_CHARGE_TRAY_FACT
SIZE=3, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_LOADING_TRAY_FAC
SIZE=3, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_ORDERING_TRAY_FA
SIZE=3, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_AVAILABLE_DAYS, SIZ
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_SHELF_LIFE_DAYS, S
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_PRODUCTION_LINE_N
SIZE=4, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_STACK_TRAY_FACTO
SIZE=3, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_MFGD_OR_PURCHAS
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_PRICE_1, SIZE=,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_PRICE_SIGN_1, SIZE=
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_PRICE_AMOUNT_1, SI
PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=TI
SIZE=882, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PRODUCTION_GROUPING, S
PADDING_CHAR=' ', ALIGN='L'},

```

Formats

```
{SCHEMA_COLUMN=DB_LOAD_SHEET_CATEGORY, S  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_INVOICE_CATEGORY, SIZE=2,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_INVOICE_SUB_CAT, SIZE=2,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_STANDING_ORDER_STATUS,  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_RETURNS_ALLOWED_SWITCH,  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_WHSE_PICK_CATEGORY, SIZE=2,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PREPOST_PCT, SIZE=4,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_VENDOR_NUMBER, SIZE=5,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_ONHAND_REQ, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_WEEK_NO, SIZE=2,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_HH_PROD_FLAG, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PENNY_LINE_FLAG, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_GAMBLE_TABLE, SIZE=4,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_STALE_PRICE_DAYS, SIZE=2,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_FORECASTING_TYPE, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_ORDER_ADJ_CONTROL, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_ORDER_ADJ_PERCENT, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_DNL_SALES_REP_CODE, SIZE=4,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PROD_CLASS_GROUP_CODE, SIZE=4,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PROD_SMOOTH_PRODUCT, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PROD_UNITS_TRAY_FACTOR, SIZE=3,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_SOLD_UNIT_OF_MEASURE, SIZE=3,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PROD_PRICING_GROUP, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_PROD_PRICING_GROUP_DEFAULT, SIZE=18,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_UNITS_PER_BOX, SIZE=4,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_BOXES_PER_CASE, SIZE=4,
```

```
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_LITRE_RATIO, SIZE=1,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_BUTTERFAT_RATIO,
SIZE=11, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_PALLET_SIZE, SIZE=4,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_MILK_CLASS, SIZE=2,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_ALT_LANG_DESC, SIZE=1,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_PROD_TAXABLE_FLAG, SIZE=1,
PADDING_CHAR=' ', ALIGN='L'}
```

	PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_PROD_END_OF_RECORD, SI PADDING_CHAR=' ', ALIGN='L'}]
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
Header	0
Footer	0
Limit	
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	repository: POS:Product - metadata
Needed to process rows longer than 100 000 characters	false
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	"."
Trim all columns	true
Validate date	false
	[{SCHEMA_COLUMN=DB_PROD_NUMBER, TRIM=false}]

Check column to trim

```
{SCHEMA_COLUMN=DB_PROD_DESC, TRIM=false},
{SCHEMA_COLUMN=DB_PROD_UPC_CODE, TRIM=false},
{SCHEMA_COLUMN=DB_PROD_CLASS_CODE, TRIM=false},
{SCHEMA_COLUMN=DB_PROD_CLASS_SUB_CAT,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_SALES_CATEGORY,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_SALES_SUB_CATEGOR
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_SCALING_WEIGHT,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_SCALING_SIGN,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_SCALING_AMOUNT,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_POUNDS_SOLD_WEIGHT
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_POUNDS_SOLD_SIGN
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_POUNDS_SOLD_AMOUNT
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_CHARGE_TRAY_FACTOR
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_LOADING_TRAY_FACTOR
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_ORDERING_TRAY_FACTOR
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_AVAILABLE_DAYS,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_SHELF_LIFE_DAYS,
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_PRODUCTION_LINE_NUMBER
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_STACK_TRAY_FACTOR
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_MFGD_OR_PURCHASED
TRIM=false}, {SCHEMA_COLUMN=DB_PROD_PRICE_1,
TRIM=false}, {SCHEMA_COLUMN=DB_PROD_PRICE_SINCE
TRIM=false},
{SCHEMA_COLUMN=DB_PROD_PRICE_AMOUNT_1,
TRIM=false}, {SCHEMA_COLUMN=Total, TRIM=false},
{SCHEMA_COLUMN=DB_PRODUCTION_GROUPING,
TRIM=false},
{SCHEMA_COLUMN=DB_LOAD_SHEET_CATEGORY,
TRIM=false}, {SCHEMA_COLUMN=DB_INVOICE_CATEGORY
TRIM=false}, {SCHEMA_COLUMN=DB_INVOICE_SUB_CATEGORY
TRIM=false},
{SCHEMA_COLUMN=DB_STANDING_ORDER_STATUS
TRIM=false},
{SCHEMA_COLUMN=DB_RETURNS_ALLOWED_SWITCH
TRIM=false},
```


	{SCHEMA_COLUMN=DB_WHSE_PICK_CATEGORY, TRIM=false}, {SCHEMA_COLUMN=DB_PREPOST_PCT, TRIM=false}, {SCHEMA_COLUMN=DB_VENDOR_NUMB TRIM=false}, {SCHEMA_COLUMN=DB_ONHAND_REQ, TRIM=false}, {SCHEMA_COLUMN=DB_WEEK_NO, TRIM=false}, {SCHEMA_COLUMN=DB_HH_PROD_FLAG TRIM=false}, {SCHEMA_COLUMN=DB_PENNY_LINE_FL TRIM=false}, {SCHEMA_COLUMN=DB_GAMBLE_TABLE TRIM=false}, {SCHEMA_COLUMN=DB_STALE_PRICE_D TRIM=false}, {SCHEMA_COLUMN=DB_FORECASTING_ TRIM=false}, {SCHEMA_COLUMN=DB_ORDER_ADJ_CONTROL, TRIM=false}, {SCHEMA_COLUMN=DB_ORDER_ADJ_PERCENT, TRIM=false}, {SCHEMA_COLUMN=DB_DNL_SALES_REP_CODE, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_CLASS_GROUP_CODI TRIM=false}, {SCHEMA_COLUMN=DB_PROD_SMOOTH_PRODUCT, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_UNITS_TRAY_FACTOR TRIM=false}, {SCHEMA_COLUMN=DB_SOLD_UNIT_OF_MEASURE, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_PRICING_GROUP, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_PRICING_GROUP_DE: TRIM=false}, {SCHEMA_COLUMN=DB_UNITS_PER_BO) TRIM=false}, {SCHEMA_COLUMN=DB_BOXES_PER_CA TRIM=false}, {SCHEMA_COLUMN=DB_PROD_LITRE_R/ TRIM=false}, {SCHEMA_COLUMN=DB_PROD_BUTTERFAT_RATIO, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_PALLET_ TRIM=false}, {SCHEMA_COLUMN=DB_PROD_MILK_CL/ TRIM=false}, {SCHEMA_COLUMN=DB_PROD_ALT_LANG_DESC, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_TAXABLE_FLAG, TRIM=false}, {SCHEMA_COLUMN=DB_PROD_END_OF_RECORD, TRIM=false}]
Encoding	"UTF-8"
Label format	RM_Product_Stage2

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :


Column	Key	Type	Length	Precision	Nullable	Comment
DB_PROD_NUMBER	false	Integer	9		true	
DB_PROD_DESC	false	String	18		true	
DB_PROD_UPC_CODE	false	String	12		true	
DB_PROD_CLASS_CODE	false	Integer	4		true	
DB_PROD_CLASS_SUB_CAT	false	Integer	2		true	
DB_PROD_SALES_CATEGORY	false	Integer	2		true	
DB_PROD_SALES_SUB_CATEGORY	false	Integer	2		true	
DB_PROD_SCALING_WEIGHT	false	String			true	
DB_PROD_SCALING_SIGN	false	String	1		true	

DB_PROD_SCALING_AMOUNT	false	Float	8		true	
DB_PROD_POUNDS_SOLD_WEIGHT	false	String			true	
DB_PROD_POUNDS_SOLD_SIGN	false	String	1		true	
DB_PROD_POUNDS_SOLD_AMOUNT	false	String	8		true	
DB_PROD_CHARGE_TRAY_FACTOR	false	Integer	3		true	
DB_PROD_LOADING_TRAY_FACTOR	false	Integer	3		true	
DB_PROD_ORDERING_TRAY_FACTOR	false	Integer	3		true	
DB_PROD_AVAILABLE_DAYS	false	String	7		true	
DB_PROD_SHELF_LIFE_DAYS	false	Integer	2		true	
DB_PROD_PRODUCTION_LINE_NO	false	Integer	4		true	
DB_PROD_STACK_TRAY_FACTOR	false	Integer	3		true	
DB_PROD_MFGD_OR_PURCHASED	false	String	1		true	
DB_PROD_PRICE_1	false	String			true	
DB_PROD_PRICE_SIGN_1	false	String	1		true	
DB_PROD_PRICE_AMOUNT_1	false	Float	8		true	
Total	false	String	882		true	
DB_PRODUCTION_GROUPING	false	String	2		true	

DB_LOAD_SHEET_CATEGORY	false	String	2		true	
DB_INVOICE_CATEGORY	false	String	2		true	
DB_INVOICE_SUB_CAT	false	String	2		true	
DB_STANDING_ORDER_STATUS	false	String	1		true	
DB_RETURNS_ALLOWED_SWITCH	false	String	1		true	
DB_WHSE_PICK_CATEGORY	false	String	4		true	
DB_PREPOST_PCT	false	String	4		true	
DB_VENDOR_NUMBER	false	String	5		true	
DB_ONHAND_REQ	false	String	1		true	
DB_WEEK_NO	false	String	2		true	
DB_HH_PROD_FLAG	false	Integer	1		true	
DB_PENNY_LINE_FLAG	false	Integer	1		true	
DB_GAMBLE_TABLE	false	String	4		true	
DB_STALE_PRICE_DAYS	false	String	2		true	
DB_FORECASTING_TYPE	false	String	1		true	
DB_ORDER_ADJ_CONTROL	false	String	1		true	
DB_ORDER_ADJ_PERCENT	false	Integer	3		true	

DB_DNL_SALES_REP_CODE	false	String	1		true	
DB_PROD_CLASS_GROUP_CODE	false	Integer	4		true	
DB_PROD_SMOOTH_PRODUCT	false	String	1		true	
DB_PROD_UNITS_TRAY_FACTOR	false	Integer	3		true	
DB_SOLD_UNIT_OF_MEASURE	false	String	3		true	
DB_PROD_PRICING_GROUP	false	Integer	4		true	
DB_PROD_PRICING_GROUP_DESC	false	String	18		true	
DB_UNITS_PER_BOX	false	Integer	4		true	
DB_BOXES_PER_CASE	false	Integer	4		true	
DB_PROD_LITRE_RATIO	false	Float	11		true	
DB_PROD_BUTTERFAT_RATIO	false	Float	11		true	
DB_PROD_PALLET_SIZE	false	Integer	4		true	
DB_PROD_MILK_CLASS	false	String	2		true	
DB_PROD_ALT_LANG_DESC	false	String	17		true	
DB_PROD_TAXABLE_FLAG	false	String	1		true	
DB_PROD_END_OF_RECORD	false	String	1		true	

Original Function Parameters:
Component tFileList

	UNIQUE NAME	tFileList_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileInputPositional_1


Component Parameters:

Properties	Values
Unique Name	tFileList_1
Component Name	tFileList
Version	0.102 (ALPHA)
Family	File/Management Orchestration
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileList
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Directory	context.directory
FileList Type	FILES
Includes subdirectories	false
Case Sensitive	YES
Generate Error if no file found	false
Use Glob Expressions as Filemask (Unchecked means Perl5 Regex Expressions)	true
Files	[{FILEMASK="**PROD**"}]
By default	true

By file name	false
By file size	false
By modified date	false
ASC	true
DESC	false
Use Exclude Filemask	false
Exclude Filemask	"*.txt"
Format file path to slash(/) style (useful on Windows)	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	ilet_NAV_ResponseLogging_2

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[[SCHEMA_COLUMN=responseXML, VALUE=context.responseXML]]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	"." ,

Content	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int i =1;
Main code	<pre> if(i%5000 == 0) { System.out.println(i+" Records Processe Product Object"); } i++; context.objectId = row1.MATNO; context.DB_PROD_UPC_CODE = row1.UPC; //System.out.println("context.DB_PROD_UPC_CODE "+context.DB_PROD_UPC_CODE); /*String code = row1.UPC.substring(0); int val=0; for(int x=0;x<code.length();x++){ val+=((int)Integer.parseInt(code.charAt(x)+""))*((x%2==0)? } int checksum_digit = 10 - (val % 10); if (checksum_digit = 10) checksum_digit = 0; //System.out.println(row1.DB_PROD_UPC_CODE.substrin + String.valueOf(checksum_digit)); row4.ckdigit = String.valueOf(checksum_digit);*/ </pre>
End code	<pre> // end of the component, outside/closing the loop i--; System.out.println(i+" Records Processed and end of recor Product Object"); </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
UOMBASE	false	String	255		false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_10	INPUT(S)	tMap_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none
--	-------	-----------------	-----------	------

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_10
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.NAV_Product.populateAttributeUpdate(attributeUp </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_10 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_11	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_11
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code


Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateAttributeDataContainerEntr routines.NAV_Product.populateAttributeDataContainerEntr
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_11 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tAddCRCRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code // row5.CRC
Main code	// here is the main part of the component, // a piece of code executed in the row // loop context.CRC=row17.CRC;
End code	// end of the component, outside/closing the loop
TOS2.0	false


TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	

UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
DB_PROD_PRICE_AMOUNT_1	false	Float	50		true	
CRC	false	Long	255		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	<pre> routines.NAV_Product.populateDataContainerEntryChildN routines.NAV_Product.populateDataContainerEntryParentI routines.NAV_Product.populateUpdateContainerEntry(); </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.NAV_Product.populateMasterdataUpdate(Masterc context.group = MasterdataUpdate.Group; context.key=MasterdataUpdate.Key; </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;
Main code	//routines.r_HarvestRoutineLoop.createAllObjects(); routines.NAV_Product.createAllObjects(); if(b==1){ routines.NAV_Product.populateMasterdataPoolUpdate(ma if(b==50) { //routines.r_HarvestRoutine_A.populateMasterdataPoolUp b=0; } b++;
End code	// end of the component, outside/closing the loop routines.NAV_Product.createAllObjects(); routines.NAV_Product.populateMasterdataPoolUpdate(ma
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	routines.NAV_Product.populateDataContainerEntry_No_H
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_1
---	----------------	-------------	----------	--------

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_NAV_ResponseLogging_1
--	-------	-----------------	-----------	---

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	row11.responseXML = ""; if(a==50 /*&& f==(a-50)*/){ row11.responseXML=routines.NAV_Product.sendMasterData(context.mobilizerVersion); //f = a; a=0; //System.out.println(routines.NAV_Product.resetObjects());
End code	// end of the component, outside/closing the loop if(((Integer)globalMap.get("tMSSqlOutput_2_NB_LINE")) != = routines.NAV_Product.sendMasterData(context.mobilizerVersion); routines.NAV_Product.resetObjects());
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_8	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_8

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateDataContainerEntryChildN routines.NAV_Product.populateDataContainerEntryParentN
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_9
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.NAV_Product.populateMasterdataAttributeUpdate

End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJavaRow

	UNIQUE NAME	tJavaRow_5	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_2

Component Parameters:

Properties	Values
Unique Name	tJavaRow_5
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	


Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.ErrorMessage = input_row.errorMessage;
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Company_ID	false	Integer	255		true	
Company_Name	false	String	255		true	
User_ID	false	String	40		true	
First_Name	false	String	60		true	
Middel_Name	false	Character	60		true	
Last_Name	false	String	60		true	
No_	false	String	255		true	
Password	false	String	255		true	
Device_Address	false	String	255		true	
Cost_Center_Code	false	String	40		true	
Company_Code	false	String	40		true	
Depot_code	false	String	40		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tMSSqlConnection_2

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_2
--	-------	-----------------	-----------	---------------------------------

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>String foo = "bar"; System.out.println(context.DB_Navision_Server); System.out.println(context.DB_Navision_Database); System.out.println(context.DB_Navision_Login); System.out.println(context.DB_Navision_Password); System.out.println(context.DB_Navision_Schema); System.out.println(context.DB_Navision_Port); System.out.println(context.NAV_Item);</pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlInput_4

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n"); context.ProfitCenter = "04";</pre>
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_NAV_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)

Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	

root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow

Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	false
Table (print values in cells of a table)	true
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[[{SCHEMA_COLUMN=DB_PROD_NUMBER, LENGTH=10}, {SCHEMA_COLUMN=DB_PROD_PRICE_AMOUNT_1, LENGTH=10}]
Print content with log4j	true

Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogRow_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_PROD_NUMBER	false	Integer	50		true	
DB_PROD_PRICE_AMOUNT_1	false	Float	50		true	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_2	INPUT(S)	tContextLoad_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tJava_1

Component Parameters:


Properties	Values
------------	--------

Database	tMSSqlConnection
Unique Name	tMSSqlConnection_2
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false

Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	NAV_Product	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tMSSqlConnection_2
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"NAV_Product"
Query Type	Built-In
Guess Schema	""
Query	"SELECT \""+context.DB_ERP_DSD_Integration_Schema+"\".[NAV_ +" FROM \""+context.DB_ERP_DSD_Integration_Schema+"\".[NAV_
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[(SCHEMA_COLUMN=CRC, TRIM=false)]
Label format	NAV_Product
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
CRC	false	long			false	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_4	INPUT(S)	tJava_2
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server

Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false

Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_ " +context.implicit_db_environment+"]"


Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[[SCHEMA_COLUMN=key, TRIM=false], {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	

value	false	String	255		true	
-------	-------	--------	-----	--	------	--

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_2	INPUT(S)	tMap_3 , tMSSqlInput_2
	LABEL	Delta	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tMSSqlConnection_2
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database

Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Product"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	MATNO
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false

Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	true
Field options	<pre> [{SCHEMA_COLUMN=MATNO, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DESCRIPTION, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=SHORTDESCRIPTION, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LONGDESCRIPTION, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=UPC, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DB_PROD_PRICE_AMOUNT_1, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=UOMBASE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProfitCenter, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CRC, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimestamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}] </pre>


Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	Delta
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	

LONGDESCRIPTION	false	String	500		false	
UPC	false	String	255		true	
DB_PROD_PRICE_AMOUNT_1	false	Float	50		true	
UOMBASE	false	String	255		false	
ProfitCenter	false	String	100		true	
CRC	true	Long	255		true	
ProcessTimestamp	false	String	30		true	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2

Component Parameters:


Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:

Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2 , tJavaRow_5

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	<pre> {{SCHEMA_COLUMN=MATNO, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=DESCRIPTION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=SHORTDESCRIPTION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=LONGDESCRIPTION, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=UPC, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=UOMBASE, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}} </pre>
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true


Choose Column(s)	[{SCHEMA_COLUMN=MATNO, EMPTY_NULL=false}, {SCHEMA_COLUMN=DESCRIPTION, EMPTY_NULL=false}, {SCHEMA_COLUMN=SHORTDESCRIPTION, EMPTY_NULL=false}, {SCHEMA_COLUMN=LONGDESCRIPTION, EMPTY_NULL=false}, {SCHEMA_COLUMN=UPC, EMPTY_NULL=false}, {SCHEMA_COLUMN=UOMBASE, EMPTY_NULL=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSchemaComplianceCheck_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
MATNO	false	String	255		false	
DESCRIPTION	false	String	500		false	
SHORTDESCRIPTION	false	String	255		false	
LONGDESCRIPTION	false	String	500		false	

UPC	false	String	255		true	
UOMBASE	false	String	255		false	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_2	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_2
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****

Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tWarn

	UNIQUE NAME	tWarn_2	INPUT(S)	tJavaRow_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tWarn_2
Component Name	tWarn
Version	0.101 (ALPHA)

Family	Logs_Errors
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	Integer	255		true	
Company_Name	false	String	255		true	
User_ID	false	String	40		true	
First_Name	false	String	60		true	

Middel_Name	false	Character	60		true	
Last_Name	false	String	60		true	
No_	false	String	255		true	
Password	false	String	255		true	
Device_Address	false	String	255		true	
Cost_Center_Code	false	String	40		true	
Company_Code	false	String	40		true	
Depot_code	false	String	40		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component jlet_CustomLogging_NAV

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Component Parameters:

Properties	Values
Version	Latest

Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_NAV_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_NAV_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_1	INPUT(S)	tJavaFlex_7
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none


Component Parameters:

Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_NAV_ResponseLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component jlet_NAV_ResponseLogging

	UNIQUE NAME	jlet_NAV_ResponseLogging_2	INPUT(S)	tFixedFlowInput_1
	LABEL	jlet_NAV_ResponseLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest

Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_NAV_ResponseLogging_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMSSqlOutput_2 , tLogRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_5 , tJavaFlex_9 , tJavaFlex_4 , tJavaFlex_10 , tJavaFlex_11 , tJavaFlex_6 , tJavaFlex_8 , tJavaFlex_3 , tJavaFlex_7

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	

Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):
Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
MATNO	String		false
DESCRIPTION	String		false
SHORTDESCRIPTION	String		false
LONGDESCRIPTION	String		false
UPC	String		true
DB_PROD_PRICE_AMOUNT_1	Float		true
UOMBASE	String		false
ProfitCenter	String		true
CRC	Long		true
ProcessTimestamp	String		true

Constraint Table Entries(row7):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterDataAttributeUpdate):

Properties	Values
Name	MasterDataAttributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterDataAttributeUpdate):

Name	Type	Expression	isNullable
Pool	String	context.Pool	true
Key	String	Var.Key	true

Constraint Table Entries(MasterDataAttributeUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Group	String	"DEFAULT"	true
Key	String	Var.Key	true
Filter1	String	Var.UPC	true
Description	String	row7.DESCRPTION	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(attributeUpdate):

Properties	Values
Name	attributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(attributeUpdate):

Name	Type	Expression	isNullable
Name	String	context.AttName	true
UseIndex	Boolean	context.UseIndex	true

Constraint Table Entries(attributeUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(AttributeEntry):

Properties	Values
Name	AttributeEntry
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(AttributeEntry):

Name	Type	Expression	isNullable
PROFITCENTER	String	context.ProfitCenter	true

Constraint Table Entries(AttributeEntry):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(Product):

Properties	Values
Name	Product
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Product):

Name	Type	Expression	isNullable
MATNO	String	Var.Key	true
DESCRIPTION	String	row7.DESCRPTION	true
PROFITCENTER	String	row7.ProfitCenter	true
SHORTDESCRIPTION	String	row7.SHORTDESCRIPTION	true
LONGDESCRIPTION	String	row7.LONGDESCRIPTION	true
UPC	String	Var.UPC	true
INVENTORYCOUNTINGFREQUENCY	String		true

BASEPRICE	String	row7.DB_PROD_PRICE_AMOUNT_1+""	true
UOMBASE	String	"EA"	true
TYPE	String		true
INVOICETYPE	String		true
ITEMTYPE	String		true
INVPOSTGROUP	String		true
ITEMWEIGHT	String		true
ITMCATGRP	String		true
EMPTYIND	String	"false"	true
COUNTRYORIGIN	String	"US"	true
EXPIRATIONCALC	Integer		true
ITEMSTATUS	Integer		true
PRICEGROUP	String		true
BRANDCODE	String		true
SEGMENTCODE	Integer		true
ORDERCONTROLGROUP	String	Var.MATNO	true

Constraint Table Entries(Product):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(TAX):

Properties	Values
Name	TAX
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(TAX):

Name	Type	Expression	isNullable
TAX	String	"TAX"	true
TAX1	String	"1"	true
TAXCLASSIFICATION	String	"1"	true
TAXGROUPCODE	String	"00000"	true

Constraint Table Entries(TAX):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MARM):

Properties	Values
Name	MARM
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MARM):

Name	Type	Expression	isNullable
MARM	String	"MARM"	true
MARM1	String	""	true
DENOMINATOR	String		true
NOMINATOR	String		true

Constraint Table Entries(MARM):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression	isNullable
MATNO	String	"0000000" + row7.MATNO.replace("F","")	false
Key	String	"0000000" + row7.MATNO.replace("F","")	false
Type	String		false
UPC	String	row7.UPC	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMSSqlOutput_2 , tLogRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tAddCRCRow_1

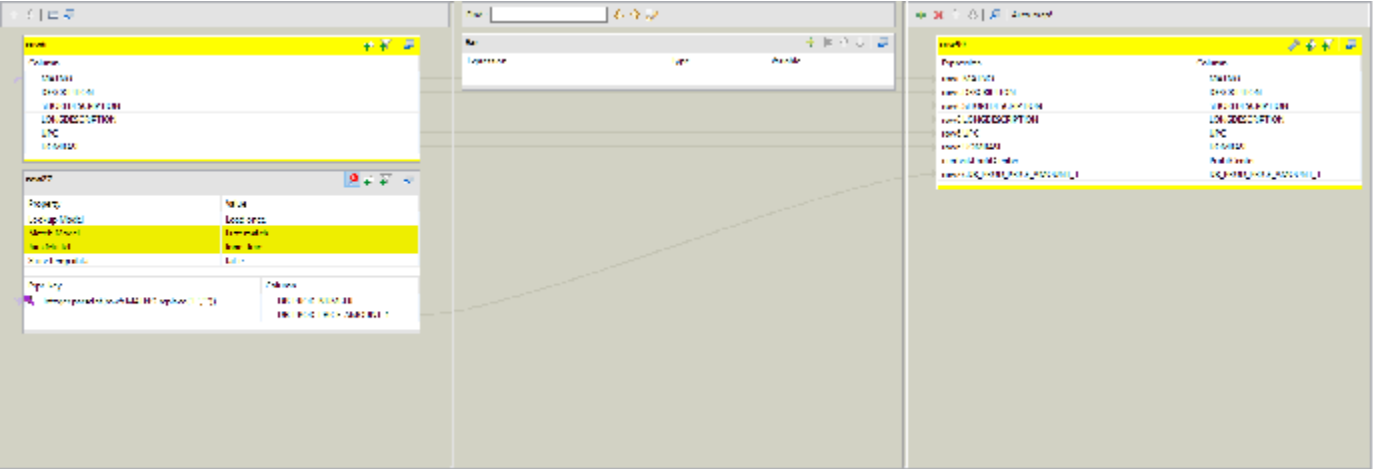

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false

Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row6):

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row6):

Name	Type	Expression	isNullable
MATNO	String		false
DESCRIPTION	String		false
SHORTDESCRIPTION	String		false
LONGDESCRIPTION	String		false
UPC	String		true
UOMBASE	String		false

Constraint Table Entries(row6):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row27):

Properties	Values
Name	row27
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row27):

Name	Type	Expression	isNullable
DB_PROD_NUMBER	Integer	Integer.parseInt(row6.MATNO.replace("F",""))	true
DB_PROD_PRICE_AMOUNT_1	Float		true

Constraint Table Entries(row27):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):**Mapper table Properties(row90):**

Properties	Values
Name	row90
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row90):

Name	Type	Expression	isNullable
MATNO	String	row6.MATNO	false
DESCRIPTION	String	row6.DESCRPTION	false
SHORTDESCRIPTION	String	row6.SHORTDESCRIPTION	false
LONGDESCRIPTION	String	row6.LONGDESCRIPTION	false
UPC	String	row6.UPC	true
UOMBASE	String	row6.UOMBASE	false
ProfitCenter	String	context.ProfitCenter	true
DB_PROD_PRICE_AMOUNT_1	Float	row27.DB_PROD_PRICE_AMOUNT_1	true

Constraint Table Entries(row90):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_3 , tMSSqlInput_2
	LABEL	LookUp_ExistingRecords	OUTPUT(S)	tMSSqlOutput_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):
Mapper table Properties(row5):

Properties	Values
Name	row5
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row5):

Name	Type	Expression	isNullable
MATNO	String		false
DESCRIPTION	String		false
SHORTDESCRIPTION	String		false
LONGDESCRIPTION	String		false
UPC	String		true
UOMBASE	String		false
ProfitCenter	String		true
DB_PROD_PRICE_AMOUNT_1	Float		true
CRC	Long		true

Constraint Table Entries(row5):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
CRC	long	row5.CRC	false

Constraint Table Entries(row2):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (output):**Mapper table Properties(out):**

Properties	Values
Name	out
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	true
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out):

Name	Type	Expression	isNullable
MATNO	String	row5.MATNO	false
DESCRIPTION	String	row5.DESCRPTION	false
SHORTDESCRIPTION	String	row5.SHORTDESCRIPTION	false
LONGDESCRIPTION	String	row5.LONGDESCRIPTION	false
UPC	String	row5.UPC	true
DB_PROD_PRICE_AMOUNT_1	Float	row5.DB_PROD_PRICE_AMOUNT_1	true
UOMBASE	String	row5.UOMBASE	false
ProfitCenter	String	row5.ProfitCenter	true
CRC	Long	row5.CRC	true
ProcessTimestamp	String	context.ProcessTimeStamp	true

Constraint Table Entries(out):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tFileInputPositional_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_1

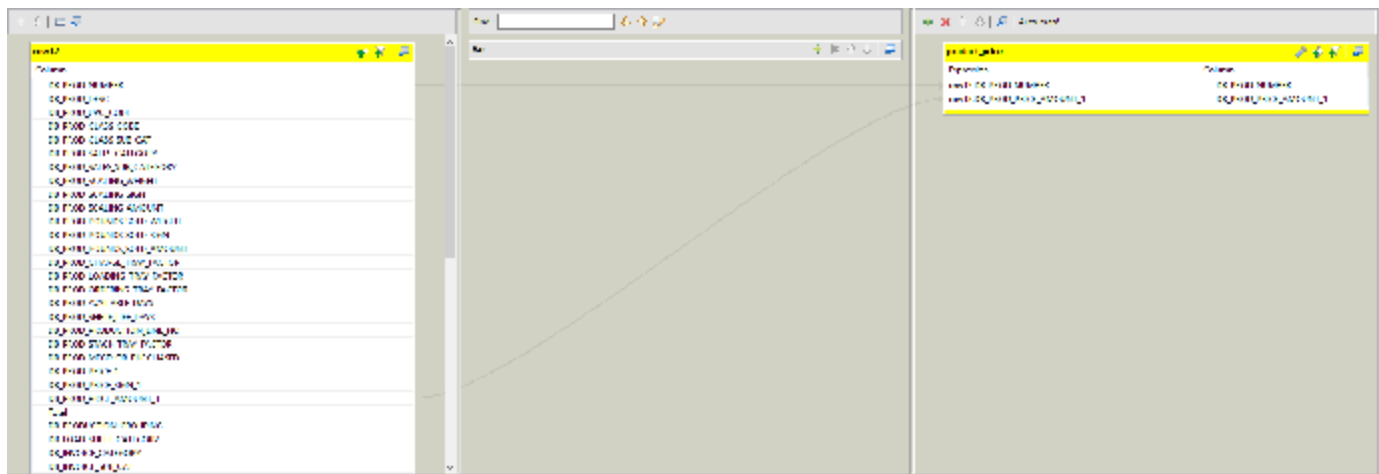

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row12):

Properties	Values
Name	row12
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row12):

Name	Type	Expression	isNullable
DB_PROD_NUMBER	Integer		true
DB_PROD_DESC	String		true
DB_PROD_UPC_CODE	String		true
DB_PROD_CLASS_CODE	Integer		true
DB_PROD_CLASS_SUB_CAT	Integer		true
DB_PROD_SALES_CATEGORY	Integer		true
DB_PROD_SALES_SUB_CATEGORY	Integer		true

DB_PROD_SCALING_WEIGHT	String		true
DB_PROD_SCALING_SIGN	String		true
DB_PROD_SCALING_AMOUNT	Float		true
DB_PROD_POUNDS_SOLD_WEIGHT	String		true
DB_PROD_POUNDS_SOLD_SIGN	String		true
DB_PROD_POUNDS_SOLD_AMOUNT	String		true
DB_PROD_CHARGE_TRAY_FACTOR	Integer		true
DB_PROD_LOADING_TRAY_FACTOR	Integer		true
DB_PROD_ORDERING_TRAY_FACTOR	Integer		true
DB_PROD_AVAILABLE_DAYS	String		true
DB_PROD_SHELF_LIFE_DAYS	Integer		true
DB_PROD_PRODUCTION_LINE_NO	Integer		true
DB_PROD_STACK_TRAY_FACTOR	Integer		true
DB_PROD_MFGD_OR_PURCHASED	String		true
DB_PROD_PRICE_1	String		true
DB_PROD_PRICE_SIGN_1	String		true
DB_PROD_PRICE_AMOUNT_1	Float		true

Total	String		true
DB_PRODUCTION_GROUPING	String		true
DB_LOAD_SHEET_CATEGORY	String		true
DB_INVOICE_CATEGORY	String		true
DB_INVOICE_SUB_CAT	String		true
DB_STANDING_ORDER_STATUS	String		true
DB_RETURNS_ALLOWED_SWITCH	String		true
DB_WHSE_PICK_CATEGORY	String		true
DB_PREPOST_PCT	String		true
DB_VENDOR_NUMBER	String		true
DB_ONHAND_REQ	String		true
DB_WEEK_NO	String		true
DB_HH_PROD_FLAG	Integer		true
DB_PENNY_LINE_FLAG	Integer		true
DB_GAMBLE_TABLE	String		true
DB_STALE_PRICE_DAYS	String		true
DB_FORECASTING_TYPE	String		true

DB_ORDER_ADJ_CONTROL	String		true
DB_ORDER_ADJ_PERCENT	Integer		true
DB_DNL_SALES_REP_CODE	String		true
DB_PROD_CLASS_GROUP_CODE	Integer		true
DB_PROD_SMOOTH_PRODUCT	String		true
DB_PROD_UNITS_TRAY_FACTOR	Integer		true
DB_SOLD_UNIT_OF_MEASURE	String		true
DB_PROD_PRICING_GROUP	Integer		true
DB_PROD_PRICING_GROUP_DESC	String		true
DB_UNITS_PER_BOX	Integer		true
DB_BOXES_PER_CASE	Integer		true
DB_PROD_LITRE_RATIO	Float		true
DB_PROD_BUTTERFAT_RATIO	Float		true
DB_PROD_PALLET_SIZE	Integer		true
DB_PROD_MILK_CLASS	String		true
DB_PROD_ALT_LANG_DESC	String		true
DB_PROD_TAXABLE_FLAG	String		true

DB_PROD_END_OF_RECORD	String		true
-----------------------	--------	--	------

Constraint Table Entries(row12):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (output):

Mapper table Properties(product_price):

Properties	Values
Name	product_price
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(product_price):

Name	Type	Expression	isNullable
DB_PROD_NUMBER	Integer	row12.DB_PROD_NUMBER	true
DB_PROD_PRICE_AMOUNT_1	Float	row12.DB_PROD_PRICE_AMOUNT_1	true

Constraint Table Entries(product_price):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------