



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:15:40 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_Commons_010_ObjectDelete_Navision
Author	
Version	0.1
Purpose	
Status	
Description	printing order table data with start, end time and number of rows in source and target files
Creation	Mar 11, 2019 9:43:41 AM
Modification	Dec 2, 2019 12:53:58 PM

Preview Picture

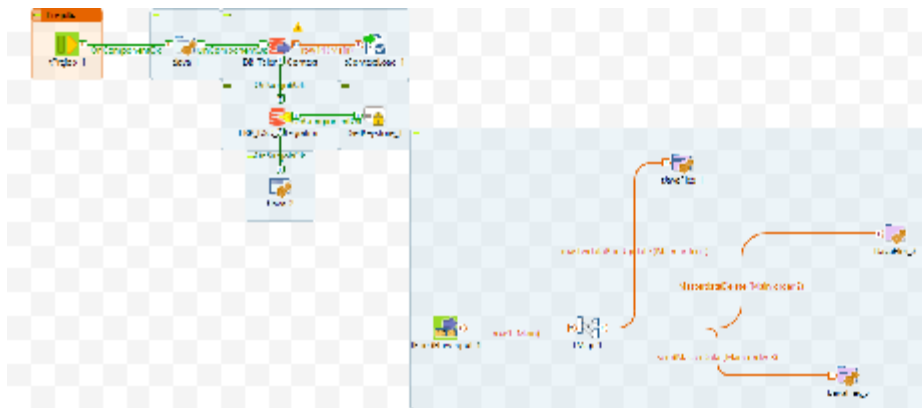

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
Pool	Pool?	true
Key	Key?	false
IsKeyAvailableForDelete	IsKeyAvailableForDelete?	false
batch	batch?	false
CRC	CRC?	false

customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
Location	Location?	false
message1	message1?	false

message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false
SystemId	SystemId?	false

SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false

DB_Talend_Context_Server	DB_Talend_Context_Server?	false
--------------------------	---------------------------	-------

ContextQA

Name	Prompt	Need Prompt
Pool	Pool?	true
Key	Key?	false
IsKeyAvailableForDelete	IsKeyAvailableForDelete?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false

partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false

DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

ContextPROD

Name	Prompt	Need Prompt
Pool	Pool?	true
Key	Key?	false
IsKeyAvailableForDelete	IsKeyAvailableForDelete?	false
batch	batch?	false

CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
Location	Location?	false

message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false

DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

ContextPREPROD

Name	Prompt	Need Prompt
Pool	Pool?	true
Key	Key?	false
IsKeyAvailableForDelete	IsKeyAvailableForDelete?	false
batch	batch?	false
CRC	CRC?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false

ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
filepath	filepath?	false
group	group?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
keystore	keystore?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

objectType	objectType?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
requestXML	requestXML?	false
RouteGroup	RouteGroup?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false

DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false


Component List

Component Name	Component Type
tContextLoad_1	tContextLoad
tDBInput_1	tMSSqlInput
tFixedFlowInput_1	tFixedFlowInput

tJavaFlex_1	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_5	tJavaFlex
tJava_1	tJava
tJava_2	tJava
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMap_1	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSetKeystore_1	tSetKeystore

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
------------	--------

Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1 , tMSSqlConnection_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context


Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[[SCHEMA_COLUMN=key, TRIM=false], {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[[{SCHEMA_COLUMN=Pool, VALUE=context.Pool}, {SCHEMA_COLUMN=Key, VALUE=context.Key}]]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false

Row Separator	"\n"
Field Separator	"," ,
Content	
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Pool	false	String			true	
Key	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMap_1
	LABEL	__ UNIQUE_NAME __	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java


Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.ObjectDelete.createAllObjects(); //routines.ObjectDelete.populateMasterdataPoolUpdate(ma routines.ObjectDelete.populateMasterdataPoolUpdate2(ma </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code


Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.ObjectDelete.populateMasterdataDelete(Masterda
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.ObjectDelete.populateUpdateContainerEntry(); routines.ObjectDelete.sendMasterData(context.movilizerUI context.movilizerVersion); routines.ObjectDelete.resetObjects(); </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__ UNIQUE_NAME __	OUTPUT(S)	tDBInput_1

Component Parameters:


Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n");</pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tMSSqlConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar"; System.out.println("URL = " + context.movilizerURL); System.out.println("SystemID = " + context.SystemId); System.out.println("Password = " + context.SystemPassword); System.out.println("Key = " + context.Key);
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)


Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tDBInput_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1 , tJava_2

Component Parameters:


Properties	Values
------------	--------

Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	true

Shared DB Connection Name	"DB_ERP_DSD_Integration"
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPostjob


	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1

Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob


	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1

Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180

Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:


Properties	Values
------------	--------


Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tFixedFlowInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1 , tJavaFlex_3, tJavaFlex_5

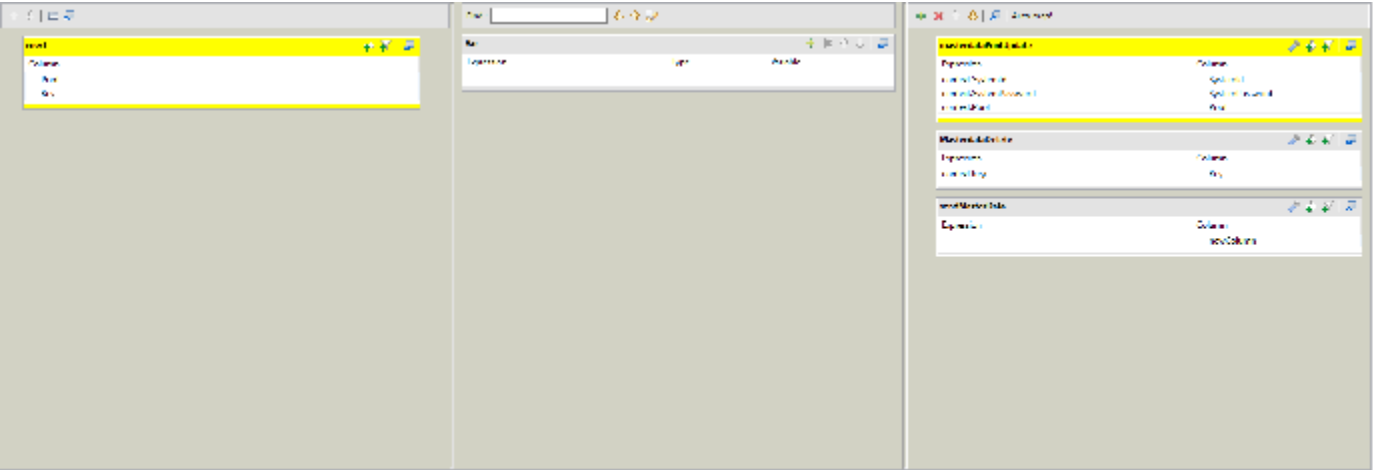

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	

Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
Pool	String		true
Key	String		true

Constraint Table Entries(row1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataDelete):

Properties	Values
Name	MasterdataDelete
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataDelete):

Name	Type	Expression	isNullable
Key	String	context.Key	true

Constraint Table Entries(MasterdataDelete):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------