

# Jobs

# Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 12:55:11 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

## **Summary**

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

## **Project Description**


Properties	Values
Name	NAV_MOV
Language	java

Description	

# **Description**

Properties	Values
Name	j_NavExport_010_DescriptionTable
Author	
Version	0.1
Purpose	
Status	
Description	printing order table data with start, end time and number of rows in source and target files
Creation	Jun 16, 2016 4:15:57 PM
Modification	Nov 15, 2019 10:12:13 AM

## **Preview Picture**

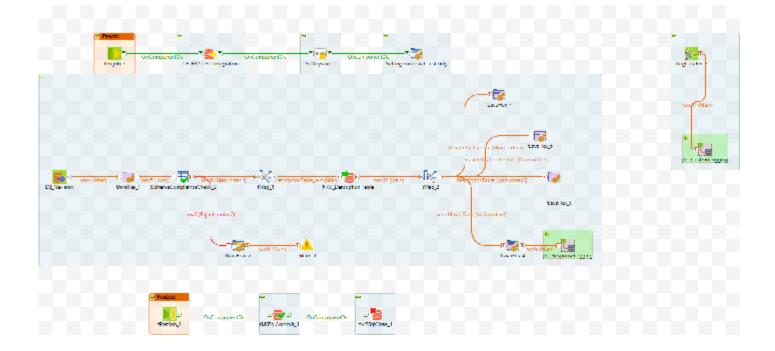

# **Settings**

## Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

### Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## **Context List**

#### ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false
description	description?	false
mafAppSpace	mafAppSpace?	false

Pool	Pool?	false
group	group?	false
filter1	filter1?	false
length	length?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true

key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database?	false
DB_AMC_Login?	false
DB_AMC_Password?	false
DB_AMC_Port?	false
DB_AMC_Schema?	false
DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams?	false
DB_Navision_Database?	false
DB_Navision_Login?	false
DB_Navision_Password?	false
	DB_AMC_Login?  DB_AMC_Password?  DB_AMC_Port?  DB_AMC_Schema?  DB_AMC_Server?  DB_ERP_DSD_Integration_AdditionalParams?  DB_ERP_DSD_Integration_Database?  DB_ERP_DSD_Integration_Login?  DB_ERP_DSD_Integration_Password?  DB_ERP_DSD_Integration_Port?  DB_ERP_DSD_Integration_Schema?  DB_ERP_DSD_Integration_Server?  DB_ERP_DSD_Integration_Server?  DB_Navision_AdditionalParams?  DB_Navision_Database?  DB_Navision_Login?

DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_DescriptionTable_FieldSeparator	RM_DescriptionTable_FieldSeparator?	false
Rm_DescriptionTable_RowSeparator	Rm_DescriptionTable_RowSeparator?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false

NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false

#### ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
directory	directory?	false

description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
filter1	filter1?	false
length	length?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false

ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false

type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_DescriptionTable_FieldSeparator	RM_DescriptionTable_FieldSeparator?	false
Rm_DescriptionTable_RowSeparator	Rm_DescriptionTable_RowSeparator?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false

NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

### ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false

objectType	objectType?	false
directory	directory?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
group	group?	false
filter1	filter1?	false
length	length?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false

Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
source	source?	false

SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false

DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_DescriptionTable_FieldSeparator	RM_DescriptionTable_FieldSeparator?	false
Rm_DescriptionTable_RowSeparator	Rm_DescriptionTable_RowSeparator?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false

NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

# **Component List**

Component Name	Component Type
jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging
tJavaFlex_1	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaRow_2	tJavaRow
tJava_1	tJava
tLogCatcher_2	tLogCatcher
tMSSqlClose_1	tMSSqlClose
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_2	tMSSqlInput
tMSSqlOutput_2	tMSSqlOutput
tMap_1	tMap

tMap_2	tMap
tPostjob_2	tPostjob
tPrejob_2	tPrejob
tSchemaComplianceCheck_2	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tWarn_1	tWarn

# **Components Description**

### Component tJavaFlex

_ 400	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_2
	LABEL	UNIQUE_NAME	OUTPUT(S)	tSchemaComplianceCheck_2

Component i didineters.		
Properties	Values	
Unique Name	tJavaFlex_1	
Component Name	tJavaFlex	
Version	0.101 (ALPHA)	
Family	Custom_Code	
Start	false	

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	int i =1;
Main code	context.objectId=row5.Code; context.objectName=row5.Table_Name; if( i%5000 == 0) { System.out.println("5000 Records Have Processed"); } i++;
End code	// end of the component, outside/closing the loop i; System.out.println(i+" Records Have Processed");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Table_Name	false	String	16		false	
Location_Code	false	String	10		false	
Code	false	String	20		false	
Description	false	String	100		false	

# Original Function Parameters: Component tJavaFlex

UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_2
LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_ResponseLogging_1

Component i arameters.		
Properties	Values	
Unique Name	tJavaFlex_4	
Component Name	tJavaFlex	
Version	0.101 (ALPHA)	
Family	Custom_Code	
Start	false	

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	if(a==50 /*&& f==(a-50)*/){ row8.responseXML=routines.r_HarvestRoutineLoop.send\( \) context.movilizerVersion); //f = a; a=0; //System.out.println( routines.r_HarvestRoutineLoop.resetObjects();
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.sendMasterData(context.m context.movilizerVersion); routines.r_HarvestRoutineLoop.
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJavaFlex\_4 :

Column	Key	Туре	Length	Precision	Nullable	Comment
responseXML	false	String			true	

# Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:			
Properties	Values		
Unique Name	tJavaFlex_5		
Component Name	tJavaFlex		
Version	0.101 (ALPHA)		
Family	Custom_Code		
Start	false		
Startable	true		
SUBTREE_START	false		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		

tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
End code	// end of the component, outside/closing the loop
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJavaFlex\_5:

|--|

# Original Function Parameters: Component tJavaFlex

UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_2
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Properties	Values
------------	--------

Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;
Main code	routines.r_HarvestRoutineLoop.createAllObjects(); if(b==1) routines.r_HarvestRoutineLoop.populateMasterdataPoolUpelse if(b==50) { //routines.r_HarvestRoutine_A.populateMasterdataPoolUpeb=0; } b++;
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUt
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJavaFlex\_6:

Column	Key	Туре	Length	Precision	Nullable	Comment

# Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_2	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component i diameters.			
Properties	Values		
Unique Name	tJavaFlex_7		
Component Name	tJavaFlex		
Version	0.101 (ALPHA)		
Family	Custom_Code		
Start	false		

Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.r_HarvestRoutineLoop.populateMasterdataUpdate
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJavaFlex\_7 :

Column	Key	Туре	Length	Precision	Nullable	Comment

### **Original Function Parameters:**

### Component tJavaRow

 UNIQUE NAME	tJavaRow_2	INPUT(S)	tSchemaComplianceCheck_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tWarn_1

Component Parameters:		
Properties	Values	
Unique Name	tJavaRow_2	
Component Name	tJavaRow	
Version	0.101 (ALPHA)	
Family	Custom_Code	
Startable	false	
SUBTREE_START	false	
END_OF_FLOW	false	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tJavaRow	
Update components	true	

IREPORT_PATH			
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java		
Subjob color			
Title color			
Enable parallel execution	false		
Number of parallel executions	2		
	false		
REPOSITORY_ALLOW_AUTO_SWITCH	Itrue		
Schema	Built-In		
Code	context.ErrorMsg = input_row.errorMessage;		
Import	//import java.util.List;		
Label format	UNIQUE_NAME		
Hint format	<b>UNIQUE_NAME</b> COMMENT		
Connection format	row		
Show Information	false		
Comment			
Use an existing validation rule	false		

Validation Rule Type	
----------------------	--

#### Schema for tJavaRow\_2:

Scrienia ioi taa	<u> </u>					
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Table_Name	false	String	16		false	
Location_Code	false	String	10		false	
Code	false	String	20		false	
Description	false	String	100		false	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

### Original Function Parameters: Component tJava

UNIQUE NAME	tJava_1	INPUT(S)	tSetKeystore_1
LABEL	Setting contetxs fr test only	OUTPUT(S)	none

Properties	Values
Unique Name	tJava_1

Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Code	String foo = "bar"; context.DB_Navision_Database =  "HFS_Master_DataAccess_DB";  //context.DB_Navision_Schema = "dbo";
Import	//import java.util.List;
Schema	Built-In
Label format	Setting contetxs fr test only
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava\_1 :

Column Key Type Length Precision Nulla	ble Comment
--	-------------

### Original Function Parameters: Component tLogCatcher

	UNIQUE NAME	tLogCatcher_2	INPUT(S)	none	
	LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_CustomLogging_1	

Component Parameters:			
Properties	Values		
Unique Name	tLogCatcher_2		
Component Name	tLogCatcher		
Version	0.101 (ALPHA)		
Family	Logs_Errors		
Start	true		
Startable	true		
SUBTREE_START	true		
END_OF_FLOW	false		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tLogCatcher		
Update components	true		

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher\_2:

LLOGGALGII	ÇI				
Key	Туре	Length	Precision	Nullable	Comment
false	java.util.Date			true	
false	String	20		true	
false	String	20		true	
false	String	20		true	
false	String	50		true	
false	String	255		true	
false	String	50		true	
false	Integer	3		true	
false	String	255		true	
false	String	255		true	
false	String	255		true	
false	Integer	3		true	
	false	false java.util.Date false String  false String	KeyTypeLengthfalsejava.util.DatefalseString20falseString20falseString50falseString255falseString50falseInteger3falseString255falseString255falseString255falseString255falseString255	KeyTypeLengthPrecisionfalsejava.util.DatefalseString20falseString20falseString50falseString255falseString50falseString50falseString255falseString255falseString255falseString255falseString255falseString255	Key Type Length Precision Nullable   false java.util.Date true   false String 20 true   false String 20 true   false String 20 true   false String 50 true   false String 255 true   false String 3 true   false String 255 true

#### **Original Function Parameters:**

#### Component tMSSqlClose

UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1	
LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:				
Properties	Values			
Database	tMSSqlClose			
Unique Name	tMSSqlClose_1			
Component Name	tMSSqlClose			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/MS_SQL_Server			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			

Help	org.talend.help.tMSSqlClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

|--|

### Original Function Parameters: Component tMSSqlCommit

UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlClose_1

Component Parameters:				
Properties	Values			
Database	tMSSqlCommit			
Unique Name	tMSSqlCommit_1			
Component Name	tMSSqlCommit			
Version	0.102 (ALPHA)			
Family	Databases/DB Specifics/MS_SQL_Server			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit\_1:

Column	Key	Туре	Length	Precision	Nullable	Comment

#### Original Function Parameters: Component tMSSqlConnection

 UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_2
LABEL	DB_ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS

Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	пп
Auto Commit	false
Share identity insert in multi table	false

Label format	DB_ERP_DSD_Integration
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Original Function Parameters: Component tMSSqlInput

-	The second secon	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
		LABEL	DB_Navision	OUTPUT(S)	tJavaFlex_1

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_DescriptionTable
Query Type	Built-In
Guess Schema	1111

Query	"SELECT \""+context.DB_Navision_Schema+"\".\""+context.NAV_DelID\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_DelName\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_DelName\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_DelCode\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_DelCode\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_DelContext.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".\""+context.DB_Navision_Schema+"\".
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Company_ID, TRIM=false}, {SCHEMA_COLUMN=Company_Name, TRIM=false}, {SCHEMA_COLUMN=Table_Name, TRIM=false}, {SCHEMA_COLUMN=Location_Code, TRIM=false}, {SCHEMA_COLUMN=Description, TRIM=false}
Label format	DB_Navision
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput\_2:

Schema for twissquinput_2:						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Table_Name	false	String	16		false	
Location_Code	false	String	10		false	
Code	false	String	20		false	
Description	false	String	100		false	

### Original Function Parameters: Component tMSSqlOutput

UNIQUE NAME	tMSSqlOutput_2	INPUT(S)	tMap_1
LABEL	NAV_Description Table	OUTPUT(S)	tMap_2

Properties	Values
Database	tMSSqlOutput

Unique Name	tMSSqlOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tMSSqlConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_DescriptionTable"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT

I	
Specify identity field	false
Identity field	Company_ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	нн
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false

Field options	[{SCHEMA_COLUMN=Company_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Company_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Table_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Location_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Code, UPDATE_KEY=false, DELETE_KEY=false, DELETE_KEY=false, DELETE_KEY=false, DELETE_KEY=false, UPDATABLE=true}, {SCHEMA_COLUMN=Description, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	NAV_Description Table
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DescriptionTable\_out :

Schema for Description Lable_out:						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Table_Name	false	String	16		false	
Location_Code	false	String	10		false	
Code	false	String	20		false	
Description	false	String	100		false	
ProcessTimeStamp	false	String	30		true	

### Original Function Parameters: Component tPostjob

	UNIQUE NAME	tPostjob_2	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlCommit_1

Properties	Values
------------	--------

Unique Name	tPostjob_2
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0

Enable parallel execution	false
Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Original Function Parameters: Component tPrejob

UNIQUE NAME	tPrejob_2	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlConnection_1

Properties	Values
Unique Name	tPrejob_2

Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false

Number of parallel executions	2
	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Original Function Parameters: Component tSchemaComplianceCheck

UNIQUE NAME	tSchemaComplianceCheck_2	INPUT(S)	tJavaFlex_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tMap_1 ,tJavaRow_2

Properties	Values			
Unique Name	tSchemaComplianceCheck_2			

Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true
Checked Columns	[{SCHEMA_COLUMN=Company_ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Company_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Table_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Location_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=false, MAX_LENGTH=false}, {SCHEMA_COLUMN=Description, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}]
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In

Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true
Choose Column(s)	[{SCHEMA_COLUMN=Company_ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=Company_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Table_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Location_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Description, EMPTY_NULL=false}]
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSchemaComplianceCheck\_2 :

olumn		Key	Туре	Length	Precision	Nullable	Comment
-------	--	-----	------	--------	-----------	----------	---------

Company_ID	false	String	6	false	
Company_Name	false	String	27	false	
Table_Name	false	String	16	false	
Location_Code	false	String	10	false	
Code	false	String	20	false	
Description	false	String	100	false	

### Original Function Parameters: Component tSetKeystore

UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_1

Component arameters.	Component i arameters.		
Properties	Values		
Unique Name	tSetKeystore_1		
Component Name	tSetKeystore		
Version	0.102 (ALPHA)		
Family	Internet		
Start	false		
Startable	true		

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	*****

Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_2
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Properties	Values				
Unique Name	tWarn_1				
Component Name	tWarn				
Version	0.101 (ALPHA)				
Family	Logs_Errors				
Start	false				
Startable	true				
SUBTREE_START	false				
END_OF_FLOW	true				
Activate	true				
DUMMY	false				
tStatCatcher Statistics	false				
Help	org.talend.help.tWarn				
Update components	true				
IREPORT_PATH					
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java				
Subjob color					

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tWarn\_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Company_ID	false	String	6	false	
Company_Name	false	String	27	false	
Table_Name	false	String	16	false	
Location_Code	false	String	10	false	
Code	false	String	20	false	
Description	false	String	100	false	
errorCode	false	String	255	true	
errorMessage	false	String	255	true	

# Original Function Parameters: Component jlet\_CustomLogging

The second second	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	tLogCatcher_2
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

Component Parameters:					
Properties	Values				
Version	Latest				
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code				
Show Information	false				

Comment	
---------	--

Schema for jlet\_CustomLogging\_1:

Juliellia 10	i jiet_cus	storiiLoggirig_i				
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

## Component jlet\_ResponseLogging

A DESCRIPTION OF THE PERSON NAMED IN COLUMN 1	UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_4

LABEL	jlet_ResponseLogging	OUTPUT(S)	none
-------	----------------------	-----------	------

**Component Parameters:** 

Component Farameters.	
Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet\_ResponseLogging\_1 :

	-					
Column	Key	Туре	Length	Precision	Nullable	Comment
responseXML	false	String			true	

### Component tMap

UNIQUE NAME	tMap_1	INPUT(S)	tSchemaComplianceCheck_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlOutput_2

**Component Parameters:** 

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false

Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	200000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap\_1 ( input ):

Mapper table Properties (row9):

mapper table i repetties	2(.0.0).
Properties	Values
Name	row9
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( row9 ):

Name	Туре	Expression	isNullable
Company_ID	String		false
Company_Name	String		false
Table_Name	String		false
Location_Code	String		false
Code	String		false
Description	String		false

**Constraint Table Entries( row9 ):** 

Name Type Expression isNullable
---------------------------------

Mapper table for tMap\_1 ( output ):

Mapper table Properties( DescriptionTable\_out ):

mapper table i reperme	of Description rabie_out j.
Properties	Values
Name	DescriptionTable_out
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( DescriptionTable\_out ):

Name	Туре	Expression	isNullable
Company_ID	String	row9.Company_ID	false
Company_Name	String	row9.Company_Name	false
Table_Name	String	row9.Table_Name	false
Location_Code	String	row9.Location_Code	false
Code	String	row9.Code	false
Description	String	row9.Description	false
ProcessTimeStamp	String	context.ProcessTimeStamp	true

Constraint Table Entries( DescriptionTable\_out ):

Name	Туре	Expression	isNullable	

Mapper table for tMap\_1 ( var ):

Mapper table Properties (Var):

mapper table i reperties ( var ).		
Properties	Values	
Name	Var	
Matching-mode		
isMinimized	true	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries( Var ):

ıme	Туре	Expression	isNullable
-----	------	------------	------------

**Constraint Table Entries (Var):** 

Name Type Expre	ssion isNullable
-----------------	------------------

#### Component tMap

UNIQUE NAME	tMap_2	INPUT(S)	tMSSqlOutput_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tJavaFlex_6 , tJavaFlex_7, tJavaFlex_5, tJavaFlex_4

#### **Component Parameters:**

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap\_2 ( input ):
Mapper table Properties( row12 ):

Properties	Values
Name	row12
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row12):** 

Name	Туре	Expression	isNullable
Company_ID	String		false
Company_Name	String		false
Table_Name	String		false
Location_Code	String		false
Code	String		false
Description	String		false
ProcessTimeStamp	String		true

# Constraint Table Entries( row12 ):

Name Type Expression is	sNullable
-------------------------	-----------

Mapper table for tMap\_2 ( output ):
Mapper table Properties( masterdataPoolUpdate ):

Mapper table Properties infasterdata Poolopuate ).		
Properties	Values	
Name	masterdataPoolUpdate	
Matching-mode		
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries( masterdataPoolUpdate ):

Name	Туре	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries( masterdataPoolUpdate ):

Name	Туре	Expression	isNullable	
Ivailie	Турс	LAPICSSIOII	1314ullable	

Mapper table Properties( MasterdataUpdate ):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( MasterdataUpdate ):

Name	Туре	Expression	isNullable
Group	String	context.group	true
Key	String	row12.Code	true
Filter1	String	context.filter1	true
Description	String	context.description	true
mafAppSpace	String	context.mafAppSpace	true

**Constraint Table Entries (MasterdataUpdate):** 

Mapper table Properties( DescriptionTable ):

Properties	Values
Name	DescriptionTable
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( DescriptionTable ):

Name	Туре	Expression	isNullable
NOTEID	String	row12.Code	true
TEXT1	String	row12.Description	true
TEXT2	String	row12.Table_Name	true

**Constraint Table Entries( DescriptionTable ):** 

Name		Expression	isNullable
1441110	. , , ,	- Xpi oooioii	iortanabio

Mapper table Properties( sendMasterData ):

Mapper table i ropertie	mapper table i roperties, seriamasterbata j.		
Properties	Values		
Name	sendMasterData		
Matching-mode			
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries( sendMasterData ):

Name	Туре	Expression	isNullable
newColumn	String		true

**Constraint Table Entries( sendMasterData ):** 

Name	Туре	Expression	isNullable
------	------	------------	------------

Mapper table for tMap\_2 ( var ):

**Mapper table Properties (Var):** 

mapper table i reperties ( rai ):		
Properties	Values	
Name	Var	
Matching-mode		
isMinimized	true	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries( Var ):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

**Constraint Table Entries(Var):** 

Name	Туре	Expression	isNullable