



Jobs

Generated by Talend Data Management
Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:05:03 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_Order_020_BulkLoad
Author	
Version	1.0
Purpose	
Status	
Description	Enhanced Bundling and modified job to track orders only sending new orders
Creation	Mar 5, 2019 12:39:53 AM
Modification	Nov 15, 2019 10:12:17 AM

Preview Picture

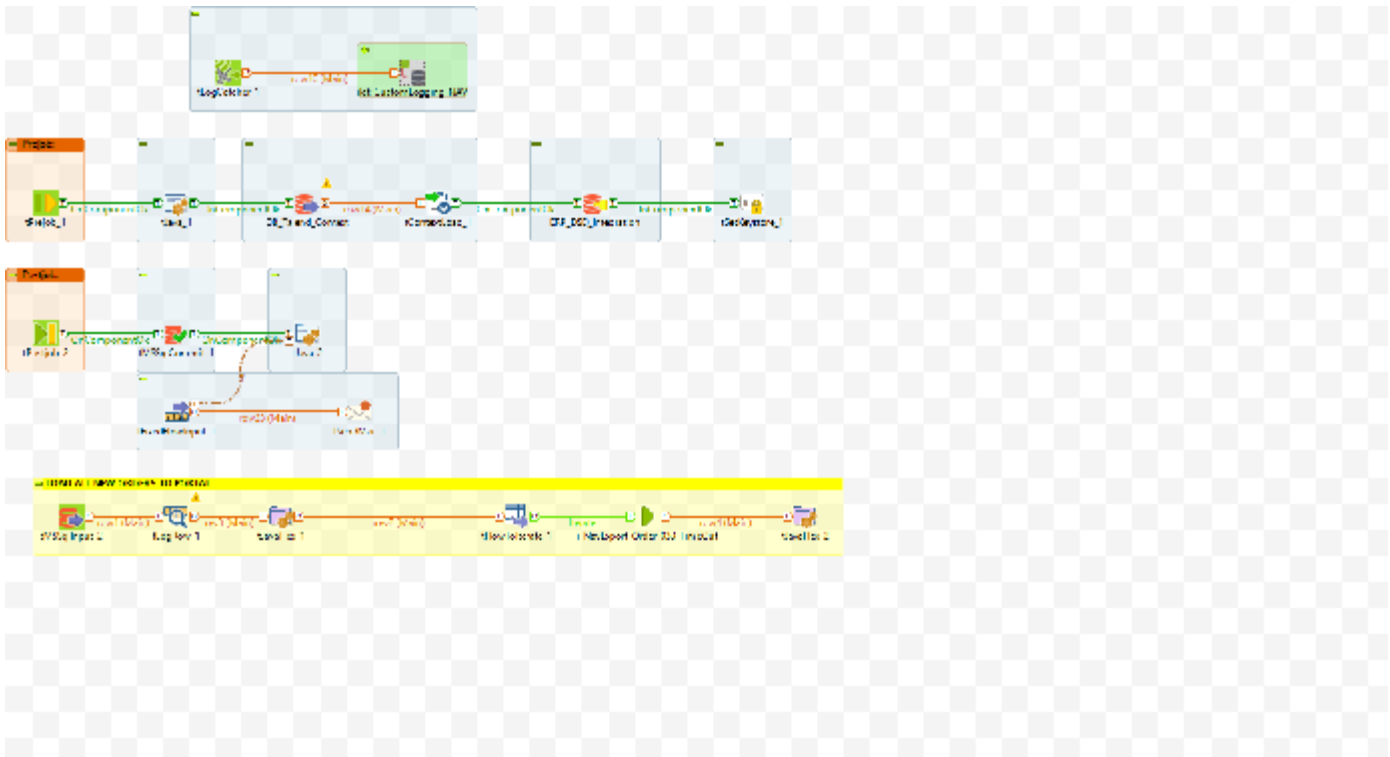

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	true
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false

Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false

group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false

referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false

CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true

routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false

DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order-Encoding	RM_Order-Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false

objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false

updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false

orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false

partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false

DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false

UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false

movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false

objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false

DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false

RM_Order_RowSeparator	RM_Order_RowSeparator?	false
-----------------------	------------------------	-------

ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false

table	table?	false
viewname	viewname?	false
AttNAmE	AttNAmE?	false
UseIndex	UseIndex?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false

headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	true
interruptedRoutesList	interruptedRoutesList?	false
movilizerURL	movilizerURL?	false

movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
route_number	route_number?	true
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false

DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false


Component List

Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
tContextLoad_1	tContextLoad
tDBConnection_1	tMSSqlConnection
tDBInput_1	tMSSqlInput
tFixedFlowInput_1	tFixedFlowInput
tFlowTolterate_1	tFlowTolterate
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJava_1	tJava
tJava_2	tJava

tLogCatcher_1	tLogCatcher
tLogRow_1	tLogRow
tMSSqlCommit_1	tMSSqlCommit
tMSSqlInput_2	tMSSqlInput
tPostjob_2	tPostjob
tPrejob_1	tPrejob
tRunJob_1	tRunJob
tSendMail_1	tSendMail
tSetKeystore_1	tSetKeystore

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad


Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tContextLoad_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port

Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	true
Shared DB Connection Name	"Order_Conn"
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_1
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context


Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_enviromen where instance='"+context.source+"_" +context.instance.substring
Specify a data source alias	false

Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[[SCHEMA_COLUMN=key, TRIM=false], {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tJava_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSendMail_1

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[[SCHEMA_COLUMN=newColumn, VALUE=]]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"

Field Separator	"."
Content	
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
newColumn	false	String			true	

Original Function Parameters:
Component tFlowTolterate

	UNIQUE NAME	tFlowTolterate_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRunJob_1

Component Parameters:

Properties	Values
------------	--------


Unique Name	tFlowTolterate_1
Component Name	tFlowTolterate
Version	0.101 (ALPHA)
Family	Orchestration
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFlowTolterate
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use the default (key, value) in global variables.	true
Customize	[]
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFlowTolterate_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tLogRow_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFlowTolterate_1
--	-------	-----------------	-----------	----------------------------------

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	context.route_number=row3.RTE_NUMBER;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
count	false	Integer	20		true	
RTE_NUMBER	false	String	10		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tRunJob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	context.interruptedRoutesList=row4.interruptedRoutesList; System.out.println("context.interruptedRoutesList:"+context.interruptedRoutesList);
End code	
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaFlex_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
interruptedRoutesList	false	String			true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); context.ProcessDate=context.ProcessTimeStamp.replace(" ", "-").replace(":", "");
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tMSSqlCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFixedFlowInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)


Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Code	if(!context.interruptedRoutesList.isEmpty()) context.interruptedRoutesList= context.interruptedRoutesList.replaceFirst(",","").trim();
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_NAV_1

Component Parameters:


Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMSSqlInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	


Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	false
Table (print values in cells of a table)	true
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false

Lengths	[[{SCHEMA_COLUMN=count, LENGTH=10}, {SCHEMA_COLUMN=RTE_NUMBER, LENGTH=10}]
Print content with log4j	false
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
count	false	Integer	20		true	
RTE_NUMBER	false	String	10		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_2

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2
--	-------	-----------------	-----------	-------------------------

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	false
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS


Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT count(1) a , RTE_NUMBER FROM NAV_ORDER_X where IsProcessed='N' group by RTE_NUMBER order by a"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"

Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=count, TRIM=false], {SCHEMA_COLUMN=RTE_NUMBER, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
count	false	Integer	20		true	
RTE_NUMBER	false	String	15		true	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_2	INPUT(S)	none


	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1
--	-------	-----------------	-----------	----------------

Component Parameters:

Properties	Values
Unique Name	tPostjob_2
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none


	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1
--	-------	-----------------	-----------	---------

Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tRunJob

	UNIQUE NAME	tRunJob_1	INPUT(S)	tFlowTolterate_1

	LABEL	__PROCESS__	OUTPUT(S)	tJavaFlex_2
--	-------	-------------	-----------	-----------------------------

Component Parameters:

Properties	Values
Unique Name	tRunJob_1
Component Name	tRunJob
Version	0.101 (ALPHA)
Family	System Orchestration
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRunJob
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Use dynamic job	false
Context job	
Job	j_NavExport_Order_030_TimeOut
Context	Default
Use an independent process to run subjob	false
Die on child error	false
Transmit whole context	true
Context Param	[]

Propagate the child result to the output schema	true
Print Parameters	false
Transmit original context value(if unchecked, there will convert context value to string type before transmitting.)	true
Label format	__PROCESS__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRunJob_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
interruptedRoutesList	false	String			true	

Original Function Parameters: Component tSendMail

	UNIQUE NAME	tSendMail_1	INPUT(S)	tFixedFlowInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tSendMail_1
Component Name	tSendMail
Version	0.101 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSendMail
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
To	"cody.phillips@harvestfoodsolutions.com"
From	context.implicit_db_environment +"-Order@harvestfoodsolutions.com"
Show sender's name?	false
Sendername	"sender"
Cc	"kashyap.shah@thinkartha.com"
Bcc	""
Subject	context.implicit_db_environment +" - Order Job has Interrupted Routes - "+context.interruptedRoutesList
Message	"\n"+context.implicit_db_environment +" - Nav Order Job has these Interrupted Routes - "+context.interruptedRoutesList+".\nPlease reprocess."
Die if the attachment file doesn't exist.	false
Attachments	[]


Other headers	[]
SMTP host	"relay.harvesterp.com"
SMTP port	25
SSL Support	false
STARTTLS Support	false
Importance	Normal
Need authentication?	false
Username	""
Password	**
Die on error	false
MIME subtype from the 'text' MIME type	plain
charset used for encoding message	"ISO-8859-15"
Set localhost	false
Localhost	"localhost"
Schema	Built-In
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSendMail_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
newColumn	false	String			true	

Original Function Parameters: Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tDBConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)

Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component jlet_CustomLogging_NAV

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

Component Parameters:

Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_NAV_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	

priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	