



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:11 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description

Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_OpenItems
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Jul 5, 2016 10:45:12 AM
Modification	Nov 15, 2019 10:12:15 AM

Preview Picture

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
group	group?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false

source	source?	false
table	table?	false
viewname	viewname?	false
Description	Description?	false
Filter1	Filter1?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false

DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false

NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_Vehicle	NAV_Vehicle?	false

ContextQA

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
group	group?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false

source	source?	false
table	table?	false
viewname	viewname?	false
Description	Description?	false
Filter1	Filter1?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false

DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false

NAV_Vehicle	NAV_Vehicle?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

ContextPREPROD

Name	Prompt	Need Prompt
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
group	group?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false

source	source?	false
table	table?	false
viewname	viewname?	false
Description	Description?	false
Filter1	Filter1?	false
database	database?	false
table_view	table_view?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false

DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false

DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_User	NAV_User?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false

NAV_Vehicle	NAV_Vehicle?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

Component List


Component Name	Component Type
jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex

tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaRow_4	tJavaRow
tJava_1	tJava
tLogCatcher_1	tLogCatcher
tMSSqlClose_1	tMSSqlClose
tMSSqlCommit_1	tMSSqlCommit
tMSSqlConnection_1	tMSSqlConnection
tMSSqlInput_2	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMap_1	tMap
tMap_3	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tSortRow_1	tSortRow

tWarn_1	tWarn
---------	-------

Components Description

Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int i=1;

Main code	<pre> context.objectId=row1.Customer_No+" - "+row1.Document_No; context.objectName=""; if(i%5000 == 0) { //System.out.println("Source - Directory - PF_Dorder05 - 5000 rows processed " + TalendDate.getCurrentDate()); System.out.println(i+"-----5000 Records Have Processed"); } i++; // here is the main part of the component, // a piece of code executed in the row // loop </pre>
End code	<pre> // end of the component, outside/closing the loop i--; System.out.println(i+"Records Have Processed and end of records"); </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Posting_Date	false	java.util.Date	23	3	false	
Document_No	false	String	20		false	
Sales__LCY__	false	BigDecimal	38	20	false	
Currency_Code	false	String	10		false	
Payment_Method_Code	false	String	10		false	
Due_Date	false	java.util.Date	23	3	false	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2


	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code // loop routines.r_HarvestRoutineLoop.populateMasterdataUpdate
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true


Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int row_count=0;

Main code	// here is the main part of the component, // a piece of code row_count++; int chk=routines.r_HarvestRoutineLoop.getHMcountValue(Op routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=0;
Main code	// here is the main part of the component, // a piece of code if(row_count==0) { routines.r_HarvestRoutineLoop.createA routines.r_HarvestRoutineLoop.populateMasterdataPoolUp }else { routines.r_HarvestRoutineLoop.createAllObjects_N routines.r_HarvestRoutineLoop.populateMasterdataPoolUp }
End code	// end of the component, outside/closing the loop if(row_co routines.r_HarvestRoutineLoop.createAllObjects()); }else { routines.r_HarvestRoutineLoop.createAllObjects_NotData(routines.r_HarvestRoutineLoop.populateMasterdataPoolUp
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME__
Hint format	__ UNIQUE_NAME__ __ COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_3
	LABEL	__ UNIQUE_NAME__	OUTPUT(S)	Servlet_ResponseLogging_1

Component Parameters:

Properties	Values
------------	--------

Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	


Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code if(row_count==0) { row11.responseXML=routines.r_HarvestRoutineLoop.send context.movilizerVersion); routines.r_HarvestRoutineLoop.i routines.r_HarvestRoutineLoop.resetObjects_NotData(); }
End code	// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.sendMasterData(context.m context.movilizerVersion); if(row_count==0) { routines.r_Ha }else { routines.r_HarvestRoutineLoop.resetObjects_NotDa
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMSSqlOutput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSortRow_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code


Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code executed in the row // loop int b=routines.r_HarvestRoutineLoop.getHMcount(row9.Custo
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Posting_Date	false	java.util.Date	23	3	false	
Document_No	false	String	20		false	
Sales__LCY__	false	BigDecimal	38	20	false	
Currency_Code	false	String	10		false	
Payment_Method_Code	false	String	10		false	
Due_Date	false	java.util.Date	23	3	false	

Original Function Parameters:
Component tJavaRow

	UNIQUE NAME	tJavaRow_4	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_1

Component Parameters:

Properties	Values
Unique Name	tJavaRow_4
Component Name	tJavaRow

Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false


REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	context.ErrorMsg = input_row.errorMessage;
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	255		true	
Company_Name	false	String	255		true	
Customer_No_	false	String	255		true	
Posting_Date	false	java.util.Date			true	

Document_No_	false	String	255		true	
Sales__LCY_	false	Float	255	3	true	
Currency_Code	false	String	255		true	
Due_Date	false	java.util.Date			true	
Payment_Method_Code	false	String	255		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tSetKeystore_1
	LABEL	Setting contetxs fr test only	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code


Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Code	String foo = "bar"; context.DB_Navision_Database = "HFS_Master_DataAccess_DB"; //context.DB_Navision_Schema = "dbo";
Import	//import java.util.List;
Schema	Built-In
Label format	Setting contetxs fr test only
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_1

Component Parameters:


Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters: Component tMSSqlClose


	UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlClose
Unique Name	tMSSqlClose_1
Component Name	tMSSqlClose
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlClose
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlClose_1
--	-------	-----------------	-----------	-------------------------------

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tMSSqlCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tMSSqlCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tMSSqlConnection

	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_1
	LABEL	DB_ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tMSSqlConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port

Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	View_NAV_Customer AR OpenItem	OUTPUT(S)	tJavaFlex_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	tMSSqlConnection_1
Property Type	repository: DB (MSSQL):DB_Navision

Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_CustomerAROpenItem
Query Type	Built-In
Guess Schema	""

Query	<pre>"SELECT \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: ID\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: Name\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: No\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: Date\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: No\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: (LCY)\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: Code\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: Method Code\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu: Date\"\" +\" FROM \""+context.DB_Navision_Schema+"\".\""+context.NAV_Cu:</pre>
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	<pre>[[{SCHEMA_COLUMN=Company_ID, TRIM=false}, {SCHE TRIM=false}, {SCHEMA_COLUMN=Customer_No, TRIM= {SCHEMA_COLUMN=Posting_Date, TRIM=false}, {SCHEI TRIM=false}, {SCHEMA_COLUMN=Sales__LCY_, TRIM=I {SCHEMA_COLUMN=Currency_Code, TRIM=false}, {SCHEMA_COLUMN=Payment_Method_Code, TRIM=fals {SCHEMA_COLUMN=Due_Date, TRIM=false}]</pre>


Label format	View_NAV_Customer AR OpenItem
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Posting_Date	false	java.util.Date	23	3	false	
Document_No	false	String	20		false	
Sales__LCY__	false	BigDecimal	38	20	false	
Currency_Code	false	String	10		false	
Payment_Method_Code	false	String	10		false	

Due_Date	false	java.util.Date	23	3	false	
----------	-------	----------------	----	---	-------	--

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_1
	LABEL	NAV_OpenItems	OUTPUT(S)	tJavaFlex_6

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tMSSqlConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database

Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_OpenItems"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Company_ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false

Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
Field options	<pre> [{SCHEMA_COLUMN=Company_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Company_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Customer_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Posting_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Document_No, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Sales__LCY_, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Currency_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Payment_Method_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Due_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}] </pre>


Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	NAV_OpenItems
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	

Posting_Date	false	java.util.Date	23	3	false	
Document_No	false	String	20		false	
Sales__LCY__	false	BigDecimal	38	20	false	
Currency_Code	false	String	10		false	
Payment_Method_Code	false	String	10		false	
Due_Date	false	java.util.Date	23	3	false	
ProcessTimeStamp	false	String	30		true	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlCommit_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlConnection_1


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1 , tJavaRow_4

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true

Checked Columns	{[SCHEMA_COLUMN=Company_ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Company_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Customer_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Posting_Date, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Document_No, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Sales__LCY_, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Currency_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Payment_Method_Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Due_Date, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}]}
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false


!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true
Choose Column(s)	{SCHEMA_COLUMN=Company_ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=Company_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Customer_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Posting_Date, EMPTY_NULL=false}, {SCHEMA_COLUMN=Document_No, EMPTY_NULL=false}, {SCHEMA_COLUMN=Sales__LCY__, EMPTY_NULL=false}, {SCHEMA_COLUMN=Currency_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Payment_Method_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Due_Date, EMPTY_NULL=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tSchemaComplianceCheck_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Posting_Date	false	java.util.Date	23	3	false	
Document_No	false	String	20		false	
Sales__LCY__	false	BigDecimal	38	20	false	
Currency_Code	false	String	10		false	
Payment_Method_Code	false	String	10		false	
Due_Date	false	java.util.Date	23	3	false	

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)

Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	*****
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSortRow

	UNIQUE NAME	tSortRow_1	INPUT(S)	tJavaFlex_6
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tSortRow_1
Component Name	tSortRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tSortRow
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Criteria	[[COLNAME=Customer_No, SORT=alpha, ORDER=asc]]
Sort on disk	false
Temp data directory path	"C:/Talend/6.2.1/studio/workspace/temp"
Create temp data directory if does not exist	true
Buffer size of external sort	1000000
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Posting_Date	false	java.util.Date	23	3	false	
Document_No	false	String	20		false	
Sales__LCY__	false	BigDecimal	38	20	false	
Currency_Code	false	String	10		false	
Payment_Method_Code	false	String	10		false	
Due_Date	false	java.util.Date	23	3	false	

Original Function Parameters:
Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_4

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none
--	-------	-----------------	-----------	------

Component Parameters:

Properties	Values
Unique Name	tWarn_1
Component Name	tWarn
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	255		true	
Company_Name	false	String	255		true	
Customer_No_	false	String	255		true	
Posting_Date	false	java.util.Date			true	
Document_No_	false	String	255		true	
Sales__LCY_	false	Float	255	3	true	
Currency_Code	false	String	255		true	
Due_Date	false	java.util.Date			true	
Payment_Method_Code	false	String	255		true	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:
Component jlet_CustomLogging

	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	tLogCatcher_1
	LABEL	jlet_CustomLogging	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

Schema for jlet_CustomLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	

origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component jlet_ResponseLogging

	UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_5
	LABEL	jlet_ResponseLogging	OUTPUT(S)	none


Component Parameters:

Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_ResponseLogging_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tSchemaComplianceCheck_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMSSqlOutput_1
--	-------	-----------------	-----------	----------------

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):
Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
Company_ID	String		false
Company_Name	String		false
Customer_No	String		false
Posting_Date	java.util.Date		false
Document_No	String		false
Sales__LCY_	BigDecimal		false
Currency_Code	String		false
Payment_Method_Code	String		false
Due_Date	java.util.Date		false

Constraint Table Entries(row2):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(out):

Properties	Values
Name	out
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out):

Name	Type	Expression	isNullable
Company_ID	String	StringHandling.TRIM(row2.Company_ID)	false
Company_Name	String	StringHandling.TRIM(row2.Company_Name)	false
Customer_No	String	Var.Customer_No	false
Posting_Date	java.util.Date	row2.Posting_Date	false
Document_No	String	StringHandling.TRIM(row2.Document_No)	false
Sales__LCY__	BigDecimal	row2.Sales__LCY__	false
Currency_Code	String	StringHandling.TRIM(row2.Currency_Code)	false
Payment_Method_Code	String	StringHandling.TRIM(row2.Payment_Method_Code)	false
Due_Date	java.util.Date	row2.Due_Date	false
ProcessTimeStamp	String	context.ProcessTimeStamp	true

Constraint Table Entries(out):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression
TempCustNo	String	StringHandling.TRIM(row2.Customer_No)
Customer_No	String	String.format("%010d",Integer.parseInt(Var.TempCustNo.substring(Var.TempCu

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tSortRow_1
	LABEL	____UNIQUE_NAME____	OUTPUT(S)	tJavaFlex_4 , tJavaFlex_2, tJavaFlex_3, tJavaFlex_5

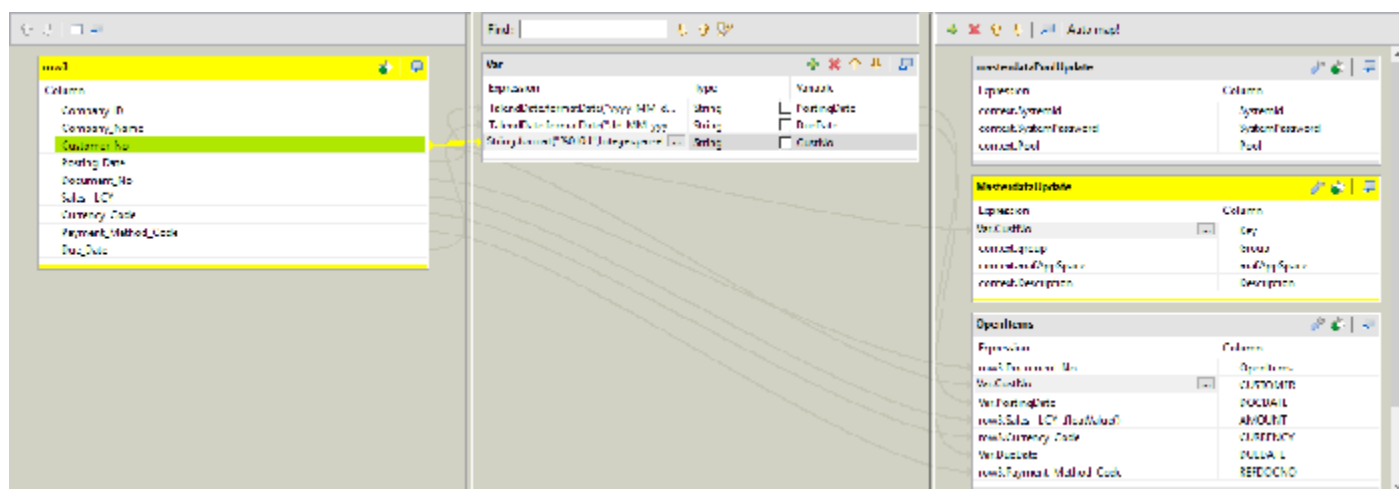

Component Parameters:

Component Parameters:	
Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
Company_ID	String		false
Company_Name	String		false
Customer_No	String		false
Posting_Date	java.util.Date		false
Document_No	String		false
Sales__LCY_	BigDecimal		false
Currency_Code	String		false
Payment_Method_Code	String		false
Due_Date	java.util.Date		false

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Key	String	Var.CustNo	true
Group	String	context.group	true
mafAppSpace	String	context.mafAppSpace	true
Description	String	context.Description	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(OpenItems):

Properties	Values
Name	OpenItems
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(OpenItems):

Name	Type	Expression	isNullable
OpenItems	String	row3.Document_No	true
CUSTOMER	String	Var.CustNo	true
DOCDATE	String	Var.PostingDate	true
AMOUNT	Float	row3.Sales__LCY_.floatValue()	true
CURRENCY	String	row3.Currency_Code	true
DUEDATE	String	Var.DueDate	true
REFDOCNO	String	row3.Payment_Method_Code	true

Constraint Table Entries(OpenItems):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(sendMasterData):

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sendMasterData):

Name	Type	Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNull
PostingDate	String	TalendDate.formatDate("yyyy-MM-dd",row3.Posting_Date)	false
DueDate	String	TalendDate.formatDate("dd-MM-yyyy",row3.Due_Date)	false
CustNo	String	String.format("%010d",Integer.parseInt(row3.Customer_No.replaceAll("\\D+", "")))	false

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------